Reliable Web evidence acquisition

Source reports and extraction outputs are different evidence units.

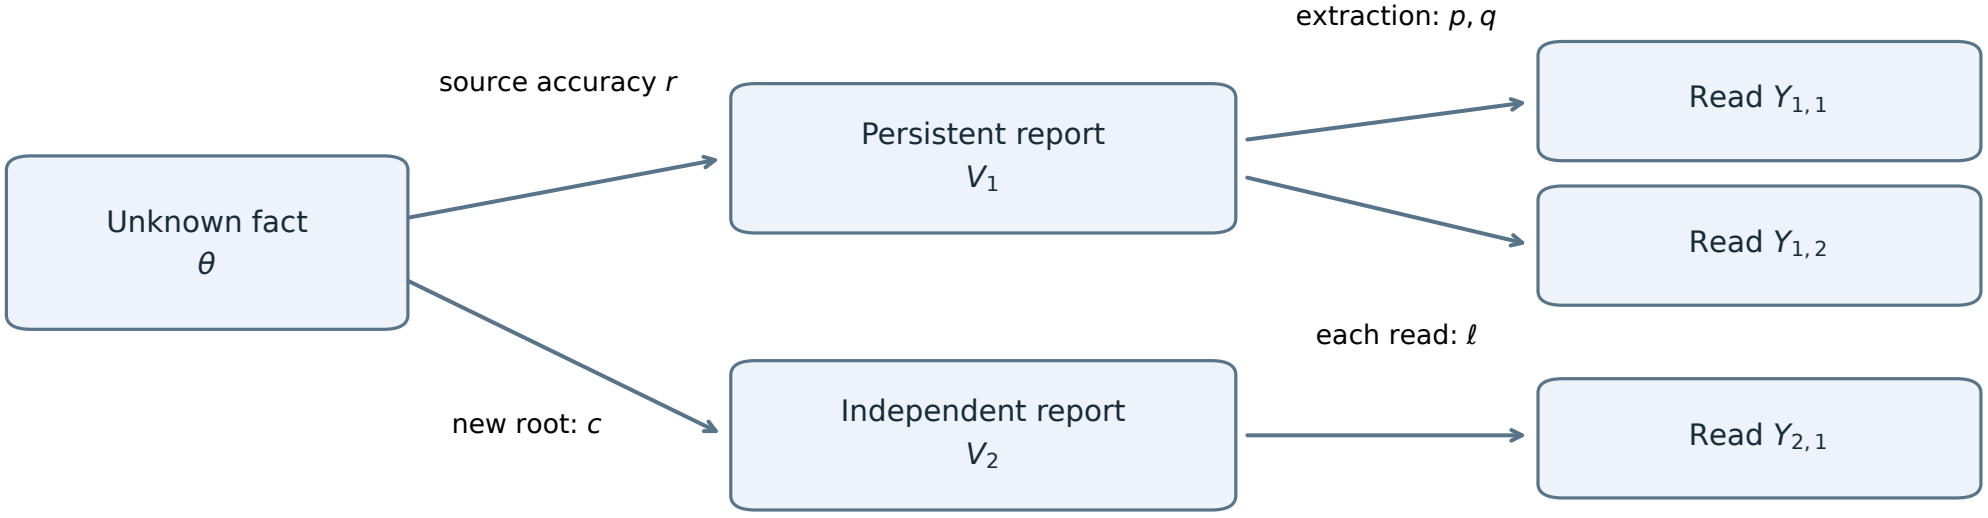

Repeated reads share one report; a new root supplies another report.

What changes the optimal reading depth?

Perfect sources: $r = 1$ Unknown p, q Maximum depth N suffices	Imperfect sources Known p, q A fixed depth suffices	Imperfect sources; unknown p, q Finite calibration Multiple depths can be necessary

Completed blocks; known source rate and better format; first-order online cost.

Controls summarize model theorems. Necessity holds in an explicit certified region; no Web/LLM measurements.