Database logical ER diagram

Overview: principal links. Complete reference cardinalities are listed on page 5.

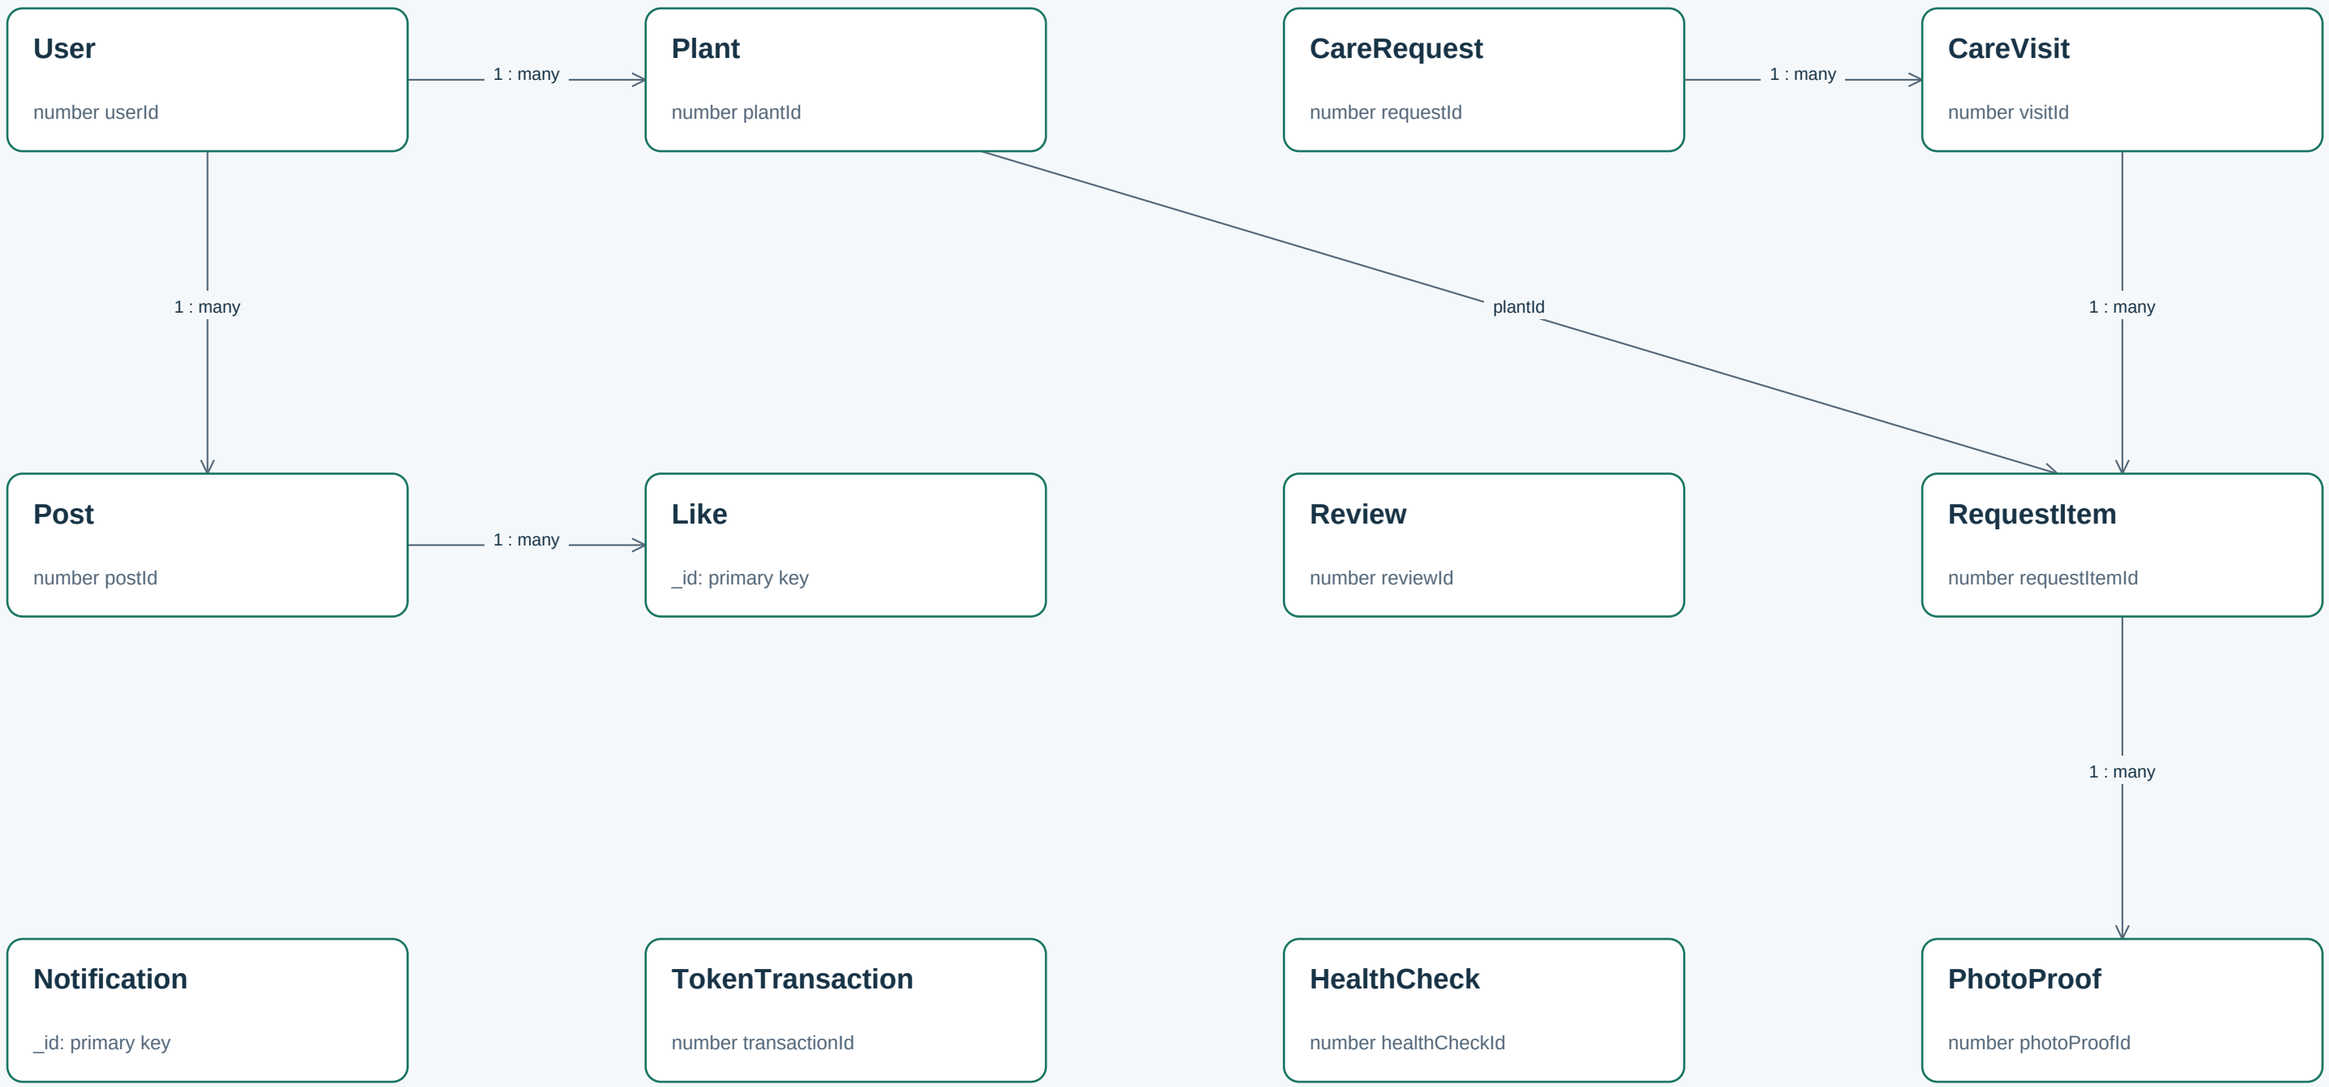

Counter generates numeric application IDs; it has no foreign-key relationship.

All collections use MongoDB _id. Numeric IDs shown here are unique application keys.

Use the complete relationship register on page 5 for optional links, roles and conditional targets.

Accounts and community

Full model attributes | UK = unique key | FK = logical reference | PK = physical primary key

User

number userId UK
string userName UK
string email UK
string passwordHash
string photoUrl
string photoPublicId
string bio
string postalCode
string block
string unitNumber
number lat
number lng
number tokenBalance
object_array tokenReservations
boolean accountPublic
boolean hideFromLeaderboard
string userRole
object_array badges
date createdAt

Post

number postId UK
number creatorId FK
string title
string content
string_array postImages
number likedCount

Like

ObjectId _id PK
number creatorId FK
number postId FK
date likedAt

Review

number reviewId UK
string type
number visitId FK
number postId FK
number parentReviewId FK
number creatorId FK
number receiverId FK
number rating
string comment
date createdAt
date lastChangeAt

Notification

ObjectId _id PK
number userId FK
string type
string message
number visitId FK
number requestId FK
date readAt
date createdAt

Except Counter, every model also has an ObjectId _id; version metadata is omitted.
Embedded arrays/objects remain inside their parent document. Refer to the source ERD for embedded field details.

Plant care and scheduling

Full model attributes | UK = unique key | FK = logical reference | PK = physical primary key

Plant

number plantId UK
number ownerId FK
string plantName
string photoUrl
string photoPublicId
object wateringInfo
string plantLocation
boolean rainExposed
boolean isOutdoor
boolean weatherAdjustmentEnabled
date lastWateredAt
date createdAt
date updatedAt

CareRequest

number requestId UK
number ownerId FK
number makeupForVisitId FK,UK
date startDate
date endDate
string note
string waterSource
boolean healthCheck
number tokenReward
string status
date createdAt

CareVisit

number visitId UK
number sitterId FK
number requestId FK
date visitDate
string status
date doneAt
string weatherAlert
boolean corridorCared
date weatherCheckedAt
boolean weatherSkip

RequestItem

number requestItemId UK
number visitId FK
number plantId FK
string action
number amountToWater
string careInstructions
string_array completedSteps
string status
date originalDueAt
date dueAt
string adjustmentType
string adjustmentReason
date weatherCheckedAt

Except Counter, every model also has an ObjectId _id; version metadata is omitted.
Embedded arrays/objects remain inside their parent document. Refer to the source ERD for embedded field details.

Evidence, health and token ledger

Full model attributes | UK = unique key | FK = logical reference | PK = physical primary key

PhotoProof

number photoProofId UK
number requestItemId FK
number visitId FK
string photoUrl
string photoPublicId
date takenAt

HealthCheck

number healthCheckId UK
number requestItemId FK,UK
number visitId FK
number plantId FK
number ownerId FK
string status
string provider
boolean isHealthy
number healthProbability
object_array issues
string error
date ownerSeenAt
date createdAt

TokenTransaction

number transactionId UK
number visitId FK
number requestId FK
string reason
number senderId FK
number receiverId FK
number amount
string type
boolean balanceApplied
date createdAt

Counter

string _id PK
number seq

Except Counter, every model also has an ObjectId _id; version metadata is omitted.
Embedded arrays/objects remain inside their parent document. Refer to the source ERD for embedded field details.

Complete relationship register

Each row gives the referenced parent and the stored reference on the child. Links are application-level.

PARENT	CHILD / REFERENCE	CARDINALITY / ROLE
User	Plant / owns (ownerId)	1 parent per child; 0..many children per parent
User	CareRequest / creates (ownerId)	1 parent per child; 0..many children per parent
User	CareVisit / sits (sitterId, optional)	0..1 parent per child; 0..many children per parent
CareRequest	CareVisit / schedules (requestId)	1 parent per child; 0..many children per parent
CareVisit	CareRequest / makeupForVisitId (optional)	0..1 parent per child; 0..1 children per parent
CareVisit	RequestItem / contains (visitId)	1 parent per child; 0..many children per parent
Plant	RequestItem / included in (plantId)	1 parent per child; 0..many children per parent
RequestItem	PhotoProof / has (requestItemId)	1 parent per child; 0..many children per parent
CareVisit	PhotoProof / documents (visitId)	1 parent per child; 0..many children per parent
RequestItem	HealthCheck / has (requestItemId unique)	1 parent per child; 0..1 children per parent
CareVisit	HealthCheck / checked during (visitId)	1 parent per child; 0..many children per parent
Plant	HealthCheck / assessed (plantId)	1 parent per child; 0..many children per parent
User	HealthCheck / notified owner (ownerId)	1 parent per child; 0..many children per parent
User	Post / writes (creatorId)	1 parent per child; 0..many children per parent
User	Like / likes (creatorId)	1 parent per child; 0..many children per parent
Post	Like / receives (postId)	1 parent per child; 0..many children per parent
User	Review / authors (creatorId)	1 parent per child; 0..many children per parent
User	Review / receives (receiverId)	1 parent per child; 0..many children per parent
CareVisit	Review / VISIT target (optional)	0..1 parent per child; 0..many children per parent
Post	Review / POST target (optional)	0..1 parent per child; 0..many children per parent
Review	Review / REVIEW parent (optional)	0..1 parent per child; 0..many children per parent
User	TokenTransaction / sends (senderId, optional)	0..1 parent per child; 0..many children per parent
User	TokenTransaction / receives (receiverId, optional)	0..1 parent per child; 0..many children per parent
CareVisit	TokenTransaction / visitId (optional)	0..1 parent per child; 0..many children per parent
CareRequest	TokenTransaction / requestId (optional)	0..1 parent per child; 0..many children per parent
User	Notification / receives (userId)	1 parent per child; 0..many children per parent
CareVisit	Notification / visitId (optional)	0..1 parent per child; 0..many children per parent
CareRequest	Notification / requestId (optional)	0..1 parent per child; 0..many children per parent

Review: exactly one target matches type VISIT, POST or REVIEW. A VISIT review requires rating 1-5.
Unique compound keys: Like (creatorId, postId); Review (creatorId, visitId) only when visitId is numeric.
HealthCheck.requestItemId is unique; PhotoProof.requestItemId is not. One make-up request per referenced visit.
TokenTransaction: at most one CARE transaction per visit; other transaction types can also reference that visit.
Embedded: User.tokenReservations[] = requestId + amount; badges[] = id, name, description, icon, unlockedAt.
Plant.wateringInfo = frequencyDays, amountMl, notes. HealthCheck.issues[] embeds diagnosis and treatment arrays.
TokenTransaction.visitId declares ref "Visit" in code; the intended target is the CareVisit model.
Source: server/models/*.js. Based on schema code, not inspection of a running database.