Task One:

yunusapp > src > App.js > App

```javascript
import logo from './logo.svg';
import './App.css';

function App() {
  return (
    <div className="App">
      <header className="App-header">
        <img src={logo} className="App-logo" alt="logo" />
        <p>
          Edit <code>src/App.js</code> and save to reload.
        </p>
        <a
          className="App-link"
          href="https://reactjs.org"
          target="_blank"
          rel="noopener noreferrer"
        >
          Learn how to use react in cn5006
        </a>
      </header>
    </div>
  );
}

export default App;
```

App.js M | App.css M | index.js M | AppColour.js U | index.css | mygreetingprop.js U | Greetings.js U

yunusapp > src > index.js > ...

```javascript
import React from 'react';
import ReactDOM from 'react-dom/client';
import './index.css';
import App from './App';
import reportWebVitals from './reportWebVitals';
import GreetingElement from './Greetings.js';
import GreetingElementwithProp from './mygreetingprop.js';
import AppColour from './AppColour.js';

const root = ReactDOM.createRoot(document.getElementById('root'));
root.render(
  <React.StrictMode>
    <App/>


  </React.StrictMode>,

  document.getElementById('root')

);

// If you want to start measuring performance in your app, pass a function
// to log results (for example: reportWebVitals(console.log))
// or send to an analytics endpoint. Learn more: https://bit.ly/CRA-vitals
reportWebVitals();
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS node - yunusapp

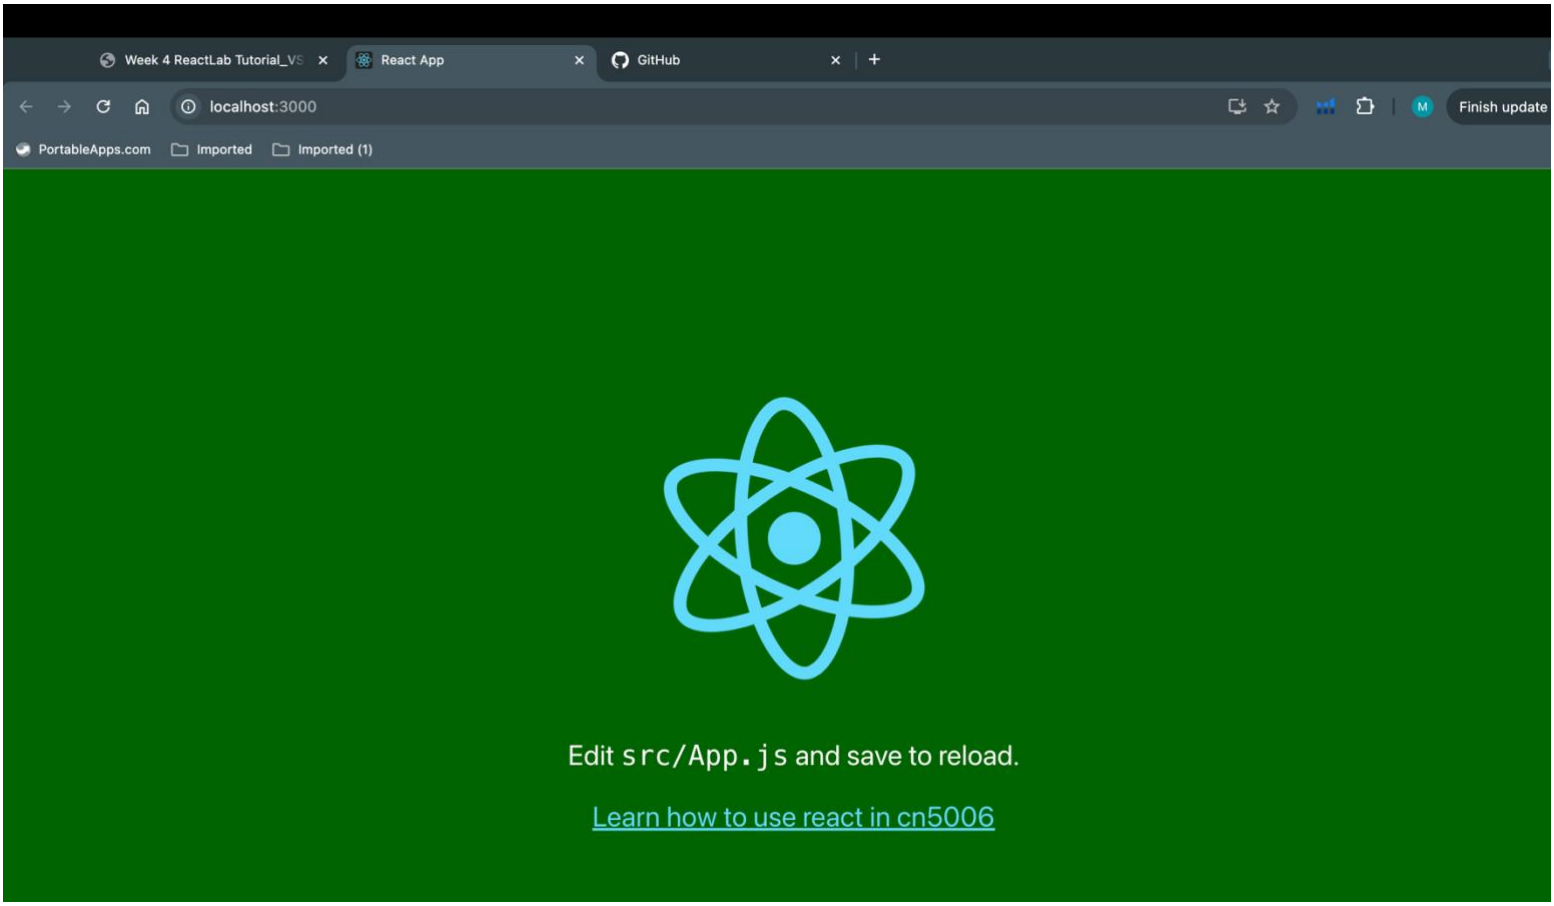

Changing the text in the app.js file allowed the underlined text to be changed. The code in the index.js file had to have the **<React.StrictMode> <App/> </React.StrictMode>,** to run it.

Task Two:

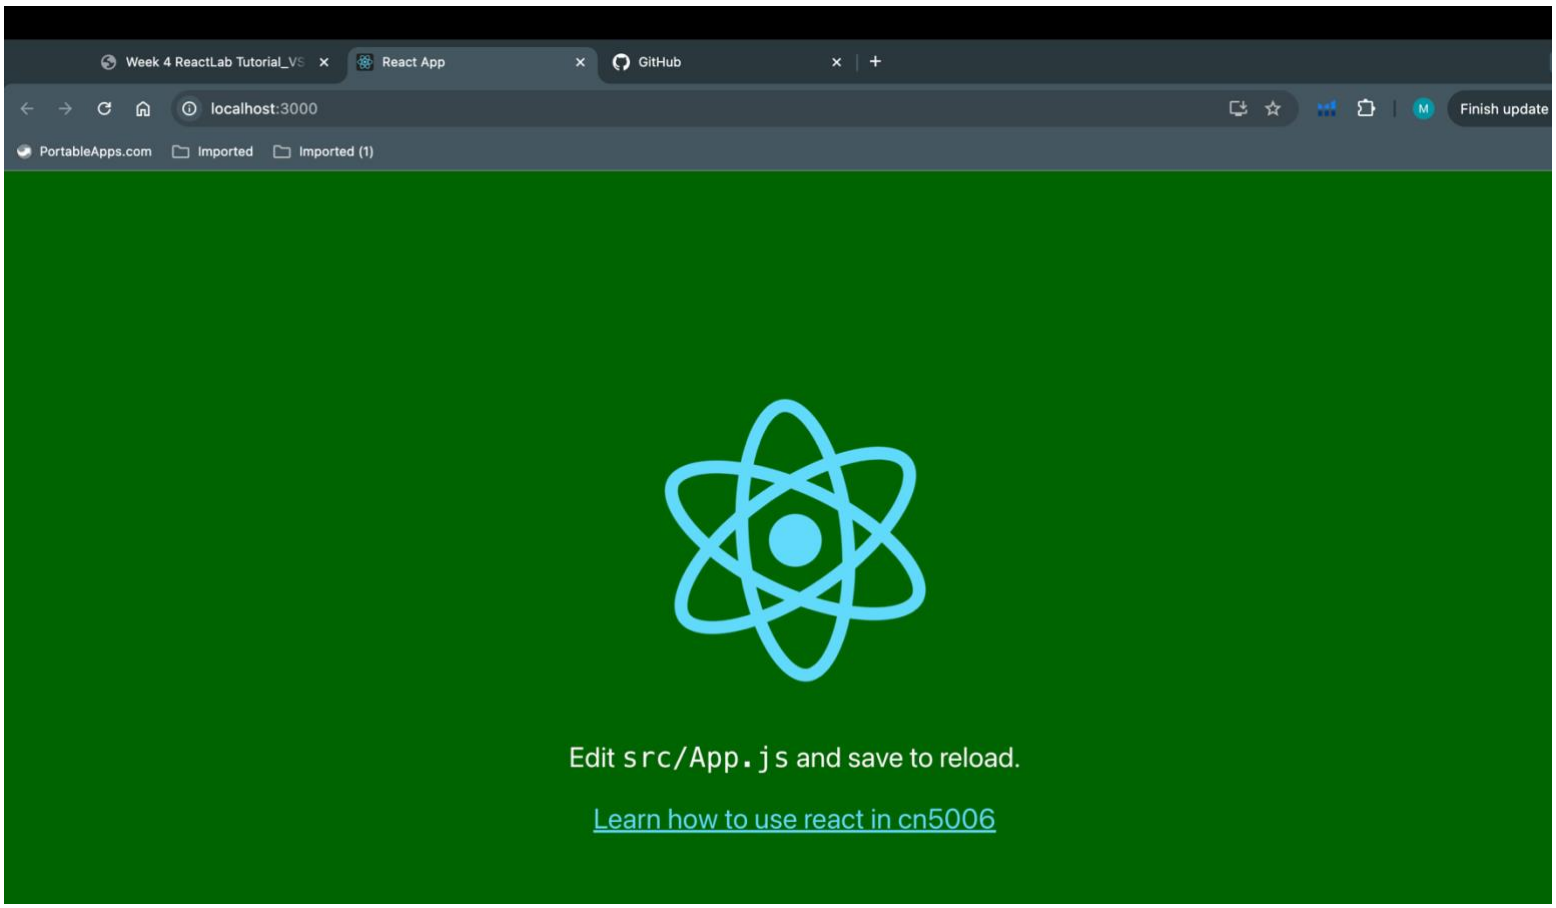

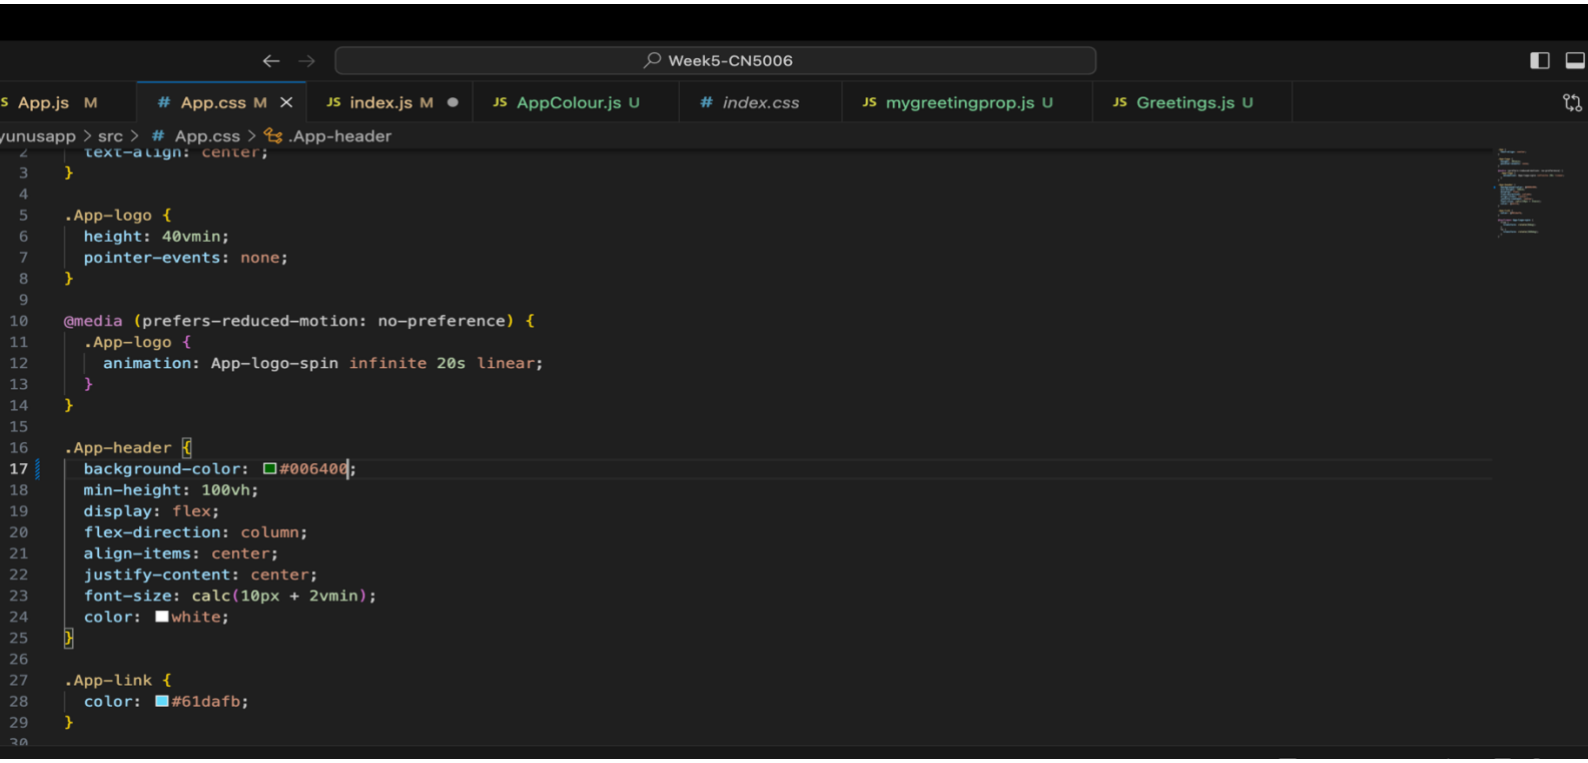


```
  text-align: center;
}

.App-logo {
  height: 40vmin;
  pointer-events: none;
}

@media (prefers-reduced-motion: no-preference) {
  .App-logo {
    animation: App-logo-spin infinite 20s linear;
  }
}

.App-header {
  background-color: #006400;
  min-height: 100vh;
  display: flex;
  flex-direction: column;
  align-items: center;
  justify-content: center;
  font-size: calc(10px + 2vmin);
  color: white;
}

.App-link {
  color: #61dafb;
}
```

Background colour was changed on CSS File.

Task Three:

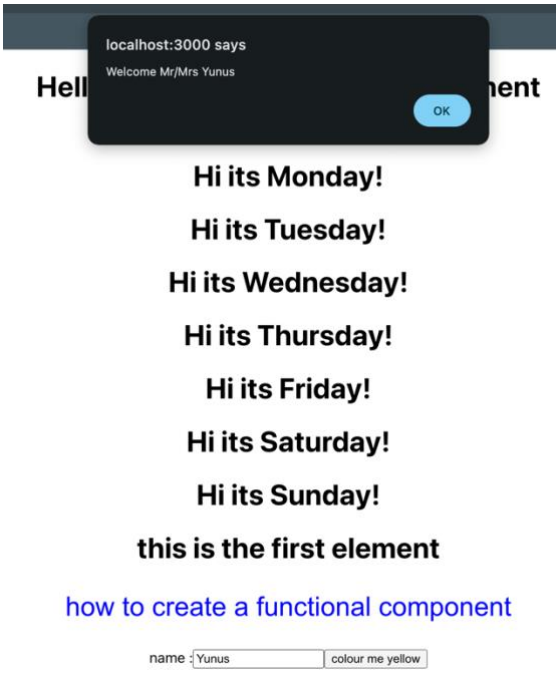

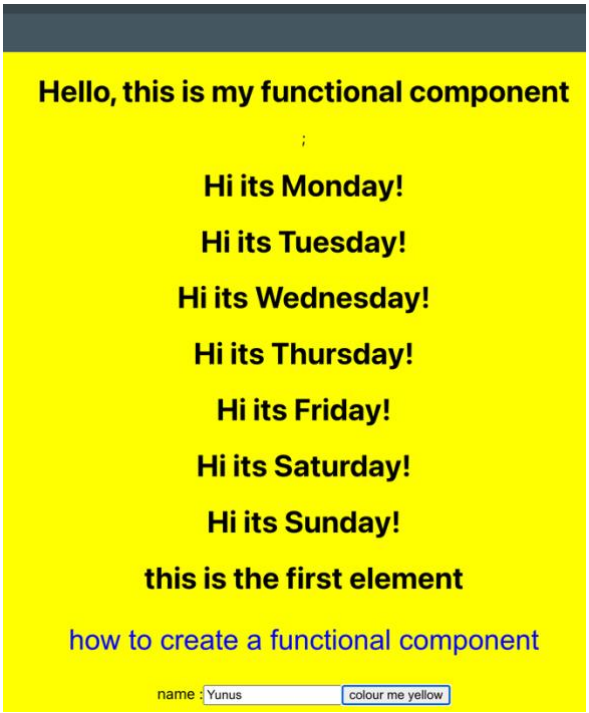

JS App.js M | # App.css M | JS index.js M × | JS AppColour.js U | # index.css

yunusapp > src > JS index.js > ...

```
1   import React from 'react';
2   import ReactDOM from 'react-dom/client';
3   import './index.css';
4   import App from './App';
5   import reportWebVitals from './reportWebVitals';
6   import GreetingElement from './Greetings.js';
7   import GreetingElementwithProp from './mygreetingprop.js';
8   import AppColour from './AppColour.js';
9
10  const root = ReactDOM.createRoot(document.getElementById('root'));
11  root.render(
12    <React.StrictMode>
13      <GreetingElement/>
14       <GreetingElementwithProp msg = "Hi its Monday!"/>
15      <GreetingElementwithProp msg = "Hi its Tuesday!"/>
16      <GreetingElementwithProp msg = "Hi its Wednesday!"/>
17      <GreetingElementwithProp msg = "Hi its Thursday!"/>
18      <GreetingElementwithProp msg = "Hi its Friday!"/>
19      <GreetingElementwithProp msg = "Hi its Saturday!"/>
20      <GreetingElementwithProp msg = "Hi its Sunday!"/>
21  <AppColour heading = "this is the first element" lbl = "name :" color = "yel
22
23
24    </React.StrictMode>,
25
26    document.getElementById('root')
27
28  );
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS

```
WARNING in [eslint]
src/index.js
  Line 4:8:  'App' is defined but never used  no-unused-vars

webpack compiled with 1 warning
One of your dependencies, babel-preset-react-app, is importing the
"@babel/plugin-proposal-private-property-in-object" package without
declaring it in its dependencies. This is currently working because
"@babel/plugin-proposal-private-property-in-object" is already in your
node_modules folder for unrelated reasons, but it may break at any time.
```

```
JS App.js M   # App.css M   JS index.js M   JS mygreetingprop.js U ●   JS AppColou
yunusapp > src > JS mygreetingprop.js > GreetingElementwithProp
1   import './App.css';
2   function GreetingElementwithProp(props){
3       const greeting =  "Hello lets start learning how to use properties....";
4   console.log("prop is",props.msg)
5   return (
6       <div className = "App">
7           <h1>{props.msg}</h1>
8       </div>
9   );
10
11  }
12  export default GreetingElementwithProp;
```

```
JS App.js M   # App.css M   JS index.js M   JS mygreetingprop.js U ●   JS AppColour.js U ×   # index.css
yunusapp > src > JS AppColour.js > AppColor
1   import './App.css'
2   function AppColor(props){
3   function greetUser(e){
4       document.body.style.background = e.target.value;
5       alert("Welcome Mr/Mrs " + document.getElementById(props.color).value)
6   }
7   return(
8       <body style = {{backgroundcolor: 'powderblue', color:'black'}}>
9           <div className = 'App'>
10              <h1>{props.heading}</h1>
11              <p style = {{color: 'blue', font: '30px arial'}}> how to create a functional component</p>
12              <label class = "label" id= "lbl">{props.lbl}</label>
13              <input id = {props.color} type = "text"/>
14              <button value= {props.color} onClick = {greetUser}>colour me {props.color}</button>
15
16          </div>
17      </body>
18  );
19  }
20  export default AppColor;
21
```

Using the GreetingElementWithProp function from the mygreetingprop file, we created the propery “msg” which changed the heading text within the browsers. Calling the function multiple times allowed different messages to be written. The colour changes after putting in text and clicking the buttong because of the appColour file which has a functional component called AppColor which is called with the color being yellow in index.js