What you need to write for your Portfolio of this Week

Q1 Write one page reflective what did you learn about React Hook API during this week

React Hook APIs let you add features like state, side effects, and lifecycle methods to functional components. useState is a hook that allows you to create and manage state in a component, returning the current state and a function to update it. useEffect is used for handling side effects like data fetching or DOM updates, and it runs after the component renders. Both hooks trigger re-renders when the state changes, keeping the UI up-to-date. These hooks simplify component logic and help manage state and side effects without needing class-based components.

I learnt how to use both useState hooks as well as useEffect hooks in my tutorial by allowing it to hold the initial value const [count,setCount]=useState(0). Which is then changed everytime the button was clicked const ClickHandle=() =>

```
 {
 setCount(count+1)
 }
return (
<div className="App">
 <p>{props.pic} <span></span>
 <button onClick={ClickHandle}>{count }
 <img src={pic} alt=""/>
 </button>
 </p></div>
)}
```

Q2. Study the code in **EmojeeCounters.js,** Please note, You Do not need to submit the full code rather you need to answer the following questions for your this week portfolio

- What is Name of the Component you have created in **EmojeeCounters.js**

The functional component in my file was called EmojeeCounter(props).

- **Identify the line of code that uses the EmojeeCounter in index.js**

```
<EmojeeCounter pic='Love'/>
```

- Declares the states of each of the html elements defined in the **EmojeeCounters.js** (identify these lines and explain only those lines)

```
const [count,setCount]=useState(0)
```

This line declared the state of the count variable to start at 0 which will later be used as an arrow function to allow the count to increase by +1 everytime the button was clicked.

```
const [pic, setPic]=useState(Love)
```

This hook declares the pic variable storing an initial value of (Love) which was imported as a file initially which can be changed with the setPic allowing re-rendering when its clicked to hold a different state.

- Lines of codes that are used to associate the event handler used.

```
const ClickHandle=() =>
 {
 setCount(count+1)
 }
return (
<div className="App">
 <p>{props.pic} <span></span>
 <button onClick={ClickHandle}>{count }
 <img src={pic} alt=""/>
 </button>
 </p>
</div>
```

- Explain the line : <EmojeeCounter pic='Love'/> , what is pic=’Love’ means in this line.

This calls the imported file as a prop using the EmojeeCounter functional component and has the text and allows the image to be rendered into the browser UI.

- What is useEffect and why you think we have used it in the Component.

The useEffect hook allows for the props.pic of the to be changed every time a separate value inside it is run to be re-rendered to the corresponding image.

- Explain these line of the codes in functional component EmojeeCounter.js:

```
return (
<div className="App">
   <p>{props.pic} <span></span>
   <button onClick={ClickHandle}>{count }
   <img src={pic} alt=""/>
   </button>
  </p>
</div>
)
}
```

These lines of code allows the return of the button element to take into account how many times the user clicks each emoji. Every time the property is clicked, the click count is returned to the index file re rendering the UI to show the clicks for the emoji.

Q3

Create a code for a Component that takes two HTML one text box and one label. Label will be used to display the images. So it should be like this

If I write “Happy” in the text box the label should show happy face (You can use any image)

If I write “Like” in the text box the label should show Like icon

If I write “sad “ the label should show sad emoji.

Run this component take the screen shot of your newly run component and write a paragraph how did you develop this component

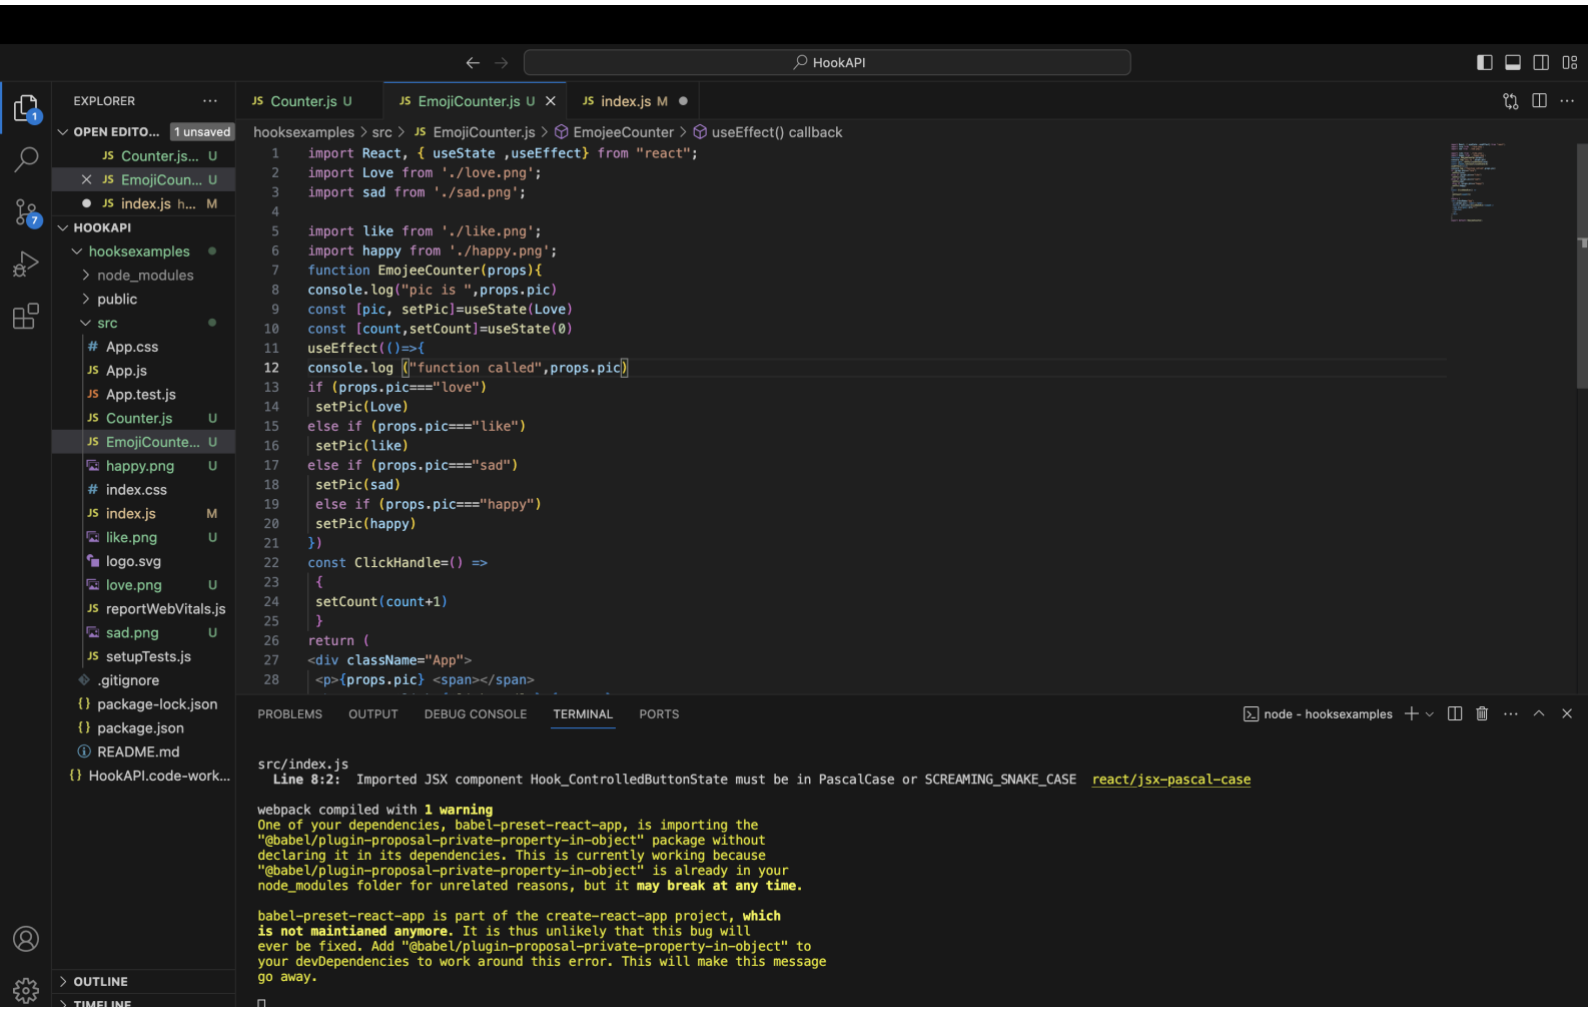

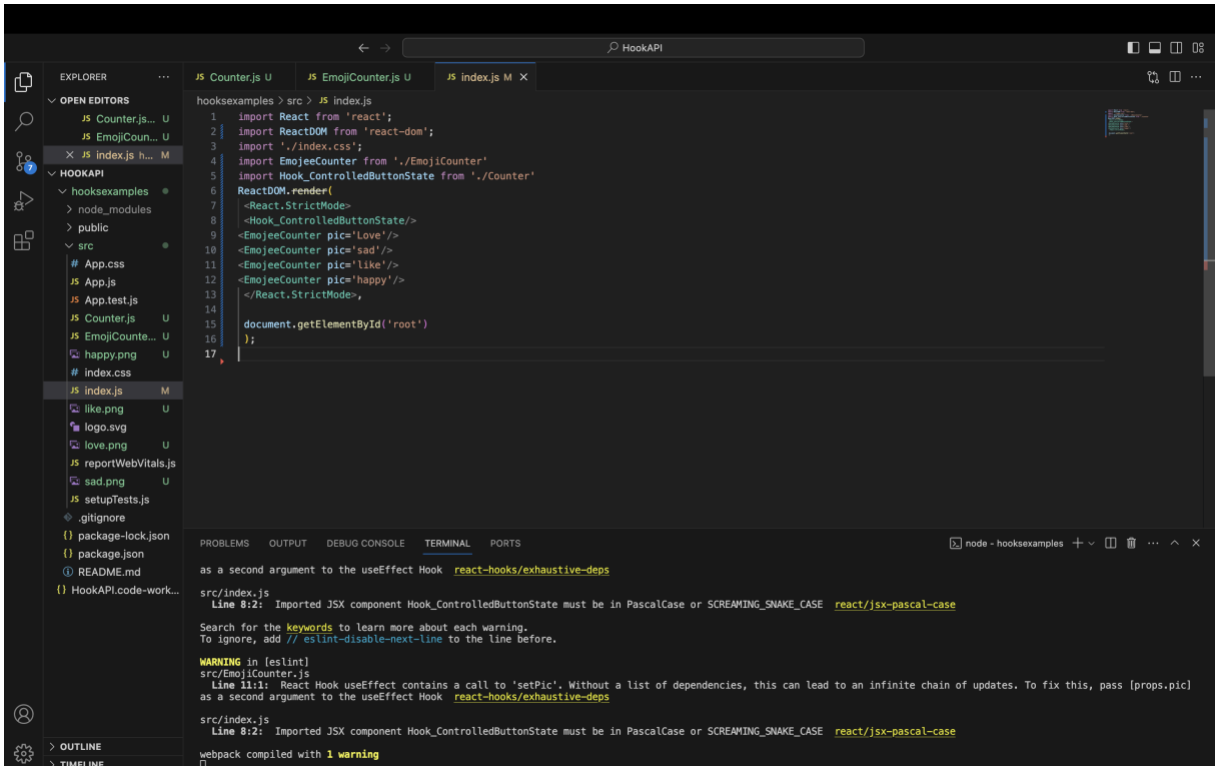
HookAPI
EXPLORER
OPEN EDITORS
Counter.js... U
EmojiCoun... U
index.js h... M
HOOKAPI
hooksexamples
node_modules
public
src
App.css
App.js
App.test.js
Counter.js U
EmojiCounte... U
happy.png U
index.css
index.js M
like.png U
logo.svg
love.png U
reportWebVitals.js
sad.png U
setupTests.js
.gitignore
package-lock.json
package.json
README.md
HookAPI.code-work...
OUTLINE
Counter.js U
EmojiCounter.js U
index.js M
hooksexamples > src > index.js
import React from 'react';
import ReactDOM from 'react-dom';
import './index.css';
import EmojeeCounter from './EmojiCounter'
import Hook_ControlledButtonState from './Counter'
ReactDOM.render(
<React.StrictMode>
<Hook_ControlledButtonState/>
<EmojeeCounter pic='Love'/>
<EmojeeCounter pic='sad'/>
<EmojeeCounter pic='like'/>
<EmojeeCounter pic='happy'/>
</React.StrictMode>,
document.getElementById('root')
);
PROBLEMS
OUTPUT
DEBUG CONSOLE
TERMINAL
PORTS
node - hooksexamples
as a second argument to the useEffect Hook react-hooks/exhaustive-deps
src/index.js
Line 8:2: Imported JSX component Hook_ControlledButtonState must be in PascalCase or SCREAMING_SNAKE_CASE react/jsx-pascal-case
Search for the keywords to learn more about each warning.
To ignore, add // eslint-disable-next-line to the line before.
WARNING in [eslint]
src/EmojiCounter.js
Line 11:1: React Hook useEffect contains a call to 'setPic'. Without a list of dependencies, this can lead to an infinite chain of updates. To fix this, pass [props.pic]
as a second argument to the useEffect Hook react-hooks/exhaustive-deps
src/index.js
Line 8:2: Imported JSX component Hook_ControlledButtonState must be in PascalCase or SCREAMING_SNAKE_CASE react/jsx-pascal-case
webpack compiled with 1 warning

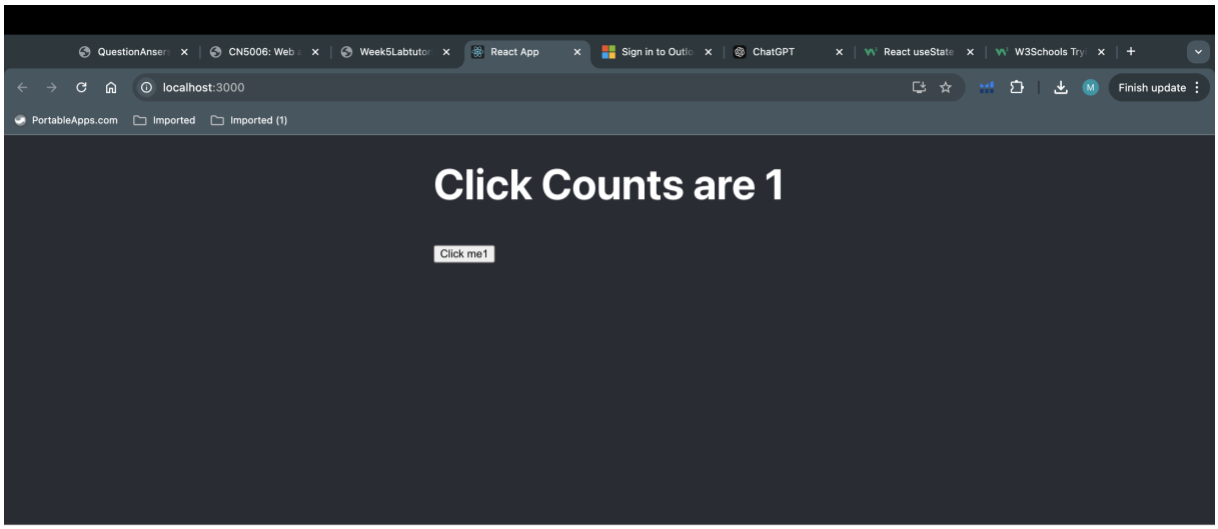
QuestionAnser
CN5006: Web
Week5Labtutor
React App
Sign in to Outlo
ChatGPT
React useState
W3Schools Try
localhost:3000
Finish update
PortableApps.com
Imported
Imported (1)
Click Counts are 1
Click me1


Love 2
sad 2
like 2