Exercise 1

Sending response to use on the browser

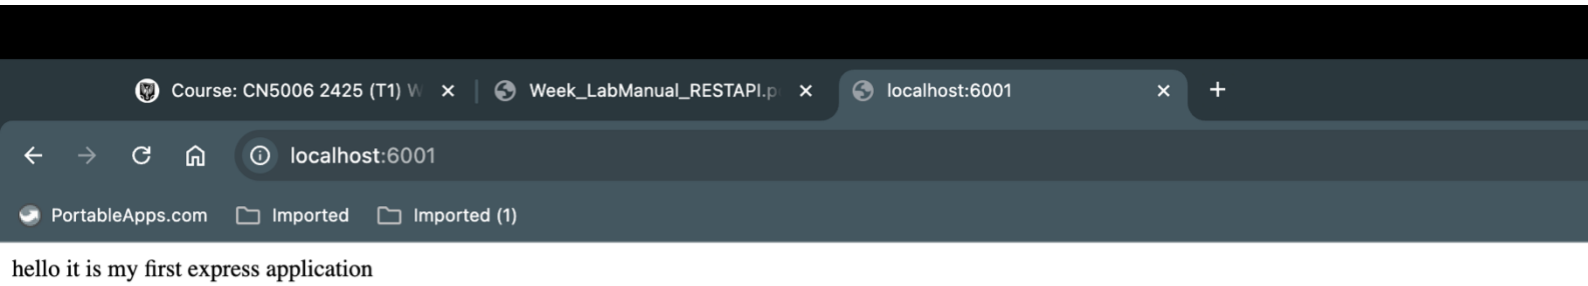

Exercise 2:

When typing the URL “localhost:6001/about” this response is shown in the browser

When typing the URL , the “userID” and “bookID” is able to be changed into the server.

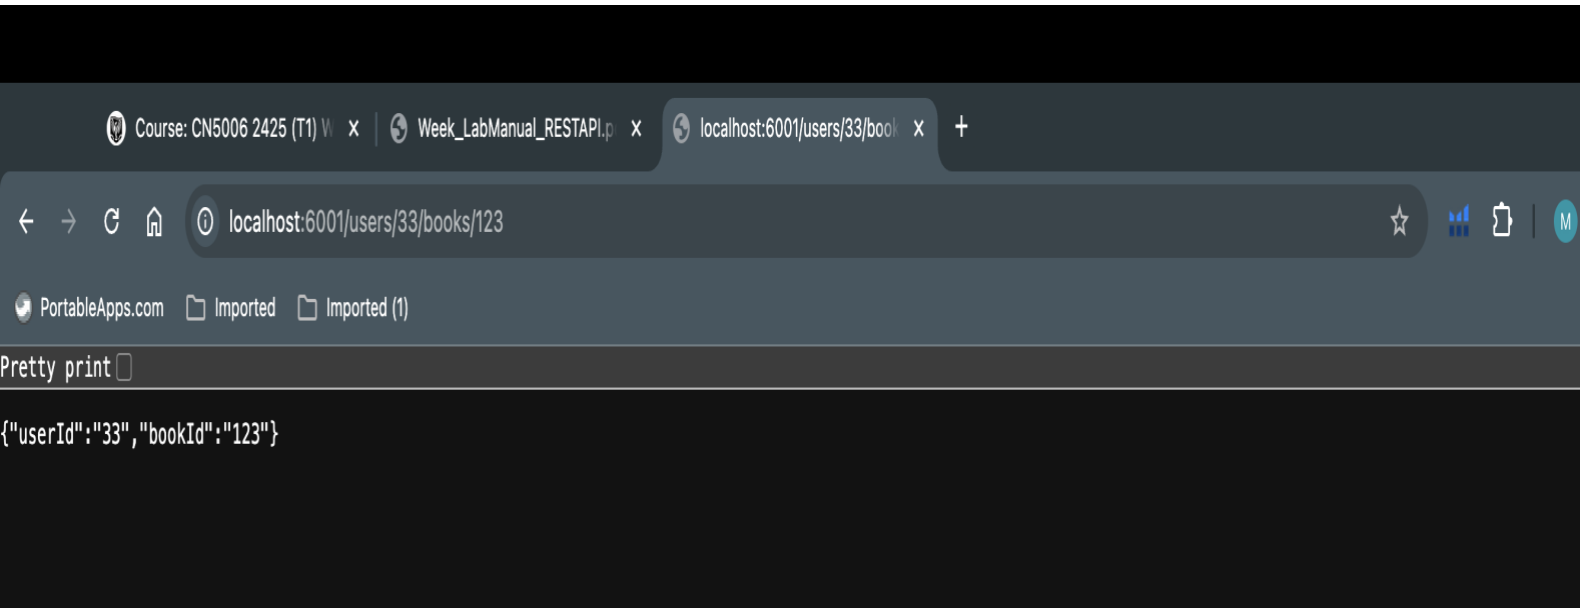

Exercise 3:

When typing the url “Localhost:6001/GetStudents”, we are able to see the package for the student.json files details.

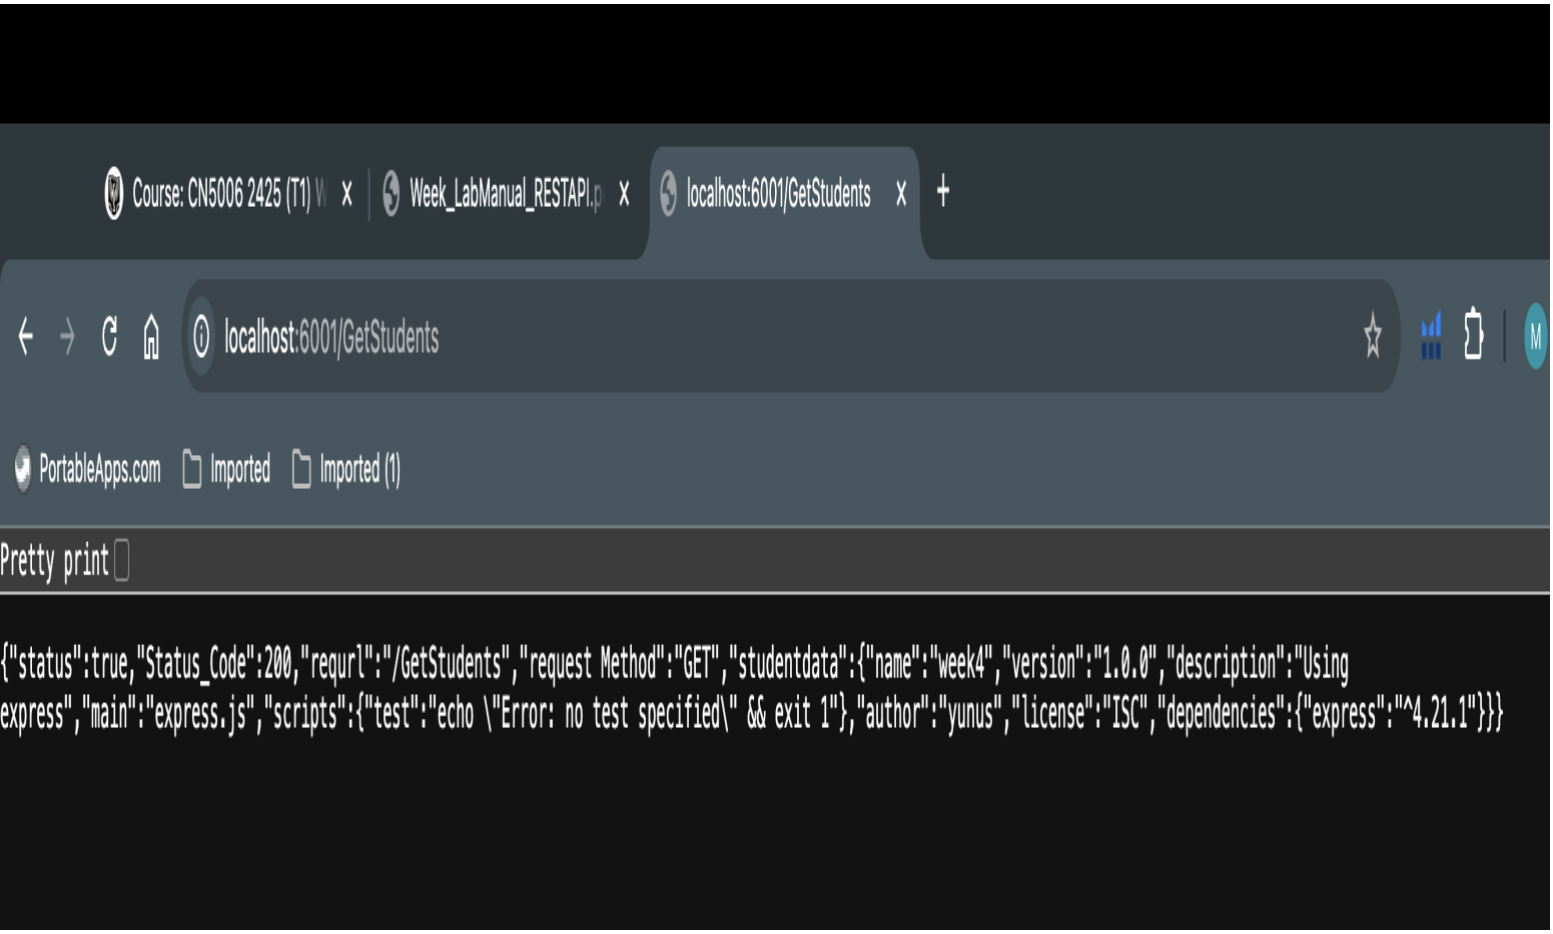

When typing the URL for localhost:6001/GetStudentid/1, the students id 1 from the student.json file is displayed, likewise when changing the URL to localhost:6001/GetStudentid/2, student 2s id from student.json file is shown. The same happens for 3 and 4 too.

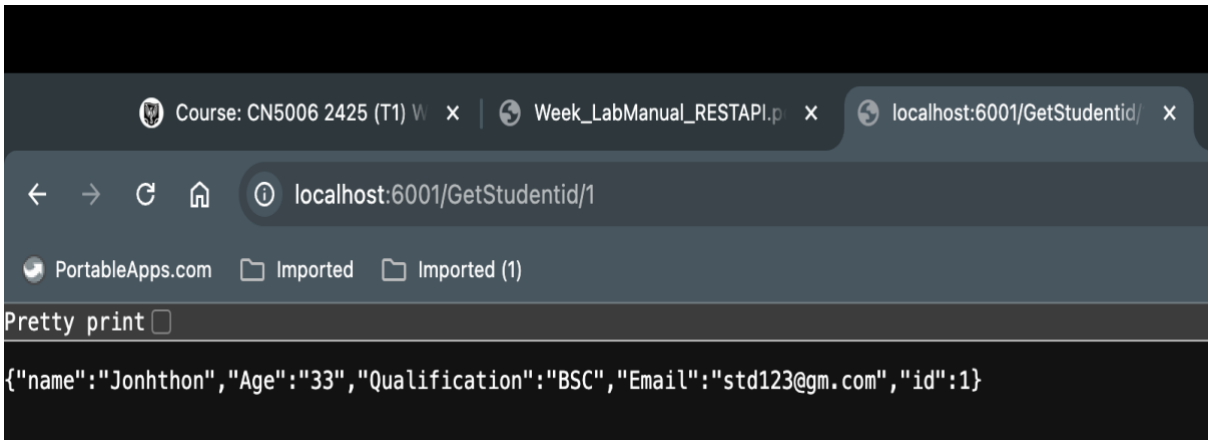

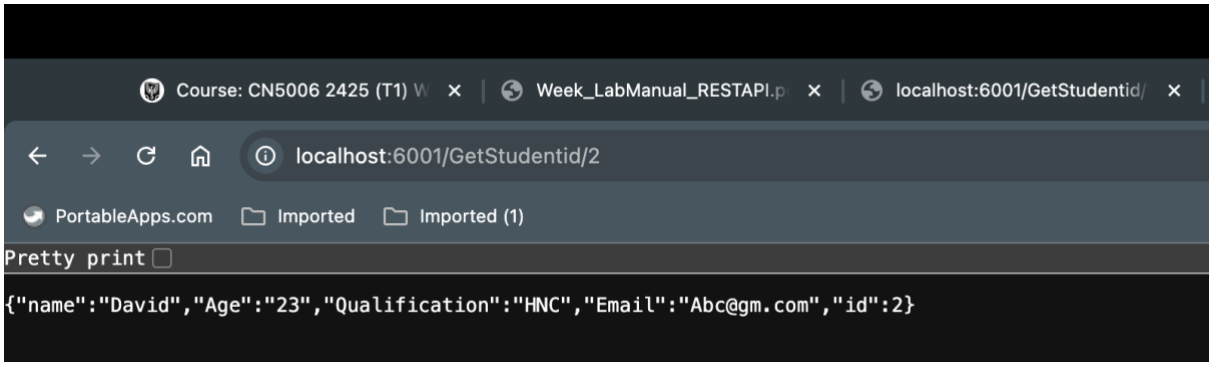

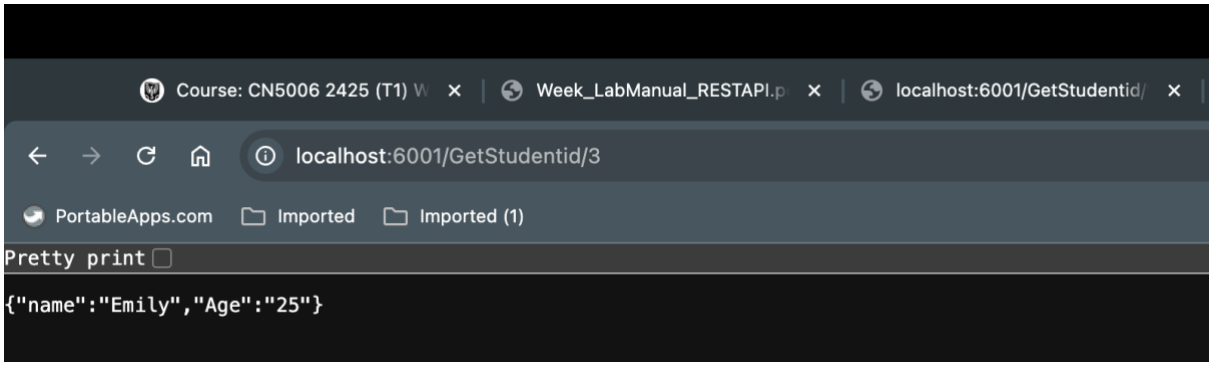

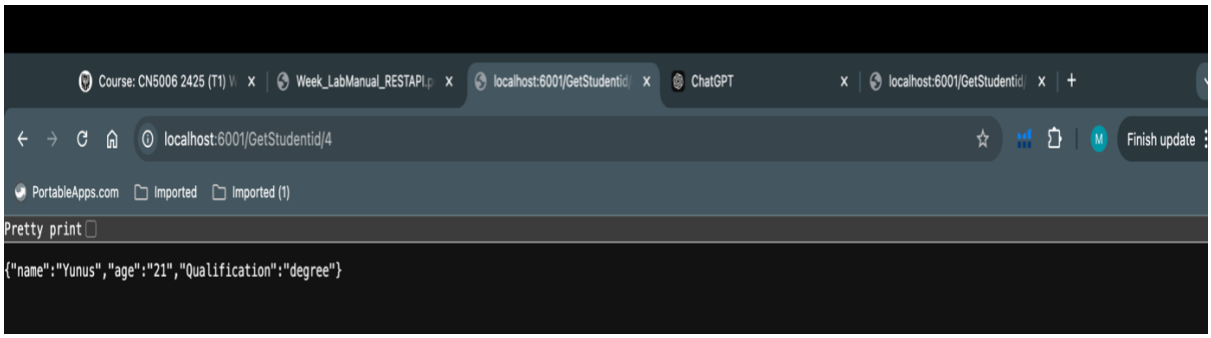

Exercise 3:

We have created a form that's been able to be submitted using the html file.