

# Runtime Tree Draft Construction

## Logits Cache (k=3)

*token id*    *top-3 token ids*

Tom

has

buy

gives

has

12

a

many

buys

3

two

more


gives

her

it


back

## Logits Tree

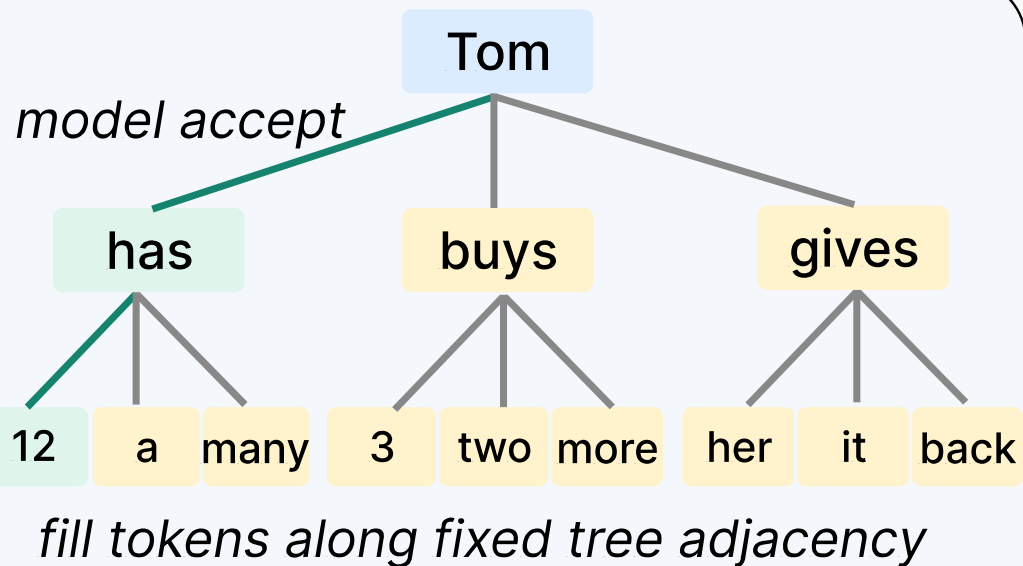

## Fixed-Template Specialization over a Few Sample

### Aggregated selected-path count

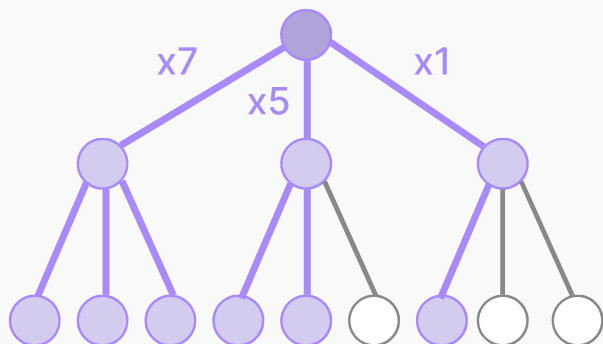

### Dataset-specific template

