



ReadData()

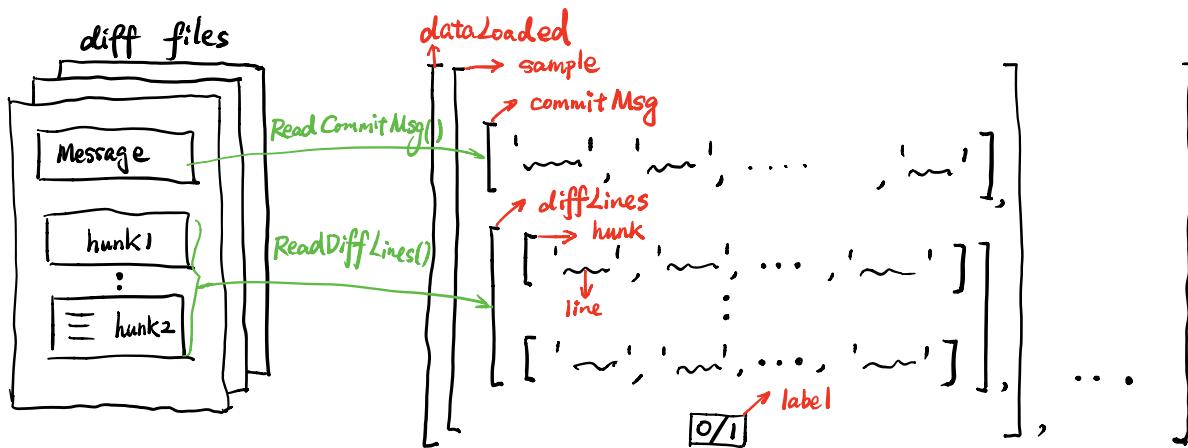

GetDiffProps()

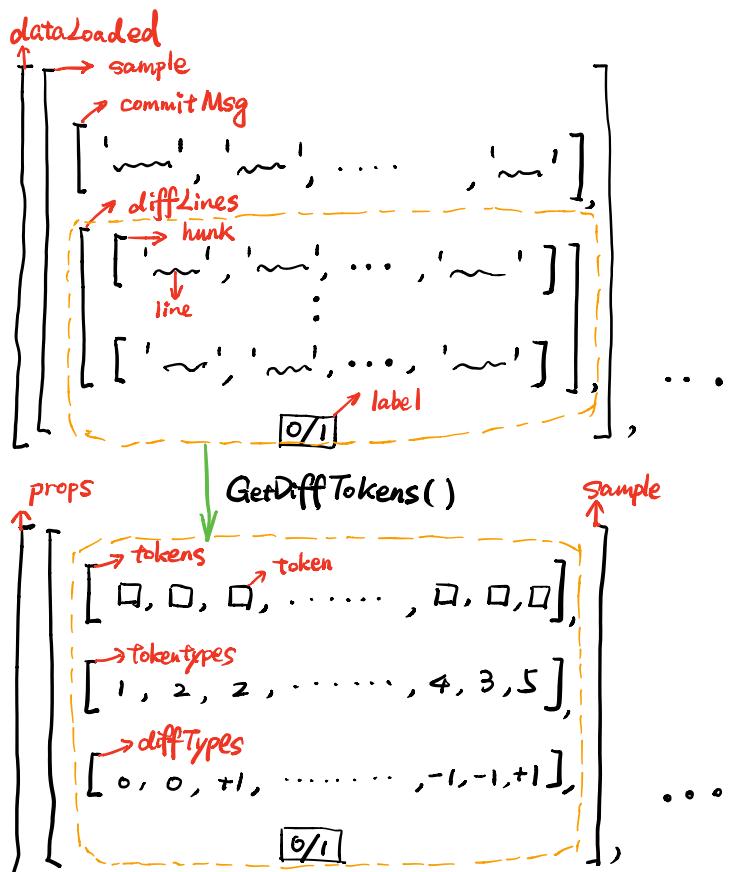


```


if(unlikely(ts == '%')) {
    'if', '(', 'unlikely', '(', ' ', '+', ' ', '+', ' ', '+', ' ', '+', ' ', ')', ')', ')',
    TokenKind KEYWORD if +>SourceLocation file 'tmp.cpp', line 1, column 10>
TokenKind PUNCTUATION ( <SourceLocation file 'tmp.cpp', line 1, column 12>
TokenKind IDENTIFIER unlikely <SourceLocation file 'tmp.cpp', line 1, column 13>
TokenKind PUNCTUATION ( <SourceLocation file 'tmp.cpp', line 1, column 21>
TokenKind PUNCTUATION * <SourceLocation file 'tmp.cpp', line 1, column 22>
TokenKind IDENTIFIER i <SourceLocation file 'tmp.cpp', line 1, column 23>
TokenKind PUNCTUATION == <SourceLocation file 'tmp.cpp', line 1, column 25>
TokenKind LITERAL '%' <SourceLocation file 'tmp.cpp', line 1, column 28>
TokenKind PUNCTUATION ) <SourceLocation file 'tmp.cpp', line 1, column 31>
TokenKind PUNCTUATION ) <SourceLocation file 'tmp.cpp', line 1, column 32>
TokenKind PUNCTUATION ( <SourceLocation file 'tmp.cpp', line 1, column 34>
'if', '(', 'unlikely', '(', ' ', '+', ' ', '+', ' ', '+', ' ', ')', ')', '('
1, 4, 2, 4, 4, 2, 4, 3, 4, 4, 4
0, 0, 0, 0, 0, 0, 0, 0, 0, 0


```



GetClangTokens

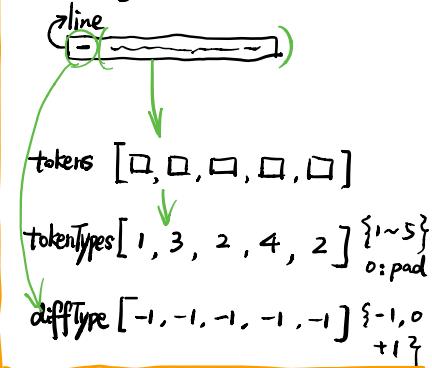


GetDiffTokens

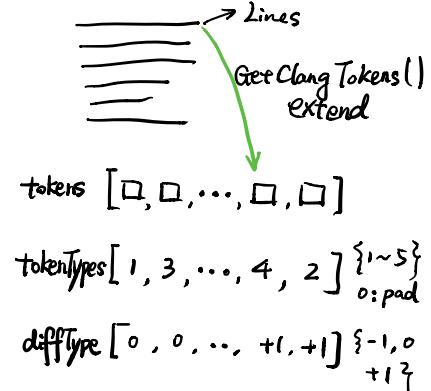

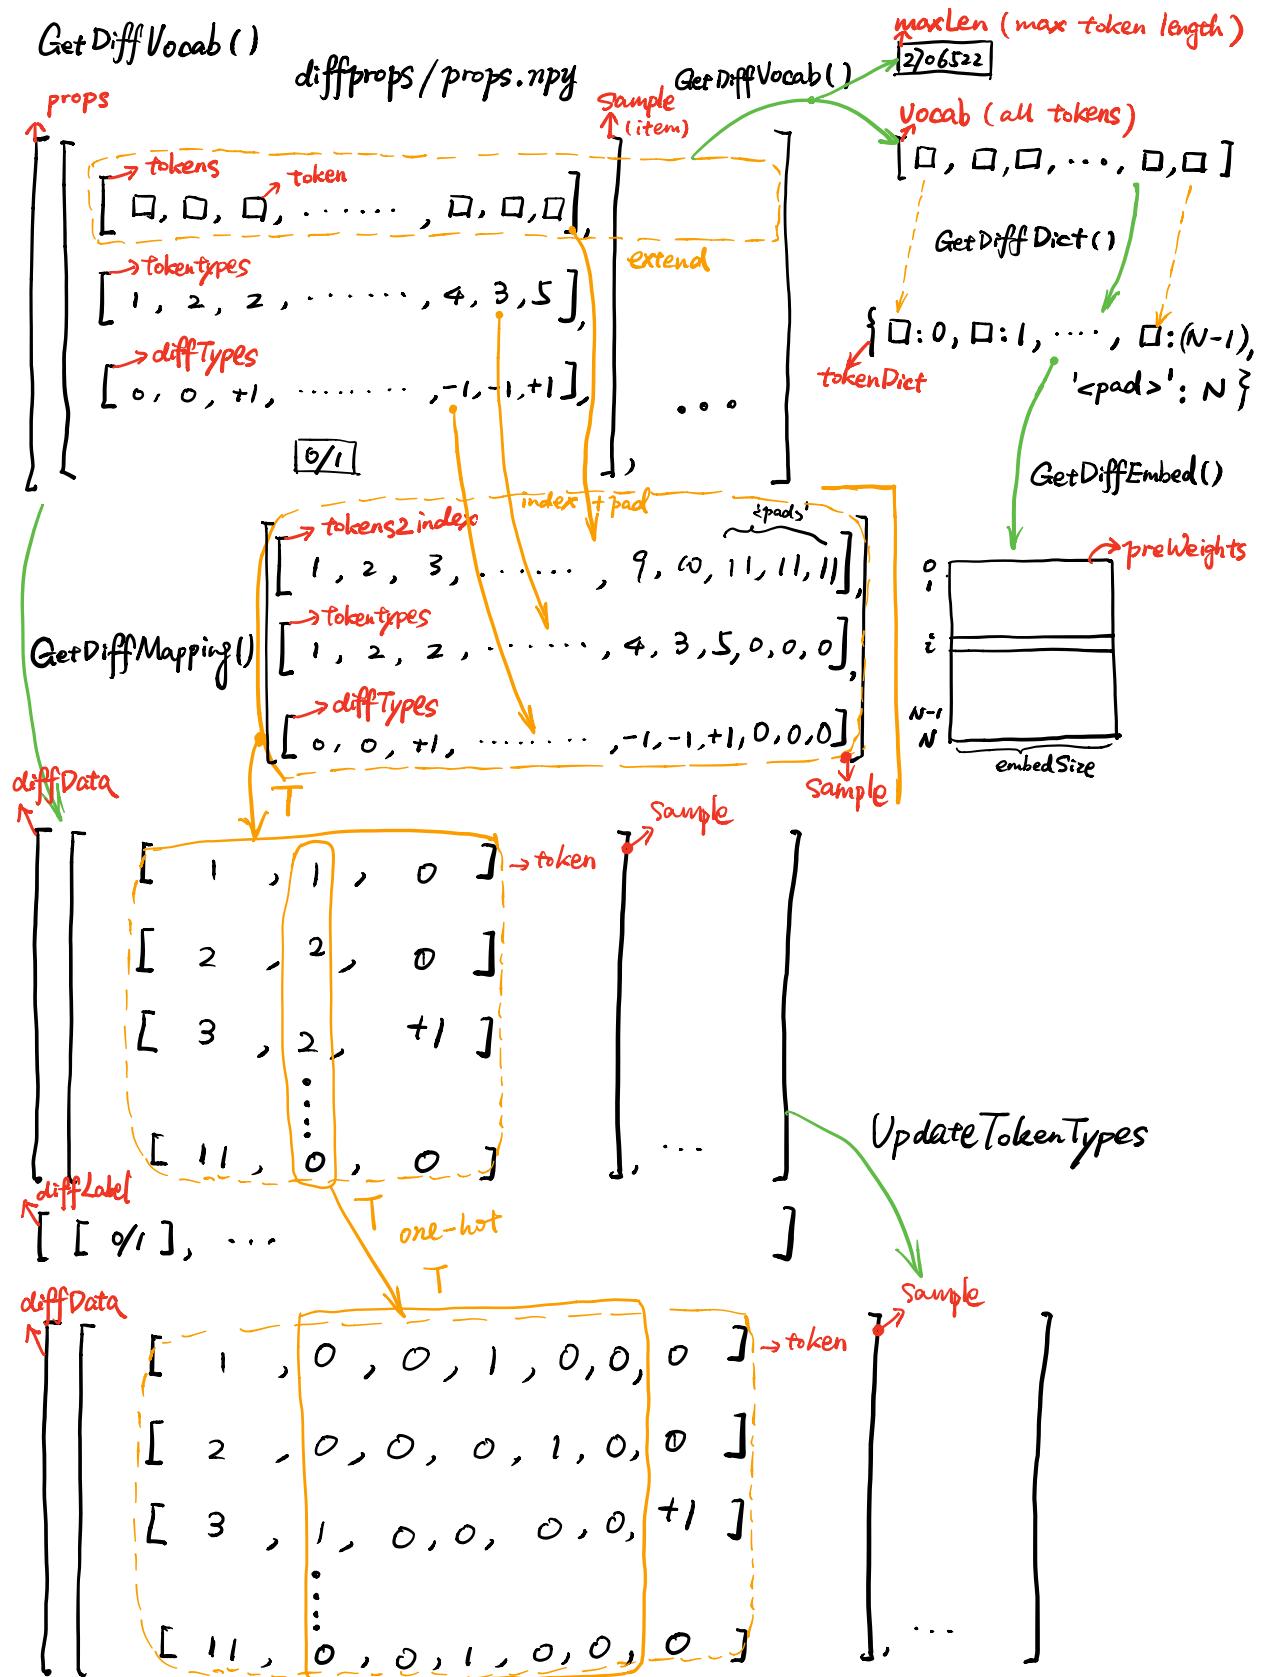

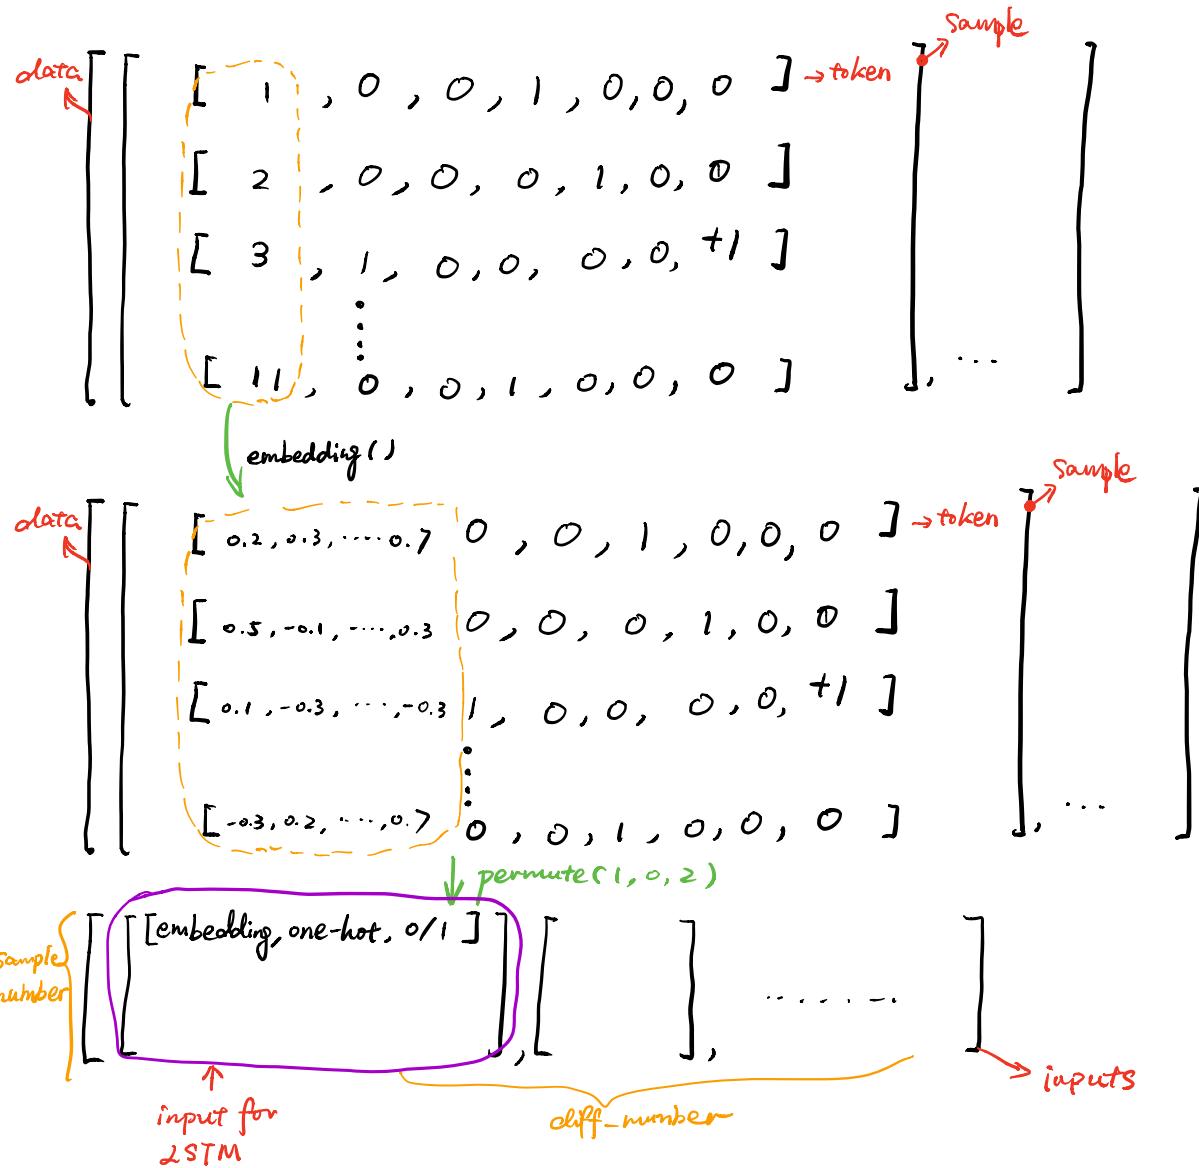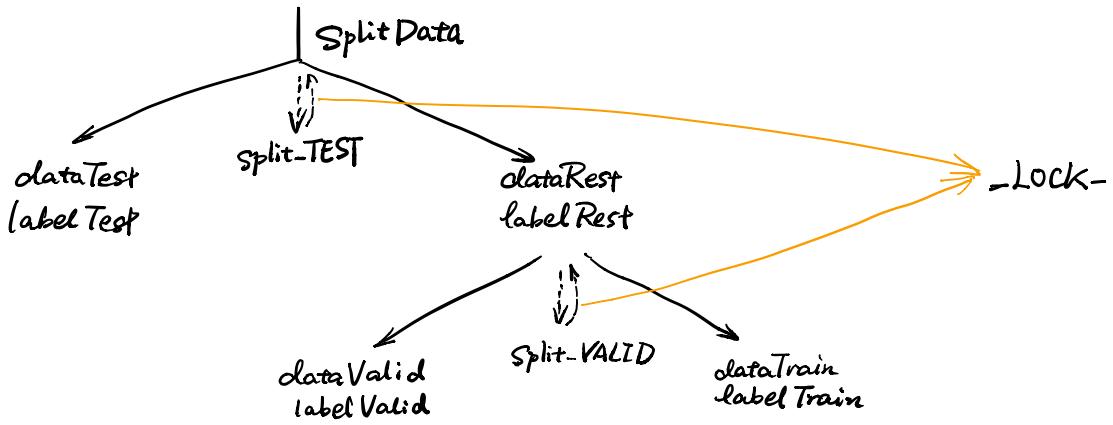

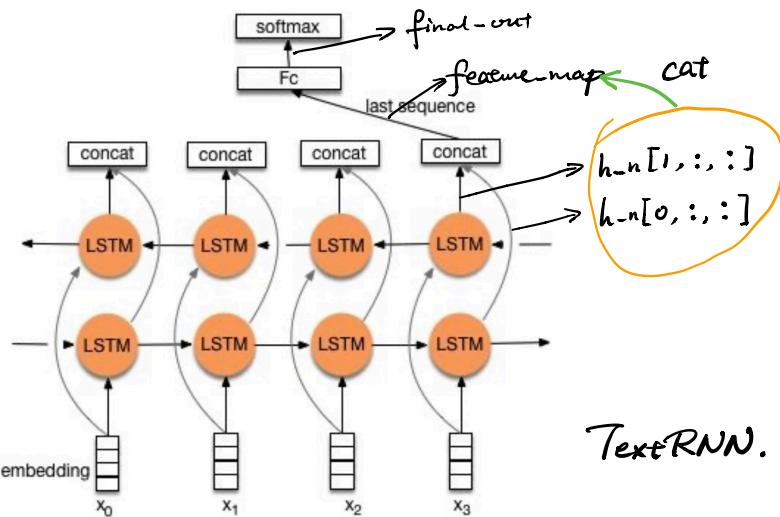

TextRNN.

