
Sistemas Operacionais de Redes II Avaliação 8 Yuri Mateus Santiago

Instalação do Putty feito no Windows 10.

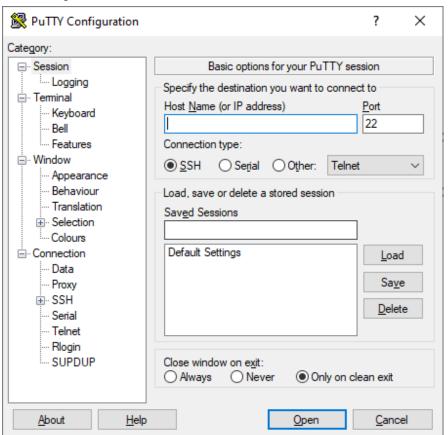

Já possuía as chaves ssh públicas e privadas do Windows.

```
MINGW64:/c/Users/Yuri/Dropbox/My PC (LAPTOP-JHR00AF0)/Documents

$ cat ~/.ssh/id_ed25519.pub | clip

Yuri@Yuri MINGW64 ~/Dropbox/My PC (LAPTOP-JHR00AF0)/Documents

$ cat ~/.ssh/id_ed25519.pub | clip

Yuri@Yuri MINGW64 ~/Dropbox/My PC (LAPTOP-JHR00AF0)/Documents

$ cat ~/.ssh/id_ed25519.pub

ssh-ed25519 AAAAC3NzaC11ZDI1NTE5AAAAIK7znhatW85ia9qPvQ2aB8HI5RbtZ4QI+7EgUoK1V0n4

yurimateussantiago@gmail.com

Yuri@Yuri MINGW64 ~/Dropbox/My PC (LAPTOP-JHR00AF0)/Documents

$ ssh-ed25519 AAAAC3NzaC11ZDI1NTE5AAAAIK7znhatW85ia9qPvQ2aB8HI5RbtZ4QI+7EgUoK1V0


n4 yurimateussantiago@gmail.com

bash: ssh-ed25519: command not found


Yuri@Yuri MINGW64 ~/Dropbox/My PC (LAPTOP-JHR00AF0)/Documents

$ |
```


Chave do Linux

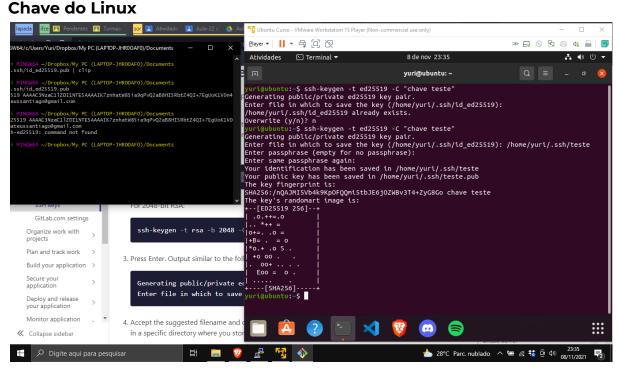

Iniciando o OpenSSH Server

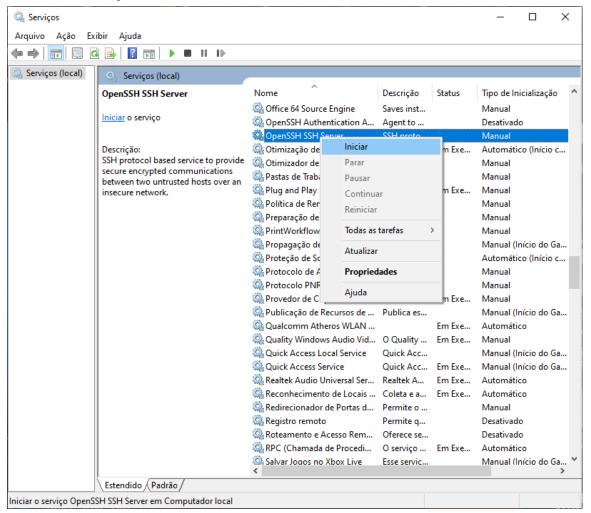

Servidor SSH iniciado

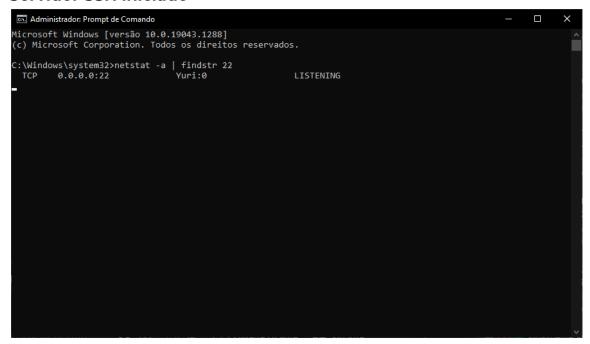

SSH Client no Ubuntu

