

Bubble Sort

Bubble Sort is the simplest sorting algorithm that works by repeatedly swapping the adjacent elements if they are in wrong order.

1.5

Example:

First Pass:

(5 1 4 2 8) \rightarrow (1 5 4 2 8), Here, algorithm compares the first two elements, and swaps since $5 > 1$.

(1 5 4 2 8) \rightarrow (1 4 5 2 8), Swap since $5 > 4$

(1 4 5 2 8) \rightarrow (1 4 2 5 8), Swap since $5 > 2$

(1 4 2 5 8) \rightarrow (1 4 2 5 8), Now, since these elements are already in order ($8 > 5$), algorithm does not swap them.

Second Pass:

(1 4 2 5 8) \rightarrow (1 4 2 5 8)

(1 4 2 5 8) \rightarrow (1 2 4 5 8), Swap since $4 > 2$

(1 2 4 5 8) \rightarrow (1 2 4 5 8)

(1 2 4 5 8) \rightarrow (1 2 4 5 8)

Now, the array is already sorted, but our algorithm does not know if it is completed. The algorithm needs one **whole** pass without **any** swap to know it is sorted.

Third Pass:

(1 2 4 5 8) \rightarrow (1 2 4 5 8)

(1 2 4 5 8) \rightarrow (1 2 4 5 8)

(1 2 4 5 8) \rightarrow (1 2 4 5 8)

(1 2 4 5 8) \rightarrow (1 2 4 5 8)

Recommended: Please solve it on “PRACTICE” first, before moving on to the solution.

Following are C/C++, Python and Java implementations of **Bubble Sort**.



C/C++

```
// C program for implementation of <a href="#">Bubble sort</a>
#include <stdio.h>

void swap(int *xp, int *yp)
{
    int temp = *xp;
    *xp = *yp;
    *yp = temp;
}

// A function to implement <a href="#">bubble sort</a>
void bubbleSort(int arr[], int n)
{
    int i, j;
    for (i = 0; i < n-1; i++)

        // Last i elements are already in place
        for (j = 0; j < n-i-1; j++)
            if (arr[j] > arr[j+1])
                swap(&arr[j], &arr[j+1]);
}

/* Function to print an array */
void printArray(int arr[], int size)
{
    int i;
    for (i=0; i < size; i++)
        printf("%d ", arr[i]);
    printf("\n");
}

// Driver program to test above functions
int main()
{
    int arr[] = {64, 34, 25, 12, 22, 11, 90};
    int n = sizeof(arr)/sizeof(arr[0]);
    bubbleSort(arr, n);
    printf("Sorted array: \n");
    printArray(arr, n);
    return 0;
}
```

[Run on IDE](#)

```
// Java program for implementation of <a href="#">Bubble Sort</a>
class BubbleSort
{
    void bubbleSort(int arr[])
    {
        int n = arr.length;
        for (int i = 0; i < n-1; i++)
            for (int j = 0; j < n-i-1; j++)
                if (arr[j] > arr[j+1])
                {
                    // swap temp and arr[i]
                    int temp = arr[j];
                    arr[j] = arr[j+1];
                    arr[j+1] = temp;
                }
    }

    /* Prints the array */
    void printArray(int arr[])
    {
        int n = arr.length;
```



```
for (int i=0; i<n; ++i)
    System.out.print(arr[i] + " ");
System.out.println();
}

// Driver method to test above
public static void main(String args[])
{
    BubbleSort ob = new BubbleSort();
    int arr[] = {64, 34, 25, 12, 22, 11, 90};
    ob.bubbleSort(arr);
    System.out.println("Sorted array");
    ob.printArray(arr);
}
/* This code is contributed by Rajat Mishra */
```

[Run on IDE](#)

Python

Python program for implementation of [Bubble Sort](#)

```
def bubbleSort(arr):
    n = len(arr)

    # Traverse through all array elements
    for i in range(n):

        # Last i elements are already in place
        for j in range(0, n-i-1):

            # traverse the array from 0 to n-i-1
            # Swap if the element found is greater
            # than the next element
            if arr[j] > arr[j+1]:
                arr[j], arr[j+1] = arr[j+1], arr[j]
```

```
# Driver code to test above
arr = [64, 34, 25, 12, 22, 11, 90]
```

```
bubbleSort(arr)
```

```
print ("Sorted array is:")
for i in range(len(arr)):
    print ("%d" %arr[i]),
```

[Run on IDE](#)

Output:

```
Sorted array:
11 12 22 25 34 64 90
```

Illustration :



i = 0	j	0	1	2	3	4	5	6	7
	0	5	3	1	9	8	2	4	7
	1	3	5	1	9	8	2	4	7
	2	3	1	5	9	8	2	4	7
	3	3	1	5	9	8	2	4	7
	4	3	1	5	8	9	2	4	7
	5	3	1	5	8	2	9	4	7
	6	3	1	5	8	2	4	9	7
i = 1	j	0	1	2	3	4	5	6	7
	0	3	1	5	8	2	4	7	9
	1	1	3	5	8	2	4	7	
	2	1	3	5	8	2	4	7	
	3	1	3	5	8	2	4	7	
	4	1	3	5	2	8	4	7	
	5	1	3	5	2	4	8	7	
i = 2	j	0	1	2	3	4	5	6	7
	0	1	3	5	2	4	7	8	
	1	1	3	5	2	4	7		
	2	1	3	5	2	4	7		
	3	1	3	2	5	4	7		
	4	1	3	2	4	5	7		
i = 3	j	0	1	2	3	4	5	6	7
	0	1	3	2	4	5	7		
	1	1	3	2	4	5			
	2	1	2	3	4	5			
	3	1	2	3	4	5			
i = 4	j	0	1	2	3	4	5	6	7
	0	1	2	3	4	5			
	1	1	2	3	4				
	2	1	2	3	4				
i = 5	j	0	1	2	3	4	5	6	7
	0	1	2	3	4				
	1	1	2	3					
i = 6	j	0	1	2	3	4	5	6	7
	0	1	2	3					
	1	1	2						

Optimized Implementation:

The above function always runs $O(n^2)$ time even if the array is sorted. It can be optimized by stopping the algorithm if inner loop didn't cause any swap.

```
// Optimized implementation of Bubble sort
#include <stdio.h>
```

```
void swap(int *xp, int *yp)
{
    int temp = *xp;
    *xp = *yp;
    *yp = temp;
}
```

```
// An optimized version of Bubble Sort
void bubbleSort(int arr[], int n)
{
    int i, j;
    bool swapped;
    for (i = 0; i < n-1; i++)
    {
        swapped = false;
        for (j = 0; j < n-i-1; j++)
        {
            if (arr[j] > arr[j+1])
            {
                swap(&arr[j], &arr[j+1]);
                swapped = true;
            }
        }

        // IF no two elements were swapped by inner loop, then break
        if (swapped == false)
            break;
    }
}
```

```
/* Function to print an array */
void printArray(int arr[], int size)
```

```
{
    int i;
    for (i=0; i < size; i++)
        printf("%d ", arr[i]);
    printf("\n");
}

// Driver program to test above functions
int main()
{
    int arr[] = {64, 34, 25, 12, 22, 11, 90};
    int n = sizeof(arr)/sizeof(arr[0]);
    bubbleSort(arr, n);
    printf("Sorted array: \n");
    printArray(arr, n);
    return 0;
}
```

[Run on IDE](#)

Output:

```
Sorted array:
11 12 22 25 34 64 90
```

Worst and Average Case Time Complexity: $O(n^2)$. Worst case occurs when array is reverse sorted.

Best Case Time Complexity: $O(n)$. Best case occurs when array is already sorted.

Auxiliary Space: $O(1)$

Boundary Cases: Bubble sort takes minimum time (Order of n) when elements are already sorted.


Sorting In Place: Yes

Stable: Yes



Due to its simplicity, bubble sort is often used to introduce the concept of a sorting algorithm.





In computer graphics it is popular for its capability to detect a very small error (like swap of just two elements) in almost-sorted arrays and fix it with just linear complexity ($2n$). For example, it is used in a polygon filling algorithm, where bounding lines are sorted by their x coordinate at a specific scan line (a line parallel to x axis) and with incrementing y their order changes (two elements are swapped) only at intersections of two lines (Source: [Wikipedia](#))





Snapshots:

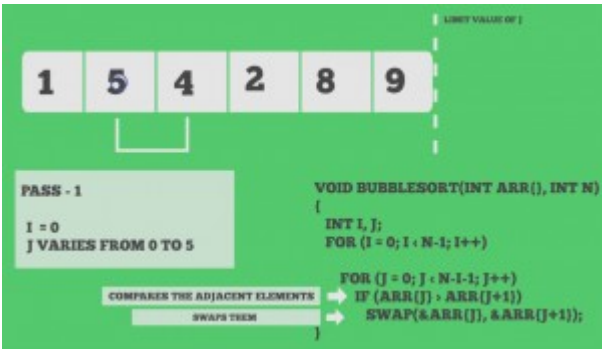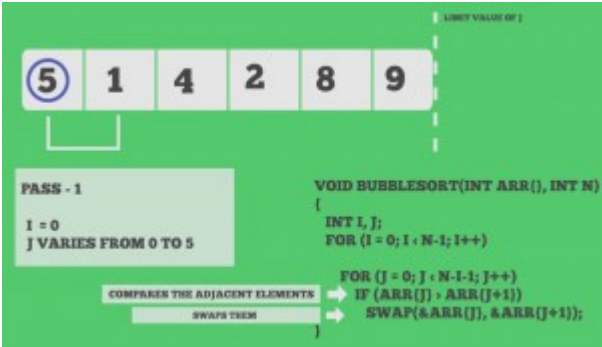

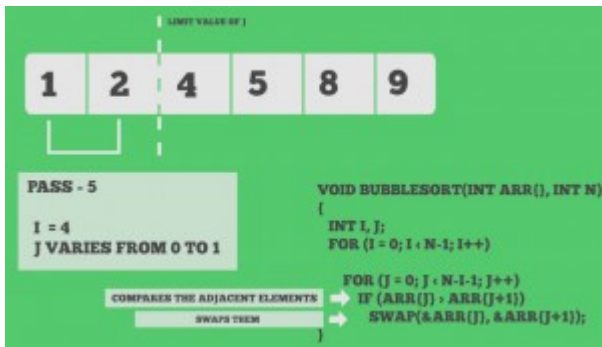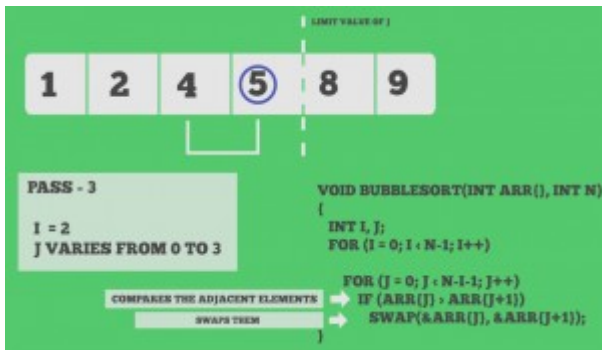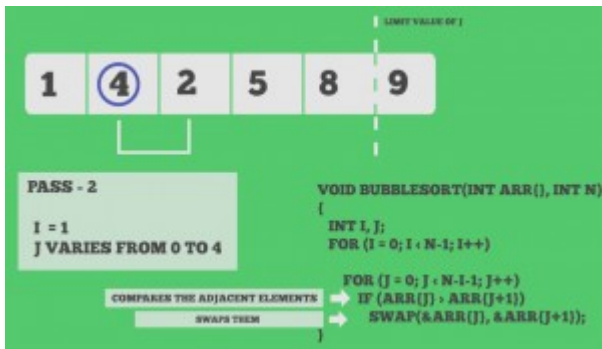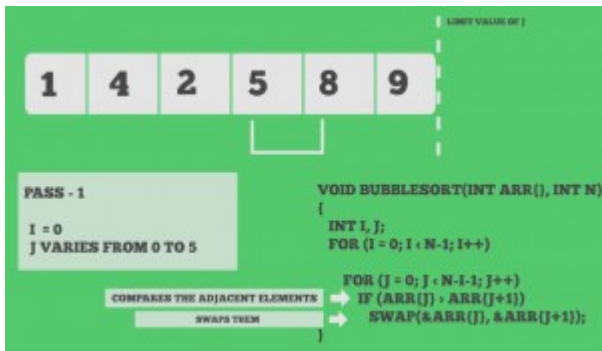

Quiz on Bubble Sort

Other Sorting Algorithms on [GeeksforGeeks/GeeksQuiz](https://www.geeksforgeeks.org/geeksquiz/):

- Selection Sort
- Insertion Sort
- Merge Sort
- Heap Sort
- QuickSort
- Radix Sort
- Counting Sort



- Bucket Sort
- ShellSort

Recursive Bubble Sort

Coding practice for sorting.

Reference:

- Wikipedia – Bubble Sort
- Image Source

Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above

GATE CS Corner Company Wise Coding Practice

Sorting

[Login to Improve this Article](#)

Please write to us at contribute@geeksforgeeks.org to report any issue with the above content.

Recommended Posts:

Insertion Sort

Selection Sort

Recursive Bubble Sort

Merge Sort

QuickSort

Sum of Manhattan distances between all pairs of points

Maximum triplet sum in array

Rearrange array such that even positioned are greater than odd

Maximum sum of pairwise product in an array with negative allowed

Sort the words in lexicographical order in Python

(Login to Rate)

1.5

Average Difficulty : 1.5/5.0
Based on 48 vote(s)

Basic

Easy

Medium

Hard

Expert



Add to TODO List



Mark as DONE

Writing code in comment? Please use ide.geeksforgeeks.org, generate link and share the link here.

Share this post!