

01 Fast-WAM - full source arrangement and all token styles

Original (left) / Editable reconstruction (right)

F_LAYOUT Fast-WAM: training and inference tokens

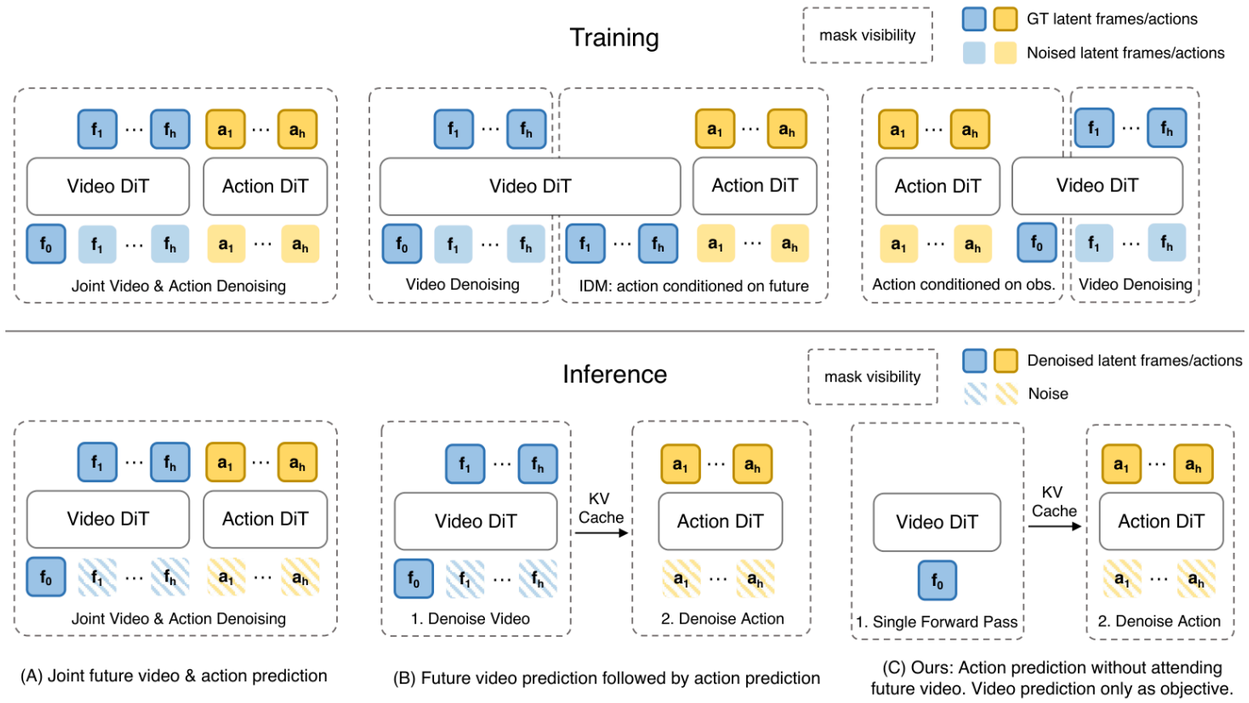

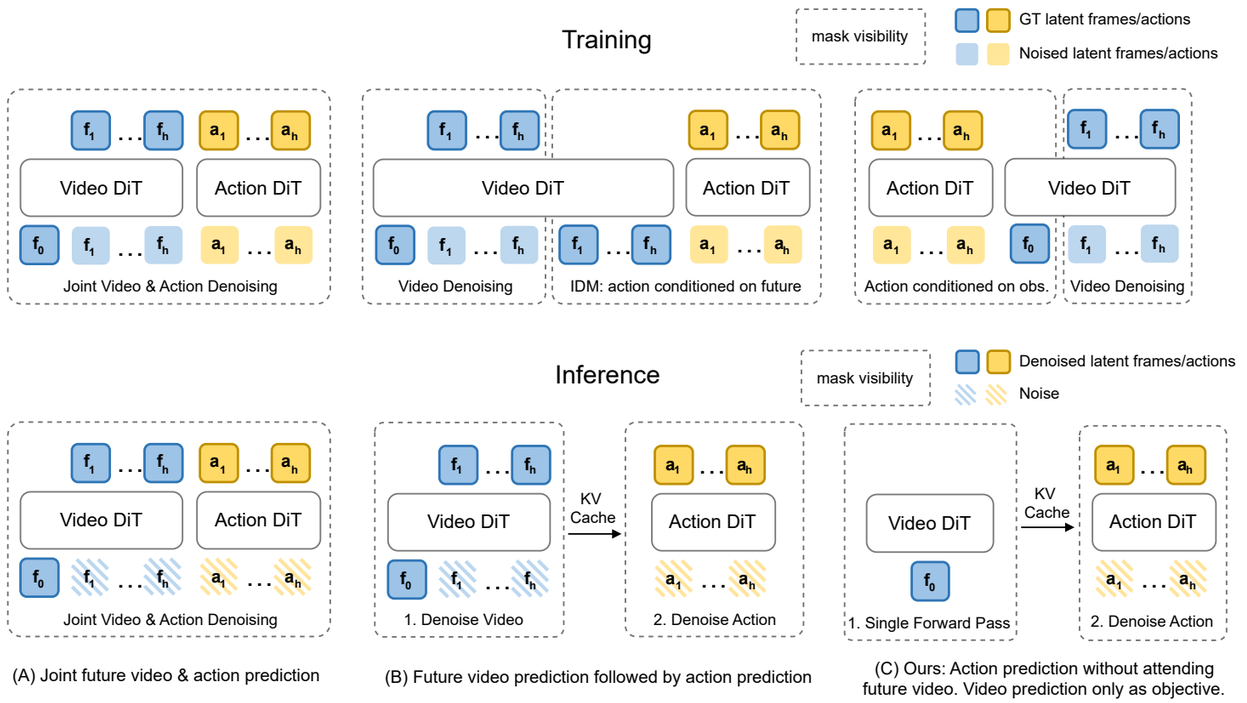

F01
GT / denoised frame

F02
GT / denoised action


F03
Noised frame (training)

F04
Noised action (training)


F05
Frame noise (inference)

F06
Action noise (inference)

F_TRAIN Fast-WAM: training blocks

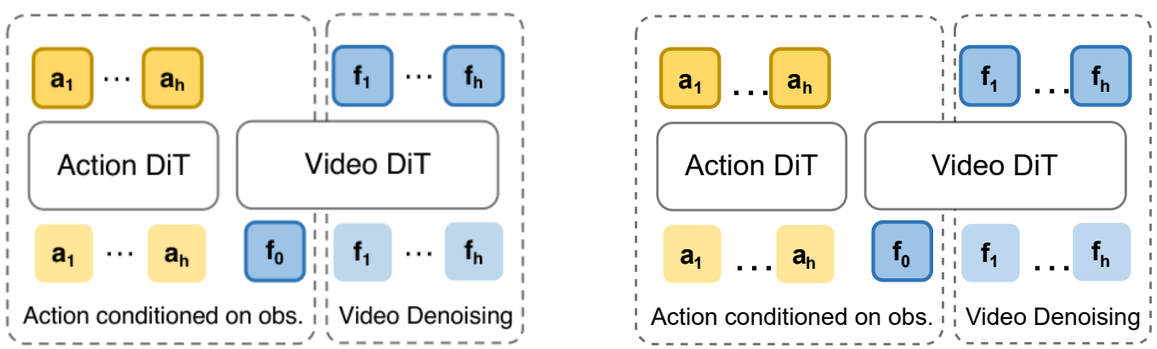

F_INFER Fast-WAM: inference blocks

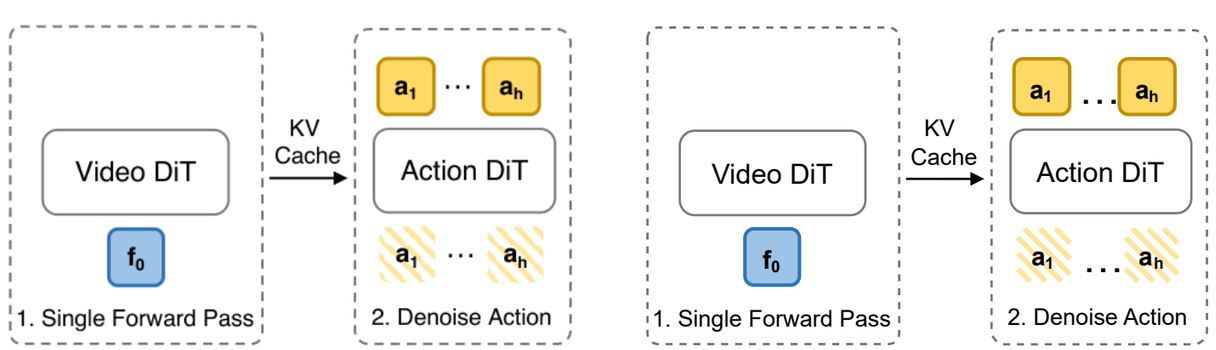

02 AHA-WAM - all token squares, rows and matrices

Original (left) / Editable reconstruction (right)

A_ROW AHA-WAM: input token rows



A01
Video input

A02
Noised video token

A03
Vision input

A04
State input

A05
Video attention token

A06
Action chunk 1

A07
Action chunk 2

A08
Inactive attention cell

A09
Inference action 1

A10
Inference action 2

A11
Updated K/V - video

A12
Updated K/V - chunk 1

A13
Updated K/V - chunk 2


A14
Observation query 1


A15
Observation query 2


A16
Query legend


A17
Action-row token

A_MASK AHA-WAM: attention-token matrices

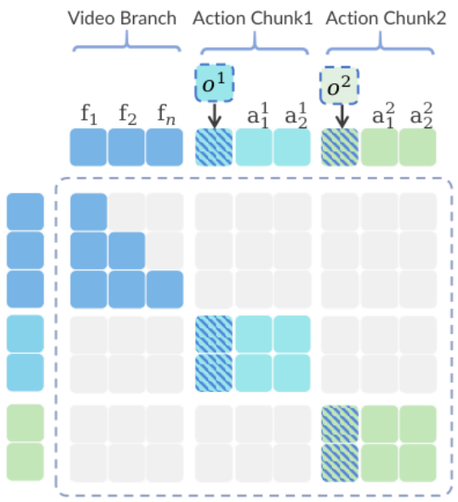


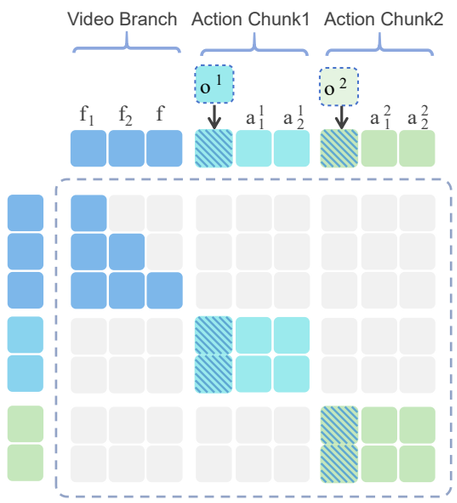

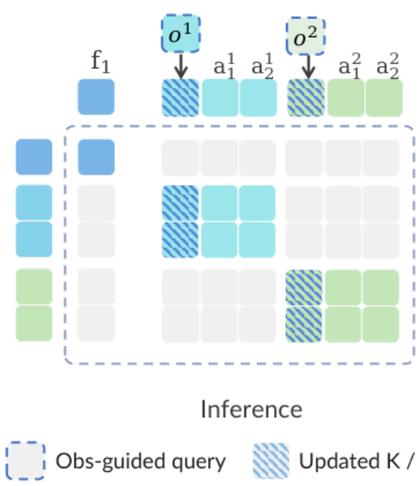

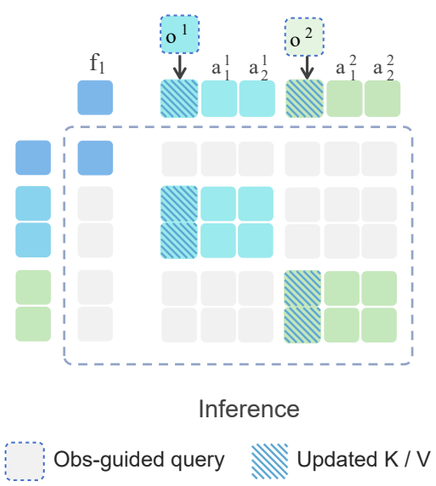

L_TOKEN LaWAM: latent-action tokens







03 Four replay / memory buckets and AAC entropy branch


Original (left) / Editable reconstruction (right)


B_EXPO EXPO-FT: replay buffer

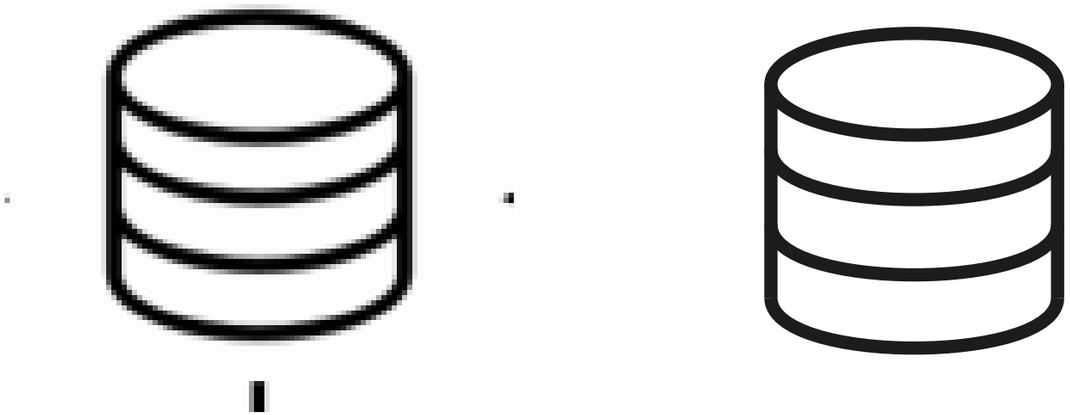


B_HIL HIL-SERL: replay buffers













B_DOPA RoboDopamine: buffer

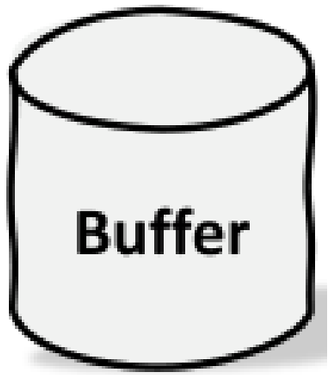

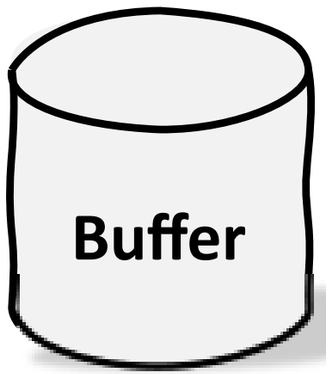



B_AHA AHA-WAM: rolling K/V memory

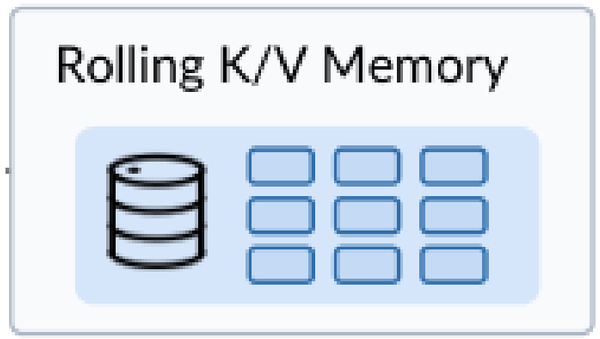

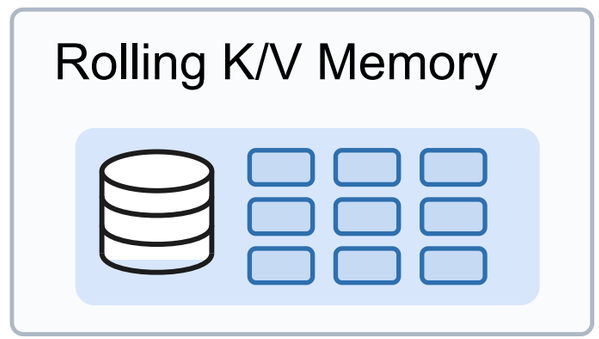

AAC AAC: samples to action entropy

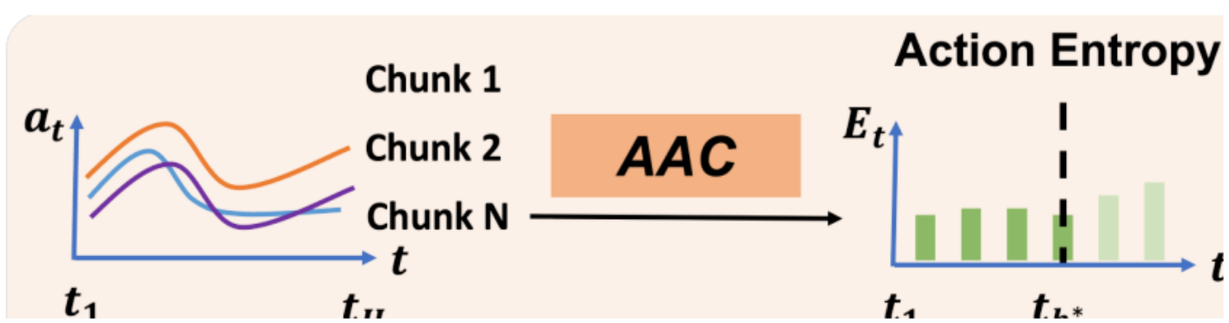


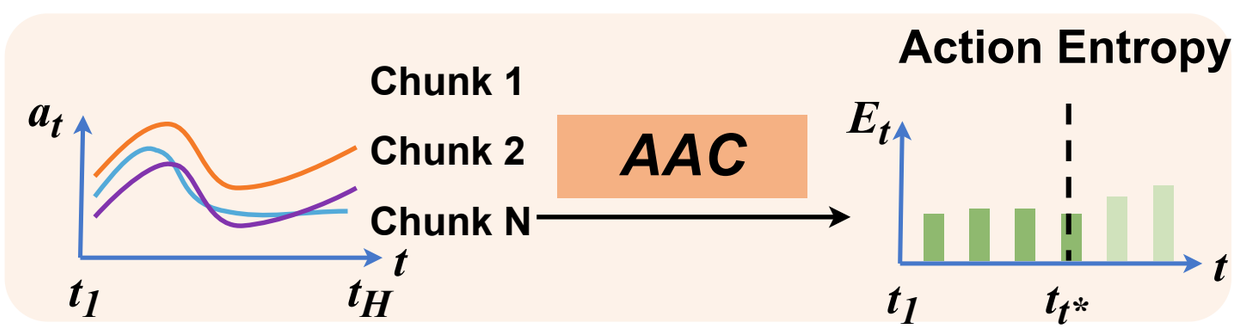


04 Components from full figures; all three selected globes

Original (left) / Editable reconstruction (right)


R_MODEL RL Token Fig.2: VLA + action expert

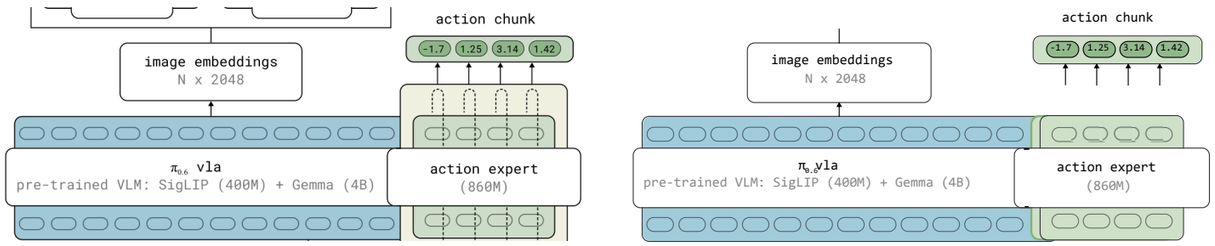


R_ENC RL Token Fig.2: encoder + decoder

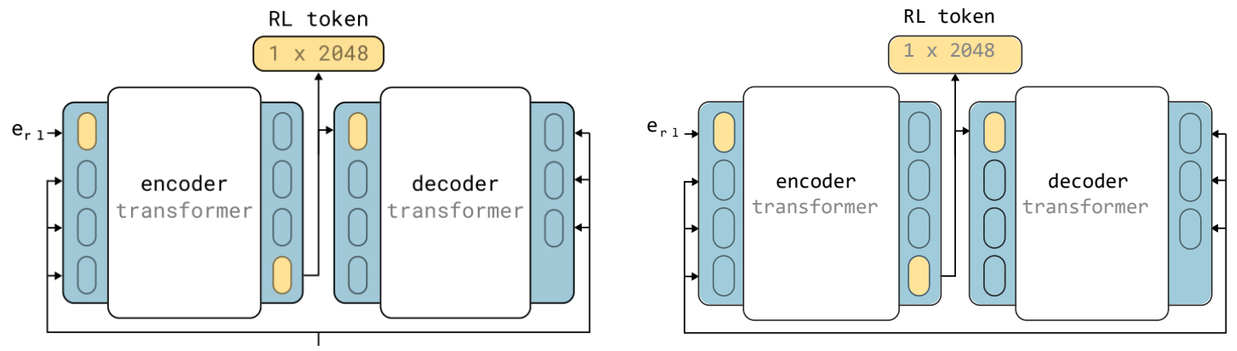


R_INPUT RL Token Fig.2: images + prompts

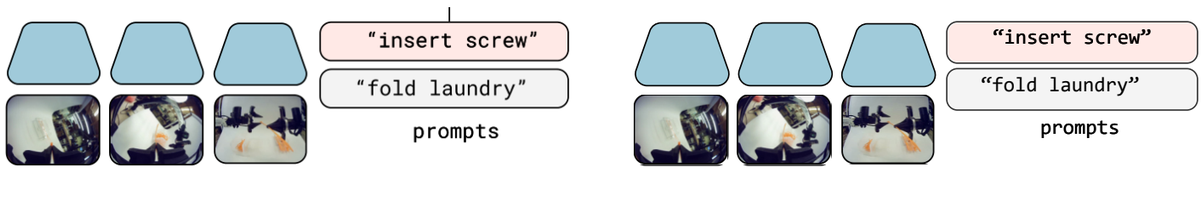

L_VLM LaWAM: VLM



L_WORLD LaWAM: latent world model

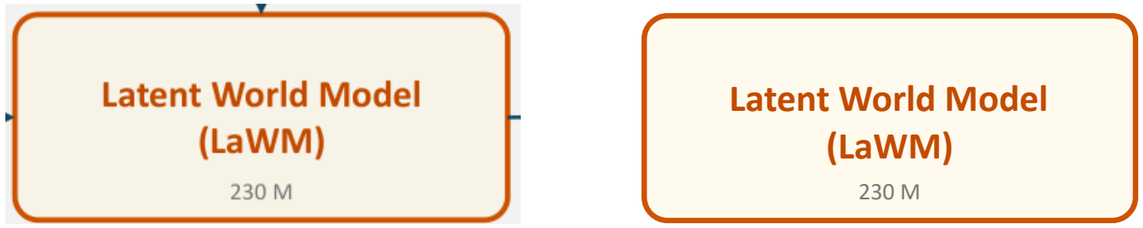

L_ACTION LaWAM: action expert



G1 Policy Decorator



G2 ReWiND



G3 RoboDopamine

