


Endpoint Choice Changes the Method Ranking

The method story changes when the endpoint changes.

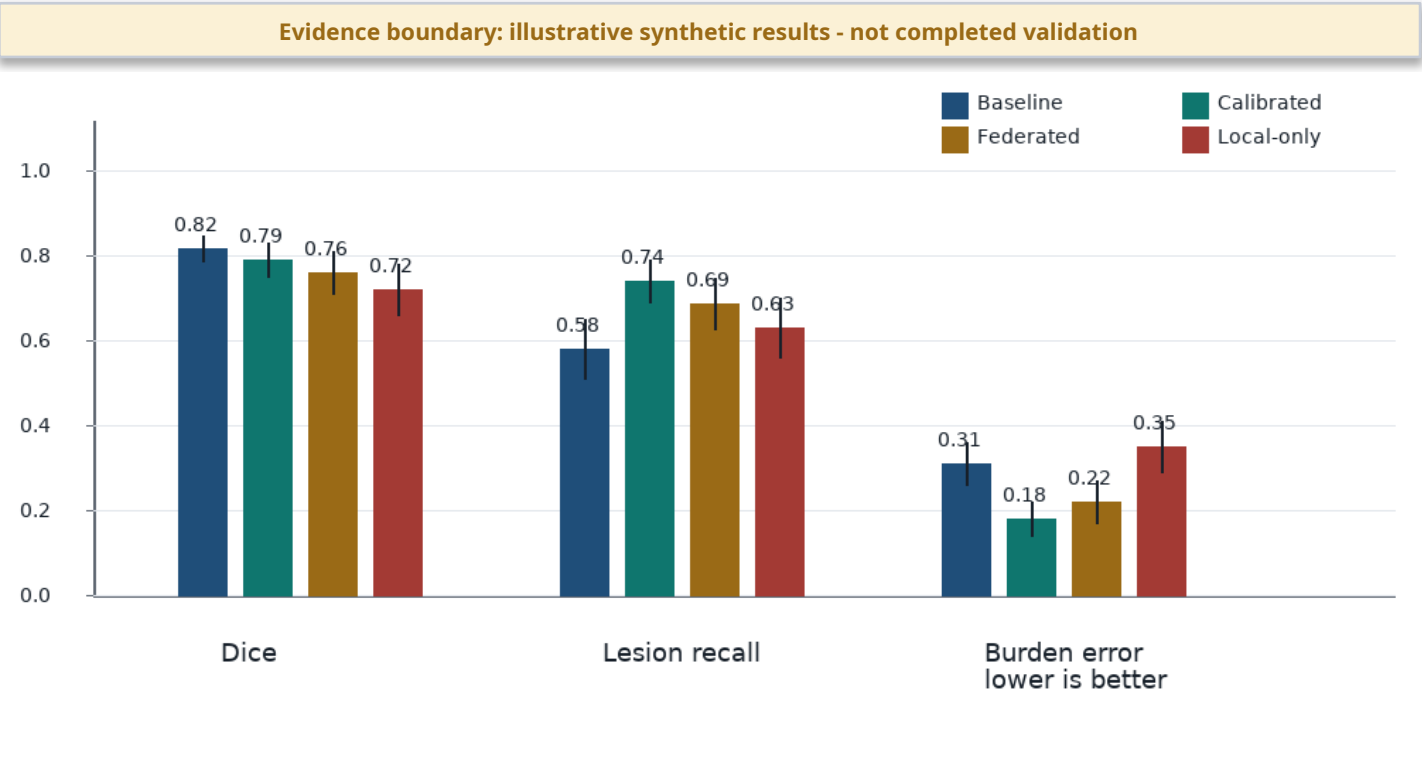

Interpretation
In this synthetic example, Calibrated wins recall; burden error is lower-is-better and lowest for Calibrated. Baseline wins Dice only.

Meeting decision
Freeze endpoint priority before ranking methods.

Average Dice Can Hide the Hard Case

A case page binds image, GT, prediction, error overlay, and metric.




Scientific object: same synthetic case, aligned GT/prediction/error overlay, case metric next to visual.

Reference retrieval: failure-case query selected inspected pages RRL-022, RRL-024, RRL-018, RRL-013, RRL-025; trace in EVIDENCE_MANIFEST; style not copied.

Limited-Information Multi-Center Experiment

Raw data stay local; shared summaries are judged by endpoint-level evidence.

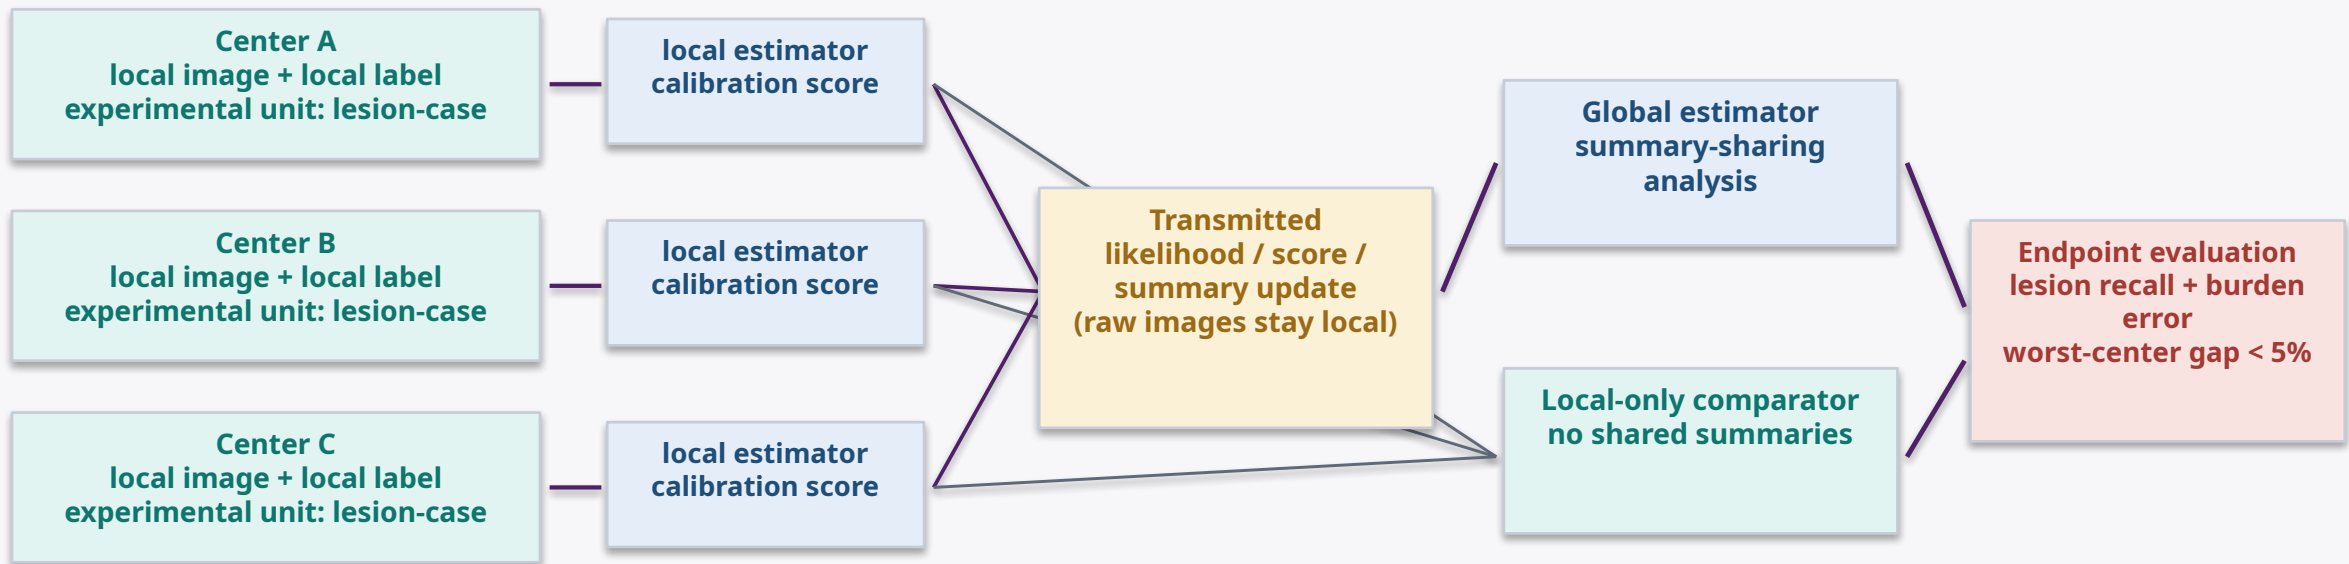


Comparator path: local-only uses the same local scores without summary sharing; both branches enter the same endpoint gate.

AI Phenotype Error Changes Inference

Segmentation output is a measured variable whose error can attenuate inference.

Target estimand

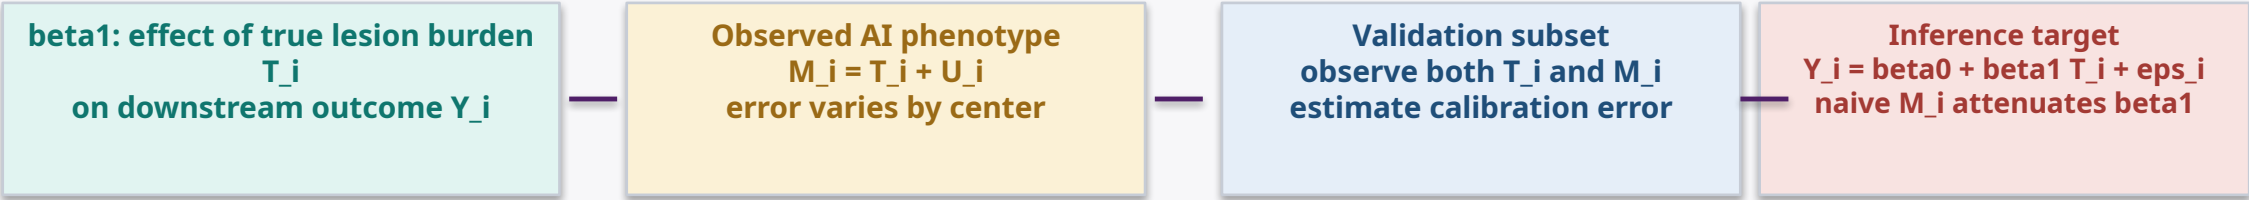

Toy calibration: $E[T | M, \text{center}] = \text{alpha_center} + \text{gamma_center } M$. Report beta1 after validation-calibrated correction, not a raw AI burden coefficient.

Evidence boundary
This page is a generated-variable inference mechanism,
not completed clinical validity evidence.