EXP.NO:06

G-COIN PROBLEM

PROBLEM STATEMENT:

Write a program to take value V and we want to make change for V Rs, and we have infinite supply of each of the denominations in Indian currency, i.e., we have infinite supply of { 1, 2, 5, 10, 20, 50, 100, 500, 1000} valued coins/notes, what is the minimum number of coins and/or notes needed to make the change.

Input Format:

Take an integer from stdin.

Output Format:

print the integer which is change of the number.

Example Input :

64

Output:

4

Explanaton:

We need a 50 Rs note and a 10 Rs note and two 2 rupee coins.


CODE:

```c
#include<stdio.h>
int main(){
    int V;
    scanf("%d", &V);

    int dominations[] = {1000, 500, 100, 50, 20, 10, 5, 2, 1};
    int n = sizeof(dominations)/sizeof(dominations[0]);
    int count = 0;
    for(int i=0;i<n;i++){
        count += V/dominations[i];
        V %= dominations[i];
    }
    printf("%d\n", count);
    return 0;
}
```

EXP.NO:06

OUTPUT:

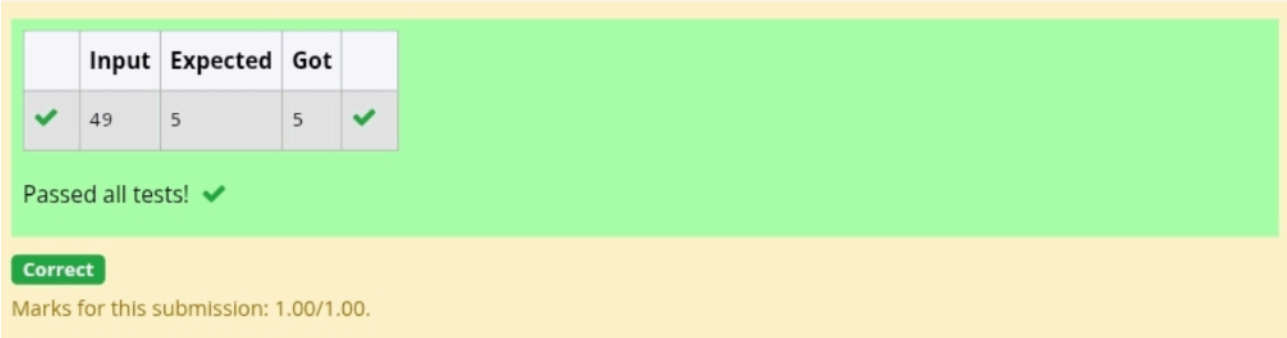

	Input	Expected	Got	
✔	49	5	5	✔

Passed all tests! ✔

Correct

Marks for this submission: 1.00/1.00.

RESULT:

The code is executed successfully.