Block-OBS-GS: Exact Per-Block Joint Brain Surgery with Gauss–Seidel Refinement for LLM Pruning

Yuwen Huang
The Hong Kong University of Science and Technology (Guangzhou)
yuwen.huang@ieee.org

Xiang Pan*
Lingnan University
xxiangpan@ln.edu.hk *Corresponding author

NeurIPS 2026 · Sydney

Scan for the paper (PDF)

Pruning can cut the storage and compute of deployed LLMs without retraining [1, 6].

Pruning an LLM block by block leaves the earlier blocks stale. One Gauss–Seidel sweep refreshes them.

- Converges to the global optimum with the mask fixed
- Same complexity class as SparseGPT
- 70B: SparseGPT's time, lower perplexity


−14% — Llama-3.1-8B, 75%
perplexity vs SparseGPT
36.86 → 31.69

−47% — Llama-3.1-8B, 87.5%
perplexity vs SparseGPT
256.7 → 137.2

12/12 — same-mask settings
one GS sweep beats SparseGPT reconstruction

70B — same time as SparseGPT
perplexity 6.039 vs 6.080
time 4,313 vs 4,248 s

1 The problem: frozen blocks

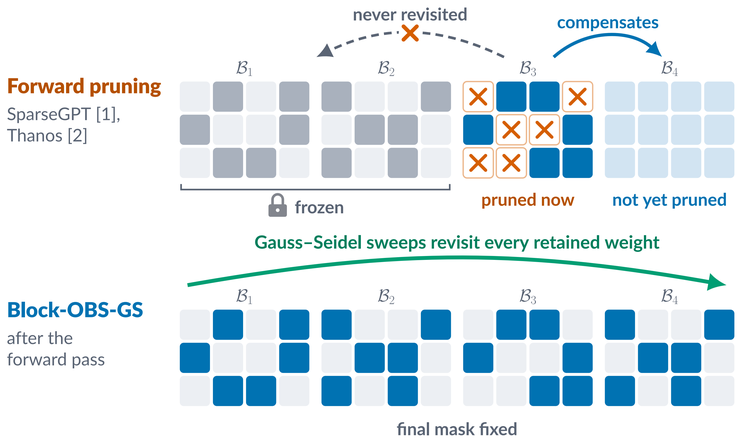

For a layer $\boldsymbol{W} \in \mathbb{R}^{m\times n}$ with calibration inputs $\boldsymbol{X} \in \mathbb{R}^{n\times T}$, each row i keeps its pruned weights at zero and minimizes


$$q(\boldsymbol{V}_{i,:}) \triangleq (\boldsymbol{V}_{i,:} - \boldsymbol{W}_{i,:}) \cdot \boldsymbol{H} \cdot (\boldsymbol{V}_{i,:} - \boldsymbol{W}_{i,:})^\top, \qquad \boldsymbol{H} \triangleq c \cdot \boldsymbol{X} \cdot \boldsymbol{X}^\top + \lambda \cdot \boldsymbol{I}.$$

Factor-graph view [5]: the forward pass decides too early



(a) forward pass fixes block $\mathcal{B}$ (b) GS sweeps on the complete graph

Circles: weights; squares: factors of $p \propto e^{-q}$, with the zero constraints δ_j in orange.

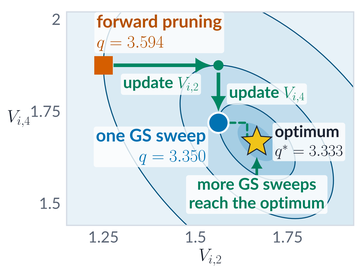

A 4-weight example

$\boldsymbol{W}_{i,:} = (1, 1, 1, 1)$, $\boldsymbol{H} = \boldsymbol{I} + \mathbf{1}\cdot\mathbf{1}^\top$; weights 1 and 3 deleted; blocks $\{1, 2\}$ and $\{3, 4\}$.

15/16

of the gap to the optimum is closed by one GS sweep

Forward pruning leaves $\partial q/\partial V_{i,2} = -5/4$ at the frozen weight $V_{i,2}$.

2 Our fix: solve, then sweep

STAGE 1 — **Forward block solve**
block by block, one exact solve per row

→

STAGE 2 — **Gauss–Seidel sweeps**
mask fixed, every block revisited

Stage 1: exact joint solve per row and block (multi-weight OBS [3])

$$\boldsymbol{V}^{(r)}_{i,\mathcal{B}\cup\mathcal{R}} = \boldsymbol{V}^{(r-1)}_{i,\mathcal{B}\cup\mathcal{R}} - \boldsymbol{V}^{(r-1)}_{i,\mathcal{D}_\mathcal{B}} \cdot \left((\boldsymbol{F}_{\mathcal{B},\mathcal{D}_\mathcal{B}})^\top \cdot \boldsymbol{F}_{\mathcal{B},\mathcal{D}_\mathcal{B}}\right)^{-1} \cdot (\boldsymbol{F}_{\mathcal{B},\mathcal{D}_\mathcal{B}})^\top \cdot \boldsymbol{F}_{\mathcal{B},\mathcal{B}\cup\mathcal{R}}$$

$\boldsymbol{F}$: upper Cholesky factor of $\boldsymbol{H}^{-1}$; $\mathcal{D}_\mathcal{B}$: deleted columns of block $\mathcal{B}$; $\mathcal{R}$: later columns.

Stage 2: Gauss–Seidel update of each retained weight, $j = 1, \ldots, n$

$$V^{(t)}_{i,j} \triangleq V^{(t-1)}_{i,j} - \frac{1}{H_{j,j}} \cdot \underbrace{\left(\sum_{l<j} H_{j,l} \cdot \left(V^{(t)}_{i,l} - W_{i,l}\right) + \sum_{l\geq j} H_{j,l} \cdot \left(V^{(t-1)}_{i,l} - W_{i,l}\right)\right)}_{\triangleq R_{j,i}}$$

Deleted weights stay zero; $R_{j,i}$ is the (j, i) entry of $\boldsymbol{R} = \boldsymbol{H} \cdot (\boldsymbol{V} - \boldsymbol{W})^\top$, kept current by one rank-one update per column.


Guarantees

- **Exact block solve.** The Stage 1 update is the unique minimizer of q over $\boldsymbol{V}_{i,\mathcal{B}\cup\mathcal{R}}$ with $\boldsymbol{V}_{i,\mathcal{D}_\mathcal{B}} = 0$ and earlier blocks fixed.
- **Converges to the global optimum with the mask fixed.** $\|\boldsymbol{e}^{(K)}\|_{\boldsymbol{H}_{\mathcal{U}\mathcal{U}}} \leq \gamma^K \cdot \|\boldsymbol{e}^{(0)}\|_{\boldsymbol{H}_{\mathcal{U}\mathcal{U}}}$ with $\gamma < 1$: the sweeps converge geometrically to the global optimum $\boldsymbol{V}^*$.
- **Built-in certificate.** $q(\boldsymbol{V}_{i,:}) - q(\boldsymbol{V}^*_{i,:}) \leq \|\boldsymbol{R}_{\mathcal{U},i}\|_2^2/\lambda$.
- **MAP view.** Minimizing q is maximum a posteriori (MAP) estimation for the log-concave $p \propto e^{-q}$; each GS update is an iterated-conditional-modes step [4] on its factor graph [5].
- **Same complexity class as SparseGPT.** $\Theta(n^3 + n^2 \cdot T + m \cdot n^2)$ per layer; measured time 1.02× SparseGPT's at 70B and 2.0× at 8B.

$\mathcal{U}$: retained columns of row i; $\boldsymbol{V}^*$: global optimum with the mask fixed; $\boldsymbol{e}^{(K)}$: error of $\boldsymbol{V}_{i,\mathcal{U}}$ after K sweeps.


GS does the work

Llama-3.2-3B, 75% sparsity; every bar uses the same mask

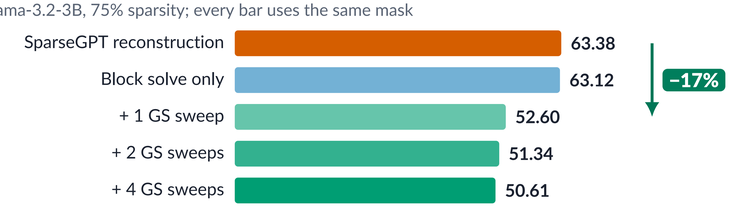

3 Results

Llama-3.1-8B: perplexity (PPL) on WikiText-2, lower is better

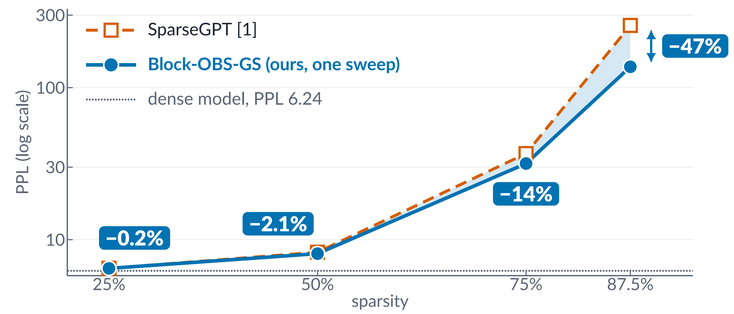


One GS sweep wins in all 12 settings

PPL change vs SparseGPT reconstruction on the same mask; darker means a larger gain

	25%	37.5%	50%	62.5%	75%	87.5%
Llama-3.2-3B	−0.3%	−0.9%	−3.1%	−9.1%	−17.0%	−10.8%
Llama-3.1-8B	−0.2%	−0.7%	−1.9%	−6.2%	−12.7%	−21.1%

70B scale: best PPL at SparseGPT's speed

Llama-3.3-70B-Instruct, 50%, six GPUs; dense PPL 3.862; block width 128 (ours), 32 (SparseGPT, Thanos)

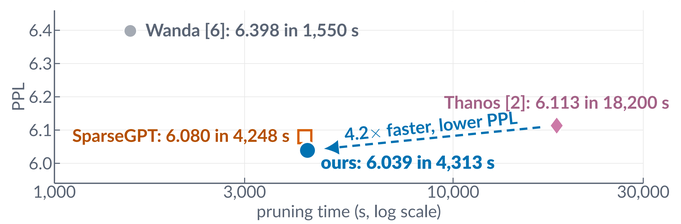

Drop-in for compression pipelines

PPL, SparseGPT → Block-OBS-GS

−12.7% — on a fixed Wanda mask [6], 3B
75%: 182.95 → 159.63

−10.5% — on a fixed Wanda mask [6], 8B
75%: 124.10 → 111.04

−4.7% — followed by 4-bit GPTQ [7], 3B
50%: 16.13 → 15.37

References. [1] E. Frantar, D. Alistarh. SparseGPT. ICML 2023. [2] I. Ilin, P. Richtárik. Thanos. arXiv:2504.05346, 2025. [3] B. Hassibi, D. G. Stork. Second order derivatives for network pruning: Optimal Brain Surgeon. NeurIPS 5, 1992. [4] J. Besag. On the statistical analysis of dirty pictures. J. R. Stat. Soc. B, 1986. [5] F. R. Kschischang, B. J. Frey, H.-A. Loeliger. Factor graphs and the sum-product algorithm. IEEE Trans. Inf. Theory, 2001. [6] M. Sun, Z. Liu, A. Bair, J. Z. Kolter. A simple and effective pruning approach for large language models. ICLR 2024. [7] E. Frantar, S. Ashkboos, T. Hoefler, D. Alistarh. GPTQ. ICLR 2023.

Acknowledgments. Supported in part by the National Natural Science Foundation of China (62601349), the Research Grants Council of Hong Kong (23201626), the Department of Education of Guangdong Province (2026KQNCX066), HKUST(GZ) (G0101000351), and Lingnan University (SDS24A16).