

WikiTopics: What is popular on Wikipedia and why.

Byung Gyu Ahn, Chris Callison-Burch, Benjamin Van Durme

Center for Language and Speech Processing

Johns Hopkins University

Baltimore, Maryland

{bahn, ccb, vandurme}@cs.jhu.edu

Abstract

We establish a novel task and pipeline to find trending topics from Wikipedia and introduce a novel data set: hourly page view statistics of all Wikipedia articles for three years and evaluation data for the results. Our pipeline consists of three steps: to find the best articles, cluster them, and extract the best sentences. Our K-means clustering and clustering using the link structures performs with a 71.5% precision compared to human annotators. Our sentence selection make use of the link structure, named entity and time expression recognition and works 54% as well as humans do. The result shows promise for explaining what is currently popular on Wikipedia and for automatically creating a timeline of past newsworthy events.

1 Introduction

In this paper we analyze a novel data set: we have collected the hourly page view statistics for every Wikipedia page in every language for a three year period. We show how these page view statistics—along with a whole host of other features like inter-page links, edit histories, mentions in contemporaneous news stories—can be used to identify and explain popular trends, including political elections, natural disasters, sports championships, popular films and music, and other current events.

Our approach is to select a set of articles whose daily page views increase above their average from the previous two week period. Rather than simply selecting the most popular articles for a given day,

this selects articles whose popularity is rapidly increasing. These popularity spikes are presumably due to some external current events in the real world. On any given day, there are many articles whose popularity is spiking: while some of articles are related to each other, many of them are a coincidence.

In this paper we attempt to select 100 such articles from each of 5 randomly selected days in 2009 and cluster the articles such that the clusters coherently correspond to current events. Quantitative and qualitative analyses are provided along with the evaluation data set.

We compared our automatically collected clusters to the Wikipedia current events. Wikipedia editors compile current events every day, which mainly consist of social and political events, traffic accidents and disasters. More often than not, they do not generate much traffic, and link to pages that are too general like “United States” or “Israel”. We view this work as an automatic mechanism that could potentially supplant the hand-curated method of selecting current events that is currently done by Wikipedia editors.

For instance, we would attempt to cluster the articles in Figure 1 into 3 clusters, { Barack Obama, Joe Biden, White House, Inauguration } which corresponds to the inauguration of Barack Obama, { US Airways Flight 1549, Chesley Sullenburger, Hudson River } which corresponds to the successful ditching of an airplane into the Hudson river without loss of life, and { Superbowl, Arizona Cardinals } which describes the then upcoming Superbowl XLIII.

We further try to explain the clusters by selecting sentences from the revision of the Wikipedia arti-

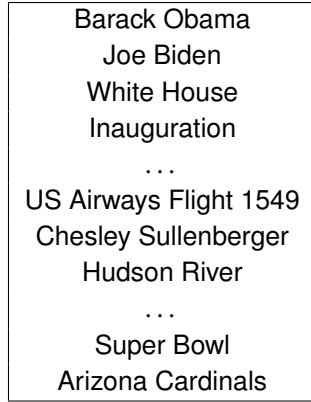


Figure 1: The automatically selected articles for January 27th, 2009. The underscores are used in place of spaces by Wikipedia.

cles on that date. For the first cluster, a good selection might be “the inauguration of Barack Obama as the 44th president of the United States took place on Jan 20, 2009”. For the second cluster, “Chesley Burnett “Sully” Sullenberger III (born January 23, 1951) is an American commercial airline pilot, . . . , who successfully carried out the emergency water landing of US Airways Flight 1549 on the Hudson River, offshore from Manhattan, New York City, on January 15, 2009, . . .”. For the third cluster, “[Superbowl XLIII] will feature the American Football Conference champion Pittsburgh Steelers (14-4) and the National Football Conference champion Arizona Cardinals (12-7) .”, which makes clear the relationship with Arizona Cardinals.

To generate the clusters we can make use of the text of the articles on that date, versions of the articles from previous dates, the link structure and category info from Wikipedia, and potentially external info like newspaper articles published before the date.

To select sentences we may want to make use of NLP technologies such as coreference resolution, named entity and date taggers, and dependency parsers to identify subjects of sentences.

2 Motivation

What are interesting topics? In an online encyclopedia such as Wikipedia, the page view counts for each article reflects the popularity of the article. Each article has a different level of popularity: some have high page views, and others low page views. This

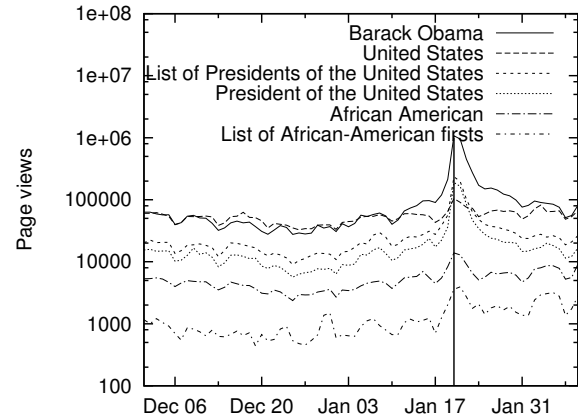


Figure 2: Page views for the articles related to the inauguration of Barack Obama. The articles are linked from an item in the Wikipedia current events. Interestingly, the list does not include the article Inauguration of Barack Obama, the very page about the event that has a spiking page views.

tendency maintains throughout the year, but sometimes, a external newsworthy event such as a major political or sports event, a natural disaster or a pandemic, occurs and incur that many articles related to that specific event has a significant increase in page views.

Wikipedia has a section called “current events”, in which the recently occurred events are listed manually by Wikipedia editors. Figure 2 shows the page views of the articles related to the inauguration of Barack Obama, as manually listed in the section. Each event may have a hierarchical structure—there may be a major event and minor events related to the major events. Each event is described in a line of text with a possibly multiple links to the related Wikipedia articles. The figure shows the spikes in page views of the related articles around the date on which the event took place—January 20th, 2009.

We have selected the articles that has a major increase in page views. The increase in page views are measured as follows. For each day, the total sum of the page views for the past 15 days and the total sum of the page views for the previous 15 days are summed, and the difference Δ between the two is calculated for each article. The articles are sorted in order of decreasing Δ , and the top 100 articles are selected. The difference Δ is formularized as below:

$$\Delta = S_{15} - S_{30}, \text{ where } S_{15} = \sum_{i=1}^{15} v_i \text{ and}$$

$$S_{30} = \sum_{i=16}^{30} v_i$$

where v_i is the page views of the article on the past i th day from the date on which the articles are selected.

We compared the automatically selected articles to the articles linked from the Wikipedia current events in some aspects. First of all, note that the hand-curated articles are less than half of the automatically selected articles: There are 17,253 hand-selected articles and 36,400¹ auto-selected articles. Only 28% of those hand-selected articles are automatically selected. When analyzed, it was found that many of the hand-selected articles have very low page views: 6,294 (36.5%) have maximum daily page views less than 1000 in 2009. Naturally, they are not chosen by automatic selection based on page views².

Figure 3 shows the comparison of the selected articles. Automatically selected articles include a newly created article about a political event (Inauguration of Barack Obama), a recently released film, a popular TV series and related articles and tend to be specific than hand-selected articles. The hand-selected articles include more generic articles related a specific event, most of which are personal, organizational or geopolitical names. The hand-generated event describes the relationships between related articles.

Should we try to predict the current event descriptions that Wikipedia editors hand-curate? We say no for the following reasons. Therefore we recommend against this methodology for other researchers.

We set up a website³ that you can see the sparkline graphs of pageviews for each day, each link, or each event in the form as Figure 2. You can see the clear correlation between the spikes of the page views of

¹The year 2009 has 365 days and one day is missing from our daily statistics.

²The automatically selected articles has an increase in page views of at least 10,000.

³See <http://ANONYMIZED>

WikiTopics
Inauguration of Barack Obama
Joe Biden
Notorious (2009 film)
The Notorious B.I.G.
Lost (TV series)
Wikipedia current events
Fraud
Florida
Hedge fund
Arthur Nadel
Federal Bureau of Investigation

Figure 3: The example articles for January 27th. These are the articles that do not have a counterpart with a window size of 15 days. The hand-selected articles are linked from an event “Florida hedge fund manager Arthur Nadel is arrested by the United States Federal Bureau of Investigation and charged with fraud.”

the articles and the date on which the articles appear as the current events.

At this point, we set the goal of our novel task: to summarize recent events related to popular articles just as the hand-curated Wikipedia current events, but with more popular articles with high page views. This work can be used to replace the hand-generated current events listing the events that many people are interested in.

Our system pipeline is explained as follows. First, the most popular pages, or topics, are collected per each day (§2). Second, clusters are identified by clustering related topics and the main article of each cluster is identified (§3). Lastly, the sentence that best describes the cluster are extracted for each cluster (§4). See Figure 4.

3 Article selection

Dataset The Wikipedia Traffic Statistics dataset is originally publicized and made available at <http://dammit.lt/wikistats/> by a Wikipediaian Domas Mituzas. This data is only kept up to a several months that the space allows. For the previous statistics, two sets of the statistics are published at Amazon Public Datasets (<http://aws.amazon.com/datasets/>,

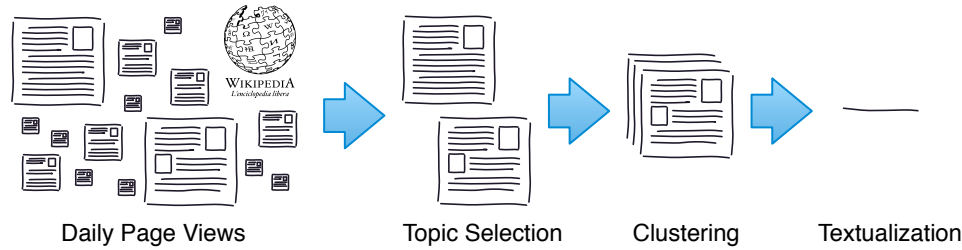


Figure 4: Process diagram. (a) Topic selection. (b) Clustering. (c) Textualization.

<http://aws.amazon.com/datasets/2596>, <http://aws.amazon.com/datasets/4182>). This dataset consists of the files that each has hourly page view statistics for every article in every language. Each line of the files contains the language or the project name, the title, the hourly page views, and the numbers of bytes of the text of an Wikipedia article.

We limited the work only to the English Wikipedia. These statistics are collected from the Wikipedia cache server as requested by users, and it includes many wrongful or malicious requests. Many requested pages are also redirect pages that automatically refer the requester into another page. The redirect pages are usually the ones that are different names of an entity. To process these difficulties, we downloaded the English Wikipedia dump on June 22nd, 2010 from Wikimedia dump (<http://download.wikipedia.org/>) and from the database dump extracted the list of the titles of all articles and the redirect articles. Using these data, we filtered out the request for non-existing articles and merged the page views for the redirect pages into the main articles. Also the title of the Wikipedia articles has to be normalized according to a specific format, that is, the first letter of each title are capitalized and a space in it has to be replaced with an underscore, and so on.

4 Clustering

More often than not, more than one popular articles are related to an external current event. For example, all the hand-selected articles shown in Figure 3 are related to a Wikipedia current event that “Florida hedge fund manager Arthur Nadel is arrested . . . and charged with Fraud.” Among the automatically selected articles, main events such as Inau-

guration of Barack Obama and release of the file Notorious (2009 film) involves making popular the incidental articles about the players of the events such as Joe Biden and The Notorious B.I.G. along with the articles about the main events themselves.

We attempt to cluster the automatically selected articles into mutually related articles and find the article that describes the main event for each cluster. For clustering, we make use of the unigram bag-of-words model and the link structures of articles. To find the centroid articles that describes the main event, we used K-means model and the link structure of articles.

Dataset For each day of the five selected dates in 2009, we downloaded the text of the 100 automatically selected articles from Wikipedia. The downloaded texts are the latest texts as of the date on which the article is selected. We use the Wikipydia module, which is a python module to make use of the Wikipedia API. As preprocessing, we stripped out all HTML tags from the article text, and replaced the Wikipedia-specific tags as the corresponding text using the mwlib⁴ library, and finally split sentences using the NLTK splitter (Loper and Bird, 2002).

Design As a baseline, two different clustering scheme makes use of the link structure: COMP-CONN and ONEHOP. CONNCOMP is to cluster articles in the same connected components, connecting articles that have a direct link from one to another. ONEHOP is to cluster articles within only one hop. The number of resulting clusters depend on the order in which you choose the next article to cluster. To find the minimum number of such clusters is NP-complete. Instead of attempting to find the optimal clusters, we just tried to cluster in the descreasing

⁴See <http://code.pediapress.com/wiki/wiki/mwlib>.

Test set	Gold standard	B-Cubed F-score
MANUAL-1	MANUAL-2	0.735 \pm 0.085
MANUAL-1	MANUAL-3	0.672 \pm 0.076
MANUAL-2	MANUAL-3	0.747 \pm 0.129
CONNCOMP	MANUAL-1	0.302 \pm 0.122
	MANUAL-2	0.342 \pm 0.134
	MANUAL-3	0.397 \pm 0.068
ONEHOP	MANUAL-1	0.395 \pm 0.151
	MANUAL-2	0.468 \pm 0.170
	MANUAL-3	0.476 \pm 0.147
K-MEANS	MANUAL-1	0.534 \pm 0.034
	MANUAL-2	0.534 \pm 0.050
	MANUAL-3	0.494 \pm 0.035

Table 1: Clustering evaluation. CONNCOMP and ONEHOP are clustering using the link structure. K-MEANS clustering uses the text of the articles as bag of words. For the B-Cubed metric, exchanging the gold standard and the data set results in the exchange of the precision and the recall score, thus leaving the F-score same.

order of the number of links: With most links, first clustered. The link structure is downloaded from the website of Henry Haselgrove⁵.

We also performed K-means clustering on the set of articles, treating the article texts as bag of words. For 100 automatically selected articles on each of the five selected dates, the number of clusters K was set to 50. We used the Mallet (McCallum, 2002) software to run K-means software. Normalization and tokenization are not performed before running K-means. The algorithm calculates the mean of each cluster in word-vector space, and we chose the centroid article that is closest to the center in the vector space.

Evaluation Three annotators performed manual clustering on the topics for the five specified dates to get the gold standard clusters. The three manual clusters were evaluated against each other to measure the annotator agreement, using the multiplicity B-cubed metric (Amigó et al., 2009) that can handle overlapping clusters. The results are shown in Table 1.

The B-cubed metric is one of the extrinsic clustering evaluation metrics, which need a gold standard set of clusters to evaluate the set of clusters of in-

terest against. Each item e has potentially multiple gold standard categories, and also potentially multiple clusters. Let $C(e)$ is the set of the clusters that e belongs to, and $L(e)$ is the set of e 's categories. The multiplicity B-cubed scores for a pair of e and e' are evaluated as follows:

$$\text{Prec}(e, e') = \frac{\min(|C(e) \cap C(e')|, |L(e) \cap L(e')|)}{|C(e) \cap C(e')|}$$

$$\text{Recall}(e, e') = \frac{\min(|C(e) \cap C(e')|, |L(e) \cap L(e')|)}{|L(e) \cap L(e')|}$$

The overall B-cubed scores are evaluated as follows:

$$\text{Prec} = \text{Average}_{e \neq e'} \text{Prec}(e, e')$$

$$\text{Recall} = \text{Average}_{e \neq e'} \text{Recall}(e, e')$$

The inter-annotator agreement in the B-cubed scores are in the range of 0.672-0.747. Clustering with the link structure performed the worse, having half of the precision for manual clusters. K-means clustering performs best, achieving 71.5% precision compared to manual clustering.

Analysis There are two main reason that the link structure performed worse. First, the link structure was too old. The link structure was generated on January 28, 2009 and 13.2% of the WikiTopics articles were created after the date, thus missing from the link structure. Second, there are a few “octopos” articles that have links to many articles, and group them into one large cluster. The United States on January 27, 2009 was particularly harmful, grouping 79 articles into a single cluster.

K-MEANS has its own defects: it does not distinguish different meanings of words. For example, the automatically selected articles for April 19 include both Piracy in Somalia and The Pirate Bay as well as Piracy. Their resemblance in word spelling might result in confusion in clustering, depending on the clustering method. In fact, K-MEANS correctly clustered The Pirate Bay with The Pirate Bay Trial, but clustered Piracy with USS Bainbridge (DDG-96) and MV Maersk Alabama, both of which are the names of vessels. Instead of Piracy, Moldova wrongfully ended up in the same cluster as Somalia and Piracy in Somalia. In contrast, clustering method using the

⁵See <http://users.on.net/~henry/home/wikipedia.htm>.

link structure, COMPCONN and ONEHOP correctly clustered Somalia, Piracy in Somalia, and Piracy all in the same cluster.

Clustering the articles according to the relevance to recent popularity is not a trivial work even for humans. In automatically selected articles for February 10, 2009, Journey (band) and Bruce Springsteen may seem to be relevant to Grammy Awards, but in fact they are relevant on this day because of the Super Bowl. The K-MEANS clusters wrongfully merged the articles relevant to Grammy Awards or Super Bowl into a cluster.

5 Textualization

We attempt to generate textual descriptions for the clustered articles to explain why they are popular and what event is relevant. We consider the date expressions, the reference to the article as features. Currently, our work is limited to select the best sentence that describes the relevant events, but it could be future work to describe the relationships of the articles to the relevant event, and summarize the description using sentence fusion or paraphrasing. Often, some articles are directly connected to an external event while others are subsidiary topics that show vague connection.

Preprocess We preprocess the Wikipedia articles using the SERIF system (Boschee et al., 2005) for date tagging and coreference resolution. The identified temporal expressions are in various formats such as exact date (“February 12, 1809”), a season (“spring”), a month (“December 1808”), a date without a specific year (“November 19”), and even relative time (“now”, “later that year”, “The following year”). Some examples are showed in Figure 5. The coreferences are analyzed into a list of the entities in the article and all the mentions of each entity in the article are compiled as co-ref chains.

Design As a baseline, we picked the first sentence for each article because the first sentence generally explains the article. The first sentence usually summarizes the topic of the article and is often relevant to the external event. We refer to this as FIRST.

As a second baseline, we picked the sentence with the most closest date to the date on which the article was selected. Closeness refers to the difference in

February 12, 1809	Later that year
1860	about 18 months of
now	schooling
the 17th century	November 19
some time	that same month
December 1808	The following winter
34 years old	The following year
spring	April 1865
September	late 1863

Figure 5: Examples of temporal expressions identified by the SERIF system in the preprocess step, selected from 247 such date and time expressions extracted from the article Abraham Lincoln.

days between the dates. The dates in sentences could vary in their formats, so we put precedence over the formats so that more exact date i.e. “February 20, 2009” has precedence over more vague date formats such as “February 2009” or “2009”. We refer to this scheme as RECENT.

For the third data set, we picked the sentence both with the most recent date and with the reference to the article’s topic. We refer to this scheme as SELF.

After selecting a sentence for each cluster, we used coreference resolution to substitute personal pronouns in the sentence with their proper names. This step enhances readability of the selected sentence, which often refers to its subject by a pronoun such as “He”, “She”, or “It”. The examples of substituted proper names appear in Figure 5 in bold face.

The SERIF system finds the chain of coreference and tags the type of each reference as proper name, nominal position, or pronoun. There may be more than one proper name for each chain and to choose the best one is not a trivial task: proper names vary from *John* to *John Kennedy* to *John Fitzgerald “Jack” Kennedy*. Our algorithm chose the most frequent proper name to substitute with.

Evaluation For ten articles on each of five selected dates, an annotator selected sentences that describes why each article gains in popularity, among 289 sentences per each article on average. The annotator picked the one best sentence, and the possible multiple second best sentences. In the case there are no best sentence among them, he marked none as

2009-01-27	Abraham Lincoln
SENT	To commemorate his upcoming 200th birthday in February 2009, Congress established the Abraham Lincoln Bicentennial Commission (ALBC) in 2000.
COREF	To commemorate Lincoln's upcoming 200th birthday in February 2009, Congress established the Abraham Lincoln Bicentennial Commission (ALBC) in 2000.
2009-01-27	Barack Obama
SENT	He was inaugurated as President on January 20, 2009.
COREF	Obama was inaugurated as President on January 20, 2009.
2009-02-10	Michael Phelps
SENT	His second book, No Limits: The Will to Succeed, was released on December 9, 2008.
COREF	Phelps's second book, No Limits: The Will to Succeed, was released on December 9, 2008.
2009-05-12	Eminem
SENT	He is planning on releasing his first album since 2004, Relapse, on May 15, 2009.
COREF	Eminem is planning on releasing his first album since 2004, Relapse, on May 15, 2009.

Figure 6: Selected examples of sentence selection and coreference resolution. From each article the best SENTENCE is selected based on the most recent date expression and the reference of the topic, and the personal pronouns are substituted with their proper names, which are typed **bold**.

Scheme	Prec ¹	Recall ¹	Prec ²
MANUAL ³	0.63	0.83	0.75
FIRST	0.14	0.21	0.34
RECENT	0.33	0.48	0.55
SELF	0.33	0.48	0.53

Table 2: The precision of different sentence selection scheme. Except for MANUAL, all sentence scheme are evaluated for the five selected dates.

the best sentence, and listed all the partially explaining sentence as second best sentences.

To see inter-annotator agreement, another annotator selected the best sentence for the ten articles of the first date.

The evaluation results for all the selection schemes are shown in Table 2.

Analysis Serena Williams is an example that the error in sentence splitting propagates to the sentential selection. The best sentence manually selected was the first sentence in the article “Serena Jameka Williams . . . , as of February 2, 2009, is ranked World No. 1 by the Women’s Tennis Association” The sentence was disastrously divided into two sentences right after “No.” by the NLTK splitter through our preprocess. It means no matter how well the sentential selection is done, it cannot choose the gold standard sentence. We ran the splitta (Gillick,

2009) over the article text and found that it does not split the first sentence at the wrong position. The better the splitting is, The better the sentential selection works.

Selection of the best sentence with dates seems to work well, with some problems. Farrah Fawcett is a nice example of multiple sentences with dates, in a single section, that could potentially be spliced together into a timeline (the final event, that she was released from the hospital, makes more sense if we included why she was there). Furthermore, the sentence describing the most recent event contains a date without the year, which has less precedence over the other dates with the year even when it is closer to the date of interest than the others are. So having precedence over the date forms might not always work well.

6 Related work

There should be lots of citation to related work here. Examples are NewsBlaster by McKeown and Barzilay; Snippet Selection by Lapata, and a list of ACL/EMNLP papers that study wikipedia.

7 Future work

Each step of the WikiTopics system can be developed further.

First, article selection. Should we predict what

the Wikipedia current events will be? No. But if we can predict which will come next before any newspaper or traditional media, it would be awesome. But should we be? The point is in automaticity anyway. We currently use the absolute difference in page views with the window of size 15-days. Using relative difference might be useful.

Second, clustering. Hierarchical clustering... There a lot of clusters that have hierarchical structures. For example, on the day of the inauguration of Barack Obama, the automatically selected articles include the former presidents of the United States, family of Barack Obama, and the appointed staff in the new government. Using hierarchical clustering, the summary of each cluster will be better.

Third, sentence selection. Sentence fusion could be useful. Most of the Wikipedia current events contain more than two links to articles. We currently select one sentence per each article, but it might be true sometimes that fewer sentences can well explain the events. We can use hierarchical clustering to summarize the clusters with fewer sentences.

Acknowledgments

We appreciate Wikipedians Domas Mituzas and Frédéric Schuütz for making the page views statistics available and Peter Skomoroch for providing Trending Topics and answering questions.

References

- Enrique Amigó, Julio Gonzalo, Javier Artiles, and Felisa Verdejo. 2009. A comparison of extrinsic clustering evaluation metrics based on formal constraints. *Inf. Retr.*, 12(4):461–486.
- Elizabeth Boschee, Ralph Weischedel, and Alex Zamarian. 2005. Automatic information extraction. In *First International Conference on Intelligence Analysis*.
- D. Gillick. 2009. Sentence Boundary Detection and the Problem with the U.S. In *HLT-NAACL-2009: Short Papers*.
- Edward Loper and Steven Bird. 2002. Nltk: the natural language toolkit. In *ACL-2002 Workshop on Effective tools and methodologies for teaching natural language processing and computational linguistics - Volume 1*, pages 63–70, Morristown, NJ, USA. Association for Computational Linguistics.

Andrew Kachites McCallum. 2002. Mallet: A machine learning for language toolkit. <http://mallet.cs.umass.edu>.