



Creating a Complete RESTful Application

Using Spring MVC to create RESTful Web Services

Objectives

After completing this lesson, you should be able to

- Create controllers to support the REST endpoints for various verbs
- Process arguments from the request and from the URL
- Utilize message converters to return data as JSON or XML
- Utilize RestTemplate to invoke RESTful services

Agenda

- **REST Introduction**
- Spring MVC support for RESTful applications
- RESTful Clients: **RestTemplate**
- Lab
- Advanced Topics




REST Introduction

- Why REST?
 - Programmatic clients leveraging HTTP
 - Mobile applications, Microservices
 - Browsers: SPA, AJAX
- REST is an *architectural style* that describes best practices to expose web services over HTTP
 - REpresentational State Transfer, term by Roy Fielding
 - HTTP as *application* protocol, not just transport
 - Emphasizes scalability
 - *Not* a framework or specification

REST Principles (1)

- Expose *resources* through URIs
 - Model nouns, not verbs
 - <http://springbank.io/banking/accounts/123456789>
- Resources support limited set of operations
 - GET, PUT, POST, DELETE in case of HTTP
 - All have well-defined semantics
- Example: update an order
 - PUT to [/orders/123](#)
 - don't POST to [/order/edit?id=123](#)

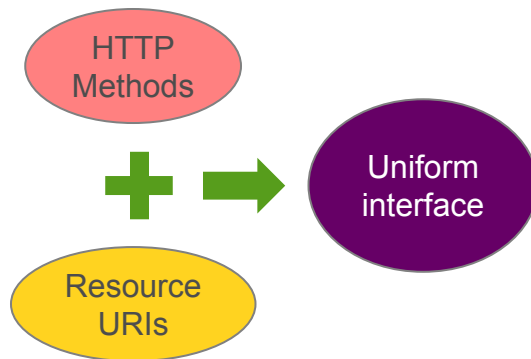

REST Principles (2)

- Clients can request particular representation
 - Resources can support multiple representations
 - HTML, XML, JSON, ...
- Representations can link to other resources
 - Allows for extensions and discovery, like with web sites
- Hypermedia As The Engine of Application State
 - HATEOAS: Probably the world's worst acronym!
 - RESTful response contain the links you need – just like HTML pages do



More on HATEAOS in *Advanced Section*

REST Principles (3)

- Stateless architecture
 - No HttpSession usage
 - GETs can be cached on URL
 - Requires clients to keep track of state
 - Part of what makes it scalable
 - Looser coupling. Between client and server
- HTTP headers and status codes communicate result to clients
 - All well-defined in HTTP Specification

Why REST?

- Benefits of REST
 - Every platform/language supports HTTP
 - Unlike, for example, SOAP + WS-* specs
 - Easy to support many different clients
 - Scripts, Browsers, Applications
 - Scalability
 - Support for redirect, caching, different representations, resource identification, ...
 - Support for multiple formats
 - JSON and Atom are popular choices



REST and Java: JAX-RS



JAX-RS

- JAX-RS is a Java EE 6 standard for building RESTful applications
 - Focuses on programmatic clients, not browsers
- Various implementations
 - Jersey (RI), RESTEasy, Restlet, CXF
 - All implementations provide Spring support
- Good option for full REST support using a standard

REST and Java: Spring-MVC



- Spring-MVC provides REST support as well
 - Using familiar and consistent programming model
 - Spring MVC does not implement JAX-RS
- Single web-application for everything
 - Traditional web-site: HTML, browsers
 - Programmatic client support (RESTful web applications, HTTP-based web services)
- **RestTemplate** for building programmatic clients in Java

Agenda

- REST Introduction
- **Spring MVC support for RESTful applications**
- RESTful Clients: `RestTemplate`
- Lab
- Advanced Topics



Spring-MVC and REST

- Requirements for using Spring MVC to support REST
 - Map requests based on HTTP method
 - Define response status
 - Message Converters
 - Access request and response body data
 - Build valid Location URIs *

** For HTTP POST responses*

Agenda

- REST Introduction
- **Spring MVC support for RESTful applications**
 - **HTTP GET**
 - HTTP PUT
 - HTTP POST
 - HTTP DELETE
- RESTful Clients: **RestTemplate**
- Lab
- Advanced Topics



HTTP GET: Fetch a Resource

- **Requirement**

- Respond *only* to GET requests
- Return requested data in the HTTP Response
- Determine requested response format

```
GET /store/orders/123
Host: shop.spring.io
Accept: application/json,
...
...
```

```
HTTP/1.1 200 OK
Date: ...
Content-Length: 756
Content-Type:
application/json
```

```
{
  "id": 123,
  "total": 200.00,
  "items": [ ... ]
}
```

Request Mapping Based on HTTP Method

- Map HTTP requests based on method
 - Allows same URL to be mapped to multiple Java methods
 - `@GetMapping`, `@PostMapping`, `@PutMapping`, `@PatchMapping`, `@DeleteMapping`
- Examples:

// Get all orders (for current user typically)

`@GetMapping(path="/orders")`

// Create a new order


`@PostMapping(path="/orders")`

@RequestMapping Annotation

- @GetMapping is a “*composed*” annotation
 - @RequestMapping (path="/accounts", method=RequestMethod.GET)
 - Equivalent to @GetMapping ("/accounts")
- RequestMethod enumerators
 - GET, POST, PUT, PATCH, DELETE, HEAD, OPTIONS, TRACE

For HEAD, OPTIONS, TRACE *must* use
@RequestMethod

Recall: Message Converters



- Message Converters
 - Implement **HttpMessageConverter**
 - Setup automatically by Spring Boot
- HTTP **GET** method returns a Java object
 - Converter generates data in HTTP response body
 - Typically XML or JSON
 - No need to convert objects manually
 - **Accept** header defines response format (and converter to use)
- Also used for HTTP **POST** and **PUT**
 - Convert *incoming* request body to a Java object

Recall: @ResponseBody

- Use converters for response data by annotating return data with **@ResponseBody**
- Converter handles rendering a response
 - *No ViewResolver and View involved any more!*

```
@GetMapping("/orders/{id}")  
public @ResponseBody Order getOrder(@PathVariable("id") long id) { ... }
```

NOTE: If you forget **@ResponseBody**, Spring MVC defaults to finding a View (and fails)

Recall: @RestController Simplification

```
@Controller
public class OrderController {

    @GetMapping("/orders/{id}")
    public @ResponseBody Order getOrder(@PathVariable long id) {
        return orderService.findOrderById(id);
    }
}
```

```
@RestController
public class OrderController {

    @GetMapping("/orders/{id}")
    public Order getOrder(@PathVariable long id) {
        return orderService.findOrderById(id);
    }
}
```

No need for @ResponseBody on GET methods

Retrieving a Representation: GET

Complete
Example

```
GET /store/orders/123
Host: shop.spring.io
Accept: application/json
...
```

```
HTTP/1.1 200 OK
Date: ...
Content-Length: 1456
Content-Type:
application/json


{
  "id": 123,
  "total": 200.00,
  "items": [ ... ]
}
```

```
@GetMapping("/orders/{id}")
public Order getOrder(@PathVariable("id") long id) {
    return orderService.findOrderById(id);
}
```

```
@RequestMapping(path="/orders/{id}", method=RequestMethod.GET)
```

Recall: Setting Response Data

- Can use **ResponseEntity** to generate a Response
 - Avoids use of **HttpServletResponse** (easier to test)

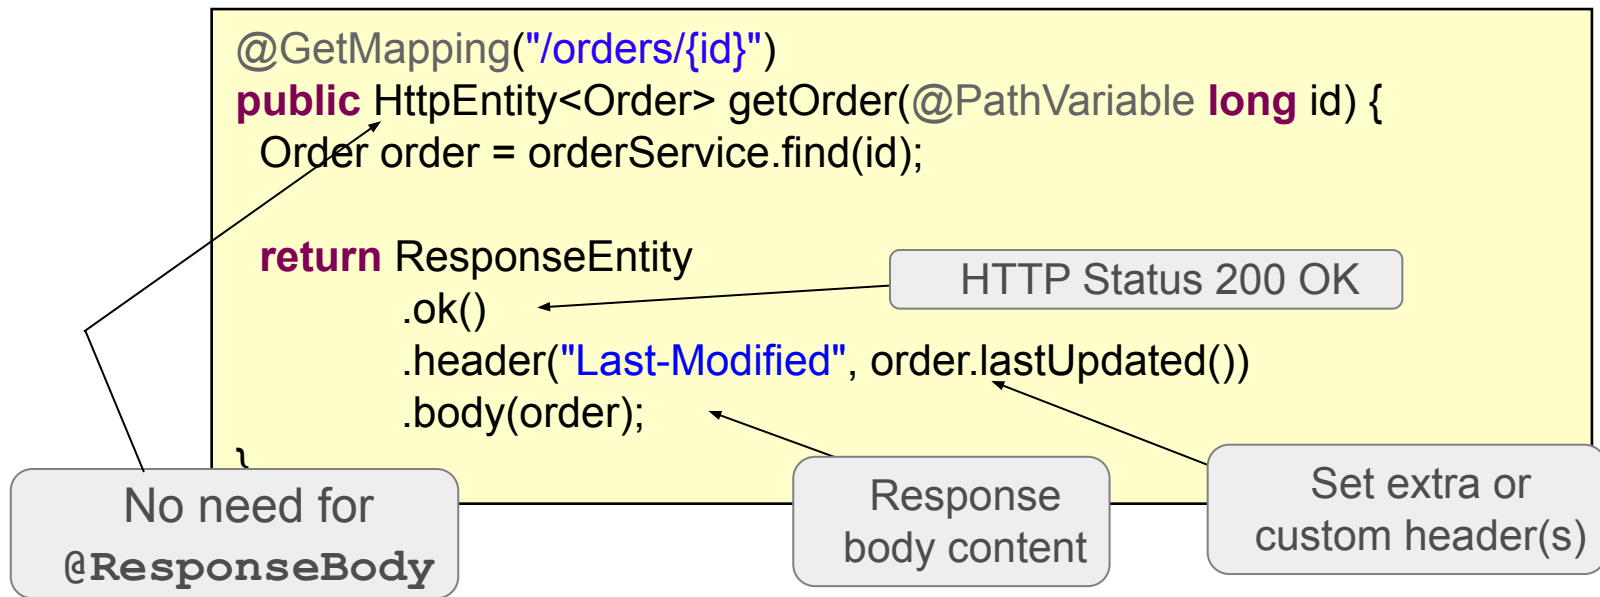

Agenda

- REST Introduction
- **Spring MVC support for RESTful applications**
 - HTTP GET
 - **HTTP PUT**
 - HTTP POST
 - HTTP DELETE
- RESTful Clients: **RestTemplate**
- Lab
- Advanced Topics



HTTP PUT: Update a Resource

- **Requirement**

- Respond *only* to PUT requests
- Access data in the HTTP Request
- Return empty response, status 204

```
PUT /store/orders/123/items/abc
Host: www.mybank.com
Content-Type: application/json

{
  "id": abc,
  "cost": 35.00,
  "product": SKU1234, ...
}
```

```
HTTP/1.1 204 No Content
Date: ...
Content-Length: 0
...
```

Successful
update –
nothing
to
return

HTTP Status Code Support



- Web apps just use a handful of status codes
 - Success: 200 OK
 - Redirect: 30x for Redirects
 - Client Error (Invalid URL): 404 Not Found
 - Server Error: 500 (such as unhandled Exceptions)
- RESTful applications use many additional codes
 - Created Successfully: 201
 - Client Error: 400
 - HTTP method not supported: 405
 - Cannot generate requested response body format: 406
 - Request body not supported: 415



For a full list: https://en.wikipedia.org/wiki/List_of_HTTP_status_codes

@ResponseStatus

- To return a status code *other* than 200
 - Use `HttpStatus` enumerator
- **Note:** `@ResponseStatus` on ***void*** methods
 - Turns *off* view-processing subsystem
 - Method returns a response with empty body (*no-content*)

```
@PostMapping("/orders/{id}")
@ResponseStatus(HttpStatus.NO_CONTENT) // 204
public void updateOrder(...) {
    // Update order
}
```



Can also set error response codes – see Advanced section

@RequestBody

- Use message converters for incoming request data
 - Correct converter chosen automatically
 - Based on `Content-Type` of request
 - `updatedOrder` could be mapped from XML (with JAXB2) or from JSON (with GSON or Jackson)
 - Annotate Order class (if need be) for JAXB/Jackson to work

```
@PutMapping("/orders/{id}")
@ResponseStatus(HttpStatus.NO_CONTENT) // 204
public void updateOrder(@RequestBody Order updatedOrder,
                        @PathVariable("id") long id) {
    // process updated order data and return empty response
    orderManager.updateOrder(id, updatedOrder);
}
```

Updating Existing Resource: PUT

Complete
Example

```
PUT /store/orders/123/items/abc
Host: shop.spring.io
Content-Type: application/json
```

```
{
  "id": abc,
  "cost": 35.00,
  "product": SKU1234, ...
}
```

```
HTTP/1.1 204 No Content
Date: ...
Content-Length: 0
```


```
@PutMapping("/orders/{orderId}/items/{itemId}")
@ResponseStatus(HttpStatus.NO_CONTENT) // 204
public void updateItem(@PathVariable long orderId,
                      @PathVariable String itemId,
                      @RequestBody Item item) {

    orderService.findOrderById(orderId).updateItem(itemId, item);
}
```

```
@RequestMapping(path="/orders/...", method=RequestMethod.PUT)
```

Agenda

- REST Introduction
- **Spring MVC support for RESTful applications**
 - HTTP GET
 - HTTP PUT
 - **HTTP POST**
 - HTTP DELETE
- RESTful Clients: `RestTemplate`
- Lab
- Advanced Topics

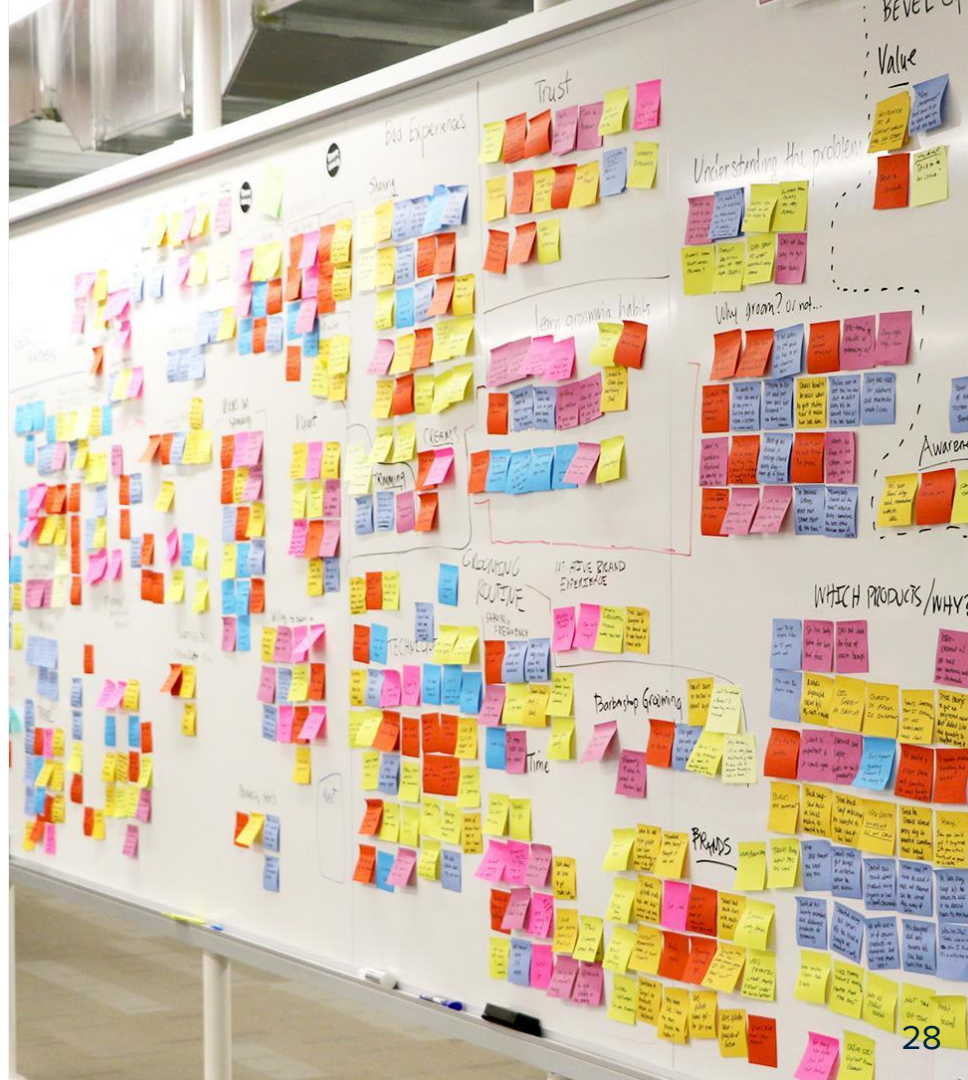

HTTP POST: Create a new Resource

- **Requirement**
 - Respond *only* to POST requests
 - Access data in the HTTP Request
 - Return “created”, status 201
 - Generate *Location* header for newly created resource

```
POST /store/orders/123/items
Host: shop.spring.io
Content-Type: application/json

{
  "cost": 50.00,
  "product": SKU9988, ...
}
```

```
HTTP/1.1 201 Created
Date: ...
Content-Length: 0
Location: http://shop.spring.io/
store/orders/123/items/abc
```

Creating a new Resource: POST (2)

- We can already implement most of this requirement
 - But how do we return the new Item location?

```
@PostMapping(path="/orders/{id}/items")
public ??? createItem (@PathVariable("id") long id, @RequestBody Item newItem) {
    // Add the new item to the order
    orderService.findOrderById(id).addItem(newItem);

    return ???
}
```

Building URIs



- HTTP POST is required to return the location of the newly created resource in the response header
- How to create a URI?
 - **UriComponentsBuilder**
 - Allows explicit creation of URI
 - *But* requires hard-coded URLs
 - **ServletUriComponentsBuilder**
 - Subclass of **UriComponentsBuilder**
 - Provides access to the URL that invoked the current controller method

ServletUriComponentsBuilder

- Use this in our Controller method

```
// Must be in a Controller method  
// Example: POST /orders/12345/items
```

```
URI location = ServletUriComponentsBuilder  
    .fromCurrentRequestUri()  
    .path("/{itemId}")  
    .buildAndExpand("item A")  
    .toUri();
```

```
return ResponseEntity.created(location).build();
```

```
// ../orders/12345/items/item%20A
```

Framework puts request URL in current thread – which builder can access

Note: leading /

Note: space

Space converted to %20

Creating a new Resource: POST

Complete
Example

```
@PostMapping("/orders/{id}/items")
public ResponseEntity<Void> createItem
    (@PathVariable long id, @RequestBody Item newItem) {
    // Add the new item to the order
    orderService.findOrderByid(id).addItem(newItem);

    // Build the location URI of the new item
    URI location = ServletUriComponentsBuilder
        .fromCurrentRequestUri()
        .path("/{itemId}")
        .buildAndExpand(newItem.getId())
        .toUri();

    // Explicitly create a 201 Created response
    return ResponseEntity.created(location).build();
}
```

@ResponseStatus
not needed

Assume this call
also set an item-id

```
@RequestMapping(path="/orders/...", method=RequestMethod.POST)
```

Agenda

- REST Introduction
- **Spring MVC support for RESTful applications**
 - HTTP GET
 - HTTP PUT
 - HTTP POST
 - **HTTP DELETE**
- RESTful Clients: **RestTemplate**
- Lab
- Advanced Topics



HTTP DELETE: Delete existing Resource

- **Requirement**
 - Respond *only* to DELETE requests
 - Return empty response, status 204

```
DELETE
/store/orders/123/items/abc
Host: shop.spring.io
Content-Length: 0
...
```

```
HTTP/1.1 204 No
Content
Date: ...
Content-Length: 0
```

Deleting a Resource: DELETE

Complete
Example

```
DELETE
/store/orders/123/items/abc
Host: shop.spring.io
...
```

```
HTTP/1.1 204 No Content
Date: ...
Content-Length: 0
```

```
@DeleteMapping("/orders/{orderId}/items/{itemId}")
@ResponseStatus(HttpStatus.NO_CONTENT) // 204
public void deleteItem(@PathVariable long orderId,
                       @PathVariable String itemId) {
    orderService.findOrderByOrderId(orderId).deleteItem(itemId);
}
```

```
@RequestMapping(path="/orders/...", method=RequestMethod.DELETE)
```

Putting it all Together

- Many new concepts
 - HTTP Message Converters
 - `@RequestBody`, `@ResponseBody`
 - `@RestController`
 - `@ResponseStatus`
 - `HttpEntity`, `ResponseEntity`
 - `ServletUriComponentsBuilder`



Agenda

- REST Introduction
- Spring MVC support for RESTful applications
- **RESTful Clients: RestTemplate**
- Lab
- Advanced Topics



RestTemplate

- Provides access to RESTful services
 - Supports all the HTTP methods

HTTP Method	RestTemplate Method
DELETE	<code>delete(String url, Object... urlVariables)</code>
GET	<code>getForObject(String url, Class<T> responseType, Object... urlVariables)</code>
HEAD	<code>headForHeaders(String url, Object... urlVariables)</code>
OPTIONS	<code>optionsForAllow(String url, Object... urlVariables)</code>
POST	<code>postForLocation(String url, Object request, Object... urlVariables)</code> <code>postForObject(String url, Object request, Class<T> responseType, Object... urlVariables)</code>
PUT	<code>put(String url, Object request, Object... urlVariables)</code>

Defining a RestTemplate

- Just call constructor in your code
 - Sets up default *HttpMessageConverters* internally
 - Same as on the server, depending on classpath

```
RestTemplate template = new RestTemplate();
```


RestTemplate Usage Examples

```
RestTemplate template = new RestTemplate();  
String uri = "http://example.com/store/orders/{id}/items";
```

// GET all order items for an existing order with ID 1:

```
OrderItem[] items =  
    template.getForObject(uri, OrderItem[].class, "1");
```

{id} = 1

// POST to create a new item

OrderItem item = // create item object

```
URI itemLocation = template.postForLocation(uri, item, "1");
```

{id} = 1

// PUT to update the item

```
item.setAmount(2);
```

```
template.put(itemLocation, item);
```

// DELETE to remove that item again

```
template.delete(itemLocation);
```

Using ResponseEntity

- Access response headers and body

```
String uri = "http://example.com/store/orders/{id}";  
  
ResponseEntity<Order> response =  
    restTemplate.getForEntity(uri, Order.class, "1");  
  
assert(response.getStatusCode().equals(HttpStatus.OK));  
  
long modified = response.getHeaders().getLastModified();  
  
Order order = response.getBody();
```

{id} = 1

Access HTTP
Response yourself

RequestEntity *and* ResponseEntity

- Setup your own request as well

```
// POST with HTTP BASIC authentication
RequestEntity<OrderItem> request = RequestEntity
    .post(new URI(itemUrl))
    .getHeaders().add(HttpHeaders.AUTHORIZATION,
        "Basic " + getBase64EncodedLoginData())
    .accept(MediaType.APPLICATION_JSON)
    .body(newItem);

ResponseEntity<Void> response =
    restTemplate.exchange(request, Void.class);

assert(response.getStatusCode().equals(HttpStatus.CREATED));
```

Summary

REST

- REST is an architectural style that can be applied to HTTP-based applications
 - Useful for supporting diverse clients and building highly scalable systems
- Spring-MVC adds REST support using a familiar programming model (but *without* Views)
 - `@ResponseStatus`, `@RequestBody`, `@ResponseBody`
 - `HttpEntity`, `ResponseEntity`
 - `ServletUriComponentsBuilder`
 - HTTP Message Converters
- Clients use *RestTemplate* to access RESTful servers

A man with a beard and a woman are sitting at a desk, looking at a computer monitor. The man is pointing at the screen. The image is overlaid with a semi-transparent blue filter.

Lab: Creating a full RESTful service

**Lab project:
38-rest-ws**

**Anticipated Lab time:
50 Minutes**

**Optional Topics: Spring REST additional details,
HATEOS**

Agenda

- REST Introduction
- Spring MVC support for RESTful applications
- RESTful Clients: **RestTemplate**
- Lab
- **Advanced Topics**
 - **More on Spring REST**
 - Spring HATEOAS



@ResponseStatus & Exceptions

- Can also annotate exception classes with this
 - Given status code used when an unhandled exception is thrown from any controller method

```
@ResponseStatus(HttpStatus.NOT_FOUND) // 404
public class OrderNotFoundException extends RuntimeException {
    ...
}
```

```
@GetMapping(value="/orders/{id}")
public Order showOrder(@PathVariable("id") long id, Model model) {
    Order order = orderService.findOrderById(id);
    if (order == null) throw new OrderNotFoundException(id);
    return order;
}
```

NOTE: Works with both REST and View based controller methods

@ExceptionHandler

- For existing exceptions you cannot annotate, use **@ExceptionHandler** method on controller
 - Method signature similar to request handling method
 - Also uses **@ResponseStatus**

```
@ResponseStatus(HttpStatus.CONFLICT) // 409
@ExceptionHandler({DataIntegrityViolationException.class})
public void conflict() {
    // could add the exception, response, etc. as method params
}
```



Spring MVC offers several ways to handle exceptions, for more details see <http://spring.io/blog/2013/11/01/exception-handling-in-spring-mvc>

HiddenHttpMethodFilter

- HTML forms do not support PUT or DELETE
 - Not even in HTML 5
- So use a POST
 - Put PUT or DELETE in a *hidden* form field
- Deploy a special filter to intercept the message
 - Restores the HTTP method you wanted to send
 - Request looks like a PUT or a DELETE to any Controller



See [HiddenHttpMethodFilter](#) online documentation

Agenda

- REST Introduction
- Spring MVC support for RESTful applications
- **RESTful Clients: RestTemplate**
- Lab
- Advanced Topics
 - More on Spring REST
 - **Spring HATEOAS**



HATEOAS - Concepts

- REST clients need *no* prior knowledge about how to interact with a particular application/server
 - SOAP web-services need a WSDL
 - SOA processes require a fixed interface defined using interface description language (IDL)
- Clients interact entirely through hypermedia
 - Provided dynamically by servers
- Serves to *decouple* client and server
 - Allows the server to evolve functionality independently
 - Unique compared to other architectures

HATEOAS Example (<http://restcookbook.com/Basics/hateoas>)

```
<account>
  <account-number>12345</account-number>
  <balance currency="usd">100.00</balance>
  <link rel="self" href="/accounts/12345" />
  <link rel="deposit" href="/accounts/12345/deposits" />
  <link rel="withdraw" href="/accounts/12345/withdrawals" />
  <link rel="transfer" href="/accounts/12345/transfers" />
  <link rel="close" href="/accounts/12345/close" />
</account>
```

Spring HATEOAS provides an API for generating these links in MVC Controller responses

Note: links *change* as state changes

```
<account>
  <account-number>12345</account-number>
  <balance currency="usd">-25.00</balance>
  <link rel="self" href="/accounts/12345" />
  <link rel="deposit" href="/accounts/12345/deposits" />
</account>
```



No standard for links yet - examples uses link style from *Hypertext Application Language* (HAL), one possible representation

Managing Links


- Use **Link** class
 - Holds an href and a rel (relationship)
 - Self implies the current resource
 - Link builder derives URL from Controller mappings

```
// A link can be built with a relationship name
// Use withSelfRel() for a self link
Link link = ControllerLinkBuilder.linkTo(AccountController.class)
    .slash(accountId).slash("transfer").withRel("transfer");

link.getRel(); // => transfer
link.getHref(); // => http://.../account/12345/transfer
```

Converting to a Resource

- Wrap return value of REST method in a **Resource**
 - Converted by **@ResponseBody** to XML/JSON with links
 - Only HAL supported currently



```
@Controller
@EnableHypermediaSupport(type=HypermediaType.HAL)
public class OrderController {

    @GetMapping(value="/orders/{id}")
    public @ResponseBody Resource<Order> getOrder(@PathVariable("id") long id) {
        Links[] = ...; // Some links (see previous slide)
        return new Resource<Order>
            (orderService.findOrderById(id), links);
    }
}
```

Spring HATEOAS



- Spring Data sub-project for REST
 - For generating links in RESTful responses
 - Supports ATOM (newsfeed XML) and HAL (Hypertext Application Language) links
 - Many other features besides examples shown here
- For more information see
 - <http://projects.spring.io/spring-hateoas/>
 - <http://spring.io/guides/gs/rest-hateoas/>