

Data Mining: Data

Lecture Notes for Chapter 2

Introduction to Data Mining , 2nd Edition
by
Tan, Steinbach, Kumar

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

1

Outline

- Attributes and Objects
- Types of Data
- Data Quality
- Similarity and Distance
- Data Preprocessing

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

2

2

What is Data?

- Collection of **data objects** and their **attributes**
- An **attribute** is a property or characteristic of an object
 - Examples: eye color of a person, temperature, etc.
 - Attribute is also known as variable, field, characteristic, dimension, or feature
- A collection of attributes describe an **object**
 - Object is also known as record, point, case, sample, entity, or instance

Tid	Refund	Marital Status	Taxable Income	Cheat
1	Yes	Single	125K	No
2	No	Married	100K	No
3	No	Single	70K	No
4	Yes	Married	120K	No
5	No	Divorced	95K	Yes
6	No	Married	60K	No
7	Yes	Divorced	220K	No
8	No	Single	85K	Yes
9	No	Married	75K	No
10	No	Single	90K	Yes

3

A More Complete View of Data

- Data may have parts
- Attributes (objects) may have relationships with other attributes (objects)
- More generally, data may have structure
- Data can be incomplete
- We will discuss this in more detail later

4

Attribute Values

- **Attribute values** are numbers or symbols assigned to an attribute for a particular object
- Distinction between attributes and attribute values
 - Same attribute can be mapped to different attribute values
 - ◆ Example: height can be measured in feet or meters
 - Different attributes can be mapped to the same set of values
 - ◆ Example: Attribute values for ID and age are integers
 - ◆ But properties of attribute values can be different

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

5

5

Measurement of Length

- The way you measure an attribute may not match the attributes properties.

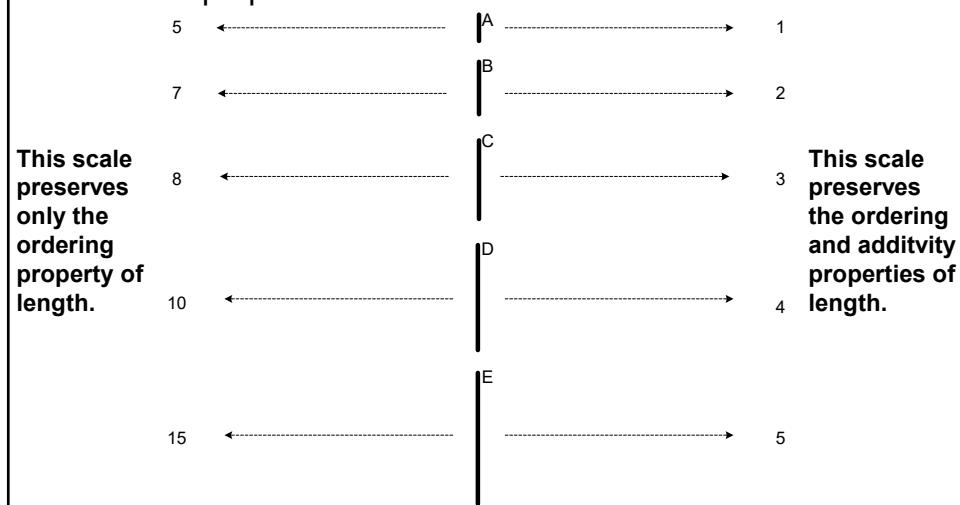

6

Types of Attributes

- There are different types of attributes
 - Nominal
 - ◆ Examples: ID numbers, eye color, zip codes
 - Ordinal
 - ◆ Examples: rankings (e.g., taste of potato chips on a scale from 1-10), grades, height {tall, medium, short}
 - Interval
 - ◆ Examples: calendar dates, temperatures in Celsius or Fahrenheit.
 - Ratio
 - ◆ Examples: temperature in Kelvin, length, counts, elapsed time (e.g., time to run a race)

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

7

Properties of Attribute Values

- The type of an attribute depends on which of the following properties/operations it possesses:
 - Distinctness: $= \neq$
 - Order: $< >$
 - Differences are meaningful : $+ -$
 - Ratios are meaningful $* /$
 - Nominal attribute: distinctness
 - Ordinal attribute: distinctness & order
 - Interval attribute: distinctness, order & meaningful differences
 - Ratio attribute: all 4 properties/operations

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

8

8

Difference Between Ratio and Interval

- Is it physically meaningful to say that a temperature of 10° is twice that of 5° on
 - the Celsius scale?
 - the Fahrenheit scale?
 - the Kelvin scale?
- Consider measuring the height above average
 - If Bill's height is three inches above average and Bob's height is six inches above average, then would we say that Bob is twice as tall as Bill?
 - Is this situation analogous to that of temperature?

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

9

9

	Attribute Type	Description	Examples	Operations
Categorical Qualitative	Nominal	Nominal attribute values only distinguish. ($=$, \neq)	zip codes, employee ID numbers, eye color, sex: {male, female}	mode, entropy, contingency correlation, χ^2 test
	Ordinal	Ordinal attribute values also order objects. ($<$, $>$)	hardness of minerals, {good, better, best}, grades, street numbers	median, percentiles, rank correlation, run tests, sign tests
	Interval	For interval attributes, differences between values are meaningful. (+, -)	calendar dates, temperature in Celsius or Fahrenheit	mean, standard deviation, Pearson's correlation, t and F tests
	Ratio	For ratio variables, both differences and ratios are meaningful. (*, /)	temperature in Kelvin, monetary quantities, counts, age, mass, length, current	geometric mean, harmonic mean, percent variation

This categorization of attributes is due to S. S. Stevens

10

Attribute Type	Transformation	Comments
Categorical Qualitative	Nominal	Any permutation of values If all employee ID numbers were reassigned, would it make any difference?
	Ordinal	An order preserving change of values, i.e., $new_value = f(old_value)$ where f is a monotonic function An attribute encompassing the notion of good, better best can be represented equally well by the values {1, 2, 3} or by {0.5, 1, 10}.
	Interval	$new_value = a * old_value + b$ where a and b are constants Thus, the Fahrenheit and Celsius temperature scales differ in terms of where their zero value is and the size of a unit (degree).
	Ratio	$new_value = a * old_value$ Length can be measured in meters or feet.

This categorization of attributes is due to S. S. Stevens

11

Discrete and Continuous Attributes

● Discrete Attribute

- Has only a finite or countably infinite set of values
- Examples: zip codes, counts, or the set of words in a collection of documents
- Often represented as integer variables.
- Note: **binary attributes** are a special case of discrete attributes

● Continuous Attribute

- Has real numbers as attribute values
- Examples: temperature, height, or weight.
- Practically, real values can only be measured and represented using a finite number of digits.
- Continuous attributes are typically represented as floating-point variables.

12

Asymmetric Attributes

- Only presence (a non-zero attribute value) is regarded as important
 - ◆ Words present in documents
 - ◆ Items present in customer transactions
- If we met a friend in the grocery store would we ever say the following?

"I see our purchases are very similar since we didn't buy most of the same things."
- We need two asymmetric binary attributes to represent one ordinary binary attribute
 - Association analysis uses asymmetric attributes
- Asymmetric attributes typically arise from objects that are sets

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

13

Some Extensions and Critiques

- Velleman, Paul F., and Leland Wilkinson. "Nominal, ordinal, interval, and ratio typologies are misleading." *The American Statistician* 47, no. 1 (1993): 65-72.
- Mosteller, Frederick, and John W. Tukey. "Data analysis and regression. A second course in statistics." Addison-Wesley Series in Behavioral Science: Quantitative Methods, Reading, Mass.: Addison-Wesley, 1977.
- Chrisman, Nicholas R. "Rethinking levels of measurement for cartography." *Cartography and Geographic Information Systems* 25, no. 4 (1998): 231-242.

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

14

14

Critiques

- Incomplete

- Asymmetric binary
- Cyclical
- Multivariate
- Partially ordered
- Partial membership
- Relationships between the data

- Real data is approximate and noisy

- This can complicate recognition of the proper attribute type
- Treating one attribute type as another may be approximately correct

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

15

Critiques ...

- Not a good guide for statistical analysis

- May unnecessarily restrict operations and results
 - ◆ Statistical analysis is often approximate
 - ◆ Thus, for example, using interval analysis for ordinal values may be justified
- Transformations are common but don't preserve scales
 - ◆ Can transform data to a new scale with better statistical properties
 - ◆ Many statistical analyses depend only on the distribution

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

16

16

More Complicated Examples

- ID numbers
 - Nominal, ordinal, or interval?
- Number of cylinders in an automobile engine
 - Nominal, ordinal, or ratio?
- Biased Scale
 - Interval or Ratio

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

17

17

Key Messages for Attribute Types

- The types of operations you choose should be “meaningful” for the type of data you have
 - Distinctness, order, meaningful intervals, and meaningful ratios are only four properties of data
 - The data type you see – often numbers or strings – may not capture all the properties or may suggest properties that are not present
 - Analysis may depend on these other properties of the data
 - ◆ Many statistical analyses depend only on the distribution
 - Many times what is meaningful is measured by statistical significance
 - But in the end, what is meaningful is measured by the domain

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

18

18

Types of data sets

- Record
 - Data Matrix
 - Document Data
 - Transaction Data
- Graph
 - World Wide Web
 - Molecular Structures
- Ordered
 - Spatial Data
 - Temporal Data
 - Sequential Data
 - Genetic Sequence Data

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

19

19

Important Characteristics of Data

- Dimensionality (number of attributes)
 - ◆ High dimensional data brings a number of challenges
- Sparsity
 - ◆ Only presence counts
- Resolution
 - ◆ Patterns depend on the scale
- Size
 - ◆ Type of analysis may depend on size of data

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

20

20

Record Data

- Data that consists of a collection of records, each of which consists of a fixed set of attributes

Tid	Refund	Marital Status	Taxable Income	Cheat
1	Yes	Single	125K	No
2	No	Married	100K	No
3	No	Single	70K	No
4	Yes	Married	120K	No
5	No	Divorced	95K	Yes
6	No	Married	60K	No
7	Yes	Divorced	220K	No
8	No	Single	85K	Yes
9	No	Married	75K	No
10	No	Single	90K	Yes

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

21

21

Data Matrix

- If data objects have the same fixed set of numeric attributes, then the data objects can be thought of as points in a multi-dimensional space, where each dimension represents a distinct attribute
- Such a data set can be represented by an m by n matrix, where there are m rows, one for each object, and n columns, one for each attribute

Projection of x Load	Projection of y load	Distance	Load	Thickness
10.23	5.27	15.22	2.7	1.2
12.65	6.25	16.22	2.2	1.1

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

22

22

Document Data

- Each document becomes a ‘term’ vector
 - Each term is a component (attribute) of the vector
 - The value of each component is the number of times the corresponding term occurs in the document.

	team	coach	play	ball	score	game	win	lost	timeout	season
Document 1	3	0	5	0	2	6	0	2	0	2
Document 2	0	7	0	2	1	0	0	3	0	0
Document 3	0	1	0	0	1	2	2	0	3	0

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

23

Transaction Data

- A special type of data, where
 - Each transaction involves a set of items.
 - For example, consider a grocery store. The set of products purchased by a customer during one shopping trip constitute a transaction, while the individual products that were purchased are the items.
 - Can represent transaction data as record data

TID	Items
1	Bread, Coke, Milk
2	Beer, Bread
3	Beer, Coke, Diaper, Milk
4	Beer, Bread, Diaper, Milk
5	Coke, Diaper, Milk



01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

24

Graph Data

- Examples: Generic graph, a molecule, and webpages

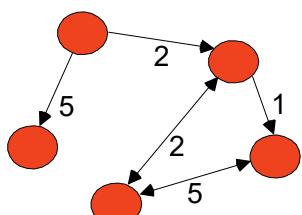

Benzene Molecule: C₆H₆

Useful Links:

- Bibliography
- Other Useful Web sites
 - ACM SIGKDD
 - KDnuggets
 - The Data Mine

Knowledge Discovery and Data Mining Bibliography

(Gets updated frequently, so visit often!)

- Books
- General Data Mining

Book References in Data Mining and Knowledge Discovery

- Usama Fayyad, Gregory Piatetsky-Shapiro, Padhraic Smyth, and Ramasamy Iyer, "Advances in Knowledge Discovery and Data Mining", AAAI Press/The MIT Press, 1996.
J. Ross Quinlan, "C4.5: Programs for Machine Learning", Morgan Kaufmann Publishers, 1993.
Michael Berry and Gordon Linoff, "Data Mining Techniques (For Marketing, Sales, and Customer Support)", John Wiley & Sons, 1997.

General Data Mining

- Usama Fayyad, "Mining Databases: Towards Algorithms for Knowledge Discovery", Bulletin of the IEEE Computer Society Technical Committee on Data Engineering, vol. 21, no. 1, March 1998.
Christopher Matheus, Philip Chan, and Gregory Piatetsky-Shapiro, "Systems for knowledge discovery in databases", IEEE Transactions on Knowledge and Data Engineering, 5(6):903-913, December 1993.

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar


25

25

Ordered Data

- Sequences of transactions

Items/Events

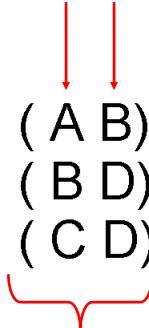

An element of
the sequence

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

26

26

Ordered Data

- Genomic sequence data

```
GGTTCCGCCTTCAGCCCCGCGCC  
CGCAGGGCCCAGCCCCGCGCCGTC  
GAGAAGGGCCCAGCCCCGCGCCG  
GGGGGAGGCAGGGCCGCCCCGAGC  
CCAACCGAGTCCGACCAGGTGCC  
CCCTCTGCTCGGCCTAGACCTGA  
GCTCATTAGGCAGCAGCGAACAG  
GCCAAGTAGAACACCGCGAACAGC  
TGGGCTGCCTGCTGCGACCAGGG
```

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar


27

27

Ordered Data

- Spatio-Temporal Data

Average Monthly
Temperature of
land and ocean

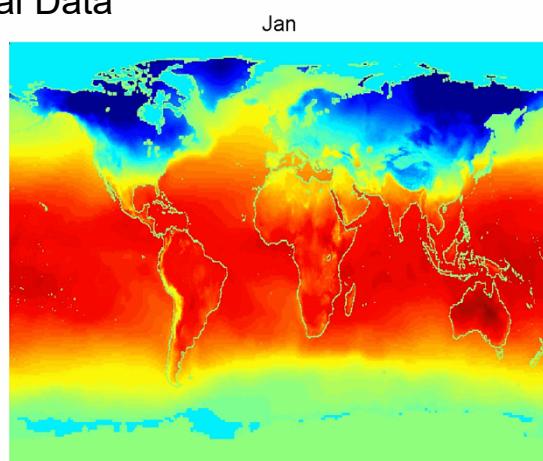

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

28

28

Data Quality

- Poor data quality negatively affects many data processing efforts

“The most important point is that poor data quality is an unfolding disaster.

- Poor data quality costs the typical company at least ten percent (10%) of revenue; twenty percent (20%) is probably a better estimate.”

Thomas C. Redman, DM Review, August 2004

- Data mining example: a classification model for detecting people who are loan risks is built using poor data
 - Some credit-worthy candidates are denied loans
 - More loans are given to individuals that default

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

29

29

Data Quality ...

- What kinds of data quality problems?
- How can we detect problems with the data?
- What can we do about these problems?

- Examples of data quality problems:
 - Noise and outliers
 - Missing values
 - Duplicate data
 - Wrong data
 - Fake data

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

30


30

Noise

- For objects, noise is an extraneous object
- For attributes, noise refers to modification of original values
 - Examples: distortion of a person's voice when talking on a poor phone and "snow" on television screen

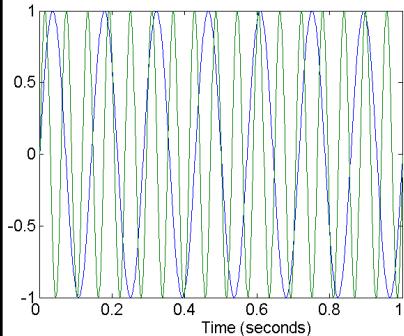

Two Sine Waves

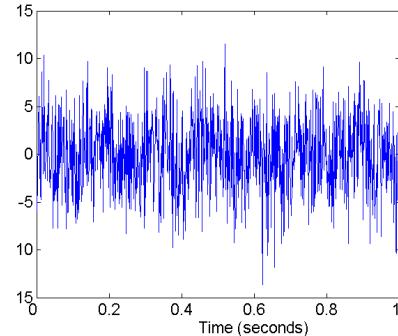

Two Sine Waves + Noise

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

31

31

Outliers

- Outliers** are data objects with characteristics that are considerably different than most of the other data objects in the data set
 - Case 1:** Outliers are noise that interferes with data analysis
 - Case 2:** Outliers are the goal of our analysis
 - Credit card fraud
 - Intrusion detection
- Causes?

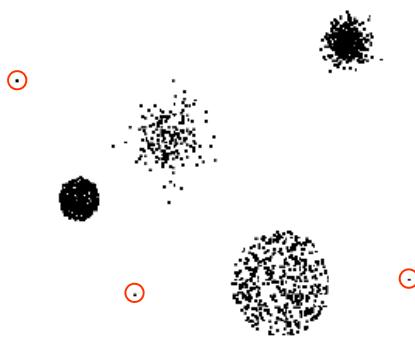

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

32

32

Missing Values

- Reasons for missing values

- Information is not collected
(e.g., people decline to give their age and weight)
- Attributes may not be applicable to all cases
(e.g., annual income is not applicable to children)

- Handling missing values

- Eliminate data objects or variables
- Estimate missing values
 - ◆ Example: time series of temperature
 - ◆ Example: census results
- Ignore the missing value during analysis

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

33

33

Missing Values ...

- Missing completely at random (MCAR)

- Missingness of a value is independent of attributes
- Fill in values based on the attribute
- Analysis may be unbiased overall

- Missing at Random (MAR)

- Missingness is related to other variables
- Fill in values based on other values
- Almost always produces a bias in the analysis

- Missing Not at Random (MNAR)

- Missingness is related to unobserved measurements
- Informative or non-ignorable missingness

- Not possible to know the situation from the data

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

34

34

Duplicate Data

- Data set may include data objects that are duplicates, or almost duplicates of one another
 - Major issue when merging data from heterogeneous sources
- Examples:
 - Same person with multiple email addresses
- Data cleaning
 - Process of dealing with duplicate data issues
- When should duplicate data not be removed?

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

35

Similarity and Dissimilarity Measures

- Similarity measure
 - Numerical measure of how alike two data objects are.
 - Is higher when objects are more alike.
 - Often falls in the range [0,1]
- Dissimilarity measure
 - Numerical measure of how different two data objects are
 - Lower when objects are more alike
 - Minimum dissimilarity is often 0
 - Upper limit varies
- **Proximity** refers to a similarity or dissimilarity

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

36

36

Similarity/Dissimilarity for Simple Attributes

The following table shows the similarity and dissimilarity between two objects, x and y , with respect to a single, simple attribute.

Attribute Type	Dissimilarity	Similarity
Nominal	$d = \begin{cases} 0 & \text{if } x = y \\ 1 & \text{if } x \neq y \end{cases}$	$s = \begin{cases} 1 & \text{if } x = y \\ 0 & \text{if } x \neq y \end{cases}$
Ordinal	$d = x - y /(n - 1)$ (values mapped to integers 0 to $n-1$, where n is the number of values)	$s = 1 - d$
Interval or Ratio	$d = x - y $	$s = -d, s = \frac{1}{1+d}, s = e^{-d}, s = 1 - \frac{d - \min_d}{\max_d - \min_d}$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

37

37

Euclidean Distance

- Euclidean Distance

$$d(\mathbf{x}, \mathbf{y}) = \sqrt{\sum_{k=1}^n (x_k - y_k)^2}$$

where n is the number of dimensions (attributes) and x_k and y_k are, respectively, the k^{th} attributes (components) or data objects \mathbf{x} and \mathbf{y} .

- Standardization is necessary, if scales differ.


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

38

38

Euclidean Distance

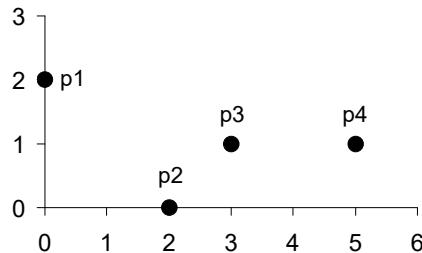

point	x	y
p1	0	2
p2	2	0
p3	3	1
p4	5	1

	p1	p2	p3	p4
p1	0	2.828	3.162	5.099
p2	2.828	0	1.414	3.162
p3	3.162	1.414	0	2
p4	5.099	3.162	2	0

Distance Matrix

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

39

Minkowski Distance

- Minkowski Distance is a generalization of Euclidean Distance

$$d(\mathbf{x}, \mathbf{y}) = \left(\sum_{k=1}^n |x_k - y_k|^r \right)^{1/r}$$

Where r is a parameter, n is the number of dimensions (attributes) and x_k and y_k are, respectively, the k^{th} attributes (components) or data objects x and y .

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

40

40

Minkowski Distance: Examples

- $r = 1$. City block (Manhattan, taxicab, L_1 norm) distance.
 - A common example of this for binary vectors is the Hamming distance, which is just the number of bits that are different between two binary vectors
- $r = 2$. Euclidean distance
- $r \rightarrow \infty$. “supremum” (L_{\max} norm, L_{∞} norm) distance.
 - This is the maximum difference between any component of the vectors
- Do not confuse r with n , i.e., all these distances are defined for all numbers of dimensions.

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

41

41

Minkowski Distance

point	x	y
p1	0	2
p2	2	0
p3	3	1
p4	5	1

L1	p1	p2	p3	p4
p1	0	4	4	6
p2	4	0	2	4
p3	4	2	0	2
p4	6	4	2	0

L2	p1	p2	p3	p4
p1	0	2.828	3.162	5.099
p2	2.828	0	1.414	3.162
p3	3.162	1.414	0	2
p4	5.099	3.162	2	0

L_{∞}	p1	p2	p3	p4
p1	0	2	3	5
p2	2	0	1	3
p3	3	1	0	2
p4	5	3	2	0

Distance Matrix

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

42

42

Mahalanobis Distance

$$\text{mahalanobis}(\mathbf{x}, \mathbf{y}) = (\mathbf{x} - \mathbf{y})^T \Sigma^{-1}(\mathbf{x} - \mathbf{y})$$

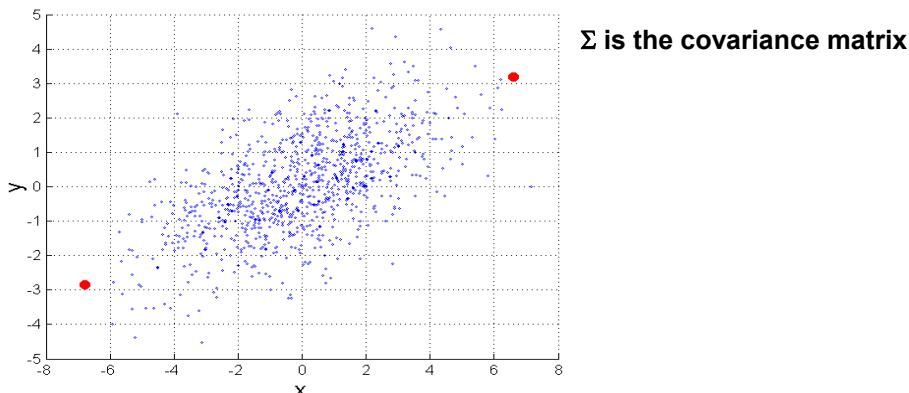

For red points, the Euclidean distance is 14.7, Mahalanobis distance is 6.


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

43

43

Mahalanobis Distance

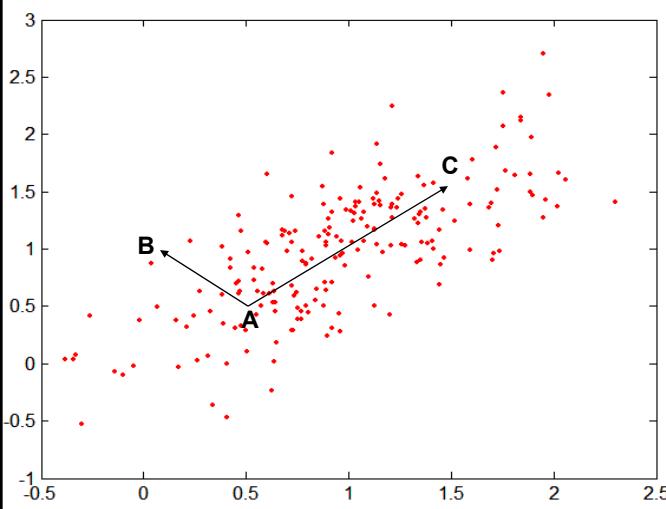

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

44

44

Common Properties of a Distance

- Distances, such as the Euclidean distance, have some well known properties.
 1. $d(x, y) \geq 0$ for all x and y and $d(x, y) = 0$ only if $x = y$. (Positive definiteness)
 2. $d(x, y) = d(y, x)$ for all x and y . (Symmetry)
 3. $d(x, z) \leq d(x, y) + d(y, z)$ for all points x, y , and z . (Triangle Inequality)
- A distance that satisfies these properties is a **metric**

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

45

Common Properties of a Similarity

- Similarities, also have some well known properties.
 1. $s(x, y) = 1$ (or maximum similarity) only if $x = y$.
(does not always hold, e.g., cosine)
 2. $s(x, y) = s(y, x)$ for all x and y . (Symmetry)

where $s(x, y)$ is the similarity between points (data objects), x and y .

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

46

46

Similarity Between Binary Vectors

- Common situation is that objects, x and y , have only binary attributes
- Compute similarities using the following quantities
 - f_{01} = the number of attributes where x was 0 and y was 1
 - f_{10} = the number of attributes where x was 1 and y was 0
 - f_{00} = the number of attributes where x was 0 and y was 0
 - f_{11} = the number of attributes where x was 1 and y was 1
- Simple Matching and Jaccard Coefficients
 - $SMC = \text{number of matches} / \text{number of attributes}$
 $= (f_{11} + f_{00}) / (f_{01} + f_{10} + f_{11} + f_{00})$
 - $J = \text{number of } 11 \text{ matches} / \text{number of non-zero attributes}$
 $= (f_{11}) / (f_{01} + f_{10} + f_{11})$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

47

SMC versus Jaccard: Example

$x = 1 0 0 0 0 0 0 0 0 0$

$y = 0 0 0 0 0 0 1 0 0 1$

$f_{01} = 2$ (the number of attributes where x was 0 and y was 1)

$f_{10} = 1$ (the number of attributes where x was 1 and y was 0)

$f_{00} = 7$ (the number of attributes where x was 0 and y was 0)

$f_{11} = 0$ (the number of attributes where x was 1 and y was 1)

$$\begin{aligned} SMC &= (f_{11} + f_{00}) / (f_{01} + f_{10} + f_{11} + f_{00}) \\ &= (0+7) / (2+1+0+7) = 0.7 \end{aligned}$$

$$J = (f_{11}) / (f_{01} + f_{10} + f_{11}) = 0 / (2 + 1 + 0) = 0$$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

48

48

Cosine Similarity

- If \mathbf{d}_1 and \mathbf{d}_2 are two document vectors, then

$$\cos(\mathbf{d}_1, \mathbf{d}_2) = \langle \mathbf{d}_1, \mathbf{d}_2 \rangle / \|\mathbf{d}_1\| \|\mathbf{d}_2\|,$$

where $\langle \mathbf{d}_1, \mathbf{d}_2 \rangle$ indicates inner product or vector dot product of vectors, \mathbf{d}_1 and \mathbf{d}_2 , and $\|\mathbf{d}\|$ is the length of vector \mathbf{d} .

- Example:

$$\mathbf{d}_1 = 3 \ 2 \ 0 \ 5 \ 0 \ 0 \ 0 \ 2 \ 0 \ 0$$

$$\mathbf{d}_2 = 1 \ 0 \ 0 \ 0 \ 0 \ 0 \ 0 \ 1 \ 0 \ 2$$

$$\langle \mathbf{d}_1, \mathbf{d}_2 \rangle = 3*1 + 2*0 + 0*0 + 5*0 + 0*0 + 0*0 + 0*0 + 2*1 + 0*0 + 0*2 = 5$$

$$\|\mathbf{d}_1\| = (3^2 + 2^2 + 0^2 + 5^2 + 0^2 + 0^2 + 0^2 + 2^2 + 0^2 + 0^2)^{0.5} = (42)^{0.5} = 6.481$$

$$\|\mathbf{d}_2\| = (1^2 + 0^2 + 0^2 + 0^2 + 0^2 + 0^2 + 0^2 + 1^2 + 0^2 + 2^2)^{0.5} = (6)^{0.5} = 2.449$$

$$\cos(\mathbf{d}_1, \mathbf{d}_2) = 0.3150$$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

49

49

Extended Jaccard Coefficient (Tanimoto)

- Variation of Jaccard for continuous or count attributes
 - Reduces to Jaccard for binary attributes

$$EJ(\mathbf{x}, \mathbf{y}) = \frac{\mathbf{x} \cdot \mathbf{y}}{\|\mathbf{x}\|^2 + \|\mathbf{y}\|^2 - \mathbf{x} \cdot \mathbf{y}}$$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

50

50

Correlation measures the linear relationship between objects

$$\text{corr}(\mathbf{x}, \mathbf{y}) = \frac{\text{covariance}(\mathbf{x}, \mathbf{y})}{\text{standard_deviation}(\mathbf{x}) * \text{standard_deviation}(\mathbf{y})} = \frac{s_{xy}}{s_x s_y}, \quad (2.11)$$

where we are using the following standard statistical notation and definitions

$$\text{covariance}(\mathbf{x}, \mathbf{y}) = s_{xy} = \frac{1}{n-1} \sum_{k=1}^n (x_k - \bar{x})(y_k - \bar{y}) \quad (2.12)$$

$$\begin{aligned} \text{standard_deviation}(\mathbf{x}) &= s_x = \sqrt{\frac{1}{n-1} \sum_{k=1}^n (x_k - \bar{x})^2} \\ \text{standard_deviation}(\mathbf{y}) &= s_y = \sqrt{\frac{1}{n-1} \sum_{k=1}^n (y_k - \bar{y})^2} \end{aligned}$$


$$\bar{x} = \frac{1}{n} \sum_{k=1}^n x_k \text{ is the mean of } \mathbf{x}$$

$$\bar{y} = \frac{1}{n} \sum_{k=1}^n y_k \text{ is the mean of } \mathbf{y}$$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

51

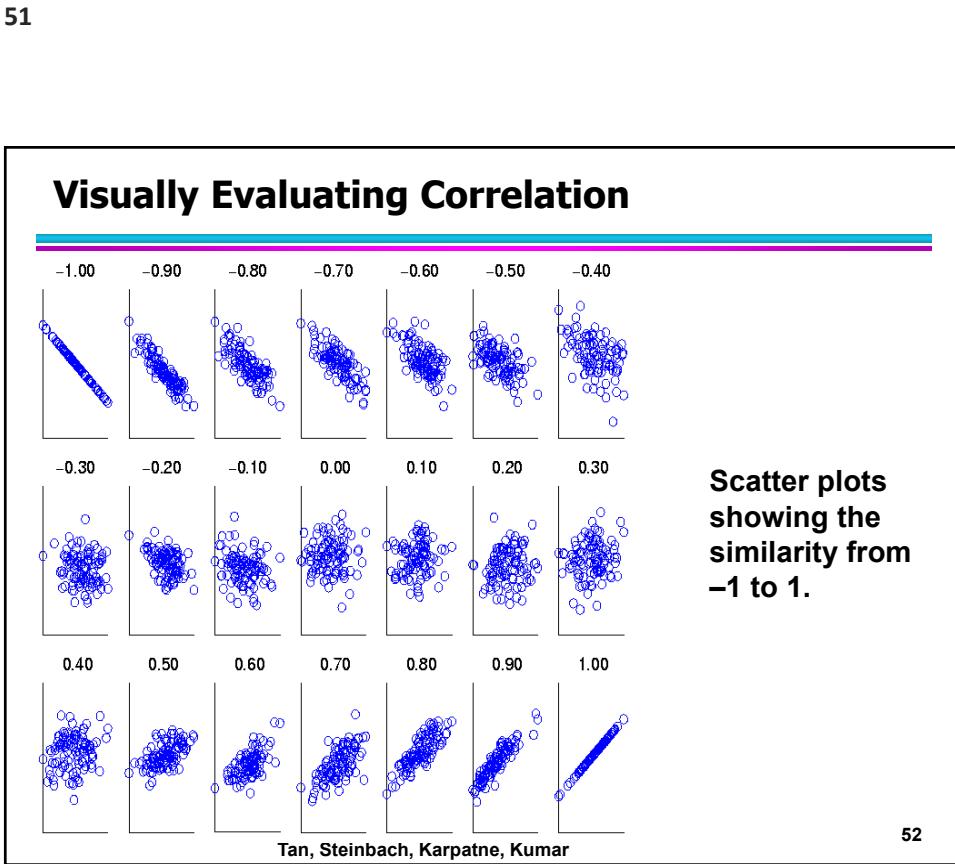

52

Drawback of Correlation

- $\mathbf{x} = (-3, -2, -1, 0, 1, 2, 3)$
- $\mathbf{y} = (9, 4, 1, 0, 1, 4, 9)$

$$y_i = x_i^2$$

- $\text{mean}(\mathbf{x}) = 0, \text{mean}(\mathbf{y}) = 4$
- $\text{std}(\mathbf{x}) = 2.16, \text{std}(\mathbf{y}) = 3.74$
- $\text{corr} = (-3)(5) + (-2)(0) + (-1)(-3) + (0)(-4) + (1)(-3) + (2)(0) + 3(5) / (6 * 2.16 * 3.74)$
= 0

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

53

Comparison of Proximity Measures

- Domain of application
 - Similarity measures tend to be specific to the type of attribute and data
 - Record data, images, graphs, sequences, 3D-protein structure, etc. tend to have different measures
- However, one can talk about various properties that you would like a proximity measure to have
 - Symmetry is a common one
 - Tolerance to noise and outliers is another
 - Ability to find more types of patterns?
 - Many others possible
- The measure must be applicable to the data and produce results that agree with domain knowledge

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

54

54

Information Based Measures

- Information theory is a well-developed and fundamental discipline with broad applications
- Some similarity measures are based on information theory
 - Mutual information in various versions
 - Maximal Information Coefficient (MIC) and related measures
 - General and can handle non-linear relationships
 - Can be complicated and time intensive to compute

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

55

55

Information and Probability

- Information relates to possible outcomes of an event
 - transmission of a message, flip of a coin, or measurement of a piece of data
- The more certain an outcome, the less information that it contains and vice-versa
 - For example, if a coin has two heads, then an outcome of heads provides no information
 - More quantitatively, the information is related to the probability of an outcome
 - ◆ The smaller the probability of an outcome, the more information it provides and vice-versa
 - Entropy is the commonly used measure



01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

56

56

Entropy

- For
 - a variable (event), X ,
 - with n possible values (outcomes), $x_1, x_2 \dots, x_n$
 - each outcome having probability, $p_1, p_2 \dots, p_n$
 - the entropy of X , $H(X)$, is given by
$$H(X) = - \sum_{i=1}^n p_i \log_2 p_i$$
- Entropy is between 0 and $\log_2 n$ and is measured in bits
 - Thus, entropy is a measure of how many bits it takes to represent an observation of X on average

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

57

Entropy Examples

- For a coin with probability p of heads and probability $q = 1 - p$ of tails

$$H = -p \log_2 p - q \log_2 q$$

- For $p = 0.5, q = 0.5$ (fair coin) $H = 1$
- For $p = 1$ or $q = 1, H = 0$

- What is the entropy of a fair four-sided die?

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

58

58

Entropy for Sample Data: Example

Hair Color	Count	p	$-p \log_2 p$
Black	75	0.75	0.3113
Brown	15	0.15	0.4105
Blond	5	0.05	0.2161
Red	0	0.00	0
Other	5	0.05	0.2161
Total	100	1.0	1.1540

Maximum entropy is $\log_2 5 = 2.3219$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

59

Entropy for Sample Data

- Suppose we have

- a number of observations (m) of some attribute, X ,
e.g., the hair color of students in the class,
- where there are n different possible values
- And the number of observation in the i^{th} category is m_i
- Then, for this sample

$$H(X) = - \sum_{i=1}^n \frac{m_i}{m} \log_2 \frac{m_i}{m}$$

- For continuous data, the calculation is harder

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

60

60

Mutual Information

- Information one variable provides about another

Formally, $I(X, Y) = H(X) + H(Y) - H(X, Y)$, where

$H(X, Y)$ is the joint entropy of X and Y ,

$$H(X, Y) = - \sum_i \sum_j p_{ij} \log_2 p_{ij}$$

Where p_{ij} is the probability that the i^{th} value of X and the j^{th} value of Y occur together

- For discrete variables, this is easy to compute
- Maximum mutual information for discrete variables is $\log_2(\min(n_X, n_Y))$, where n_X (n_Y) is the number of values of X (Y)

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

61

61

Mutual Information Example

Student Status	Count	p	$-p \log_2 p$
Undergrad	45	0.45	0.5184
Grad	55	0.55	0.4744
Total	100	1.00	0.9928

Grade	Count	p	$-p \log_2 p$
A	35	0.35	0.5301
B	50	0.50	0.5000
C	15	0.15	0.4105
Total	100	1.00	1.4406

Student Status	Grade	Count	p	$-p \log_2 p$
Undergrad	A	5	0.05	0.2161
Undergrad	B	30	0.30	0.5211
Undergrad	C	10	0.10	0.3322
Grad	A	30	0.30	0.5211
Grad	B	20	0.20	0.4644
Grad	C	5	0.05	0.2161
Total		100	1.00	2.2710

Mutual information of Student Status and Grade = $0.9928 + 1.4406 - 2.2710 = 0.1624$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

62

62

Maximal Information Coefficient

- Reshef, David N., Yakir A. Reshef, Hilary K. Finucane, Sharon R. Grossman, Gilean McVean, Peter J. Turnbaugh, Eric S. Lander, Michael Mitzenmacher, and Pardis C. Sabeti. "Detecting novel associations in large data sets." *science* 334, no. 6062 (2011): 1518-1524.
- Applies mutual information to two continuous variables
- Consider the possible binnings of the variables into discrete categories
 - $n_X \times n_Y \leq N^{0.6}$ where
 - ◆ n_X is the number of values of X
 - ◆ n_Y is the number of values of Y
 - ◆ N is the number of samples (observations, data objects)
- Compute the mutual information
 - Normalized by $\log_2(\min(n_X, n_Y))$
- Take the highest value

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

63

General Approach for Combining Similarities

- Sometimes attributes are of many different types, but an overall similarity is needed.
 - 1: For the k^{th} attribute, compute a similarity, $s_k(\mathbf{x}, \mathbf{y})$, in the range $[0, 1]$.
 - 2: Define an indicator variable, δ_k , for the k^{th} attribute as follows:
$$\delta_k = 0 \text{ if the } k^{\text{th}} \text{ attribute is an asymmetric attribute and both objects have a value of 0, or if one of the objects has a missing value for the } k^{\text{th}} \text{ attribute}$$

$$\delta_k = 1 \text{ otherwise}$$
 3. Compute $\text{similarity}(\mathbf{x}, \mathbf{y}) = \frac{\sum_{k=1}^n \delta_k s_k(\mathbf{x}, \mathbf{y})}{\sum_{k=1}^n \delta_k}$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

64

64

Using Weights to Combine Similarities

- May not want to treat all attributes the same.
 - Use non-negative weights ω_k

$$\text{similarity}(\mathbf{x}, \mathbf{y}) = \frac{\sum_{k=1}^n \omega_k \delta_k s_k(\mathbf{x}, \mathbf{y})}{\sum_{k=1}^n \omega_k \delta_k}$$

- Can also define a weighted form of distance

$$d(\mathbf{x}, \mathbf{y}) = \left(\sum_{k=1}^n w_k |x_k - y_k|^r \right)^{1/r}$$

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

65

65

Density

- Measures the degree to which data objects are close to each other in a specified area
- The notion of density is closely related to that of proximity
- Concept of density is typically used for clustering and anomaly detection
- Examples:
 - Euclidean density
 - ◆ Euclidean density = number of points per unit volume
 - Probability density
 - ◆ Estimate what the distribution of the data looks like
 - Graph-based density
 - ◆ Connectivity

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

66

66

Euclidean Density: Grid-based Approach

- Simplest approach is to divide region into a number of rectangular cells of equal volume and define density as # of points the cell contains

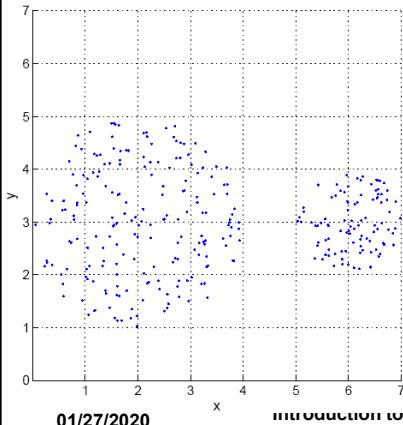

0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0
4	17	18	6	0	0	0	0
14	14	13	13	0	18	27	
11	18	10	21	0	24	31	
3	20	14	4	0	0	0	0
0	0	0	0	0	0	0	0

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

67

67

Euclidean Density: Center-Based

- Euclidean density is the number of points within a specified radius of the point

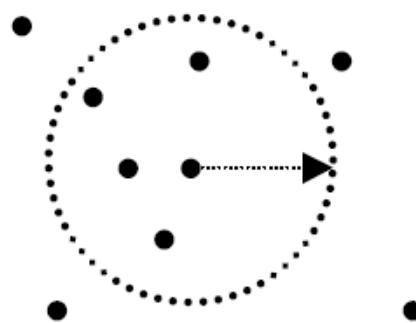


Illustration of center-based density.

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

68

68

Data Preprocessing

- Aggregation
- Sampling
- Dimensionality Reduction
- Feature subset selection
- Feature creation
- Discretization and Binarization
- Attribute Transformation

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

69

69

Aggregation

- Combining two or more attributes (or objects) into a single attribute (or object)
- Purpose
 - Data reduction
 - ◆ Reduce the number of attributes or objects
 - Change of scale
 - ◆ Cities aggregated into regions, states, countries, etc.
 - ◆ Days aggregated into weeks, months, or years
 - More “stable” data
 - ◆ Aggregated data tends to have less variability

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

70

70

Example: Precipitation in Australia

- This example is based on precipitation in Australia from the period 1982 to 1993.
The next slide shows
 - A histogram for the standard deviation of average monthly precipitation for 3,030 0.5° by 0.5° grid cells in Australia, and
 - A histogram for the standard deviation of the average yearly precipitation for the same locations.
- The average yearly precipitation has less variability than the average monthly precipitation.
- All precipitation measurements (and their standard deviations) are in centimeters.

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

71


71

Example: Precipitation in Australia ...

Variation of Precipitation in Australia

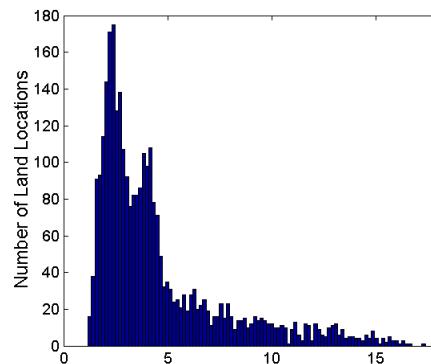

Standard Deviation of Average
Monthly Precipitation

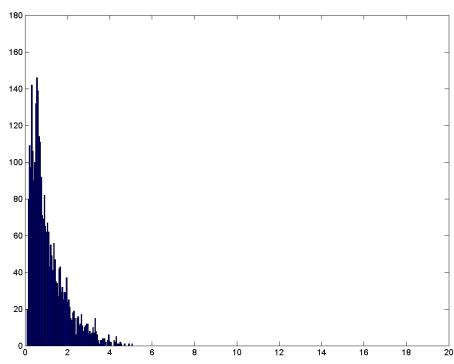

Standard Deviation of
Average Yearly Precipitation

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

72

72

Sampling

- Sampling is the main technique employed for data reduction.
 - It is often used for both the preliminary investigation of the data and the final data analysis.
- Statisticians often sample because **obtaining** the entire set of data of interest is too expensive or time consuming.
- Sampling is typically used in data mining because **processing** the entire set of data of interest is too expensive or time consuming.

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

73

73

Sampling ...

- The key principle for effective sampling is the following:
 - Using a sample will work almost as well as using the entire data set, if the sample is **representative**
 - A sample is **representative** if it has approximately the same properties (of interest) as the original set of data


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

74

74

Sample Size

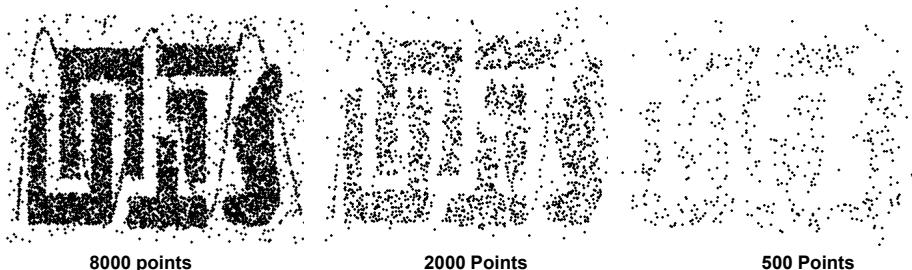

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

75

75

Types of Sampling

- Simple Random Sampling

- There is an equal probability of selecting any particular item
- Sampling without replacement
 - ◆ As each item is selected, it is removed from the population
- Sampling with replacement
 - ◆ Objects are not removed from the population as they are selected for the sample.
 - ◆ In sampling with replacement, the same object can be picked up more than once

- Stratified sampling

- Split the data into several partitions; then draw random samples from each partition

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

76

76

Sample Size

- What sample size is necessary to get at least one object from each of 10 equal-sized groups.

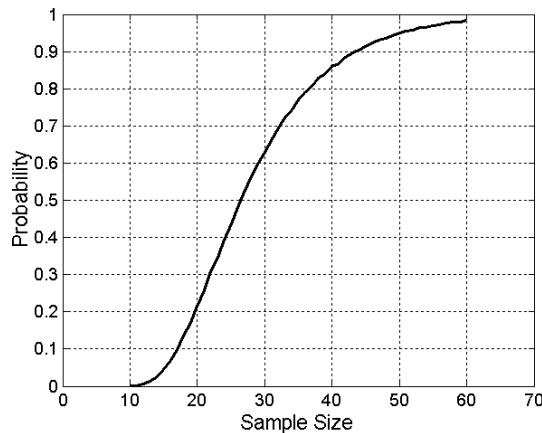

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

77

77

Curse of Dimensionality

- When dimensionality increases, data becomes increasingly sparse in the space that it occupies
- Definitions of density and distance between points, which are critical for clustering and outlier detection, become less meaningful

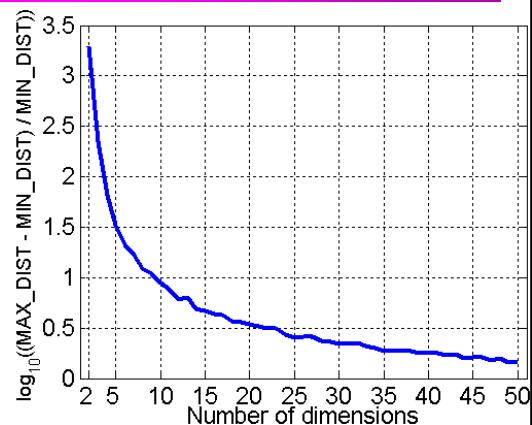

- Randomly generate 500 points
- Compute difference between max and min distance between any pair of points

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

78

78

Dimensionality Reduction

- Purpose:

- Avoid curse of dimensionality
- Reduce amount of time and memory required by data mining algorithms
- Allow data to be more easily visualized
- May help to eliminate irrelevant features or reduce noise

- Techniques

- Principal Components Analysis (PCA)
- Singular Value Decomposition
- Others: supervised and non-linear techniques

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

79

79

Dimensionality Reduction: PCA

- Goal is to find a projection that captures the largest amount of variation in data

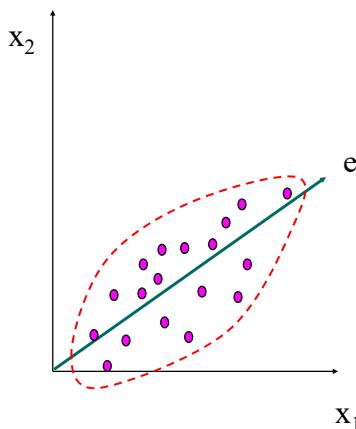

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

80

80

Dimensionality Reduction: PCA

256



01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

81

81

Feature Subset Selection

- Another way to reduce dimensionality of data
- Redundant features
 - Duplicate much or all of the information contained in one or more other attributes
 - Example: purchase price of a product and the amount of sales tax paid
- Irrelevant features
 - Contain no information that is useful for the data mining task at hand
 - Example: students' ID is often irrelevant to the task of predicting students' GPA
- Many techniques developed, especially for classification

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

82

82

Feature Creation

- Create new attributes that can capture the important information in a data set much more efficiently than the original attributes
- Three general methodologies:
 - Feature extraction
 - ◆ Example: extracting edges from images
 - Feature construction
 - ◆ Example: dividing mass by volume to get density
 - Mapping data to new space
 - ◆ Example: Fourier and wavelet analysis

01/27/2020


Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

83

83

Mapping Data to a New Space

- Fourier and wavelet transform

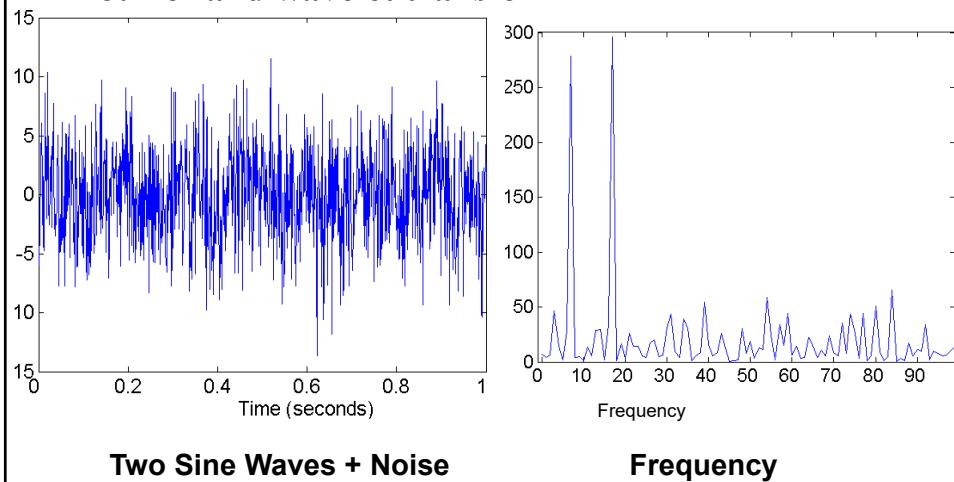

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

84

84

Discretization

- **Discretization** is the process of converting a continuous attribute into an ordinal attribute
 - A potentially infinite number of values are mapped into a small number of categories
 - Discretization is commonly used in classification
 - Many classification algorithms work best if both the independent and dependent variables have only a few values
 - We give an illustration of the usefulness of discretization using the Iris data set

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

85

85

Iris Sample Data Set

- Iris Plant data set.
 - Can be obtained from the UCI Machine Learning Repository
<http://www.ics.uci.edu/~mlearn/MLRepository.html>
 - From the statistician Douglas Fisher
 - Three flower types (classes):
 - ◆ Setosa
 - ◆ Versicolour
 - ◆ Virginica
 - Four (non-class) attributes
 - ◆ Sepal width and length
 - ◆ Petal width and length



Virginica. Robert H. Mohlenbrock. USDA NRCS. 1995. Northeast wetland flora: Field office guide to plant species. Northeast National Technical Center, Chester, PA. Courtesy of USDA NRCS Wetland Science Institute.


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

86

86

Discretization: Iris Example

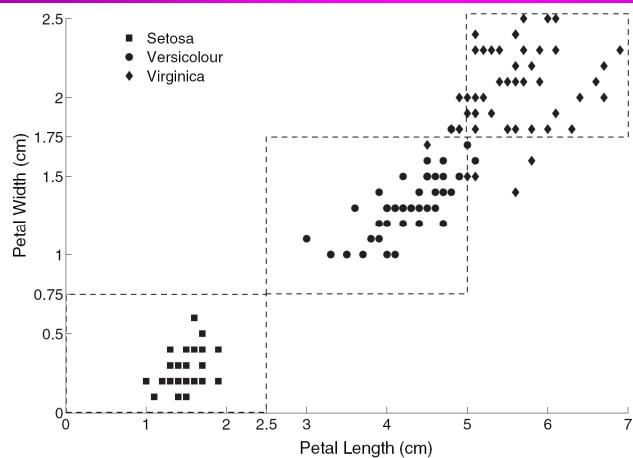

Petal width low or petal length low implies Setosa.
Petal width medium or petal length medium implies Versicolour.
Petal width high or petal length high implies Virginica.


87

Discretization: Iris Example ...

- How can we tell what the best discretization is?

– **Unsupervised discretization:** find breaks in the data values


◆ Example:
Petal Length

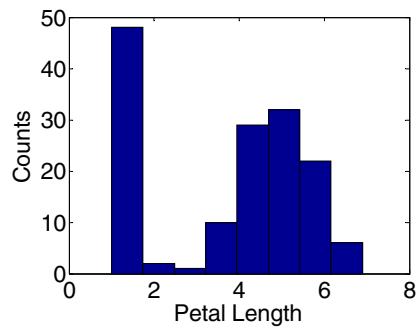

– **Supervised discretization:** Use class labels to find breaks

88

Discretization Without Using Class Labels

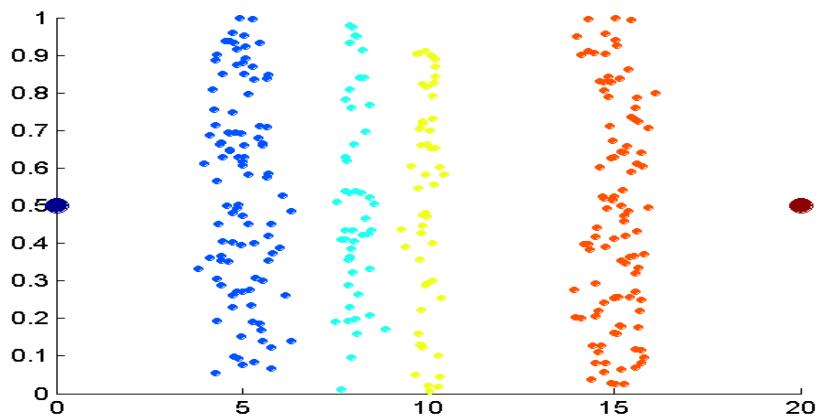

Data consists of four groups of points and two outliers. Data is one-dimensional, but a random y component is added to reduce overlap.


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

89

89

Discretization Without Using Class Labels

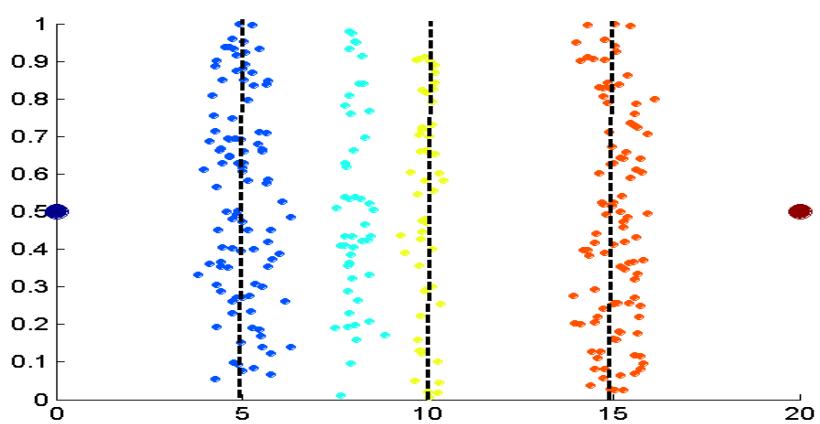

Equal interval width approach used to obtain 4 values.


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

90

90

Discretization Without Using Class Labels

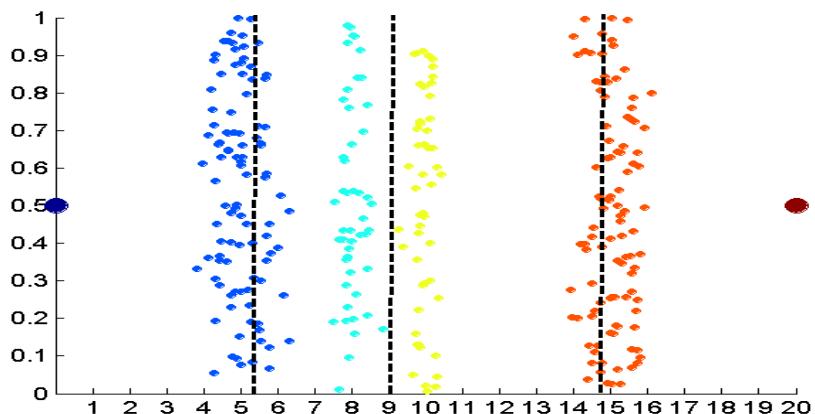

Equal frequency approach used to obtain 4 values.


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

91

91

Discretization Without Using Class Labels

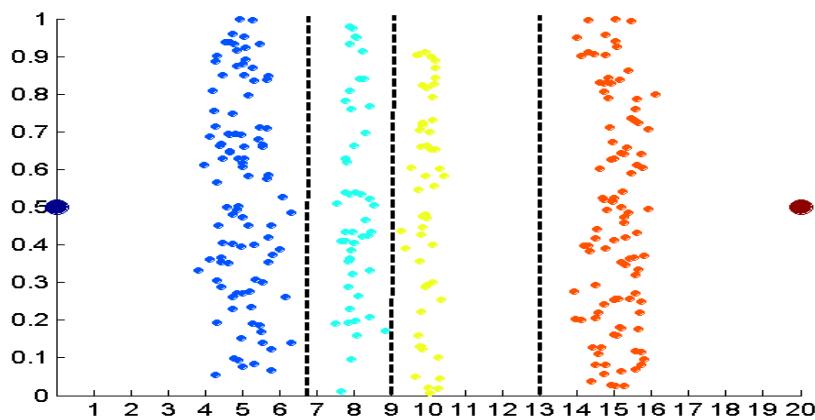

K-means approach to obtain 4 values.

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

92

92

Binarization

- Binarization maps a continuous or categorical attribute into one or more binary variables
- Typically used for association analysis
- Often convert a continuous attribute to a categorical attribute and then convert a categorical attribute to a set of binary attributes
 - Association analysis needs asymmetric binary attributes
 - Examples: eye color and height measured as {low, medium, high}

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

93

93

Attribute Transformation

- An **attribute transform** is a function that maps the entire set of values of a given attribute to a new set of replacement values such that each old value can be identified with one of the new values
 - Simple functions: x^k , $\log(x)$, e^x , $|x|$
 - **Normalization**
 - ◆ Refers to various techniques to adjust to differences among attributes in terms of frequency of occurrence, mean, variance, range
 - ◆ Take out unwanted, common signal, e.g., seasonality
 - In statistics, **standardization** refers to subtracting off the means and dividing by the standard deviation


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

94

94

Example: Sample Time Series of Plant Growth

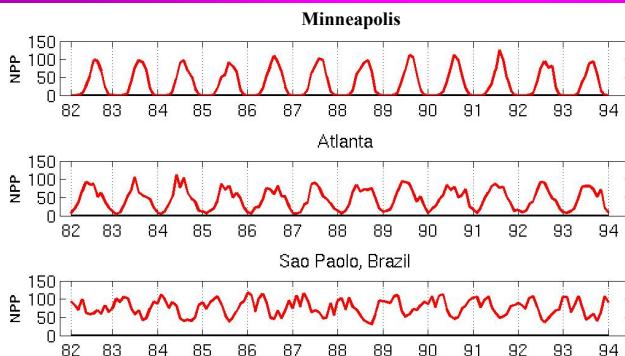

Net Primary Production (NPP)
is a measure of
plant growth used
by ecosystem
scientists.

Correlations between time series

	Minneapolis	Atlanta	Sao Paolo
Minneapolis	1.0000	0.7591	-0.7581
Atlanta	0.7591	1.0000	-0.5739
Sao Paolo	-0.7581	-0.5739	1.0000


01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

95

95

Seasonality Accounts for Much Correlation

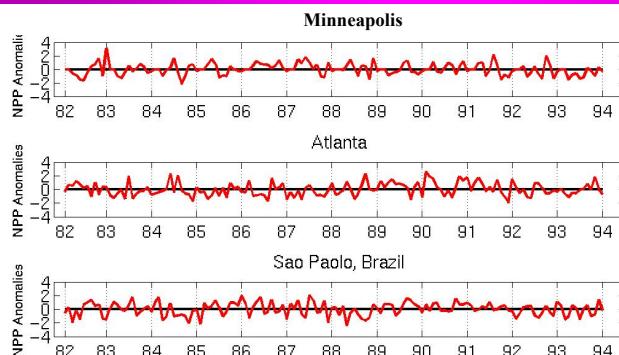

Normalized using
monthly Z Score:
Subtract off monthly
mean and divide by
monthly standard
deviation

Correlations between time series

	Minneapolis	Atlanta	Sao Paolo
Minneapolis	1.0000	0.0492	0.0906
Atlanta	0.0492	1.0000	-0.0154
Sao Paolo	0.0906	-0.0154	1.0000

01/27/2020

Introduction to Data Mining, 2nd Edition
Tan, Steinbach, Karpatne, Kumar

96

96