


Open-loop ($H = 10$)

- Observe once
- infer one chunk
- execute blindly

Initial State
(same for both)

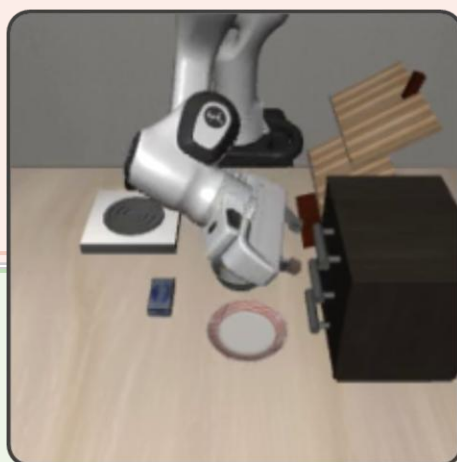

t_0

Closed-loop ($H = 1$)

- Observe each step
- infer new chunk
- execute first action

