

Coupled Joint Registration and Co-segmentation for Indoor Rigid Object Sets

Siyu Hu*

Abstract

Keywords: Co-segmentation, Joint Registration

Concepts: •Computing methodologies → Image manipulation; Computational photography;

1 Introduction

2 Related Work

3 Method Overview

3.1 Problem Statement

Given a set of point clouds which record the same group of rigid indoor objects with different layout. We intend to simultaneously partition the point clouds into objects and align the points of same object to recover layouts for corresponding object. Figure 1 shows an example of input point clouds set.

3.2 Formulation

To formulate the relation between the unknown object set and the input point clouds. We come up with a generation model as follows:

$$P(v_{mi}) = \sum_{n=1}^N p_n \sum_{k=1}^{K_n} p_k N(\phi_{mn}(v_{mi})|x_k, \Sigma_k) \quad (1)$$

which means, The observed point clouds are generated by N object model. Each object model is represented by a gaussian mixture model with K_n centroids. Our goal is to maximize the probability of the expected complete-data log-likelihood. The object function can be written as:

$$\Theta = \operatorname{argmax}_{\Theta} \sum_Z P(Z|V, \Theta) \ln P(V, Z; \Theta) \quad (2)$$

in which:

$$\Theta = \{\{p_n\}_{n=1}^N, \{p_k, x_k, \Sigma_k\}_{k=1}^{K_n}, \{\phi_{mn}\}_{m=1, n=1}^{MN}\}$$

is the parameters of the generation model.

p_n is the prior probability that the point is generated by the n -th object.

p_k is the weight of the k -th Gaussian.

x_k is the center of the k -th Gaussian.

Σ_k is the standard deviation of the k -th Gaussian.

There are $\sum K_n$ Gaussian model in total and among them, K_n Gaussian models belongs to object n .

*e-mail:sy891228@mail.ustc.edu.cn

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s). © 2016 Copyright held by the owner/author(s).

SIGGRAPH 2016 Posters, July 24-28, 2016, Anaheim, CA

ISBN: 978-1-4503-ABCD-E/16/07

DOI: <http://doi.acm.org/10.1145/9999997.9999999>

V is the M input point clouds.

v_{mi} is the i -th point of the m -th point cloud.

Z is a latent variable set defined as:

$$Z = \{z_{ij}|j = 1 \dots M, i = 1 \dots N_j\}$$

among which if $z_{ij} = k (k = 1 \dots \sum K_n)$ assign the observation of $\phi_{mn}(v_{mi})$ to the k -th component of Gaussian mixture model. Such formulation can be seen as an extension of joint registration formulation in [Evangelidis et al. 2014], upon which we add several gaussian mixture model together to express a group of objects. By solving this new problem we simultaneously solve the object co-segmentation of given observation.

4 Algorithms and Implementation

4.1 Expectation Conditional Maximization

Assuming the observed point clouds $\{V_m\}$ are independent and identically distributed, we can then write the (2) as:

$$\varepsilon(\Theta|V, Z) = \sum_{m,i,k} \alpha_{mik} (\log p_n + \log p_k + \log P(\phi_{mn}(v_{mi})|z_{ji} = k; \Theta)) \quad (3)$$

In which the $\alpha_{mik} = P(z_{mi} = k|v_{mi}; \Theta)$,

Algorithm 1 Joint Registration and Co-segmentation (JRCS)

Input:

$\{V_m\}$: Observed point clouds

Θ^0 : Initial parameter set

Output:

Θ^q : Final parameter set

1. $q \leftarrow 1$
 2. **repeat**
 3. E-step: Use Θ^{q-1} to estimate posterior probabilities $\alpha_{mik}^q = P(z_{mi}|v_{mi}; \Theta^{q-1})$
 4. CM-step-a: Use $\alpha_{mik}^q, x_k^{q-1}$ to estimate $\{R_{mn}^q\}$ and $\{t_{mn}^q\}$
 5. CM-step-b: Use $\alpha_{mik}^q, \{R_{mn}^q\}$ and $\{t_{mn}^q\}$ to estimate the Gaussian centers x_k^q .
 6. CM-step-c: Use $\alpha_{mik}^q, \{R_{mn}^q\}$ and $\{t_{mn}^q\}$ to estimate the covariances Σ_k^q .
 7. CM-step-c: Use α_{mik}^q to estimate the priors p_k^q
 8. **until** Convergence
 9. **return** Θ^q
-

4.2 Initialization Techniques

A key advantage motivates our formulation is that the soft correspondence can be initialized more flexibly comparing to the typical initialization techniques such as landmark point pairs in registration.

Initial Segment based on Planar Fitting

Block Based Feature Extraction and Clustering

The result of Clustering:

$$P(B_{mj} \in C_n)$$

Soft Correspondence Initialization

Then the α is initialized as:

$$\alpha_{ijk} = P(B_{mj} \in C_n)$$

on the condition that:

$$v_{ij} \in B_{mj} \wedge x_k \in O_n$$

5 Experiments and Discussion

5.1 Debugging The Smooth Step

Bug Description:

When the smooth step is added, the mixture of gaussian model won't expand to fit the input observations.

Test Case Generation:

In order to debug the problem, I generated a set of six synthetic point clouds. For the purpose of debugging, I deliberately made sure that the first 2657 points belonging to table, the following 2028 points belonging to chair, the last 3286 points belonging to teddy. The Test Cases are shown in Figure 1.

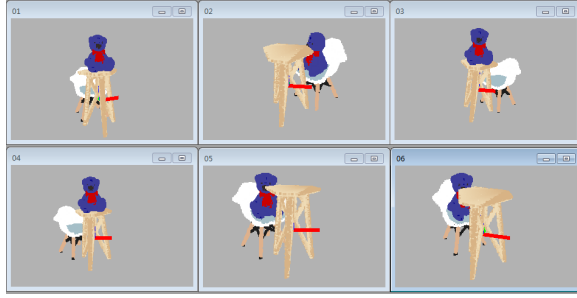


Figure 1: The Synthetic Data for Test: they are composed of three objects (teddy table and chair) with different rigid motion

The Example of α :

The α are calculated as

$$\alpha_{ijk} = p_n p_k N(\phi_n(v_{ij}) | x_k, \Sigma_k)$$

The example α with no smooth:

5.2 Current Result

As shown in Figure 2

5.3 Initialization Experiments

Acknowledgements

To Robert, for all the bagels.

References

- BOUAZIZ, S., TAGLIASACCHI, A., AND PAULY, M. 2013. Sparse iterative closest point. *Computer Graphics Forum (Symposium on Geometry Processing)* 32, 5, 1–11.
- EVANGELIDIS, G., KOUNADES-BASTIAN, D., HORAUD, R., AND E.Z., P. 2014. A generative model for the joint registration of multiple point sets. In *European Conference on Computer Vision (ECCV)*.

- JIA, Z., GALLAGHER, A. C., SAXENA, A., AND CHEN, T. 2015. 3D reasoning from blocks to stability. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 37, 5, 905–918.
- KRHENBHL, P., AND KOLTUN, V. 2012. Efficient inference in fully connected crfs with gaussian edge potentials. In *Advances in Neural Information Processing Systems*, 109–117.
- WANG, F., HUANG, Q., AND GUIBAS, L. 2013. Image co-segmentation via consistent functional maps. In *Computer Vision (ICCV), 2013 IEEE International Conference on*, 849–856.



Figure 2: *Current Result*

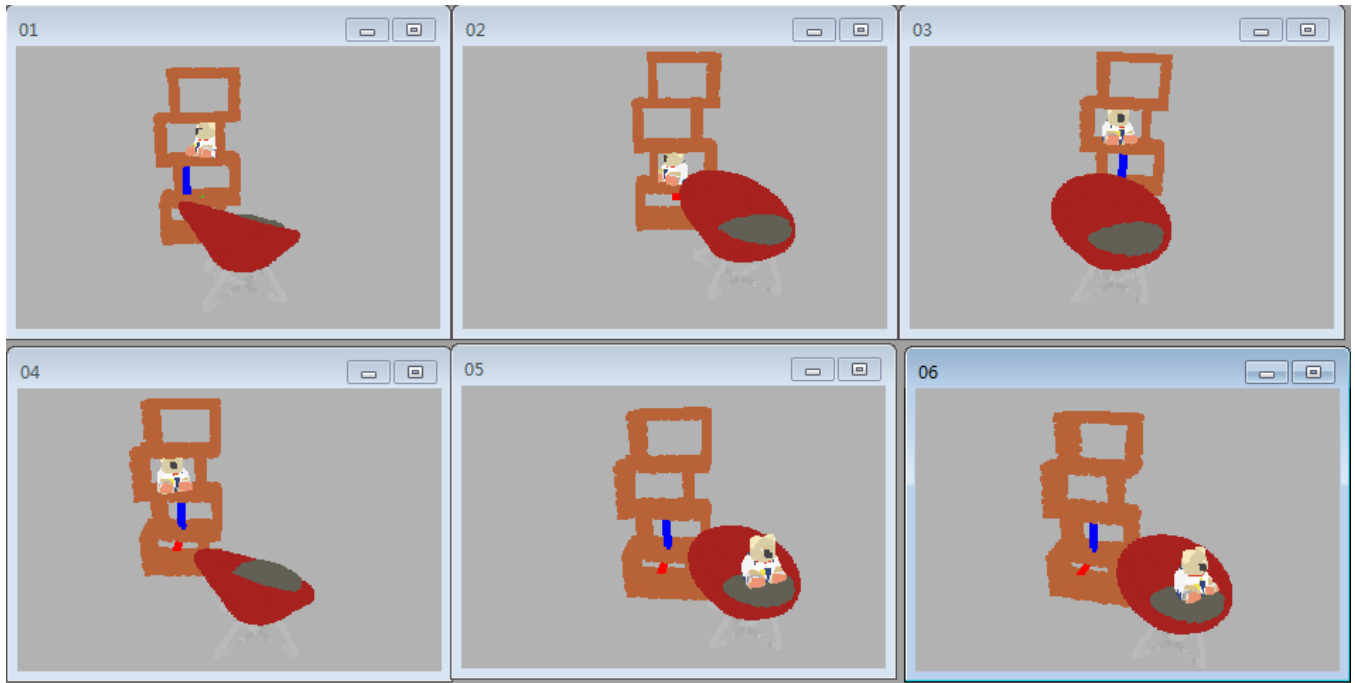


Figure 3: *Input for Initialization Experiments*

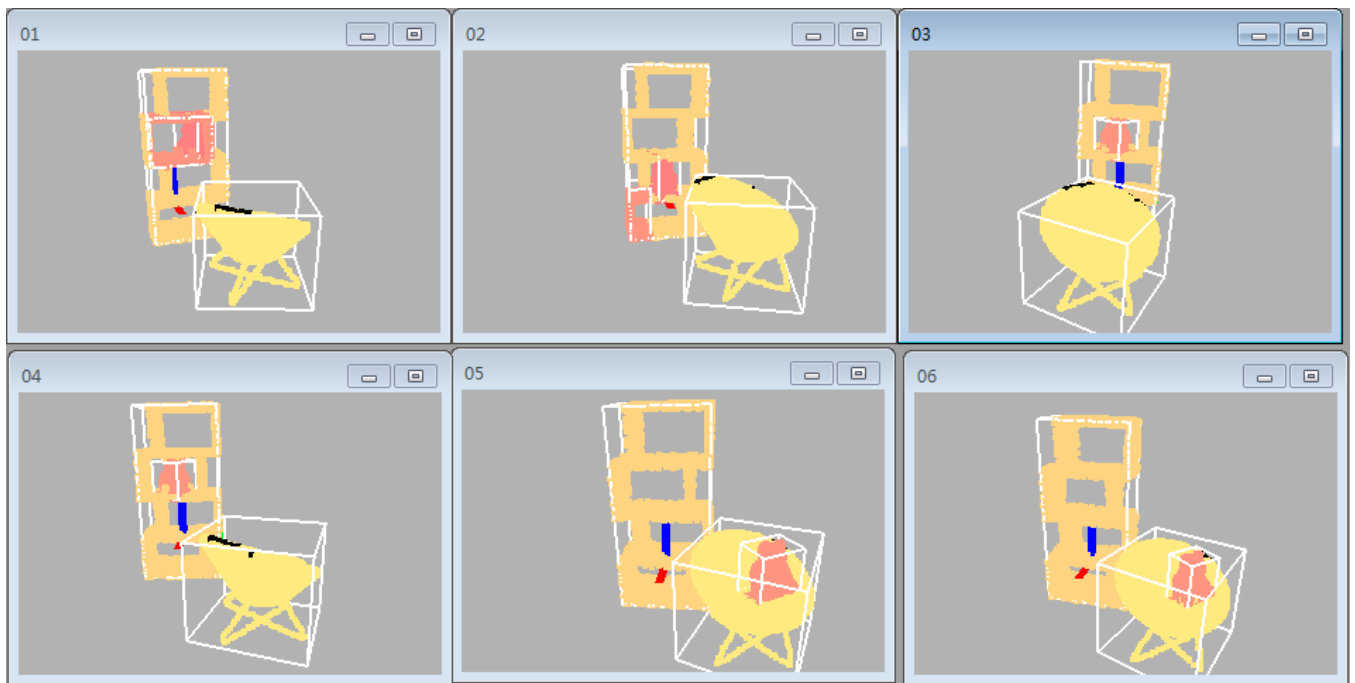


Figure 4: *Segmentation for Initialization Experiments*

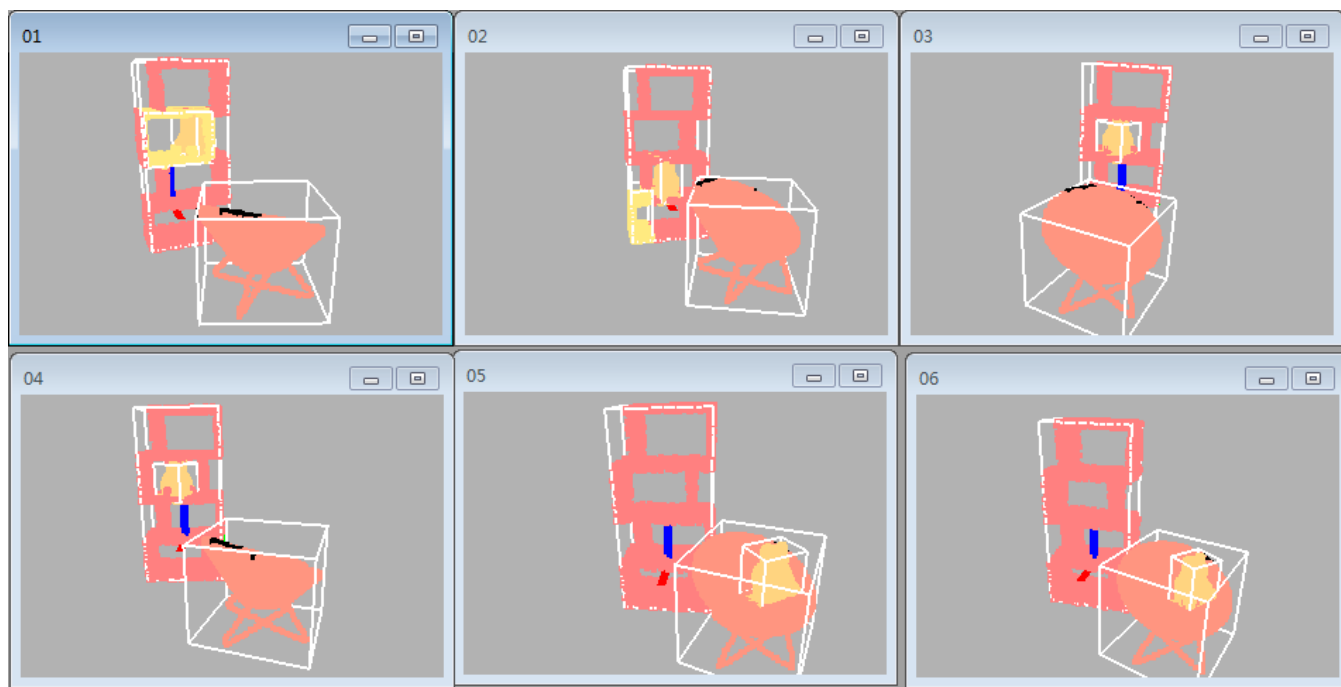


Figure 5: *Clustering for Initialization Experiments*