

BADGER HAND CHAIN HOIST

MANUAL HAND CHAIN HOIST • ½ TO 10 METRIC TON CAPACITY • ZINC-PLATED LOAD & HAND CHAIN • 10' / 20' / 30' LIFTS



HAND CHAIN HOIST

⚠ Read and follow the operator's manual before use. Never exceed rated capacity. Do not use to lift people or loads over people.

Manual hand chain hoist with a radiused hand-chain opening that allows operation from the side or even above — for lifting or pulling. Load and hand chains are **zinc-plated**. Standard lifts of **10', 20' and 30'**; custom lifts/drops available.

- Radiused hand-chain opening — operate from side or above
- Zinc-plated load & hand chains
- Standard 10' / 20' / 30' lifts; custom available
- 1-, 2- & 4-part reeving by capacity
- Optional overload protection ("V")
- Meets ASME B30.16

½-10

METRIC TON CAP.


10-30'

STANDARD LIFTS

B30.16

MEETS ASME

REEVING CONFIGURATIONS & DIMENSIONS

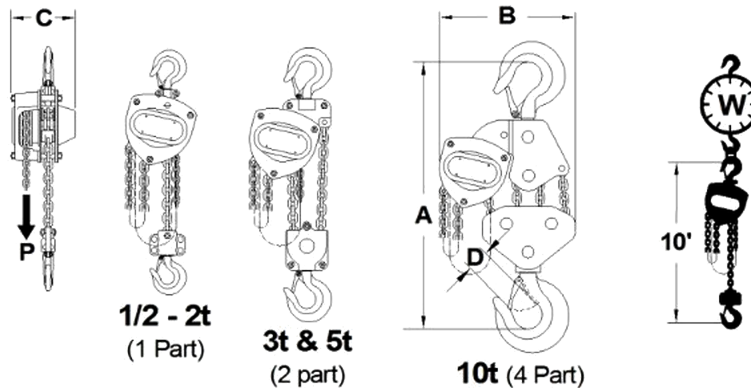

RATED CAPACITIES & SPECIFICATIONS

BASE MODEL NO.	WLL (METRIC TON / LBS)	WEIGHT (LBS)	CHAIN NO. & SIZE (MM)	CHAIN (LB/FT)		EFFORT @ WLL (LBS)	FALLS	DIMENSIONS (IN.)			
				LOAD	HAND			A	B	C	D W/ LATCH
CB005	0.5t (1,100 lbs)	22	C6X18ZC	0.54	0.38	45	1	10.6	5.4	5.4	1.10
CB010	1t (2,200 lbs)	26	C6X18ZC	0.54	0.38	72	1	13.4	6.4	5.8	1.02
CB015	1.5t (3,300 lbs)	42	C8X24ZC	0.92	0.38	81	1	15.7	7.2	6.7	1.28
CB020	2t (4,400 lbs)	44	C8X24ZC	0.92	0.38	82	1	16.3	7.6	6.7	1.26
CB030	3t (6,600 lbs)	59	C8X24ZC	1.84	0.38	87	2	20.9	8.7	6.7	1.46
CB050	5t (11,000 lbs)	101	C10X30ZC	2.96	0.38	98	2	25.0	11.3	7.5	1.80
CB100	10t (22,000 lbs)	183	C10X30ZC	5.92	0.38	98	4	29.3	15.1	7.5	1.97

HOW TO ORDER

Order by descriptive model number: **base model** + lift + hand-chain drop + option. Example — **CB030-20-18V** = 3t hoist, 20' lift, 18' hand-chain drop, with overload protection.

Specifications in inches and pounds unless noted. WLL shown in metric tons and pounds. Load and hand chains are zinc-plated. Reeving (number of falls) varies by capacity — see Falls column and the configuration figures above. Inspect before each use and remove from service if damaged; never exceed rated capacity and do not lift people or loads over people.

OPTIONS & FINISHES

V = overload protection (clutch). Load & hand chains zinc-plated. Standard lifts 10'/20'/30' — custom lifts and drops available on request.

FROM COMMON TO CUSTOM — WE DO IT ALL

866-848-2032 • murphylift.com • 80% of orders ship same day • Free shipping on orders \$50+