



强化学习原理及应用 Reinforcement Learning (RL): Theories & Applications

DCS3015 Autumn 2022

Chao Yu (余超)

School of Computer Science and Engineering
Sun Yat-Sen University




Lecture 5: 强化学习-4

Policy Gradient

Value-Based and Policy-Based RL



- Value Based
 - Learnt Value Function
 - Implicit policy (e.g. ϵ -greedy)
- Policy Based
 - No Value Function
 - Learnt Policy
- Actor-Critic
 - Learnt Value Function
 - Learnt Policy

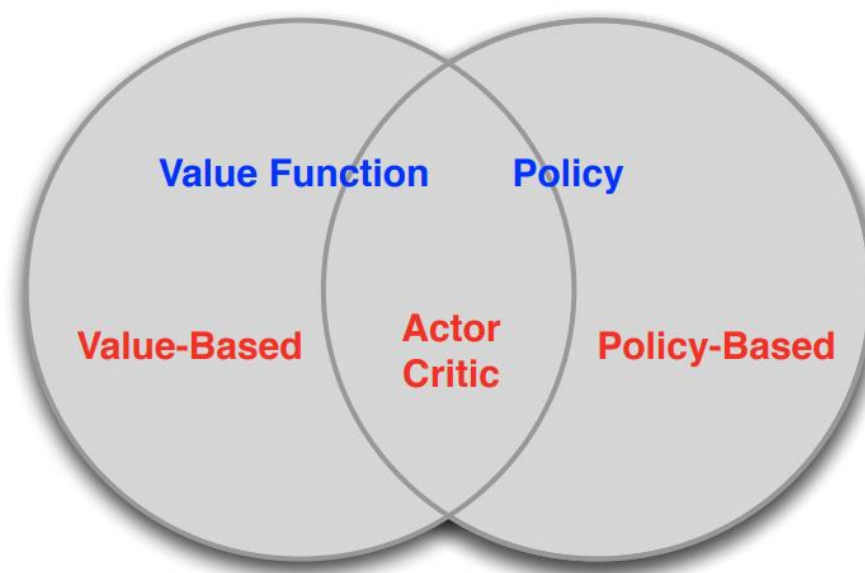

Advantages of Policy-Based RL




Advantages:

- Better convergence properties
- Effective in high-dimensional or continuous action spaces
- Can learn stochastic policies

Disadvantages:


- Typically converge to a local rather than global optimum
- Evaluating a policy is typically inefficient and high variance

Example: Aliased Gridworld

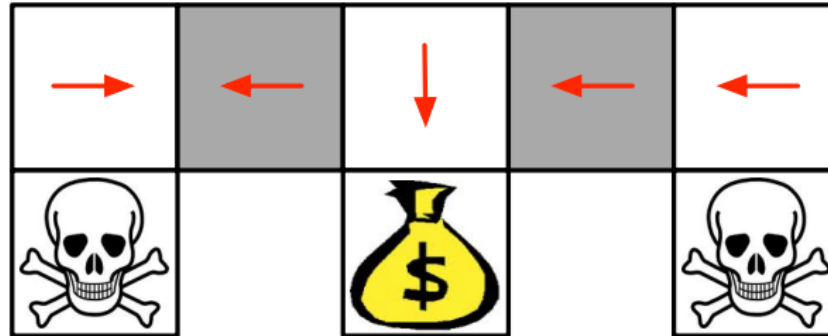

- Under aliasing, an optimal **deterministic** policy will either
 - move W in both grey states (shown by red arrows)
 - move E in both grey states
- Either way, it can get stuck and *never* reach the money
- Value-based RL learns a near-deterministic policy
 - e.g. greedy or ϵ -greedy
- So it will traverse the corridor for a long time

Example: Aliased Gridworld

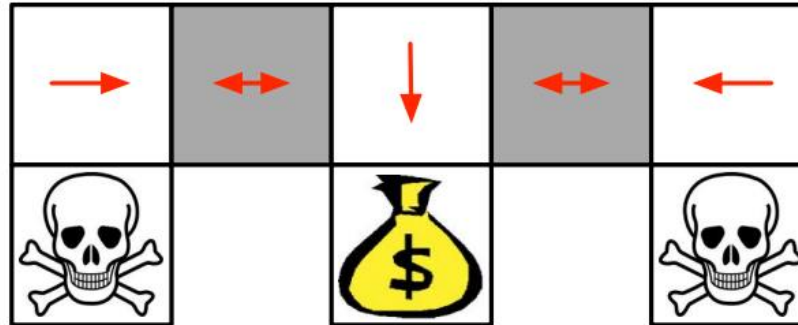

- An optimal **stochastic** policy will randomly move E or W in grey states

$$\pi_{\theta}(\text{wall to N and S, move E}) = 0.5$$

$$\pi_{\theta}(\text{wall to N and S, move W}) = 0.5$$

- It will reach the goal state in a few steps with high probability
- Policy-based RL can learn the optimal stochastic policy

Policy Objective Functions

- Goal: given policy $\pi_\theta(s, a)$ with parameters θ , find best θ
- But how do we measure the quality of a policy π_θ ?
- In episodic environments we can use the **start value**

$$J_1(\theta) = V^{\pi_\theta}(s_1) = \mathbb{E}_{\pi_\theta} [v_1]$$

- In continuing environments we can use the **average value**

$$J_{avV}(\theta) = \sum_s d^{\pi_\theta}(s) V^{\pi_\theta}(s)$$

- Or the **average reward per time-step**


$$J_{avR}(\theta) = \sum_s d^{\pi_\theta}(s) \sum_a \pi_\theta(s, a) \mathcal{R}_s^a$$

- where $d^{\pi_\theta}(s)$ is **stationary distribution** of Markov chain for π_θ

Policy Objective Functions

$$\underbrace{p_{\theta}(\mathbf{s}_1, \mathbf{a}_1, \dots, \mathbf{s}_T, \mathbf{a}_T)}_{p_{\theta}(\tau)} = p(\mathbf{s}_1) \prod_{t=1}^T \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) p(\mathbf{s}_{t+1} | \mathbf{s}_t, \mathbf{a}_t)$$

$$\theta^* = \arg \max_{\theta} \underbrace{E_{\tau \sim p_{\theta}(\tau)} \left[\sum_t r(\mathbf{s}_t, \mathbf{a}_t) \right]}_{J(\theta)}$$

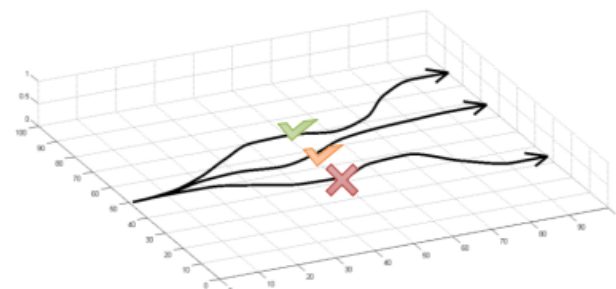

$$J(\theta) = E_{\tau \sim p_{\theta}(\tau)} \left[\sum_t r(\mathbf{s}_t, \mathbf{a}_t) \right] \approx \frac{1}{N} \sum_i \sum_t r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$

sum over samples from π_{θ}

Gradient Descent



- Let $J(\theta)$ be any policy objective function
- Policy gradient algorithms search for a *local* maximum in $J(\theta)$ by ascending the gradient of the policy, w.r.t. parameters θ

$$\Delta\theta = \alpha \nabla_{\theta} J(\theta)$$

- Where $\nabla_{\theta} J(\theta)$ is the **policy gradient**

$$\nabla_{\theta} J(\theta) = \begin{pmatrix} \frac{\partial J(\theta)}{\partial \theta_1} \\ \vdots \\ \frac{\partial J(\theta)}{\partial \theta_n} \end{pmatrix}$$

- and α is a step-size parameter

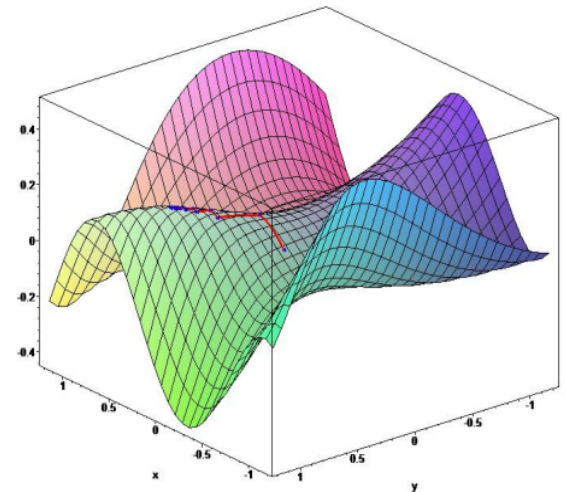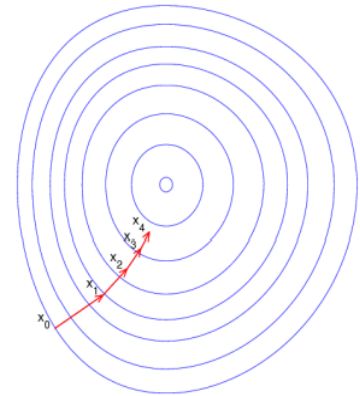

Score Function

- We now compute the policy gradient *analytically*
- Assume policy π_θ is differentiable whenever it is non-zero
- and we know the gradient $\nabla_\theta \pi_\theta(s, a)$
- **Likelihood ratios** exploit the following identity

$$\begin{aligned}\nabla_\theta \pi_\theta(s, a) &= \pi_\theta(s, a) \frac{\nabla_\theta \pi_\theta(s, a)}{\pi_\theta(s, a)} \\ &= \pi_\theta(s, a) \nabla_\theta \log \pi_\theta(s, a)\end{aligned}$$

- The **score function** is $\nabla_\theta \log \pi_\theta(s, a)$

- We will use a softmax policy as a running example
- Weight actions using linear combination of features $\phi(s, a)^\top \theta$
- Probability of action is proportional to exponentiated weight

$$\pi_\theta(s, a) \propto e^{\phi(s, a)^\top \theta}$$

- The score function is

$$\nabla_\theta \log \pi_\theta(s, a) = \phi(s, a) - \mathbb{E}_{\pi_\theta} [\phi(s, \cdot)]$$

- In continuous action spaces, a Gaussian policy is natural
- Mean is a linear combination of state features $\mu(s) = \phi(s)^\top \theta$
- Variance may be fixed σ^2 , or can also be parametrised
- Policy is Gaussian, $a \sim \mathcal{N}(\mu(s), \sigma^2)$
- The score function is

$$\nabla_{\theta} \log \pi_{\theta}(s, a) = \frac{(a - \mu(s))\phi(s)}{\sigma^2}$$

- Consider a simple class of **one-step** MDPs
 - Starting in state $s \sim d(s)$
 - Terminating after one time-step with reward $r = \mathcal{R}_{s,a}$
- Use likelihood ratios to compute the policy gradient

$$\begin{aligned} J(\theta) &= \mathbb{E}_{\pi_{\theta}} [r] \\ &= \sum_{s \in \mathcal{S}} d(s) \sum_{a \in \mathcal{A}} \pi_{\theta}(s, a) \mathcal{R}_{s,a} \\ \nabla_{\theta} J(\theta) &= \sum_{s \in \mathcal{S}} d(s) \sum_{a \in \mathcal{A}} \pi_{\theta}(s, a) \nabla_{\theta} \log \pi_{\theta}(s, a) \mathcal{R}_{s,a} \\ &= \mathbb{E}_{\pi_{\theta}} [\nabla_{\theta} \log \pi_{\theta}(s, a) r] \end{aligned}$$

Policy Gradient Theorem

- The policy gradient theorem generalises the likelihood ratio approach to multi-step MDPs
- Replaces instantaneous reward r with long-term value $Q^\pi(s, a)$
- Policy gradient theorem applies to start state objective, average reward and average value objective

Theorem

*For any differentiable policy $\pi_\theta(s, a)$,
for any of the policy objective functions $J = J_1, J_{avR}$, or $\frac{1}{1-\gamma} J_{avV}$,
the policy gradient is*

$$\nabla_\theta J(\theta) = \mathbb{E}_{\pi_\theta} [\nabla_\theta \log \pi_\theta(s, a) Q^{\pi_\theta}(s, a)]$$

- Update parameters by stochastic gradient ascent
- Using policy gradient theorem
- Using return v_t as an unbiased sample of $Q^{\pi_\theta}(s_t, a_t)$

$$\Delta\theta_t = \alpha \nabla_\theta \log \pi_\theta(s_t, a_t) v_t$$

function REINFORCE

Initialise θ arbitrarily

for each episode $\{s_1, a_1, r_2, \dots, s_{T-1}, a_{T-1}, r_T\} \sim \pi_\theta$ **do**

for $t = 1$ to $T - 1$ **do**

$\theta \leftarrow \theta + \alpha \nabla_\theta \log \pi_\theta(s_t, a_t) v_t$

end for

end for

return θ

end function

Direct policy differentiation

$$\theta^* = \arg \max_{\theta} \underbrace{E_{\tau \sim p_{\theta}(\tau)} \left[\sum_t r(\mathbf{s}_t, \mathbf{a}_t) \right]}_{J(\theta)}$$

$$J(\theta) = E_{\tau \sim p_{\theta}(\tau)} \left[\underbrace{r(\tau)}_{\sum_{t=1}^T r(\mathbf{s}_t, \mathbf{a}_t)} \right] = \int p_{\theta}(\tau) r(\tau) d\tau$$

$$\nabla_{\theta} J(\theta) = \int \underbrace{\nabla_{\theta} p_{\theta}(\tau)}_{\text{blue}} r(\tau) d\tau = \int \underbrace{p_{\theta}(\tau) \nabla_{\theta} \log p_{\theta}(\tau)}_{\text{orange}} r(\tau) d\tau = E_{\tau \sim p_{\theta}(\tau)} [\nabla_{\theta} \log p_{\theta}(\tau) r(\tau)]$$

a convenient identity

$$\underbrace{p_{\theta}(\tau) \nabla_{\theta} \log p_{\theta}(\tau)}_{\text{orange}} = p_{\theta}(\tau) \frac{\nabla_{\theta} p_{\theta}(\tau)}{p_{\theta}(\tau)} = \underbrace{\nabla_{\theta} p_{\theta}(\tau)}_{\text{blue}}$$

Direct policy differentiation

$$\begin{aligned}
 \theta^* &= \arg \max_{\theta} J(\theta) \\
 J(\theta) &= E_{\tau \sim p_{\theta}(\tau)}[r(\tau)] \\
 \nabla_{\theta} J(\theta) &= E_{\tau \sim p_{\theta}(\tau)}[\nabla_{\theta} \log p_{\theta}(\tau) r(\tau)]
 \end{aligned}$$

log of both sides

$$\underbrace{p_{\theta}(\mathbf{s}_1, \mathbf{a}_1, \dots, \mathbf{s}_T, \mathbf{a}_T)}_{p_{\theta}(\tau)} = p(\mathbf{s}_1) \prod_{t=1}^T \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) p(\mathbf{s}_{t+1} | \mathbf{s}_t, \mathbf{a}_t)$$

$$\log p_{\theta}(\tau) = \log p(\mathbf{s}_1) + \sum_{t=1}^T \log \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) + \log p(\mathbf{s}_{t+1} | \mathbf{s}_t, \mathbf{a}_t)$$

$$\nabla_{\theta} \left[\log p(\mathbf{s}_1) + \sum_{t=1}^T \log \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) + \log p(\mathbf{s}_{t+1} | \mathbf{s}_t, \mathbf{a}_t) \right]$$

$$\nabla_{\theta} J(\theta) = E_{\tau \sim p_{\theta}(\tau)} \left[\left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) \right) \left(\sum_{t=1}^T r(\mathbf{s}_t, \mathbf{a}_t) \right) \right]$$

Direct policy differentiation

Evaluating the policy gradient

$$\text{recall: } J(\theta) = E_{\tau \sim p_{\theta}(\tau)} \left[\sum_t r(\mathbf{s}_t, \mathbf{a}_t) \right] \approx \frac{1}{N} \sum_i \sum_t r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$



$$\nabla_{\theta} J(\theta) = E_{\tau \sim p_{\theta}(\tau)} \left[\left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) \right) \left(\sum_{t=1}^T r(\mathbf{s}_t, \mathbf{a}_t) \right) \right]$$

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right) \left(\sum_{t=1}^T r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$$

$$\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$$

REINFORCE algorithm:


1. sample $\{\tau^i\}$ from $\pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t)$ (run the policy)
2. $\nabla_{\theta} J(\theta) \approx \sum_i \left(\sum_t \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_t^i | \mathbf{s}_t^i) \right) \left(\sum_t r(\mathbf{s}_t^i, \mathbf{a}_t^i) \right)$
3. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$

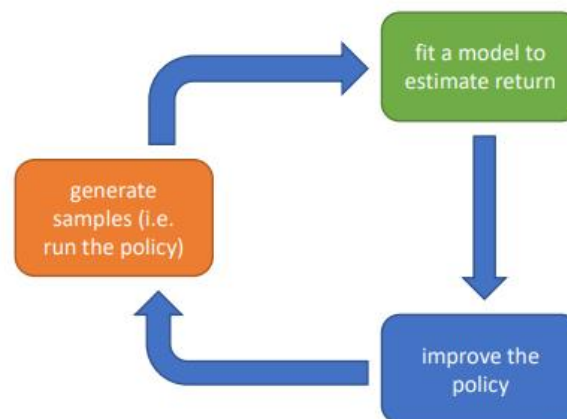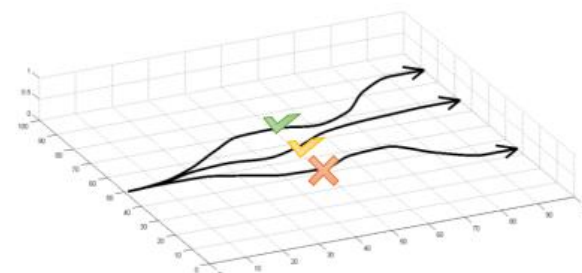

Comparison to maximum likelihood

policy gradient: $\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right) \left(\sum_{t=1}^T r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$

maximum likelihood: $\nabla_{\theta} J_{\text{ML}}(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right)$

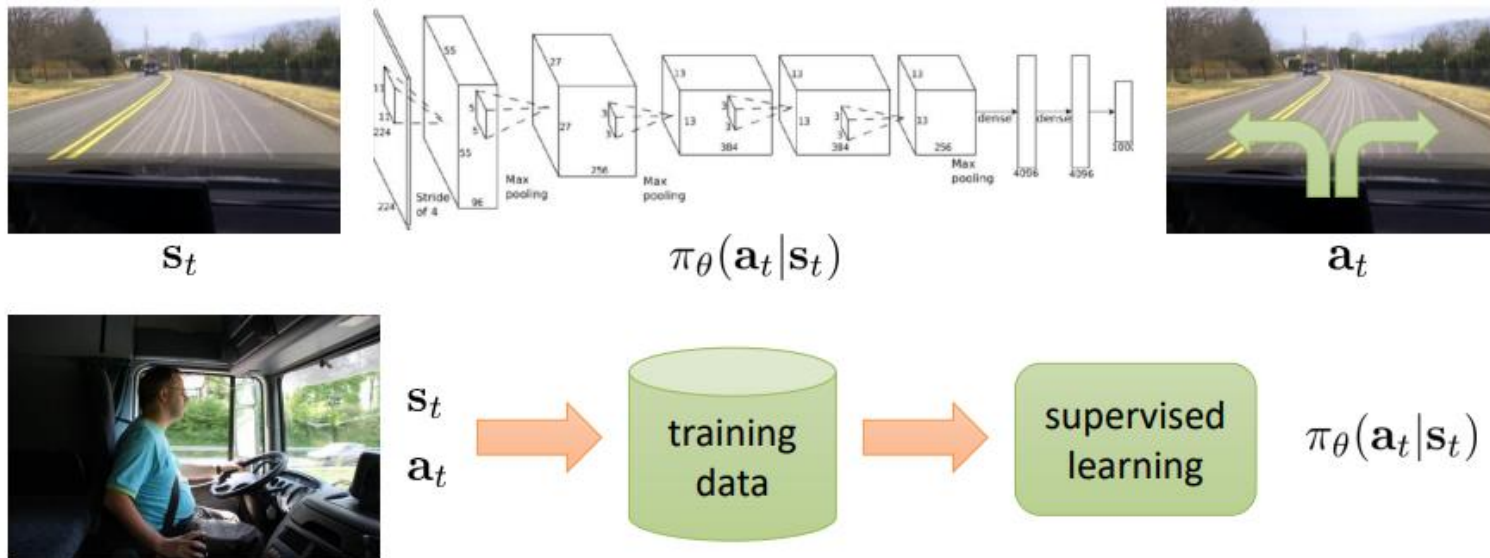

Example: Gaussian policies

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right) \left(\sum_{t=1}^T r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$$

example: $\pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) = \mathcal{N}(f_{\text{neural network}}(\mathbf{s}_t); \Sigma)$


$$\log \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) = -\frac{1}{2} \|f(\mathbf{s}_t) - \mathbf{a}_t\|_{\Sigma}^2 + \text{const}$$

$$\nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) = -\frac{1}{2} \Sigma^{-1} (f(\mathbf{s}_t) - \mathbf{a}_t) \frac{df}{d\theta}$$

REINFORCE algorithm:

1. sample $\{\tau^i\}$ from $\pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t)$ (run it on the robot)
2. $\nabla_{\theta} J(\theta) \approx \sum_i \left(\sum_t \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_t^i | \mathbf{s}_t^i) \right) \left(\sum_t r(\mathbf{s}_t^i, \mathbf{a}_t^i) \right)$
3. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$

Iteration 2000

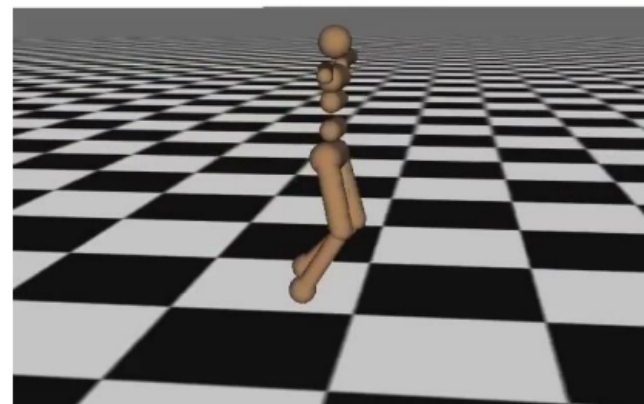

What did we just do?

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right) \left(\sum_{t=1}^T r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$$

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \underbrace{\nabla_{\theta} \log \pi_{\theta}(\tau_i)}_T r(\tau_i)$$

$$\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t})$$

maximum likelihood: $\nabla_{\theta} J_{\text{ML}}(\theta) \approx \frac{1}{N} \sum_{i=1}^N \nabla_{\theta} \log \pi_{\theta}(\tau_i)$


good stuff is made more likely

bad stuff is made less likely


simply formalizes the notion of “trial and error”!

REINFORCE algorithm:

1. sample $\{\tau^i\}$ from $\pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t)$ (run it on the robot)
2. $\nabla_{\theta} J(\theta) \approx \sum_i \left(\sum_t \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_t^i | \mathbf{s}_t^i) \right) \left(\sum_t r(\mathbf{s}_t^i, \mathbf{a}_t^i) \right)$
3. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$

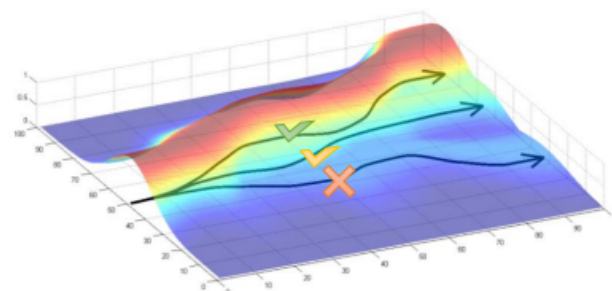

What is wrong with the policy gradient?

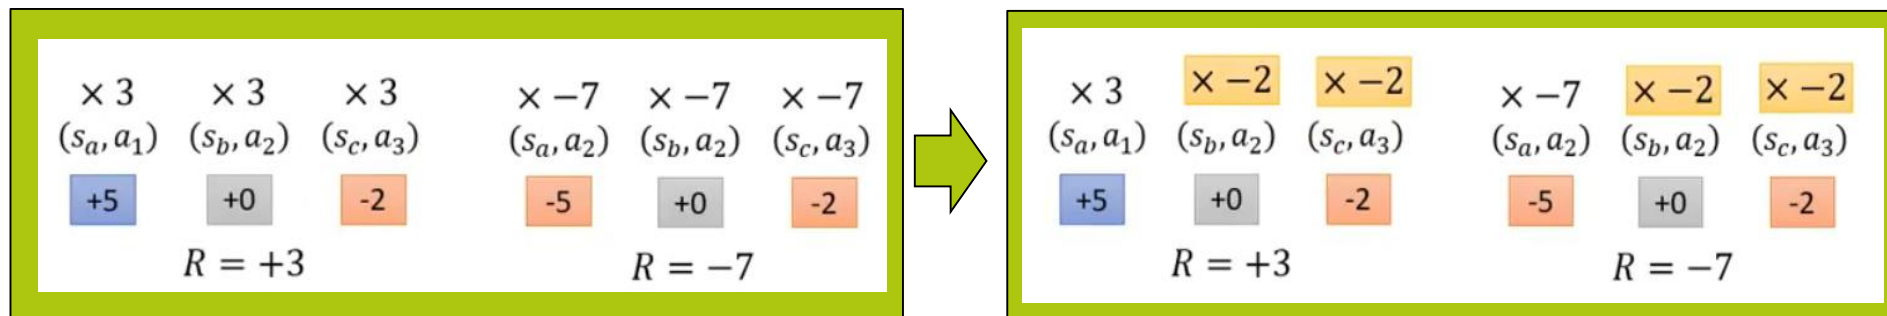

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right) \left(\sum_{t=1}^T r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$$

Causality: policy at time t' cannot affect reward at time t when $t < t'$

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \underbrace{\left(\sum_{t'=t}^T r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'}) \right)}_{\text{"reward to go"}}$$

$\hat{Q}_{i,t}$

Reducing Variance Using a Critic

- Monte-Carlo policy gradient still has high variance
- We use a **critic** to estimate the action-value function,

$$Q_w(s, a) \approx Q^{\pi_\theta}(s, a)$$

- Actor-critic algorithms maintain *two* sets of parameters
 - Critic** Updates action-value function parameters w
 - Actor** Updates policy parameters θ , in direction suggested by critic
- Actor-critic algorithms follow an *approximate* policy gradient

$$\nabla_\theta J(\theta) \approx \mathbb{E}_{\pi_\theta} [\nabla_\theta \log \pi_\theta(s, a) Q_w(s, a)]$$

$$\Delta\theta = \alpha \nabla_\theta \log \pi_\theta(s, a) Q_w(s, a)$$

- Simple actor-critic algorithm based on action-value critic
- Using linear value fn approx. $Q_w(s, a) = \phi(s, a)^\top w$
 - Critic Updates w by linear TD(0)
 - Actor Updates θ by policy gradient

function QAC

 Initialise s, θ

 Sample $a \sim \pi_\theta$

for each step **do**

 Sample reward $r = \mathcal{R}_s^a$; sample transition $s' \sim \mathcal{P}_s^a$.

 Sample action $a' \sim \pi_\theta(s', a')$

$\delta = r + \gamma Q_w(s', a') - Q_w(s, a)$

$\theta = \theta + \alpha \nabla_\theta \log \pi_\theta(s, a) Q_w(s, a)$

$w \leftarrow w + \beta \delta \phi(s, a)$

$a \leftarrow a', s \leftarrow s'$

end for

end function

Reducing Variance Using a Baseline

- We subtract a baseline function $B(s)$ from the policy gradient
- This can reduce variance, without changing expectation

$$\begin{aligned}\mathbb{E}_{\pi_{\theta}} [\nabla_{\theta} \log \pi_{\theta}(s, a) B(s)] &= \sum_{s \in \mathcal{S}} d^{\pi_{\theta}}(s) \sum_a \nabla_{\theta} \pi_{\theta}(s, a) B(s) \\ &= \sum_{s \in \mathcal{S}} d^{\pi_{\theta}} B(s) \nabla_{\theta} \sum_{a \in \mathcal{A}} \pi_{\theta}(s, a) \\ &= 0\end{aligned}$$

- A good baseline is the state value function $B(s) = V^{\pi_{\theta}}(s)$
- So we can rewrite the policy gradient using the **advantage function** $A^{\pi_{\theta}}(s, a)$

$$A^{\pi_{\theta}}(s, a) = Q^{\pi_{\theta}}(s, a) - V^{\pi_{\theta}}(s)$$

$$\nabla_{\theta} J(\theta) = \mathbb{E}_{\pi_{\theta}} [\nabla_{\theta} \log \pi_{\theta}(s, a) A^{\pi_{\theta}}(s, a)]$$

Estimating the Advantage Function

- For the true value function $V^{\pi_\theta}(s)$, the TD error δ^{π_θ}

$$\delta^{\pi_\theta} = r + \gamma V^{\pi_\theta}(s') - V^{\pi_\theta}(s)$$

- is an unbiased estimate of the advantage function

$$\begin{aligned}\mathbb{E}_{\pi_\theta} [\delta^{\pi_\theta} | s, a] &= \mathbb{E}_{\pi_\theta} [r + \gamma V^{\pi_\theta}(s') | s, a] - V^{\pi_\theta}(s) \\ &= Q^{\pi_\theta}(s, a) - V^{\pi_\theta}(s) \\ &= A^{\pi_\theta}(s, a)\end{aligned}$$

- So we can use the TD error to compute the policy gradient

$$\nabla_\theta J(\theta) = \mathbb{E}_{\pi_\theta} [\nabla_\theta \log \pi_\theta(s, a) \delta^{\pi_\theta}]$$

- In practice we can use an approximate TD error

$$\delta_v = r + \gamma V_v(s') - V_v(s)$$

Recap: policy gradients

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \left(\sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \right) \left(\sum_{t=1}^T r(\mathbf{s}_{i,t}, \mathbf{a}_{i,t}) \right)$$

Causality: policy at time t' cannot affect reward at time t when $t < t'$

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \underbrace{\left(\sum_{t'=t}^T r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'}) \right)}_{\text{"reward to go"}}$$

"reward to go"


$$\hat{Q}_{i,t}$$

$\hat{Q}_{i,t}$: estimate of expected reward if we take action $\mathbf{a}_{i,t}$ in state $\mathbf{s}_{i,t}$

can we get a better estimate?

$Q(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^T E_{\pi_{\theta}} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]$: true *expected* reward-to-go

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) Q(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$

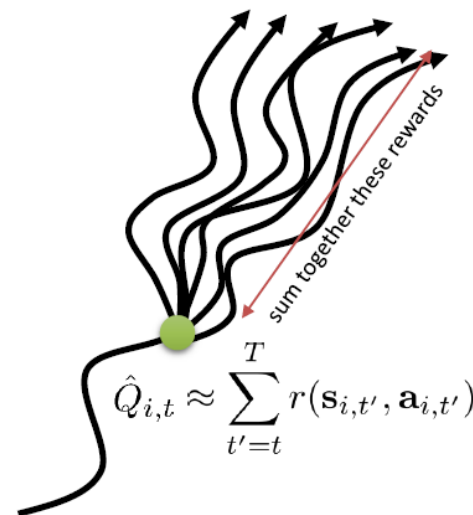


Recap: policy gradients

REINFORCE algorithm:

1. sample $\{\tau^i\}$ from $\pi_\theta(\mathbf{a}_t|\mathbf{s}_t)$ (run the policy)
2. $\nabla_\theta J(\theta) \approx \sum_i \left(\sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_t^i|\mathbf{s}_t^i) \left(\sum_{t'=t}^T r(\mathbf{s}_{t'}^i, \mathbf{a}_{t'}^i) \right) \right)$
3. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t}|\mathbf{s}_{i,t}) \underbrace{\hat{Q}_{i,t}^\pi}_{\text{"reward to go"}}$$

“reward to go”

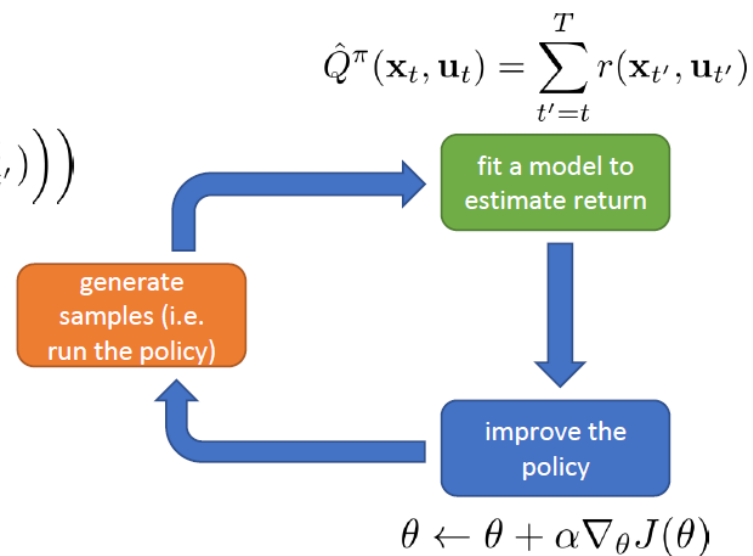

Implementing Policy Gradients

$$\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \hat{Q}_{i,t}$$

pretty inefficient to compute these explicitly!

How can we compute policy gradients with automatic differentiation?

We need a graph such that its gradient is the policy gradient!

maximum likelihood: $\nabla_{\theta} J_{\text{ML}}(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t})$ $J_{\text{ML}}(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t})$

Just implement “pseudo-loss” as a weighted maximum likelihood:

$$\tilde{J}(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \hat{Q}_{i,t}$$

cross entropy (discrete) or squared error (Gaussian)

Recap: policy gradients

Pseudocode example (with discrete actions):

Maximum likelihood:

```
# Given:
# actions - (N*T) x Da tensor of actions
# states - (N*T) x Ds tensor of states
# Build the graph:
logits = policy.predictions(states) # This should return (N*T) x Da tensor of action logits
negative_likelihoods = tf.nn.softmax_cross_entropy_with_logits(labels=actions, logits=logits)
loss = tf.reduce_mean(negative_likelihoods)
gradients = loss.gradients(loss, variables)
```

Policy gradient:

```
# Given:
# actions - (N*T) x Da tensor of actions
# states - (N*T) x Ds tensor of states
# q_values - (N*T) x 1 tensor of estimated state-action values
# Build the graph:
logits = policy.predictions(states) # This should return (N*T) x Da tensor of action logits
negative_likelihoods = tf.nn.softmax_cross_entropy_with_logits(labels=actions, logits=logits)
weighted_negative_likelihoods = tf.multiply(negative_likelihoods, q_values)
loss = tf.reduce_mean(weighted_negative_likelihoods)
gradients = loss.gradients(loss, variables)
```

$$\tilde{J}(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \log \pi_{\theta}(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) \hat{Q}_{i,t}$$

q_values

State & state-action value functions

$Q^\pi(\mathbf{s}_t, \mathbf{a}_t) = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]$: total reward from taking \mathbf{a}_t in \mathbf{s}_t

$V^\pi(\mathbf{s}_t) = E_{\mathbf{a}_t \sim \pi_\theta(\mathbf{a}_t | \mathbf{s}_t)} [Q^\pi(\mathbf{s}_t, \mathbf{a}_t)]$: total reward from \mathbf{s}_t

$A^\pi(\mathbf{s}_t, \mathbf{a}_t) = Q^\pi(\mathbf{s}_t, \mathbf{a}_t) - V^\pi(\mathbf{s}_t)$: how much better \mathbf{a}_t is



$$\nabla_\theta J(\theta) \approx \frac{1}{N} \sum_{i=1}^N \sum_{t=1}^T \nabla_\theta \log \pi_\theta(\mathbf{a}_{i,t} | \mathbf{s}_{i,t}) A^\pi(\mathbf{s}_{i,t}, \mathbf{a}_{i,t})$$

the better this estimate, the lower the variance

$$Q^\pi(\mathbf{s}_t, \mathbf{a}_t) = r(\mathbf{s}_t, \mathbf{a}_t) + \underbrace{\sum_{t'=t+1}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t, \mathbf{a}_t]}$$

$$A^\pi(\mathbf{s}_t, \mathbf{a}_t) \approx r(\mathbf{s}_t, \mathbf{a}_t) + V^\pi(\mathbf{s}_{t+1}) - \cancel{V^\pi(\mathbf{s}_t)}$$

let's just fit $V^\pi(\mathbf{s})$!

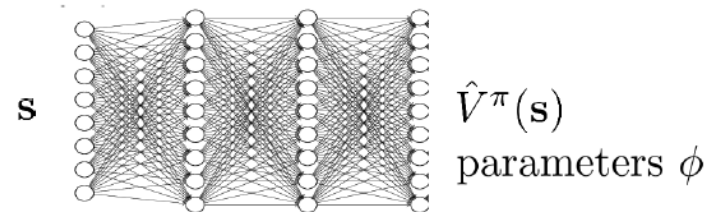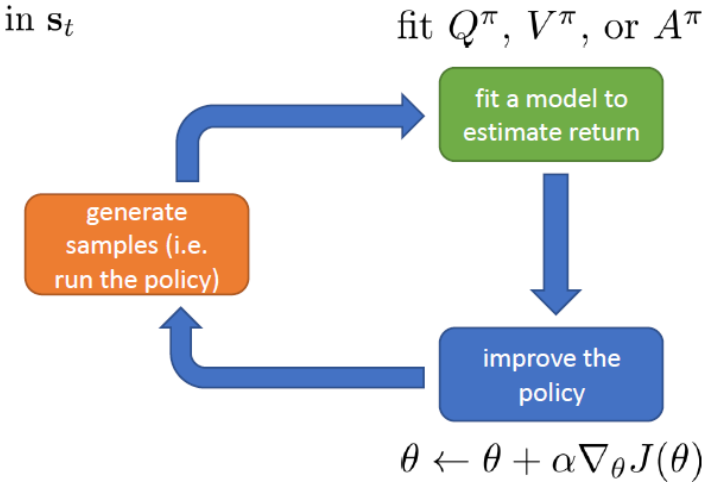


An actor-critic algorithm

batch actor-critic algorithm:

1. sample $\{\mathbf{s}_i, \mathbf{a}_i\}$ from $\pi_\theta(\mathbf{a}|\mathbf{s})$ (run it on the robot)
2. fit $\hat{V}_\phi^\pi(\mathbf{s})$ to sampled reward sums
3. evaluate $\hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i) = r(\mathbf{s}_i, \mathbf{a}_i) + \hat{V}_\phi^\pi(\mathbf{s}'_i) - \hat{V}_\phi^\pi(\mathbf{s}_i)$
4. $\nabla_\theta J(\theta) \approx \sum_i \nabla_\theta \log \pi_\theta(\mathbf{a}_i|\mathbf{s}_i) \hat{A}^\pi(\mathbf{s}_i, \mathbf{a}_i)$
5. $\theta \leftarrow \theta + \alpha \nabla_\theta J(\theta)$

$$y_{i,t} \approx \sum_{t'=t}^T r(\mathbf{s}_{i,t'}, \mathbf{a}_{i,t'})$$

$$\mathcal{L}(\phi) = \frac{1}{2} \sum_i \left\| \hat{V}_\phi^\pi(\mathbf{s}_i) - y_i \right\|^2$$

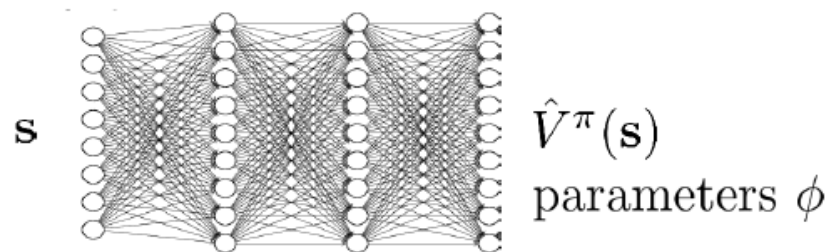


$$V^\pi(\mathbf{s}_t) = \sum_{t'=t}^T E_{\pi_\theta} [r(\mathbf{s}_{t'}, \mathbf{a}_{t'}) | \mathbf{s}_t]$$

Architecture design

online actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_{\theta}(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$
2. update \hat{V}_{ϕ}^{π} using target $r + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}')$
3. evaluate $\hat{A}^{\pi}(\mathbf{s}, \mathbf{a}) = r(\mathbf{s}, \mathbf{a}) + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}') - \hat{V}_{\phi}^{\pi}(\mathbf{s})$
4. $\nabla_{\theta} J(\theta) \approx \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}|\mathbf{s}) \hat{A}^{\pi}(\mathbf{s}, \mathbf{a})$
5. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$


two network design

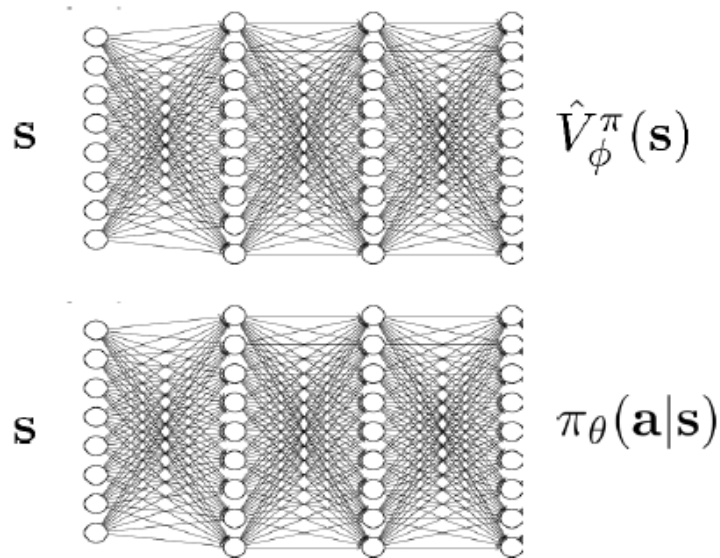

+ simple & stable

- no shared features between actor & critic

shared network design

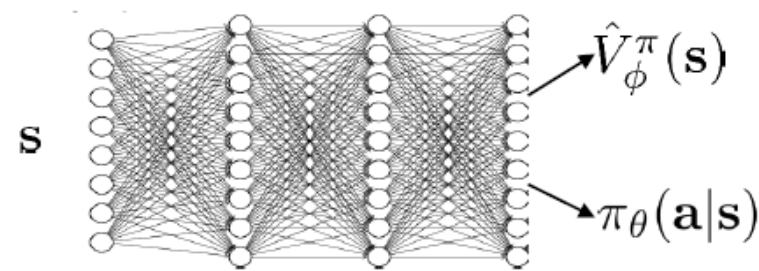


Online actor-critic in practice


online actor-critic algorithm:

1. take action $\mathbf{a} \sim \pi_{\theta}(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$
2. update \hat{V}_{ϕ}^{π} using target $r + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}')$ ← works best with a batch (e.g., parallel workers)
3. evaluate $\hat{A}^{\pi}(\mathbf{s}, \mathbf{a}) = r(\mathbf{s}, \mathbf{a}) + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}') - \hat{V}_{\phi}^{\pi}(\mathbf{s})$
4. $\nabla_{\theta} J(\theta) \approx \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}|\mathbf{s}) \hat{A}^{\pi}(\mathbf{s}, \mathbf{a})$
5. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$

synchronized parallel actor-critic

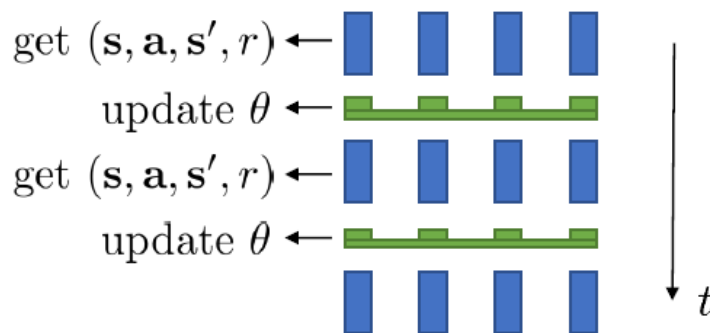

asynchronous parallel actor-critic

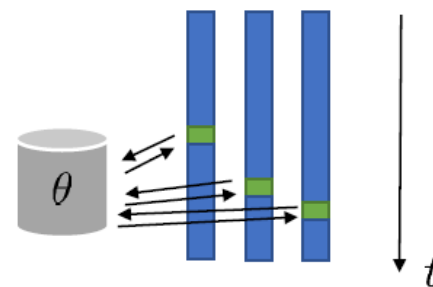

Policy gradient is on-policy

$$\theta^* = \arg \max_{\theta} J(\theta)$$


$$J(\theta) = E_{\tau \sim p_{\theta}(\tau)}[r(\tau)]$$

$$\nabla_{\theta} J(\theta) = E_{\tau \sim p_{\theta}(\tau)}[\nabla_{\theta} \log p_{\theta}(\tau) r(\tau)]$$

↑
this is trouble...

- Neural networks change only a little bit with each gradient step
- On-policy learning can be extremely inefficient!

REINFORCE algorithm:

- 
1. sample $\{\tau^i\}$ from $\pi_{\theta}(\mathbf{a}_t|\mathbf{s}_t)$ (run it on the robot)
 2. $\nabla_{\theta} J(\theta) \approx \sum_i (\sum_t \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_t^i|\mathbf{s}_t^i)) (\sum_t r(\mathbf{s}_t^i, \mathbf{a}_t^i))$
 3. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$


↖ can't just skip this!

Can we remove the on policy assumption entirely?

online actor-critic algorithm:


1. take action $\mathbf{a} \sim \pi_{\theta}(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$
 2. update \hat{V}_{ϕ}^{π} using target $r + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}')$
 3. evaluate $\hat{A}^{\pi}(\mathbf{s}, \mathbf{a}) = r(\mathbf{s}, \mathbf{a}) + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}') - \hat{V}_{\phi}^{\pi}(\mathbf{s})$
 4. $\nabla_{\theta} J(\theta) \approx \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}|\mathbf{s}) \hat{A}^{\pi}(\mathbf{s}, \mathbf{a})$
 5. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$
- form a **batch** by using old previously seen transitions

off-policy actor-critic

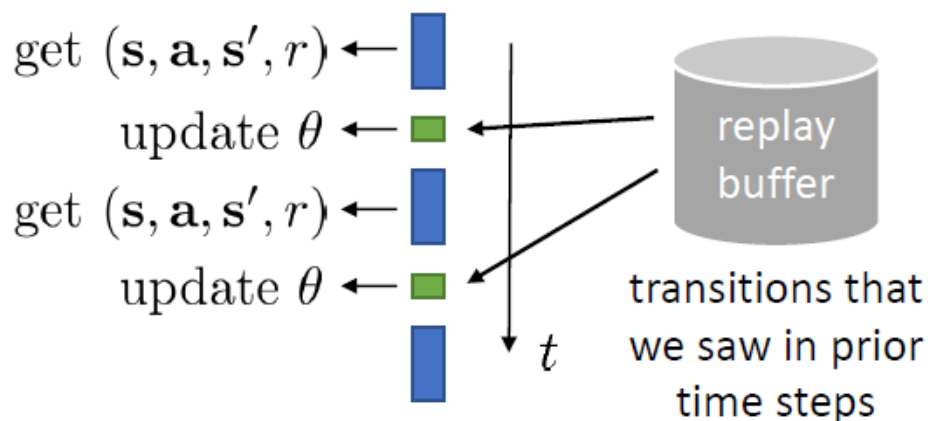

The off-policy AC


online actor-critic algorithm:

- 
1. take action $\mathbf{a} \sim \pi_{\theta}(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$
 2. update \hat{V}_{ϕ}^{π} using target $r + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}')$
 3. evaluate $\hat{A}^{\pi}(\mathbf{s}, \mathbf{a}) = r(\mathbf{s}, \mathbf{a}) + \gamma \hat{V}_{\phi}^{\pi}(\mathbf{s}') - \hat{V}_{\phi}^{\pi}(\mathbf{s})$
 4. $\nabla_{\theta} J(\theta) \approx \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}|\mathbf{s}) \hat{A}^{\pi}(\mathbf{s}, \mathbf{a})$
 5. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$

form a **batch** by
using old previously
seen transitions



online actor-critic algorithm:

- 
1. take action $\mathbf{a} \sim \pi_{\theta}(\mathbf{a}|\mathbf{s})$, get $(\mathbf{s}, \mathbf{a}, \mathbf{s}', r)$, store in \mathcal{R}
 2. sample a batch $\{\mathbf{s}_i, \mathbf{a}_i, r_i, \mathbf{s}'_i\}$ from buffer \mathcal{R}
 3. update \hat{Q}_{ϕ}^{π} using targets $y_i = r_i + \gamma \hat{Q}_{\phi}^{\pi}(\mathbf{s}'_i, \mathbf{a}'_i)$ for each $\mathbf{s}_i, \mathbf{a}_i$
 4. $\nabla_{\theta} J(\theta) \approx \frac{1}{N} \sum_i \nabla_{\theta} \log \pi_{\theta}(\mathbf{a}_i^{\pi}|\mathbf{s}_i) \hat{Q}^{\pi}(\mathbf{s}_i, \mathbf{a}_i^{\pi})$ where $\mathbf{a}_i^{\pi} \sim \pi_{\theta}(\mathbf{a}|\mathbf{s}_i)$
 5. $\theta \leftarrow \theta + \alpha \nabla_{\theta} J(\theta)$

Off-policy learning & importance sampling

$$\theta^* = \arg \max_{\theta} J(\theta)$$

$$J(\theta) = E_{\tau \sim p_{\theta}(\tau)}[r(\tau)]$$

what if we don't have samples from $p_{\theta}(\tau)$?

(we have samples from some $\bar{p}(\tau)$ instead)

$$J(\theta) = E_{\tau \sim \bar{p}(\tau)} \left[\frac{p_{\theta}(\tau)}{\bar{p}(\tau)} r(\tau) \right]$$

$$p_{\theta}(\tau) = p(\mathbf{s}_1) \prod_{t=1}^T \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) p(\mathbf{s}_{t+1} | \mathbf{s}_t, \mathbf{a}_t)$$

$$\frac{p_{\theta}(\tau)}{\bar{p}(\tau)} = \frac{\cancel{p(\mathbf{s}_1)} \prod_{t=1}^T \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t) \cancel{p(\mathbf{s}_{t+1} | \mathbf{s}_t, \mathbf{a}_t)}}{\cancel{p(\mathbf{s}_1)} \prod_{t=1}^T \bar{\pi}(\mathbf{a}_t | \mathbf{s}_t) \cancel{p(\mathbf{s}_{t+1} | \mathbf{s}_t, \mathbf{a}_t)}} = \frac{\prod_{t=1}^T \pi_{\theta}(\mathbf{a}_t | \mathbf{s}_t)}{\prod_{t=1}^T \bar{\pi}(\mathbf{a}_t | \mathbf{s}_t)}$$

importance sampling

$$\begin{aligned} E_{x \sim p(x)}[f(x)] &= \int p(x) f(x) dx \\ &= \int \frac{q(x)}{q(x)} p(x) f(x) dx \\ &= \int q(x) \frac{p(x)}{q(x)} f(x) dx \\ &= E_{x \sim q(x)} \left[\frac{p(x)}{q(x)} f(x) \right] \end{aligned}$$

Deriving the policy gradient with IS

$$\theta^* = \arg \max_{\theta} J(\theta)$$

$$J(\theta) = E_{\tau \sim p_{\theta}(\tau)}[r(\tau)]$$

a convenient identity

$$p_{\theta}(\tau) \nabla_{\theta} \log p_{\theta}(\tau) = \nabla_{\theta} p_{\theta}(\tau)$$

can we estimate the value of some *new* parameters θ' ?

$$J(\theta') = E_{\tau \sim p_{\theta}(\tau)} \left[\frac{p_{\theta'}(\tau)}{p_{\theta}(\tau)} r(\tau) \right]$$

the only bit that depends on θ'

$$\nabla_{\theta'} J(\theta') = E_{\tau \sim p_{\theta}(\tau)} \left[\frac{\nabla_{\theta'} p_{\theta'}(\tau)}{p_{\theta}(\tau)} r(\tau) \right] = E_{\tau \sim p_{\theta}(\tau)} \left[\frac{\cancel{p_{\theta'}(\tau)}}{\cancel{p_{\theta'}(\tau)}} \nabla_{\theta'} \log p_{\theta'}(\tau) r(\tau) \right]$$

now estimate locally, at $\theta = \theta'$: $\nabla_{\theta} J(\theta) = E_{\tau \sim p_{\theta}(\tau)} [\nabla_{\theta} \log p_{\theta}(\tau) r(\tau)]$