适配 Claude Code

首先 `git clone https://github.com/Narwhal-Lab/MagicSkills.git`

并执行 `pip install -e .` 指令

```
(base) PS D:\Python-learning\pythonProject\MagicSkills> conda activate MCP
(MCP) PS D:\Python-learning\pythonProject\MagicSkills> pip install -e .
Obtaining file:///D:/Python-learning/pythonProject/MagicSkills
  Installing build dependencies ... done
  Checking if build backend supports build_editable ... done
  Getting requirements to build editable ... done
  Installing backend dependencies ... done
  Preparing editable metadata (pyproject.toml) ... done
Building wheels for collected packages: MagicSkills
  Building editable for MagicSkills (pyproject.toml) ... done
  Created wheel for MagicSkills: filename=magicskills-0.1.0-py3-none-any.whl size=20083 sha256=77c08f40a821662dd45a9a260b13abfad05f96611a03a73425ec1a0e3304
f841
  Stored in directory: C:\Users\13978\AppData\Local\Temp\pip-ephem-wheel-cache-e_ijbmgh\wheels\9b\e5\63\3fd9803abba84fa461142993854eb0639ee0309fab2ff4d083
Successfully built MagicSkills
Installing collected packages: MagicSkills
Successfully installed MagicSkills-0.1.0
```

本文的示例 skill 以 `docx` 为例

打开你的 claude code 的工作目录，

安装 skill

执行 `magicskills install docx --target ./.claude/skills`

```
(MCP) PS D:\Python-learning\pythonProject\ClaudeCode_example> magicskills install docx --target ./.claude/skills
Cloning into 'C:\Users\13978\AppData\Local\Temp\tmpekrpxwdg'...
remote: Enumerating objects: 300, done.
remote: Counting objects: 100% (300/300), done.
remote: Compressing objects: 100% (227/227), done.
remote: Total 300 (delta 65), reused 285 (delta 65), pack-reused 0 (from 0)
Receiving objects: 100% (300/300), 3.15 MiB | 5.60 MiB/s, done.
Resolving deltas: 100% (65/65), done.
Installed: .claude\skills\docx
```

注册 skills

执行 `magicskills createskills coder --paths ./.claude/skills`

```
(MCP) PS D:\Python-learning\pythonProject\ClaudeCode_example> magicskills createskills coder --paths ./.claude/skills
Created skills instance: coder
Skills count: 1
```

生成 AGETNS.md

执行 `magicskills syncskills coder --output ./AGENTS.md -y`

或者直接 `magicskills syncskills coder -y`

```
(MCP) PS D:\Python-learning\pythonProject\ClaudeCode_example> magicskills syncskills coder --output ./AGENTS.md -y
Synced to D:\Python-learning\pythonProject\ClaudeCode_example\AGENTS.md
```

创建 CLAUDE.md

由于 claude code 内定是使用 CLAUDE.md 文档，所以需要手动创建和编写 `Before you take any action, please read the AGENTS.md documentation to familiarize yourself with and refer to it.` 到其中

```
CLAUDE.md > # CLAUDE
1  # CLAUDE
2
3  Before you take any action, please read the AGENTS.md documentation to familiarize yourself with and refer to it.
```

最后应有如下文件

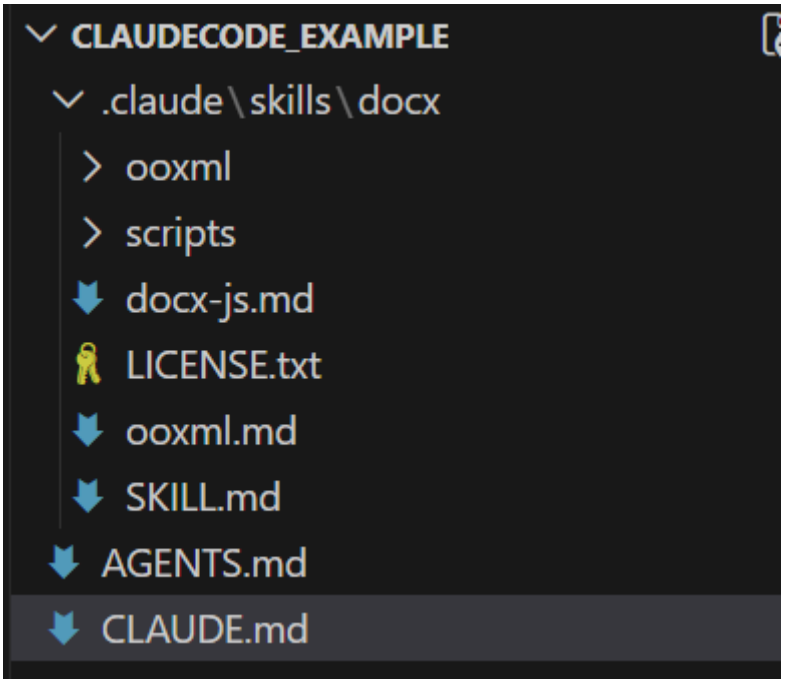

使用

配置好上述文件后，claude code 就具备了生成 docx 文档的能力，例如 “请你生成一份自我介绍，保存在 .docx 文档中，你生成文档的工作流也要记录在 .log 文件中 ”

```
(MCP) PS D:\Python-learning\pythonProject\ClaudeCode_example> claude

  Claude Code v2.1.56
  deepseek-chat · API Usage Billing
  D:\Python-learning\pythonProject\ClaudeCode_example

  /model to try Opus 4.6

❯ 请你生成一份自我介绍，保存在 .docx 文档中，你生成文档的工作流也要记录在 .log 文件中
```

结果如下

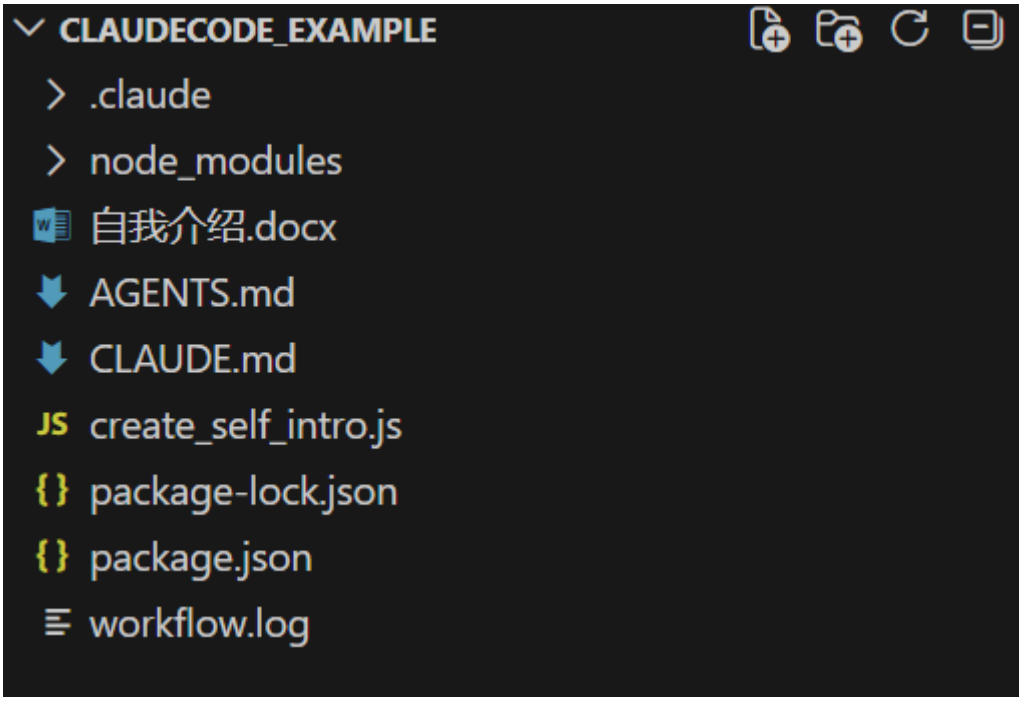
CLAUDECODE_EXAMPLE
.claude
node_modules
自我介绍.docx
AGENTS.md
CLAUDE.md
create_self_intro.js
package-lock.json
package.json
workflow.log