

Multi-Modal Route Planning in Road and Transit Networks

Master's Thesis

Daniel Tischner

University of Freiburg, Germany,
daniel.tischner.cs@gmail.com

August 24, 2018

Supervisor: Prof. Dr. Hannah Bast

Advisor: Patrick Brosi

TODO: disable todos and macro highlights.

Contents

1	Introduction	6
2	Preliminaries	7
2.1	Graph	7
2.2	Tree	9
2.3	Automaton	10
2.4	Metric	11
3	Models	12
3.1	Road graph	12
3.2	Transit graph	14
3.3	Link graph	17
3.4	Timetable	19
4	Nearest neighbor problem	21
4.1	Cover tree	23
5	Shortest path problem	28
5.1	Time-independent	29
5.1.1	Dijkstra	30
5.1.2	A* and ALT	32
5.2	Time-dependent	34
5.2.1	Connection scan	34
5.3	Multi-modal	38
5.3.1	Modified Dijkstra	39
5.3.2	Access nodes	41
6	Evaluation	43
6.1	Input data	44
6.1.1	OSM	44
6.1.2	GTFS	48
6.2	Experiments	51
6.2.1	Nearest neighbor computation	52
6.2.2	Uni-modal routing	52
6.2.3	Multi-modal routing	57
6.3	Summary	57
7	Conclusion	57
	References	59

Declaration

I hereby declare, that I am the sole author and composer of my Thesis and that no other sources or learning aids, other than those listed, have been used. Furthermore, I declare that I have acknowledged the work of others by providing detailed references of said work. I hereby also declare, that my Thesis has not been prepared for another examination or assignment, either wholly or excerpts thereof.

Place, Date

Signature

Zusammenfassung

Wir präsentieren Algorithmen für **multi-modale** Routenplanung in Straßennetzen und Netzwerken des öffentlichen Personennahverkehrs (**ÖPNV**), so wie in kombinierten Netzwerken.

Dazu stellen wir das Nächste-Nachbar und das Kürzester-Pfad Problem vor und schlagen Lösungen basierend auf **COVER TREES**, **ALT** und **CSA** vor.

Des Weiteren erläutern wir die Theorie hinter den Algorithmen, geben eine kurze Übersicht über andere Techniken, zeigen Versuchsergebnisse auf und vergleichen die Techniken untereinander.

Abstract

We present algorithms for **multi-modal** route planning in road and public transit networks, as well as in combined networks.

Therefore, we explore the nearest neighbor and shortest path problem and propose solutions based on **COVER TREES**, **ALT** and **CSA**.

Further, we illustrate the theory behind the algorithms, give a short overview of other techniques, present experimental results and compare the techniques with each other.

1 Introduction

Route planning refers to the problem of finding an *optimal* route between given locations in a network. With the ongoing expansion of road and public transit networks all over the world route planner gain more and more importance. This led to a rapid increase in research [14, 20, 29] of relevant topics and development of route planner software [24, 23, 37].

However, a common problem of most such services is that they are limited to one transportation mode only. That is a route can only be taken by a car or train but not by both at the same time. This is known as **uni-modal** routing. In contrast to that **multi-modal** routing allows the alternation of transportation modes. For example a route that first uses a car to drive to a train station, then a train which travels to a another train station and finally using a bicycle from there to reach the destination.

The difficulty with **multi-modal** routing lies in most algorithms being fitted to networks with specific properties. Unfortunately, road networks differ a lot from public transit networks. As such, a route planning algorithm fitted to a certain type of network will likely yield undesired results, have an impractical running time or not even be able to be used at all on different networks. We will explore this later in **Section 6**.

In this thesis we explore a technique with which we can combine an algorithm fitted for road networks with an algorithm for public transit networks. Effectively obtaining a generic algorithm that is able to compute routes on combined networks. The basic idea is simple, given a source and destination, both in the road network, we select *access nodes* for both. This are nodes where we will switch from the road into the public transit network. A route can then be computed by using the road algorithm for the source to its access nodes, the transit algorithm for the access nodes of the source to the access nodes of the destination and finally the road algorithm again for the destinations access nodes to the destination. Note that this technique might not yield the shortest possible path anymore. Also, it does not allow an arbitrary alternation of transportation modes. However, we accept those limitations since the resulting algorithm is very generic and able to compute routes faster than without limitations. We will cover this technique in detail in **Section 5.3.2**.

Our final technique uses a modified version of **ALT** [25] as road algorithm and **CSA** [21] for the transportation network. The algorithms are presented in **Section 5.1.2** and **Section 5.2.1** respectively. We also develop a **multi-modal** variant of **DIJKSTRA** [18] which is able to compute the shortest route in a combined network with the possibility of changing transportation modes arbitrarily. It is presented in **Section 5.3.1** and acts as baseline to our final technique based on access nodes.

We compute access nodes by solving the **NEAREST NEIGHBOR PROBLEM**. For a given node in the road network its access nodes are then all nodes in the transit network which are in the *vicinity* of the road node. We explore a solution to this problem in **Section 4**.

Section 3 starts by defining types of networks. We represent road networks by graphs only. For transit networks we provide a graph representation too. Both graphs can then

be combined into a linked graph. The advantage of graph based models is that they are well studied and therefore we are able to use our **multi-modal** variant of **DIJKSTRA** to compute routes on them. However, we also propose a non-graph based representation for transit networks, a timetable. The timetable is used by **CSA**, an efficient algorithm for route planning on public transit networks. With that, our road and transit networks get incompatible and can not easily be combined. Therefore, we use the previously mentioned generic approach based on access nodes for this type of network.

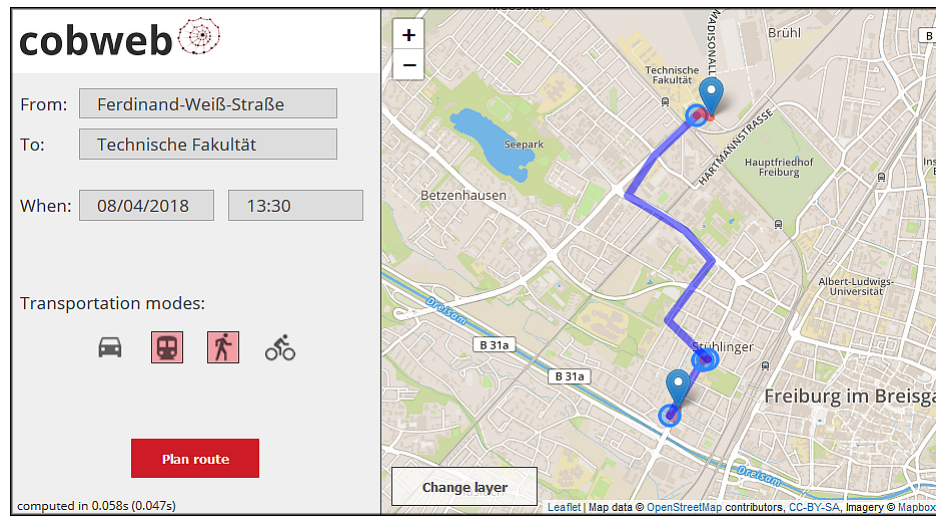


Fig. 1: Screenshot of **COBWEBS** [34] frontend, an open-source **multi-modal** route planner. It shows a **multi-modal** route starting from a given source, using the modes *foot-tram-foot-tram-foot* in that sequence to reach the destination.

Further, we implemented the presented algorithms in the **COBWEB** [34] project, which is an open-source **multi-modal** route planner (see **Fig. 1** for an image of its frontend). In **Section 6** we show our experimental results and compare the techniques with each other.

2 Preliminaries

Before we define our specific data models and problems we will introduce and formalize commonly reoccurring terms.

2.1 Graph

Definition 1. A graph G is a tuple (V, E) with a set of nodes V and a set of edges $E \subseteq V \times \mathbb{R}_{\geq 0} \times V$. An edge $e \in E$ is an ordered tuple (u, w, v) with source node $u \in V$, a non-negative weight $w \in \mathbb{R}_{\geq 0}$ and a destination node $v \in V$.

Note that **Definition 1** actually defines a *directed* graph, as opposed to an *undirected* graph where an edge like (u, w, v) would be considered equal to the edge of opposite direction (v, w, u) (compare to [22]). However, for transportation networks an undirected graph often is not applicable, for example due to one way streets or time dependent connections like trains which depart at different times for different directions.

In the context of route planning we refer to the weight w of an edge (u, w, v) as *cost*. It can be used to encode the length of the represented connection. Or to represent the time it takes to travel the distance in a given transportation mode.

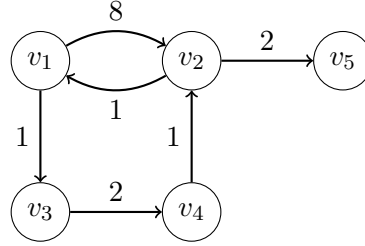


Fig. 2: Illustration of an example graph with five nodes and six edges.

As an example consider the graph $G = (V, E)$ with

$$V = \{v_1, v_2, v_3, v_4, v_5\} \text{ and}$$

$$E = \{(v_1, 8, v_2), (v_1, 1, v_3), (v_2, 1, v_1), (v_2, 2, v_5), (v_3, 2, v_4), (v_4, 1, v_2)\}.$$

which is illustrated by **Fig. 2**.

Definition 2. Given a graph $G = (V, E)$ the function $\text{src} : E \rightarrow V, ((u, w, v)) \mapsto u$ gets the source of an edge. Analogously $\text{dest} : E \rightarrow V, ((u, w, v)) \mapsto v$ retrieves the destination.

Definition 3. A path in a graph $G = (V, E)$ is a sequence $p = e_1 e_2 e_3 \dots$ of edges $e_i \in E$ such that

$$\forall i : \text{dest}(e_i) = \text{src}(e_{i+1}).$$

We write $e \in p$ if an edge e is contained at least once in the path p . The length of a path is the amount of edges it contains, i.e. the length of the sequence. The weight or cost is the sum of its edges weights.

Let k be the length of a path p , then we define:

$$\begin{aligned} \text{src}(p) &= \text{src}(e_1) \\ \text{dest}(p) &= \text{dest}(e_k) \end{aligned}$$

Given two paths $q_1 = e_1 \dots e_k$ and $q_2 = e'_1 \dots e'_l$ where $\text{dest}(e_k) = \text{src}(e'_1)$, the concatenate-

nation of both paths is a path

$$p = e_1 \dots e_k e'_1 \dots e'_l$$

with length $k + l$, also denoted by $p = q_1 q_2$.

An example for a path in the graph G would be

$$p = (v_1, 8, v_2)(v_2, 1, v_1)(v_1, 1, v_3).$$

Its length is 3 and it has a weight of 10.

2.2 Tree

Definition 4. A tree is an graph $T = (V, E)$ with the following properties:

1. There is exactly one node $r \in V$ with no ingoing edges, called the root, i.e.

$$\exists! r \in V \nexists e \in E : \text{dest}(e) = r.$$

2. All other nodes v have exactly one ingoing edge. The source p of this edge is called parent of v and v is called child of p :

$$\forall v \in V : v \neq r \Rightarrow \exists! e \in E : \text{dest}(e) = v.$$

Definition 5. The subtree of a tree $T = (V, E)$ rooted at a node $r' \in V$ is a tree $T' = (V', E')$. $V' \subseteq V$ is the set of nodes that can be reached from r' . That is, all nodes that are part of possible paths starting at r' . Likewise $E' \subseteq E$ is the set of edges restricted to the vertices in V' . The root of T' is r' .

Definition 6. The depth of a node v in a tree $T = (V, E)$, denoted by $\text{depth}(v)$, is defined as the amount of edges between the v and the root r . It is the length of the unique path p starting at r and ending at v .

The height of a tree is its greatest depth, i.e.

$$\max_{v \in V} \text{depth}(v).$$

And

$$\text{children}(v) = \{c \in T \mid c \text{ child of } v\}.$$

Trees are hierarchical data-structures. Every node, except the root, has one parent. A node itself can have multiple children. Note that it is not possible to form a loop in a tree, i.e. a path that visits a node more than once. A node without children is called a leaf.

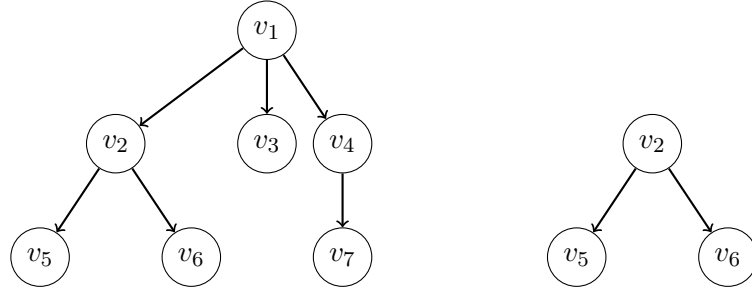


Fig. 3: Example of an unlabeled tree (left) and the subtree of v_2 (right).

Fig. 3 shows a tree with 7 nodes. The node v_1 is the root; v_5, v_6, v_3 and v_7 are the leaves. The tree has a height of 2, the depth of v_4 is 1. The subtree rooted at v_2 only consists of the nodes v_2, v_5 and v_6 .

2.3 Automaton

Automata are labeled graphs. They are used to represent states and the correlation between them.

Definition 7. A deterministic finite automaton (**DFA**) A is a tuple $(Q, \sigma, \Delta, q_0, F)$ with

- a set of states Q ,
- a set of labels σ , called alphabet,
- a transition relation $\Delta \subseteq Q \times \sigma \times Q$,
- an initial state $q_0 \in Q$ and
- a set of accepting states $F \subseteq Q$.

Definition 8. A word $w \in \Sigma^*$ is a finite sequence of letters

$$w = a_0 a_1 a_2 \dots a_{k-1}$$

with $a_i \in \Sigma$ and some $k \in \mathbb{N}$. The empty word is denoted by ε .

A word is called accepted iff

1.

$$\forall i : (q_i, a_i, q_{i+1}) \in \Delta,$$

for some $q_i \in Q$,

- 2. q_0 is the initial state of the automaton and
- 3. the last state is accepting, i.e. $q_k \in F$.

We say, the automaton A accepts the word w .

Definition 9. The language $\mathcal{L}(A)$ of an automaton A is defined as the set of accepted words:

$$\mathcal{L}(A) = \{w \in \Sigma^* \mid A \text{ accepts } w\}$$




Fig. 4: Example of a deterministic finite automaton. q_0 is the initial state and q_2 is accepting.

For an example, refer to **Fig. 4** which accepts the language

$$(ab)^*ac$$

denoting words with a finite sequence of ab , then one a and one c . Such as:

ac
 $abac$
 $ababac$
 $abababac$
 \vdots

2.4 Metric

Definition 10. A function $d : M \times M \rightarrow \mathbb{R}$ on a set M is called a metric iff for all $x, y, z \in M$

$d(x, y) \geq 0,$	<i>non-negativity</i>
$d(x, y) = 0 \Leftrightarrow x = y,$	<i>identity of indiscernibles</i>
$d(x, y) = d(y, x)$ and	<i>symmetry</i>
$d(x, z) \leq d(x, y) + d(y, z)$	<i>triangle inequality</i>

holds.

Definition 11. A metric space is a pair (M, d) where M is a set and $d : M \times M \rightarrow \mathbb{R}$ a metric on M .

Definition 12. Given a metric d on a set M , the distance of a point $p \in M$ to a subset

$Q \subseteq M$ is defined as the distance from p to its nearest point in Q :

$$d(p, Q) = \min_{q \in Q} d(p, q)$$

A metric is used to measure the distance between given locations. **Section 4** and **Section 5**, in particular **Section 5.1.2**, will make heavy use of this term.

There we measure the distance between geographical locations given as pair of *latitude* and *longitude* coordinates. Latitude and longitude, often denoted by ϕ and λ , are real numbers in the ranges $(-90, 90)$ and $[-180, 180)$ respectively, measured in degrees. However, for convenience we represent them in radians. Both representations are equivalent to each other and can easily be converted using the ratio $360^\circ = 2\pi$ rad.

A commonly used measure is the *as-the-crow-flies* metric, which is equivalent to the euclidean distance in the euclidean space. **Definition 13** defines an approximation of this distance on locations given by latitude and longitude coordinates. The approximation is commonly known as equirectangular projection of the earth [30]. Note that there are more accurate methods for computing the great-circle distance for geographical locations, like the haversine formula [31]. However, they come with a significant computational overhead.

Definition 13. Given a set of coordinates $M = \{(\phi, \lambda) | \phi \in (-\frac{\pi}{2}, \frac{\pi}{2}), \lambda \in [-\pi, \pi)\}$ we define $\text{asTheCrowFlies} : M \times M \rightarrow \mathbb{R}$ such that

$$((\phi_1, \lambda_1), (\phi_2, \lambda_2)) \mapsto \sqrt{\left((\lambda_2 - \lambda_1) \cdot \cos\left(\frac{\phi_1 + \phi_2}{2}\right)\right)^2 + (\phi_2 - \phi_1)^2 \cdot 6371000}.$$

The value 6 371 000 refers to the approximate mean of the earth radius R_\oplus in meters.

3 Models

This section defines the models we use for the different network types. We define a graph based representation for road and transit networks. Then both graphs are combined into a linked graph, making it possible to have one graph for the whole network. Afterwards an alternative representation for transit networks is shown.

3.1 Road graph

A road network typically is time independent. It consists of geographical locations and roads connecting them with each other. We assume that a road can be taken at any time, with no time dependent constraints (see **Section 2** of [20]).

Modeling the network as graph is straightforward, **Definition 14** goes into detail.

Definition 14. A road graph is a graph $G = (V, E)$ with a set of geographic coordinates

$$V = \{(\phi, \lambda) | \phi \in \left(-\frac{\pi}{2}, \frac{\pi}{2}\right), \lambda \in [-\pi, \pi)\},$$

for example road junctions. There is an edge $(u, w, v) \in E$ iff there is a road connecting the location u with the location v , which can be taken in that direction. The weight w of the edge is the average time needed to take the road from u to v using a car, measured in seconds.

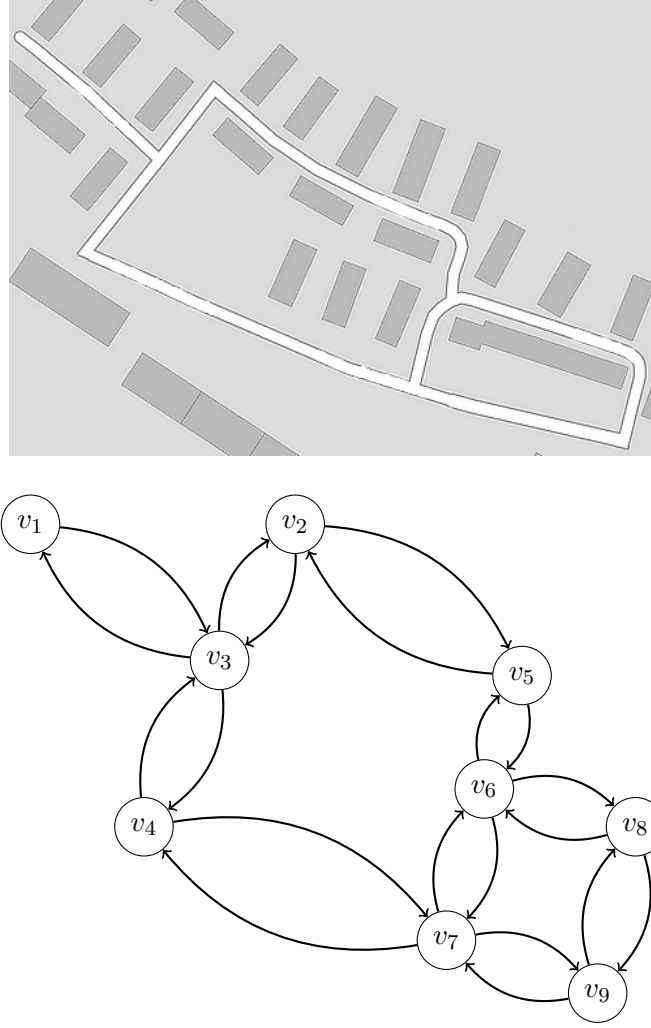


Fig. 5: Example of a road network with its corresponding road graph. White connections indicate roads, dark gray rectangles represent houses or other static objects. Geographical coordinates for each node as well as edge weights are omitted in the graph illustration.

Fig. 5 shows a constructed example road network with the corresponding road graph. Note that two way streets result in two edges, one edge for every direction the road can be taken.

Since edge weights are represented as average time it needs to take the road, it is possible to encode different road types. For example the average speed on a motorway is much higher than on a residential street. As such, the weight of an edge representing a motorway is much smaller than the weight of an edge representing a residential street.

While the example has exactly one node per road junction this must not always be the case. Typical real world data often consists of multiple nodes per road segment. However, **Definition 14** is still valid for such data as long as there are edges between the nodes if and only if there is a road connecting the locations.

3.2 Transit graph

Transit networks can be modeled similar to road graphs. The key difference is that transit networks are time dependent while road networks typically are not. For example an edge connecting *Freiburg main station* with *Karlsruhe main station* can not be taken at any time since trains and other transit vehicles only depart at certain times. The schedule might even change at different days.

The difficulty lies in modeling time dependence in a static graph. There are two common approaches to that problem (see [20, 29, 14]).

The first approach is called *time-dependent*. There edge weights are not static numbers but functions that take a date with time and compute the cost it needs to take the edge when starting at the given time. This includes waiting time. As an example assume an edge (u, c, v) with the cost function c . The edge represents a train connection and the travel time are 10 minutes. However, the train departs at 10:15 *am* but the starting time is 10:00 *am*. The cost function thus computes a waiting time of 15 minutes plus the travel time of 10 minutes. Resulting in an edge weight of 25 minutes.

The main problem with this model is that it makes pre-computations for route planning very difficult as the starting time is not known in advance.

The second approach, originally from [33], is called *time-expanded*. There, idea is to remove any time dependence from the graph by creating additional nodes for every event at a station. A node then also has a time information next to its geographic location.

Definition 15. A time expanded transit graph is a graph $G = (V, E)$ with a set of events at geographic coordinates

$$V = \{(\phi, \lambda, t) | \phi \in \left(-\frac{\pi}{2}, \frac{\pi}{2}\right), \lambda \in [-\pi, \pi], t \text{ time}\},$$

for example a train arriving or departing at a train station at a certain time.

For a node $v \in V$, v_ϕ and v_λ denote its location and v_t its time.

There is an edge $(u, w, v) \in E$ iff

1. there is a vehicle departing from u at time u_t which arrives at v at time v_t without stops in between, or

2. v is the node at the same coordinates than u with the smallest time v_t that is still greater than u_t . This edge represents exiting a vehicle and waiting for another connection. That is

$$\begin{aligned} \forall v' \in V \setminus \{v\} : v'_\phi = u_\phi \wedge v'_\lambda = u_\lambda \wedge v'_t \geq u_t \\ \Rightarrow v'_t - u_t > v_t - u_t. \end{aligned}$$

The weight w of an edge (u, w, v) is the difference between both nodes times, that is

$$w = v_t - u_t.$$

Note that weights are still positive since $v_t \geq u_t$ always holds due to construction.

Definition 15 defines such a time expanded transit graph and **Fig. 6** shows an example. For simplicity it is assumed that the trains have no stops other than shown in the schedule. The schedule lists four trains:

1. The ICE 104 which travels from Freiburg Hbf to Karlsruhe Hbf via Offenbourg,
2. the RE 17024 connecting Freiburg Hbf with Offenbourg,
3. the RE 17322 driving from Offenbourg to Karlsruhe Hbf and
4. ICE ICE 79 which travels in the opposite direction, connecting Karlsruhe Hbf with Freiburg Hbf without intermediate stops.

As seen in the example the resulting graph has no time dependency anymore and is static, as well as all edge weights. The downside is that the graph size dramatically increases as a new node is introduced for every single event. In order to limit the growth we assume that a schedule is the same every day and does not change. In fact, most schedules are stable and often change only slightly, for example on weekends or at holidays. In practice hybrid models can be used for those exceptions.

However, the model still lacks an important feature. It does not represent *transfer buffers* [29, 14] yet. It takes some minimal amount of time to exit a vehicle and enter a different vehicle, possibly even at a different platform.

We model that by further distinguishing the nodes by arrival and departure events. In between we can then add transfer nodes which model the transfer duration. Therefore, the previous definition is adjusted and **Definition 16** is received.

Definition 16. A realistic time expanded transit graph is a graph $G = (V, E)$ with a set of events at geographic coordinates

$$V = \{(\phi, \lambda, t, e) \mid \phi \in \left(-\frac{\pi}{2}, \frac{\pi}{2}\right), \lambda \in [-\pi, \pi), t \text{ time}, e \in \{\text{arrival, departure, transfer}\}\},$$

for example a train arriving at a train station at a certain time.

→	Freiburg Hbf	Offenburg		Karlsruhe Hbf
	departure	arrival	departure	arrival
ICE 104	3:56 pm	4:28 pm	4:29 pm	4:58 pm
RE 17024	4:03 pm	4:50 pm		
RE 17322			4:35 pm	5:19 pm
←	arrival	departure	arrival	departure
ICE 79	8:10 pm			7:10 pm

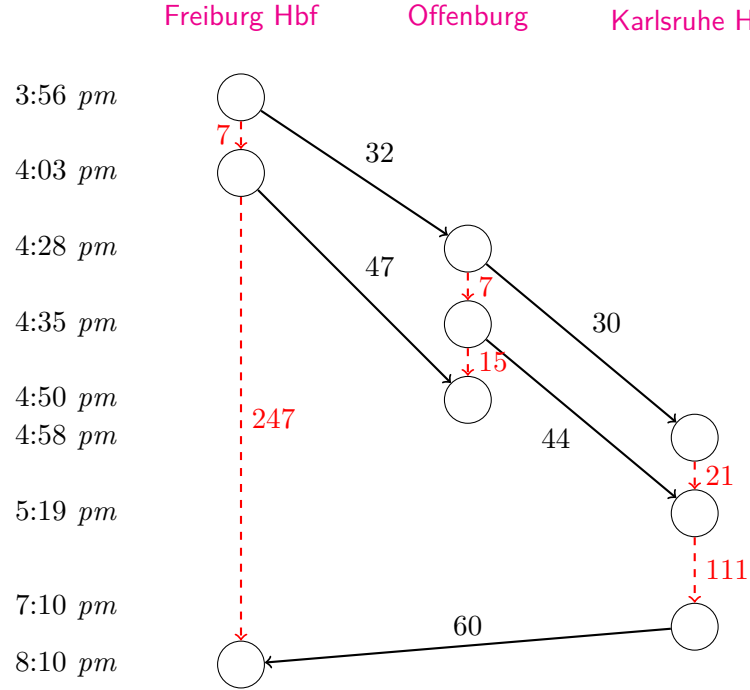


Fig. 6: Example of a transit network with its corresponding time expanded transit graph. The table shows an excerpt of a train schedule. Regular edges indicate a train connection and dashed edges waiting edges. Edge weights are measured in minutes.

A node $(\phi, \lambda, t, e) \in V$ is an arrival node if $e = \text{arrival}$, analogously it is a departure node for $e = \text{departure}$ and a transfer node for $e = \text{transfer}$. For a node $v \in V$, v_ϕ and v_λ denote its location, v_t its time and v_e its event type.

For every arrival node n there must exist a transfer node m at the same coordinates such that $m_t = n_t + d$ with d being the average transfer duration at the corresponding stop.

There is an edge $(u, w, v) \in E$ iff

1. $u_e = \text{departure} \wedge v_e = \text{arrival}$ such that there is a vehicle departing from u at time u_t which arrives at v at time v_t without stops in between; or
2. $u_e = \text{arrival} \wedge v_e = \text{departure}$ such that u and v belong to the same connection. For example a train arriving at a station and then departing again; or
3. $u_e = \text{arrival} \wedge v_e = \text{transfer}$ such that v is the first transfer node at the same coordinates whose time v_t comes after u_t . That is

$$\begin{aligned} \forall v' \in V \setminus \{v\} : v'_\phi = u_\phi \wedge v'_\lambda = u_\lambda \wedge v'_e = \text{transfer} \wedge v'_t \geq u_t \\ \Rightarrow v'_t - u_t > v_t - u_t. \end{aligned}$$

Such an edge represents exiting the vehicle and getting ready to enter a different vehicle; or

4. $u_e = \text{transfer} \wedge v_e = \text{transfer}$ such that v is the first transfer node at the same coordinates whose time v_t comes after u_t , representing waiting at a stop; or
5. $u_e = \text{transfer} \wedge v_e = \text{departure}$ such that u is the last transfer node at the same coordinates whose time u_t comes before v_t , i.e.

$$\begin{aligned} \forall u' \in V \setminus \{u\} : u'_\phi = v_\phi \wedge u'_\lambda = v_\lambda \wedge u'_e = \text{transfer} \wedge u'_t \leq v_t \\ \Rightarrow v_t - u'_t > v_t - u_t. \end{aligned}$$

An edge like this represents entering a different vehicle from a stop after transferring or waiting at the stop.

The weight w of an edge (u, w, v) is the difference between both nodes times, that is

$$w = v_t - u_t.$$

Fig. 7 shows how the transit graph from **Fig. 6** changes with transfer buffers.

The weight of edges connecting arrival nodes with transfer nodes is equal to the transfer duration, 5 minutes in the example. The transfer duration can be different for each edge. A transfer is now possible if the departure of the desired vehicle is after the arrival of the current vehicle plus the duration time. As seen in the example, edges connecting transfer nodes with departure nodes are present exactly in this case. A transfer from **ICE 104** to **RE 17322** in **Offenburg** is indicated by taking the edge to the first transfer node in **Offenburg** and then following the edge with cost 2 to the departure node of the train.

3.3 Link graph

In this section we examine how a road and a transit graph can be combined into a single graph such that all connections of the real network are preserved.

The approach is simple, selected nodes in the road network are connected to nodes

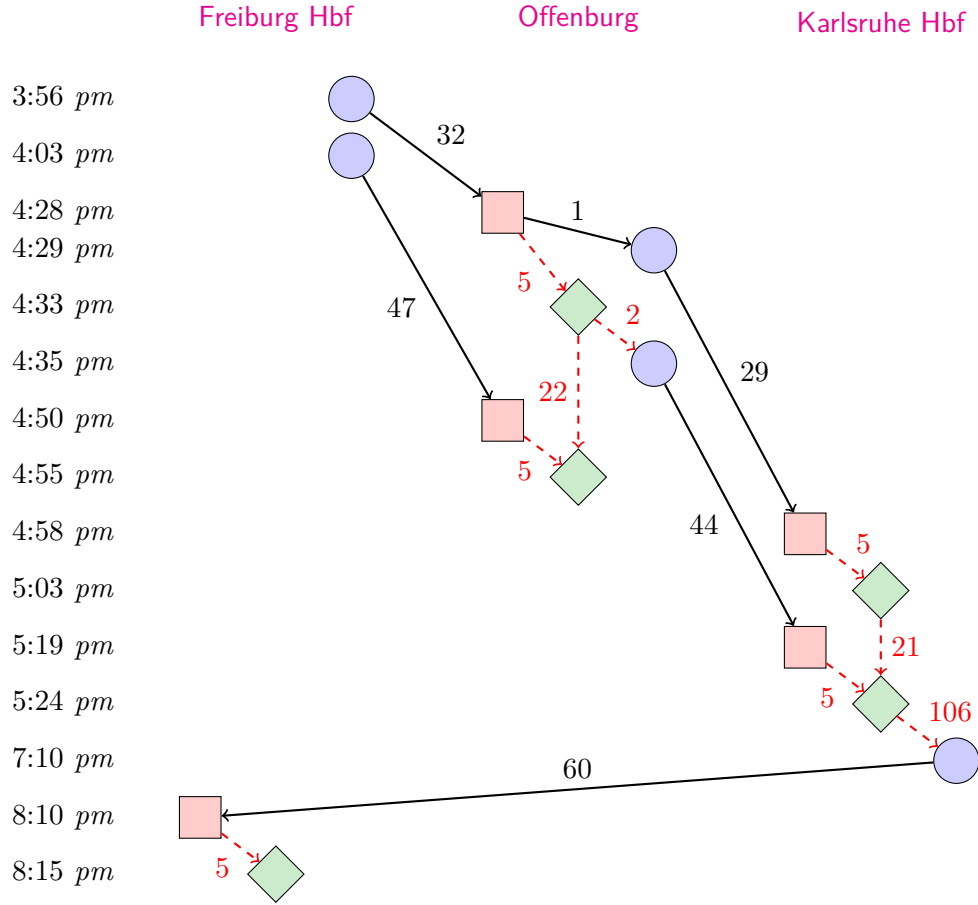


Fig. 7: Illustration of a realistic time expanded transit graph representing the schedule from **Fig. 6**. A transfer duration of 5 minutes is assumed at every stop. Rectangular nodes are arrival nodes, circular nodes represent departure nodes and diamond shaped nodes are transfer nodes. Regular edges indicate a train connection and dashed edges involve transfer nodes. Edge weights are measured in minutes.

of a certain stop in the transit network and vice versa. Since starting time is not known in advance the graph must connect a road node to all arrival nodes of a stop (compare to [19]).

In order to not miss a connection the transit graph must ensure that every connection starts with an arrival node. In **Fig. 7** this is not the case and all four trains start at a departure node. However, this is easily fixed by adding an additional arrival node to the beginning of every connection not starting with an arrival node already. The arrival nodes time is the same as the time of the departure node and both are connected by an edge with a weight of 0. **Definition 17** formalized the model.

Definition 17. Assume a road graph $R = (V_R, E_R)$, a realistic time expanded transit

graph $T = (V_T, E_T)$ where every connection in T starts by an arrival node and a partial function $\text{link} : V_R \rightarrow M$ where M contains subsets $S \subseteq V_T$. For every element $S \in M$ with an arbitrary element $s \in S$ the following properties must hold:

1. All contained elements must be arrival nodes and have the same location than s , i.e.

$$\forall s' \in S : s'_e = \text{arrival} \wedge s'_\phi = s_\phi \wedge s'_\lambda = s_\lambda.$$

2. The set must contain all arrival nodes at the location of s , i.e.

$$\nexists v \in V_T \setminus S : v_e = \text{arrival} \wedge v_\phi = s_\phi \wedge v_\lambda = s_\lambda.$$

Then a link graph is a graph $L = (V_R \cup V_T, E_R \cup E_T \cup E_L)$ with an additional set of link edges $E_L = V_R \times \mathbb{R}_{\geq 0} \times V_T$.

There is an edge $(u, 0, v) \in E_L$ iff $\text{link}(u)$ is defined and $v \in \text{link}(u)$.

The function link can be obtained in different ways. For example by creating a mapping from a road node u to a stop S if u is in the vicinity of S according to the `asTheCrowFlies` metric.

Another straightforward possibility is to always connect a stop with the road node nearest to it. We will explore this problem in **Section 4**. An obvious downside of this approach is that the nearest road node might not always have a good connectivity to the road network. A solution consists in creating a road node at the coordinates of the stop as representative. The node can then be connected with all road nodes in the vicinity.

3.4 Timetable

Timetables [14] are non-graph based representations for transit networks. They consist of stops, trips, connections and footpaths.

Definition 18. A timetable is a tuple (S, T, C, F) with stops S , trips T , connections C and footpaths F .

A stop is a position where passengers can enter or exit a vehicle, for example a train station or bus stop. It is represented as geographical coordinate (ϕ, λ) with $\phi \in (-\frac{\pi}{2}, \frac{\pi}{2})$, $\lambda \in [-\pi, \pi)$.

A trip is a scheduled vehicle, like the **ICE 104** in the example schedule of **Fig. 6** or a bus.

In contrast to a trip a connection is only a segment of a trip without stops in between. For example the connection of the **ICE 104** from **Freiburg Hbf** at 3:56 pm to **Offenburg** with arrival at 4:28 pm. It is defined as tuple $c = (s_{\text{dep}}, s_{\text{arr}}, t_{\text{dep}}, t_{\text{arr}}, o)$ with $s_{\text{dep}}, s_{\text{arr}} \in S$ representing the departure and arrival stop of the connection respectively.

Analogously t_{dep} is the time the vehicle departs at s_{dep} and t_{arr} when it arrives at s_{arr} . And $o \in T$ is the trip the connection belongs to.

Footpaths represent transfer possibilities between stops and are formalized as ordered tuple $(s_{\text{dep}}, d, s_{\text{arr}})$ with $s_{\text{dep}}, s_{\text{arr}} \in S$ the stops the footpath connects. The duration it needs to take the path by foot is represented by d , measured in seconds. Together with the set of stops S the footpaths build a graph $G = (S, F)$ representing directed edges between stops.

We require the following for the footpaths:

1. The footpaths must be transitively closed, that is

$$\exists(a, d_1, b), (b, d_2, c) \in F \Rightarrow (a, d_3, c) \in F$$

for arbitrary durations d_1, d_2, d_3 .

2. The triangle inequality must hold for all footpaths:

$$\exists(a, d_1, b), (b, d_2, c) \in F \Rightarrow \exists(a, d_3, c) \in F : d_3 \leq d_1 + d_2$$

3. Every stop must have a self-loop footpath, i.e.

$$\forall s \in S \Rightarrow (s, d, s) \in F.$$

The duration d models the transfer time at this stop, as already seen in **Section 3.2**.

The first property can easily make the set of footpaths huge. However, it is necessary for our algorithms that the amount of footpaths stays relatively small. In practice, we therefore connect each stop only to stops in its vicinity and then compute the transitive closure to ensure it is transitively closed.

To familiarize more with the model we take a look at the schedule from **Fig. 6** again. The corresponding timetable consists of:

$$S = \{f, o, k\},$$

where f, o, k represent **Freiburg Hbf**, **Offenburg** and **Karlsruhe Hbf** respectively;

$$T = \{t_{104}, t_{17024}, t_{17322}, t_{79}\},$$

representing the four trains **ICE 104**, **RE 17024**, **RE 17322** and **ICE 79**; the connections

$$\begin{aligned} &(f, o, 3:56 \text{ pm}, 4:28 \text{ pm}, t_{104}), \\ &(o, k, 4:29 \text{ pm}, 4:58 \text{ pm}, t_{104}), \\ &(f, o, 4:03 \text{ pm}, 4:50 \text{ pm}, t_{17024}), \\ &(o, k, 4:35 \text{ pm}, 5:19 \text{ pm}, t_{17322}), \\ &(k, f, 7:10 \text{ pm}, 8:10 \text{ pm}, t_{79}) \end{aligned}$$

and at least the footpaths

$$\begin{aligned} &(f, 300, f), \\ &(o, 300, o), \\ &(k, 300, k) \end{aligned}$$

for transferring at the same stop with a duration of 300 seconds (5 minutes).

If we would decide that **Offenburg** is reachable from **Freiburg Hbf** by foot and analogously **Karlsruhe Hbf** from **Offenburg**, we would also need to add a footpath connecting **Freiburg Hbf** directly with **Karlsruhe Hbf**. Else the footpaths would not be transitively closed anymore.

4 Nearest neighbor problem

In this section we introduce the **NEAREST NEIGHBOR PROBLEM**, also known as nearest neighbor search (**NNS**). First, we define the problem. Then a short overview of related research is given, after which we elaborate on a solution called **COVER TREE** [16].

Definition 19. *Given a metric space (M, d) (see **Definition 11**) with $|M| \geq 2$ and a point $x \in M$, the nearest neighbor problem asks for finding a point $y \in M$ such that*

$$y = \arg \min_{y' \in M \setminus \{x\}} d(x, y').$$

The point y is called nearest neighbor of x .

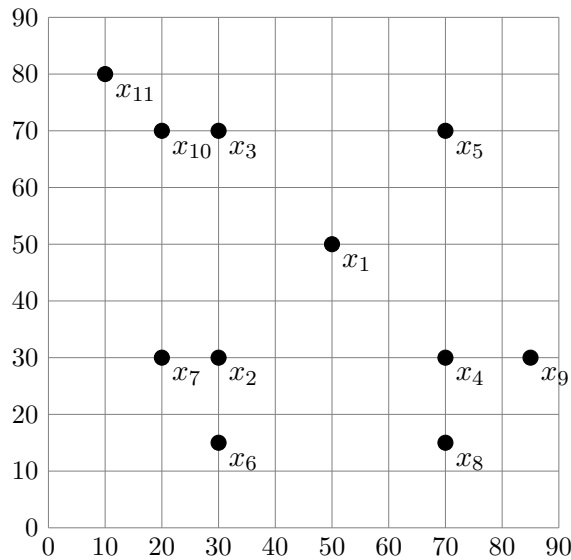


Fig. 8: Grid showing eleven points in the cartesian plane \mathbb{R}^2 .

For following examples the toy data set shown in **Fig. 8** is introduced. It consists of the points

$$\begin{aligned}x_1 &= (50, 50), \\x_2 &= (30, 30), \\x_3 &= (30, 70), \\x_4 &= (70, 30), \\x_5 &= (70, 70), \\x_6 &= (30, 15), \\x_7 &= (20, 30), \\x_8 &= (70, 15), \\x_9 &= (85, 30), \\x_{10} &= (20, 70), \\x_{11} &= (10, 80).\end{aligned}$$

All points are elements of the cartesian plane \mathbb{R} . The euclidean distance d is chosen as metric on this set. For two dimensions it can be defined as:

$$d : \mathbb{R}^2 \times \mathbb{R}^2, ((x_1, y_1), (x_2, y_2)) \mapsto \sqrt{(x_2 - x_1)^2 + (y_2 - y_1)^2}$$

Informally d computes the *ordinary* straight-line distance between two points.

The nearest neighbor of x_5 is x_1 as

$$\begin{aligned}d(x_5, x_1) &= \sqrt{(50 - 70)^2 + (50 - 70)^2} \\&= \sqrt{800}\end{aligned}$$

is smaller than all other distances to x_5 , like

$$\begin{aligned}d(x_5, x_4) &= \sqrt{(70 - 70)^2 + (30 - 70)^2} \\&= \sqrt{1600}.\end{aligned}$$

On the other hand, x_1 has four smallest neighbors:

$$d(x_1, x_2) = d(x_1, x_3) = d(x_1, x_4) = d(x_1, x_5)$$

Any of them is a valid solution to the nearest neighbor problem of x_1 .

The search for a nearest neighbor is a well understood problem [10, 9] and has many applications. Without restrictions, solving the problem on general metrics was proven to require $\Omega(n)$ time [10], where n is the amount of points.

Typical approaches divide the space into regions, exploiting properties of the metric

space. Common examples include **K-D TREES** [15], **VP TREES** [36], **BK-TREES** [17] and **COVER TREES** [16].

The problem also has a lot of variants. We elaborate on two of them:

Definition 20. *The k-nearest neighbors of a point $x \in M$ are the k closest points $\{y_1, y_2, \dots, y_k\} \subseteq M$ to x . That is*

$$\begin{aligned} y_1 &= \arg \min_{y' \in M \setminus \{x\}} d(x, y'), \\ y_2 &= \arg \min_{y' \in M \setminus \{x, y_1\}} d(x, y'), \\ &\vdots \\ y_k &= \arg \min_{y' \in M \setminus \{x, y_1, \dots, y_{k-1}\}} d(x, y'). \end{aligned}$$

Definition 21. *The k-neighborhood of a point $x \in M$ is the set*

$$\{y \in M \setminus \{x\} \mid d(x, y) \leq k\}.$$

4.1 Cover tree

Definition 22. *A cover tree T on a metric space (M, d) is a leveled tree (V, E) .*

The root is placed at the greatest level, denoted by $i_{\text{max}} \in \mathbb{Z}$. The level of a node $v \in V$ is

$$\text{lvl}(v) = i_{\text{max}} - \text{depth}(v).$$

The lowest level is denoted by i_{min} . Every node $v \in V$ is associated with a point $m \in M$. We write $\text{assoc}(v) = m$. Nodes of a certain level form a cover of points in M . A cover for a level i is defined as

$$C_i = \{m \in M \mid \exists v \in V : \text{lvl}(v) = i \wedge \text{assoc}(v) = m\}.$$

The following properties must hold

1. *For a level i there must not exist nodes which are associated with the same point $m \in M$:*

$$\nexists v, v' \in V : i = \text{lvl}(v) = \text{lvl}(v') \wedge v \neq v' \wedge \text{assoc}(v) = \text{assoc}(v')$$

So each point can at most appear once per level.

2. *$C_i \subset C_{i-1}$. This ensures that, once a point was associated with a node in a level, it appears in all lower levels too.*
3. *Points are covered by their parents:*

$$\forall p \in C_{i-1} \exists q \in C_i : d(p, q) < 2^i$$

and the node v_p with $\text{lvl}(v_p) = i \wedge \text{assoc}(v_p) = p$ is the parent of the node v_q with $\text{lvl}(v_q) = i - 1 \wedge \text{assoc}(v_q) = q$.

4. Points in a cover C_i have a separation of at least 2^i , i.e.

$$\forall p, q \in C_i : p \neq q \Rightarrow d(p, q) > 2^i.$$

A cover tree [16] has interesting distance properties on its nodes which allows for efficient retrieval of nearest neighbors. The general approach is straightforward. Given a node v in the tree placed at level i , we know that all nodes of the subtree rooted at v are associated with points inside a distance of at most 2^i . This means that, if we search for a nearest neighbor, and traverse to a node v in the tree, all nodes underneath v are relatively close to v . So, if we already have a candidate for a nearest neighbor, with distance of d and v is already further away than $d + 2^i$; v and all nodes in its subtree can not improve the distance.

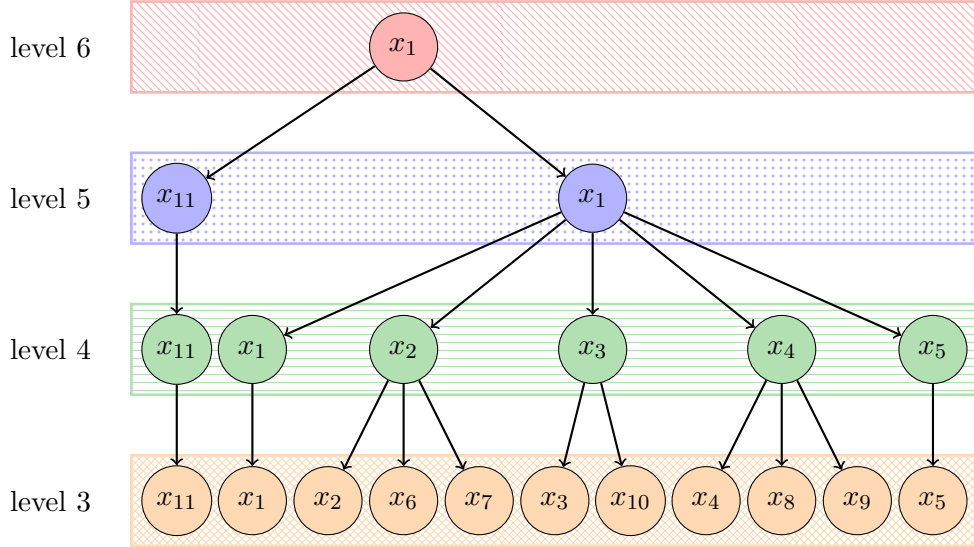


Fig. 9: Cover tree for the data set of **Fig. 8**. Nodes are vertically grouped by their levels and highlighted accordingly.

Fig. 9 shows a valid cover tree for the toy example illustrated by **Fig. 8**. The covers are

$$\begin{aligned} C_6 &= \{x_1\}, \\ C_5 &= \{x_1, x_{11}\}, \\ C_4 &= \{x_1, x_2, x_3, x_4, x_5, x_{11}\}, \\ C_3 &= \{x_1, x_2, x_3, x_4, x_5, x_6, x_7, x_8, x_9, x_{10}, x_{11}\}. \end{aligned}$$

Clearly the first property holds, there is no level where a x_i is associated with a node

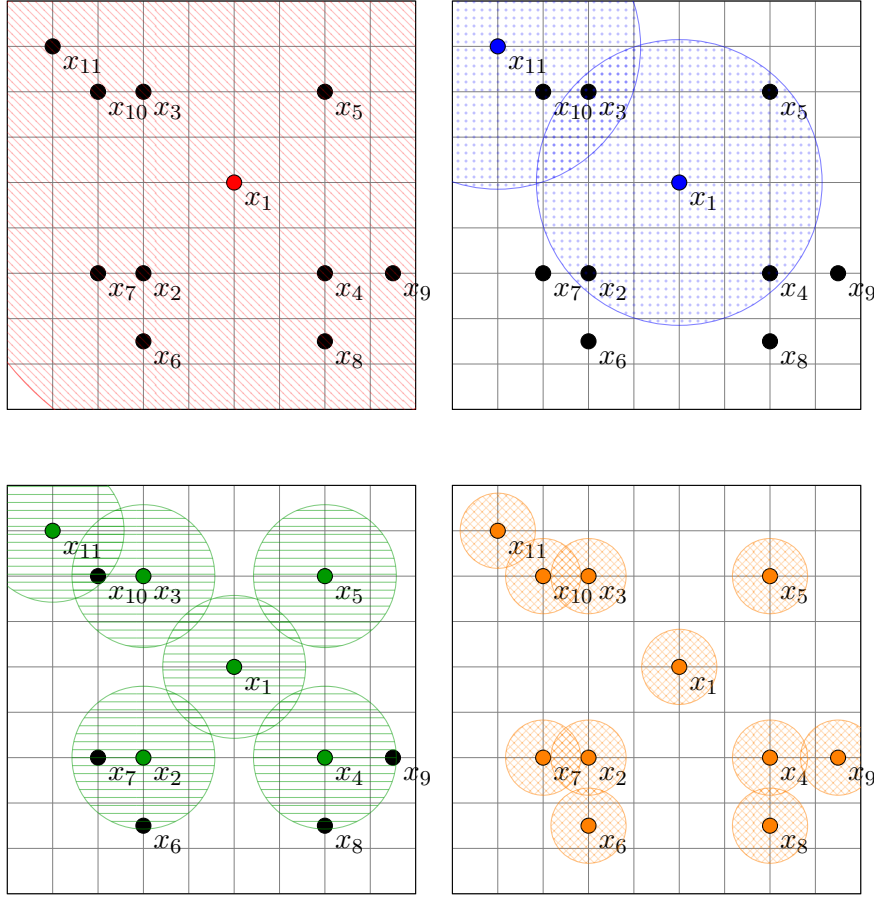


Fig. 10: Figure that shows the separation property for each level of the cover tree shown by **Fig. 9**. The levels are highlighted in the same manner than in the previous example. The levels are 6, 5, 4 and 3 from top left to bottom right. The radii around the points have a size of 2^6 , 2^5 , 2^4 and 2^3 .

more than once. The second property holds too, it is

$$C_6 \subset C_5 \subset C_4 \subset C_3.$$

For the last two properties we take a look at **Fig. 10**. It illustrates the fourth property. The property states that all points in a cover C_i must have a distance of at least 2^i to each other. For level 6 this is trivial since the set only contains x_1 . For level 5 it must hold that

$$d(x_1, x_{11}) = 50 > 32 = 2^5,$$

which is true. If this would not be the case, the figure would show the nodes included inside the circle around the other node. Analogously all nodes in C_4 and C_3 are separated enough from each other.

The third property can easily be confirmed using the figure too. It states that a node in level $i - 1$ must be closer than 2^i to its parent. Obviously this holds for x_1 and x_{11} in level 5, as a radius of 2^6 around their parent x_1 covers all nodes. Likewise are x_1, x_2, x_3, x_4 and x_5 included in the circle around their parent x_1 with radius 2^5 .

Note that it is not necessary that a node covers its whole subtree in its level. As example, we refer to x_1 in level 5 which does not cover x_{10} , as $d(x_1, x_{10}) > 2^5$, though it is part of the subtree rooted at x_1 . The third property only demands that a parent covers all its direct children, not grandchildren or similar.

Algorithm 1: Inserting a point into a cover tree operating on a metric space (M, d) .

```

input : point  $p \in M$ , candidate cover set  $Q_i \subseteq C_i$ , level  $i$ 
output: true if  $p$  was inserted at level  $i - 1$ , false otherwise

1  $Q \leftarrow \{\text{children}(q) | q \in Q_i\};$ 
2 if  $d(p, Q) > 2^i$  then
3   return false; // Check separation
4 else
5    $Q_{i-1} \leftarrow \{q \in Q | d(p, q) \leq 2^i\};$  // Covering candidates
6   if  $\neg \text{insert}(p, Q_{i-1}, i - 1) \wedge d(p, Q_i) \leq 2^i$  then
7     pick any  $q \in Q_i : d(p, q) \leq 2^i$ ;
8     append  $q$  as child to  $q$ ;
9     return true;
10  else
11    return false;

```

The cover tree is constructed using **Algorithm 1** with the maximal level i_{\max} and the cover set C_k which only consists of the root. The algorithm is stated recursively, but can easily be implemented without recursion by descending the levels and only following relevant candidates.

A point p can be appended in level $i - 1$ to a parent q in level i if the point has enough separation to all other nodes in this level, meaning more than 2^{i-1} , and is covered by the parent, that is a distance of less than 2^i . The algorithm searches such a point by descending the levels, computing the separation and appending it to a node if it also covers the point.

A search for a nearest neighbor follows a similar approach. **Algorithm 2** starts at the root and traverses the tree by following the children. The candidate set is refined by

Algorithm 2: Searching a nearest neighbor in a cover tree operating on a metric space (M, d) .

input : point $p \in M$
output: a nearest neighbor to p in M

```

1  $Q_{i_{\max}} \leftarrow C_{i_{\max}};$ 
2 for  $i$  from  $i_{\max}$  to  $i_{\min}$  do
3    $Q \leftarrow \{\text{children}(q) | q \in Q_i\};$ 
4    $Q_{i-1} \leftarrow \{q \in Q | d(p, q) \leq d(p, Q) + 2^i\};$ 
5 return  $\arg \min_{q \in Q_{i_{\min}}} d(p, q);$ 

```

only following children which are closer than

$$d(p, Q) + 2^i.$$

There, the distance to the set represents the distance of the currently best candidate. Nodes in the subtree rooted at a child can maximally be 2^i closer than the child itself. Therefore, take a look at **Fig. 10** where x_2 is maximally 2^5 closer to x_7 than x_1 , else it would not be covered by its parent x_1 . Because of that the algorithm only follows children which can have nodes in their subtree that improve over the currently best candidate. Other children are rejected.

Note that the algorithm must track down all levels, as another node could show up in the lowest level because of the separation property.

Algorithm 3: Searching the k -nearest neighbors in a cover tree operating on a metric space (M, d) .

input : point $p \in M$, amount $k \in \mathbb{N}$
output: k -nearest neighbors to p in M

```

1  $Q_{i_{\max}} \leftarrow C_{i_{\max}};$ 
2 for  $i$  from  $i_{\max}$  to  $i_{\min}$  do
3    $Q \leftarrow \{\text{children}(q) | q \in Q_i\};$ 
4   perform a  $k$ -partial sort of  $Q$ , ascending in  $d(p, q)$ ;
5   let  $q'$  be the  $k$ -th element of  $Q$ ;
6    $Q_{i-1} \leftarrow \{q \in Q | d(p, q) \leq d(p, q') + 2^i\};$ 
7 perform a  $k$ -partial sort of  $Q_{i_{\min}}$ , ascending in  $d(p, q)$ ;
8 return first  $k$  elements of  $Q_{i_{\min}};$ 

```

The cover tree can also be used to efficiently compute the k -nearest neighbors or the

Algorithm 4: Computing the k -neighborhood by using a cover tree which operates on a metric space (M, d) .

input : point $p \in M$, radius $k \in \mathbb{R}_{\geq 0}$
output: k -neighborhood of p in M

```

1  $Q_{i_{\max}} \leftarrow C_{i_{\max}};$ 
2 for  $i$  from  $i_{\max}$  to  $i_{\min}$  do
3    $Q \leftarrow \{\text{children}(q) | q \in Q_i\};$ 
4    $Q_{i-1} \leftarrow \{q \in Q | d(p, q) \leq k + 2^i\};$ 
5 return  $\{q \in Q_{i_{\min}} | d(p, q) \leq k\};$ 

```

k -neighborhood. In order to compute the k -nearest neighbors, **Algorithm 3** extends the range bound from the currently best candidate to the k -th best candidate. Likewise does **Algorithm 4** extend the bound to the given range k instead of involving candidate distances.

For other operations and a detailed analysis of the cover tree, as well as its complexity and a comparison against other techniques, refer to [16].

5 Shortest path problem

For route planning, routes through a network must be optimized in regards to one or even many criteria. A common criteria is the *travel time*. Others include cost, number of transfers or restrictions in transportation types.

In this chapter, we will first give an informal description of the **EARLIEST ARRIVAL PROBLEM**. Followed by the **SHORTEST PATH PROBLEM**, which is equivalent to the **EARLIEST ARRIVAL PROBLEM** for our graph based network representations.

Then, we introduce algorithms for solving the problem. First, for time-independent networks, then for time-dependent. Afterwards, we explain two solutions for combined networks, using multiple transportation modes. There, the problem description slightly changes by adding transportation mode restrictions.

Definition 23. *The earliest arrival problem asks for finding a route in a network with following properties*

1. *The route must start at s and end at t .*
2. *The departure time at s is τ .*
3. *All other applicable routes must have a greater travel time, i.e. arrive later at t .*

Points s and t are given source and target points in the network respectively. τ is the desired departure time, it may be ignored for a time-independent network.

Definition 24. Given a graph $G = (V, E)$, source and target nodes $s, t \in V$ and a desired departure time τ , the shortest path problem asks for a path p (see **Definition 3**) which

1. begins at s and ends at t ,
2. has the smallest weight of all applicable paths.

The arrival time at t is τ plus the weight of p . In a time-dependent graph τ must be used to ensure correct edge weights. The path p is called shortest path.

Additionally, we consider a special variant of the shortest path problem:

Definition 25. The many-to-one shortest path problem is a variation of the shortest path problem where the source consists of a set of source nodes $S \subseteq V$.

The problem asks for the path p that starts at the source $s \in S$ which minimizes the path weight.

5.1 Time-independent

Route planning in time-independent networks is a very well studied problem. Many efficient solutions to the shortest path problem exists. We introduce a very basic algorithm, **DIJKSTRA** and a simple improvement based on heuristics, **A***.

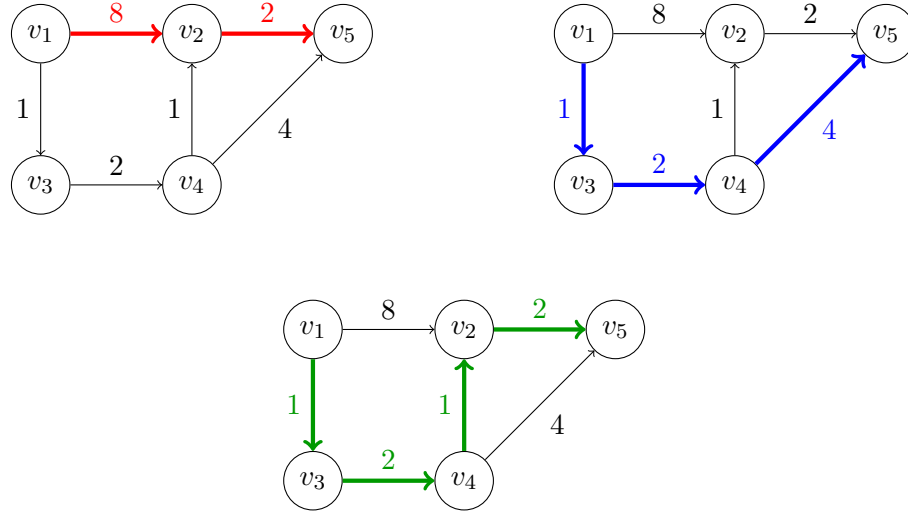


Fig. 11: Example for a time independent network, represented by a road graph. The figure shows three paths from v_1 to v_5 . From top left to bottom right, the path weights are 10, 7 and 6. The last example represents the shortest path from v_1 to v_5 .

The network shown by **Fig. 11** acts as toy example for this section.

5.1.1 Dijkstra

DIJKSTRA [18] is a simple approach to solving the shortest path problem. It can be viewed as the logical extension of breadth-first search (**BFS**) [18] in weighted graphs. The algorithm revolves around a priority queue where it stores neighboring nodes, sorted by their shortest path cost. In each round, the node with the smallest shortest path cost is *relaxed*. That is, all its neighboring, not already relaxed, nodes are added to the queue. The algorithm terminates as soon as the target node has been relaxed. **Algorithm 5** gives a formal description.

To familiarize with the algorithm, we step through the execution for the graph shown by **Fig. 11**, with v_1 as source and v_5 as target node.

The **dist** function, often implemented as array, stores the tentative shortest path weight to the given node. **prev** is used for path extraction at the end, it stores the parent nodes used for the shortest paths represented by **dist**. The algorithm starts by initializing both collections with default values. Initially the distance to all nodes, except the source, is unknown. Thus, ∞ is used for them. Q represents the list of nodes that need to be processed, usually implemented as priority queue. Initially, it only holds the source node s .

In the example Q is initially $\{v_1\}$. The algorithm then relaxes v_1 and stores distances to its neighbors:

$$\begin{aligned} \text{dist}(v_2) &= 8 & \text{prev}(v_2) &= v_1, \\ \text{dist}(v_3) &= 1 & \text{prev}(v_3) &= v_1 \end{aligned}$$

Additionally, the queue Q is updated, it is

$$Q = \{v_2, v_3\}.$$

The next iteration of the loop starts and the node with the smallest distance is chosen, i.e. v_3 . The node is relaxed and we receive

$$\begin{aligned} \text{dist}(v_4) &= 3 & \text{prev}(v_4) &= v_3, \\ Q &= \{v_2, v_4\}. \end{aligned}$$

The next node is v_4 , yielding

$$\begin{aligned} \text{dist}(v_2) &= 4 & \text{prev}(v_2) &= v_4, \\ \text{dist}(v_5) &= 7 & \text{prev}(v_5) &= v_4, \\ Q &= \{v_2, v_5\}. \end{aligned}$$

Note that v_4 improves the distance to v_2 . The previous values for v_2 are overwritten and the tentative shortest path to v_2 uses $(v_4, 1, v_2)$ and not $(v_1, 8, v_2)$ anymore. In the next round v_2 is relaxed which improves the distance to v_5 :

$$\begin{aligned} \text{dist}(v_5) &= 6 & \text{prev}(v_5) &= v_2, \\ Q &= \{v_5\}. \end{aligned}$$

Algorithm 5: Dijkstra's algorithm for computing shortest paths in time-independent graphs.

```

input : graph  $G = (V, E)$ , source  $s \in V$ , target  $t \in V$ 
output: shortest path from  $s$  to  $t$ 

// Initialization
1 for  $v \in V$  do
2    $\text{dist}(v) \leftarrow \infty$ ;
3    $\text{prev}(v) \leftarrow \text{undefined}$ ;

4  $\text{dist}(s) \leftarrow 0$ ;
5  $Q \leftarrow \{s\}$ ;

// Compute shortest paths
6 while  $Q$  is not empty do
7    $u \leftarrow \arg \min_{u' \in Q} \text{dist}(u')$ ;
8    $Q \leftarrow Q \setminus \{u\}$ ;
9   if  $u == t$  then
10    break;

    // Relax  $u$ 
11   for outgoing edge  $(u, w, v) \in E$  do
12      $\text{currentDist} \leftarrow \text{dist}(u) + w$ ;
13     if  $\text{currentDist} < \text{dist}(v)$  then
14       // Improve distance by using this edge
15        $\text{dist}(v) \leftarrow \text{currentDist}$ ;
16        $\text{prev}(v) \leftarrow u$ ;
17        $Q \leftarrow Q \cup \{v\}$ ;

// Extract path by backtracking
17  $p \leftarrow \text{empty path}$ ;
18  $u \leftarrow t$ ;
19 while  $\text{prev}(u) \neq \text{undefined}$  do
20    $w \leftarrow \text{dist}(u) - \text{dist}(\text{prev}(u))$ ;
21   prepend  $(\text{prev}(u), w, u)$  to  $p$ ;
22    $u \leftarrow \text{prev}(u)$ ;
23 prepend  $s$  to  $p$ ;
24 return  $p$ ;
```

The only node left is the target node v_5 now. It is relaxed and the loop terminates. The algorithm backtracks the parent pointer

```

prev( $v_5$ ) =  $v_2$ ,
prev( $v_2$ ) =  $v_4$ ,
prev( $v_4$ ) =  $v_3$ ,
prev( $v_3$ ) =  $v_1$ ,
prev( $v_1$ ) = undefined

```

and constructs the shortest path

$$p = (v_1, 1, v_3)(v_3, 2, v_4)(v_4, 1, v_2)(v_2, 2, v_5)$$

which is the path shown by the last example in the figure.

5.1.2 A* and ALT

An important observation of **DIJKSTRA** is that, if it settles the shortest path distance to a node, then, all nodes which are closer to the source, were already settled in a previous round.

Moreover, the algorithm explores the graph in all directions equally. It has no sense of *goal direction*.

The **A*** algorithm [25] is a simple extension of **DIJKSTRA** which improves its efficiency by steering the exploration more towards the target. **Fig. 12** illustrates this by comparing the *search space* of both algorithms. The search space of **A*** is smaller and much more directed to the target node t .

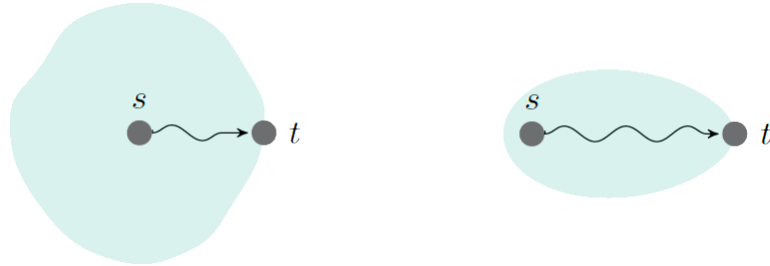


Fig. 12: Schematic illustration of a query processed by **DIJKSTRA** (left) and **A*** (right). The highlighted areas indicate the *search space*, i.e. the nodes the algorithm has explored already. The illustration is from [14].

Unfortunately, computing the exact goal direction is as hard as computing the shortest path to the target. Therefore, a heuristic is used to approximate the direction. The choice of the heuristic heavily depends on the underlying network. In the worst case, a heuristic may not improve over **DIJKSTRA** and the same search space is received. In the best case, the algorithm explores only the nodes on the shortest path.

Such a heuristic must fulfill two properties, formulated by **Definition 26**.

Definition 26. Given a graph $G = (V, E)$, a metric dist on V (see **Definition 10**), a heuristic is a function $h : V \times V \rightarrow \mathbb{R}_{\geq 0}$ which approximates dist . The heuristic h must be

1. admissible, i.e. never overestimate:

$$\forall u, t \in V : h(u, t) \leq \text{dist}(u, t)$$

2. monotone, i.e. satisfy the triangle inequality:

$$\forall t \in V \forall (u, w, v) \in E : h(u, t) \leq w + h(v, t)$$

Given such a heuristic h , the A^* algorithm is received by adjusting **line 7** of **Algorithm 5** to

$$u \leftarrow \arg \min_{u' \in Q} \text{dist}(u') + h(u', t).$$

This will prefer nodes that are estimated to be closer to the target before others. By that, the algorithms search space first expands into a direction that minimizes the distance according to the heuristic h .

A common choice for a simple heuristic is the *as-the-crow-flies* metric (see **Definition 13**). The properties are easily verified. A theoretically shortest path has the shortest possible distance and uses the fastest available transportation mode. This is exactly the path represented by the *straight-line* distance, computed by the *as-the-crow-flies* metric. It can thus never overestimate. It is also trivially monotone since it is a metric, i.e. the triangle inequality holds for all elements.

A heuristic is a good choice if it approximates the actual shortest path distance well. As such, the *as-the-crow-flies* heuristic works well on networks with a high connectivity in all directions. For example a residential area of a city without one way streets. Unfortunately, in road networks, the common case is to first drive into the opposite direction in order to reach a fast highway. This even gets worse on networks where the importance of nodes heavily differ, such as public transit networks. For train networks, the typical case is that one first needs to travel to a main station. This is obviously due to a main station having a much better connectivity and faster trains available. Because of that, the effectiveness of *as-the-crow-flies* is very limited on such networks.

The *landmark heuristic* partially solves the issue. An A^* algorithm using the landmark heuristic is called **ALT** [25], which stands for *landmarks and triangle inequality*.

The heuristic provides a more generic approach by approximating the distance between nodes u and v by using precomputed distances with pre-determined nodes l , called *landmarks*.

Definition 27. Given a set of landmarks $L \subseteq V$, the heuristic landmarks is defined by

$$\text{landmarks}(u, v) = \max_{l \in L} (\max\{\text{dist}(u, l) - \text{dist}(v, l), \text{dist}(l, v) - \text{dist}(l, u)\}).$$

Obviously, the heuristic improves if the set of landmarks is increased. However, actual shortest path distances from all landmarks to all other nodes in the graph must be precomputed. With an increasing amount of landmarks the precomputation might not be feasible anymore because it takes too long or consumes too much space. Note that if $L = V$, the heuristic becomes the actual shortest path distance function, i.e. $\text{landmarks} = \text{dist}$.

In practice, an amount between 20 and 50 randomly chosen nodes seems to be a good compromise. Refer to [25] for a detailed analysis.

The computation of the actual shortest path distances, to and from the landmarks, can be done by using **DIJKSTRA**. But, instead of running the algorithm for all pairs of nodes, the distances can be obtained with two runs only. Therefore, the algorithm is slightly modified by dropping **lines 9** and **10**, such that the algorithm relaxes the whole network. By that, a single run of **DIJKSTRA** with a landmark l as source, computes the distances $\text{dist}(l, v)$ to all nodes v in the network. By reversing the graph, i.e. edges (u, w, v) become (v, w, u) , the distances to the landmarks can be obtained analogously with l as source again. Depending on the graph implementation, reversal can be done in $\mathcal{O}(1)$ by only implicitly reversing the edges.

5.2 Time-dependent

Approaches designed for time-independent networks, such as **ALT**, have an important drawback. Optimization is always done on assuming that edge costs are constant. However, in a time-dependent network, this is not the case. The weight of an edge is dependent on the departure time, which is not known in advance.

DIJKSTRA and its variants **A*** and **ALT** can easily be adapted to also work in time-dependent networks by taking the departure time into consideration when computing the weight of an edge. However, their effectiveness is very limited. Nonetheless, they were used for a long time for time-dependent networks too. With increasing research on route planning in time-dependent networks, more effective algorithms, such as **TRANSFER PATTERNS** [13] and **CSA** [21], were developed. Many of them do not use graphs and prefer data-structures that are designed for time-dependent data, such as *timetables* (see **Section 3.4**).

5.2.1 Connection scan

Connection scan (**CSA**) [21] is an algorithm for route planning specially designed for time-dependent networks, such as public transit networks. It processes the network represented as timetable, as defined by **Definition 18**.

The algorithm is very simple. All connections of the timetable are sorted by their departure time. Given a query, connections are explored increasing in their departure time. The algorithm is fast primarily due to the fact that connections can be maintained in a simple array. In contrast to **DIJKSTRA**, it does not need to maintain a priority queue or other more complex data-structures. Arrays are heavily optimized and benefit from a lot of effects, like cache locality [26].

Algorithm 6 shows the full connection scan algorithm. The array S stores for each stop the currently best arrival time. T associates for each trip the first connection it is taken with. J is used for path extraction and memorizes for each stop a segment of a trip, consisting of enter and exit connections c_{enter} and c_{exit} respectively, and a footpath f :

$$(c_{\text{enter}}, c_{\text{exit}}, f)$$

It represents a path which takes the segment of the trip starting at c_{enter} , ending at c_{exit} and then taking the footpath f from the arrival stop of c_{exit} . Such an entry is associated to the arrival stop of the footpath f , always representing the parent path that results in the current best arrival time for the corresponding stop.

The algorithm starts by initializing the arrays with default values and relaxing all initial footpaths. Connections are then explored increasing in their departure time, starting from the first connection c_0 that starts after the departure time τ . **Line 7** is typically implemented as *binary search* [28] on a sorted array of connections C .

Line 9 is the stopping criteria, which lets the algorithm terminate once a connection departs after the current best arrival time at the target t . Since connections are explored increasing in time, it is impossible that a connection can improve on the arrival time anymore.

Line 11 will only explore a connection if a previous connection of the same trip was already used, indicating traveling without a transfer; or if it was already possible to arrive at the stop earlier with a previous connection, indicating a transfer at this stop.

A connection is then only relaxed if it improves the arrival time at its arrival stop, represented by **line 14**. If so, all outgoing footpaths are explored. A footpath represents exiting the vehicle, walking to the arrival stop of the footpath ready for entering another vehicle. Note that self-loop footpaths must be contained in timetables (compare to **Definition 18**), making it possible to transfer at one stop.

Line 16 only considers footpaths that improve the arrival time at the corresponding stop. **Line 18** stores the path represented by taking this connection and the footpath.

For an example, we refer to the schedule of **Fig. 6** again. The corresponding timetable is explained in **Section 3.4**, we use the same notion again. It consists of five connections, denoted by c_1, c_2, c_3, c_4 and c_5 , sorted by departure time. We assume only the three self-loop footpaths on the stops f , o and k .

Assume a query from **Freiburg Hbf**, represented by stop f to **Karlsruhe Hbf**, represented

Algorithm 6: Connection scan algorithm for computing shortest paths in time-dependent networks, represented by timetables.

input : timetable (S, T, C, F) , source $s \in S$, target $t \in S$, departure time τ
output: shortest path from s to t

// Initialization

```

1 for  $u \in S$  do  $S[u] \leftarrow \infty$ ;
2 for  $o \in T$  do  $T[o] \leftarrow \text{undefined}$ ;
3 for  $u \in S$  do  $J[u] \leftarrow (\text{undefined}, \text{undefined}, \text{undefined})$ ;
4 for  $f = (u_{\text{dep}}, d, u_{\text{arr}}) \in F : u_{\text{dep}} = s$  do
5    $S[u_{\text{arr}}] \leftarrow \tau + d$ ;
6    $J[u_{\text{arr}}] \leftarrow (\text{undefined}, \text{undefined}, f)$ ;

// Explore connections increasing in departure time
7  $c_0 \leftarrow \arg \min_{(u_{\text{dep}}, u_{\text{arr}}, \tau_{\text{dep}}, \tau_{\text{arr}}, o) \in C : \tau_{\text{dep}} \geq \tau} \tau_{\text{dep}}$ ;
8 for  $c = (u_{\text{dep}}, u_{\text{arr}}, \tau_{\text{dep}}, \tau_{\text{arr}}, o) \in C$  increasing by  $\tau_{\text{dep}}$ , starting from  $c_0$  do
9   if  $\tau_{\text{dep}} \geq S[t]$  then
10    break;
11   if  $T[o] \neq \text{undefined} \vee \tau_{\text{dep}} \geq S[u_{\text{dep}}]$  then
12     if  $T[o] == \text{undefined}$  then
13        $T[o] \leftarrow c$ ;
14     if  $\tau_{\text{arr}} < S[u_{\text{arr}}]$  then
15       for  $f = (v_{\text{dep}}, d, v_{\text{arr}}) \in F : v_{\text{dep}} = u_{\text{arr}}$  do
16         if  $\tau_{\text{arr}} + d < S[v_{\text{arr}}]$  then
17            $S[v_{\text{arr}}] \leftarrow \tau_{\text{arr}} + d$ ;
18            $J[v_{\text{arr}}] \leftarrow (T[o], c, f)$ ;

// Extract path by backtracking
19  $p \leftarrow \text{empty path}$ ;
20  $u \leftarrow t$ ;
21 while  $c_{\text{enter}} \neq \text{undefined} : (c_{\text{enter}}, c_{\text{exit}}, f) = J[u]$  do
22   prepend  $f$  to  $p$ ;
23   prepend the part of the trip between  $c_{\text{enter}}$  and  $c_{\text{exit}}$  to  $p$ ;
24    $u \leftarrow v_{\text{dep}} : (v_{\text{dep}}, v_{\text{arr}}, \tau'_{\text{dep}}, \tau'_{\text{arr}}, o) = c_{\text{enter}}$ ;
25 prepend  $f : (\text{undefined}, \text{undefined}, f) = J[s]$  to  $p$ ;
26 return  $p$ ;
```

by k , with a departure time of $\tau = 3:50$ *pm*. The initial configuration after **line 3** is

$$\begin{aligned} S[f] &= S[o] = S[k] = \infty, \\ T[t_{104}] &= T[t_{17024}] = T[t_{17322}] = T[t_{79}] = \text{undefined}, \\ J[f] &= J[o] = J[k] = (\text{undefined}, \text{undefined}, \text{undefined}). \end{aligned}$$

Then the footpath $(f, 300, f)$ departing at **Freiburg Hbf** is relaxed, resulting in

$$\begin{aligned} S[f] &= 3:55 \text{ pm}, \\ J[f] &= (\text{undefined}, \text{undefined}, (f, 300, f)). \end{aligned}$$

Connections are now explored increasing in departure time, starting with

$$c_1 = (f, o, 3:56 \text{ pm}, 4:28 \text{ pm}, t_{104}).$$

The connection is considered since we already arrived at **Freiburg Hbf** before 3:56 *pm*. The trip is set and the footpath at **Offenburg** is relaxed, yielding

$$\begin{aligned} T[t_{104}] &= c_1, \\ S[o] &= 4:33 \text{ pm}, \\ J[o] &= (c_1, c_1, (o, 300, o)). \end{aligned}$$

The next connection is

$$c_2 = (f, o, 4:03 \text{ pm}, 4:50 \text{ pm}, t_{17024}).$$

However, it induces no changes, as the previous connection already arrived at **Offenburg** earlier. The algorithm continues by exploring

$$c_3 = (o, k, 4:29 \text{ pm}, 4:58 \text{ pm}, t_{104}).$$

The connection is considered because the trip t_{104} was used before already, indicating that the trip can be taken without transferring. Else it would not be applicable, since the current best arrival time at **Offenburg**, including the transfer duration of 5 minutes, is 4:33 *pm*, which is after the departure time of c_3 . The changes are

$$\begin{aligned} S[k] &= 5:03 \text{ pm}, \\ J[k] &= (c_1, c_3, (k, 300, k)). \end{aligned}$$

In the next iteration

$$c_4 = (o, k, 4:35 \text{ pm}, 5:19 \text{ pm}, t_{17322})$$

is considered, again inducing no changes. The algorithm then terminates exploration since the last connection

$$c_5 = (k, f, 7:10 \text{ pm}, 8:10 \text{ pm}, t_{79})$$

departs after the current best arrival time at **Karlsruhe Hbf**, which is $S[k] = 5:03 \text{ pm}$.

Path construction is straightforward, it is

$$\begin{aligned} J[k] &= (c_1, c_3, (k, 300, k)), \\ J[f] &= (\text{undefined}, \text{undefined}, (f, 300, f)), \end{aligned}$$

which yields the path which takes

the footpath from **Freiburg Hbf** to **Freiburg Hbf**,

t_{104} starting with c_1 to c_3 , which is using the **ICE 104** from **Freiburg Hbf** to **Karlsruhe Hbf**,

and a final footpath from **Karlsruhe Hbf** to **Karlsruhe Hbf**.

The earliest arrival time at **Karlsruhe Hbf** is $S[k] = 5:03 \text{ pm}$.

5.3 Multi-modal

So far, all presented route planning algorithms are limited to networks only consisting routes of one transportation mode, for example a train network. We only distinguished between time-independent and time-dependent networks. However, in practice we want to plan routes involving multiple transportation modes. For example using a bicycle to drive to the next train main station, using the road network, and then entering a train.

To represent transportation mode possibilities in the networks, we slightly modify our models. All edges in graph based models get transportation mode labels, formalized by **Definition 28**.

Definition 28. *Given a set of transportation mode labels M , a **multi-modal** graph $G = (V, E)$ is a graph with a label function*

$$\text{mode} : E \rightarrow \{S \subseteq M\}$$

that assigns to each vertex a set of available transportation modes.

In our implementation in **COBWEB** we use the modes

$$M = \{\text{car}, \text{bike}, \text{foot}, \text{tram}\}.$$

The *timetable* model is adjusted by assigning all connections the mode **tram** and all footpaths **foot**.

Another difficulty of **multi-modal** routing is that, in practice, it is usually not be applicable to change transportation modes arbitrarily. User have different requirements and preferences regarding the change of modes. For example, it might not be possible to use a car right after traveling with a tram and then leaving it at a train station before continuing the journey using a train. If the model does not account for this, the algorithm should not be allowed to pick such a route.

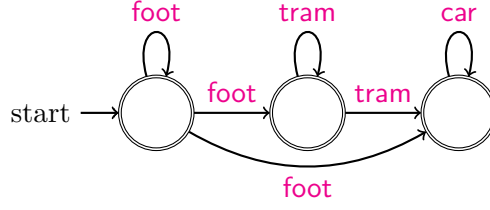


Fig. 13: Automaton representing transportation mode constraints.

Applicable transportation mode sequences are typically represented as languages of automata (see **Section 2.3**) [12]. **Fig. 13** shows an example. The automaton accepts words consisting of routes that

1. are empty,
2. only use **foot**,
3. use the **tram** after walking to a stop,
4. use the **car** after walking to a stop and using the **tram**, and
5. use the **car** directly after walking.

A route that takes the **tram** after using a **car** is not accepted by the automaton and thus, not applicable.

The search of shortest paths, restricted to such transportation mode automata, is called the **LABEL-CONSTRAINED SHORTEST PATH PROBLEM** [12] (**LCSP**). Common algorithms, like **DIJKSTRA**, **A*** and **ALT**, were adapted and analyzed with respect to the **LCSP** [12, 25, 35].

However, we will study two algorithms that are restricted to fixed languages, not accepting arbitrary automata. First, we show a simple extension of **DIJKSTRA** and its variants that adapts the algorithm for **multi-modal** route planning. Afterwards, we present a generic approach to combine any **uni-modal** algorithms for limited **multi-modal** route planning.

5.3.1 Modified Dijkstra

In order to adapt **DIJKSTRA** and its variants **A*** and **ALT** for **multi-modal** graphs (see **Definition 28**), the algorithm needs to account for the labels at edges.

Given a **multi-modal** graph, a source s and a target t , and a set of available transportation modes

$$S \subseteq \{\text{car, bike, foot, tram}\} = M$$

The modified **DIJKSTRA** computes a shortest path p from s to t which does only use edges labeled with available modes, i.e.

$$\forall e \in p : \text{mode}(e) \subseteq S.$$

Therefore, we adjust **line 11** of **Algorithm 5** to only consider outgoing edges such that

$$e = (u, w, v) \in E : \text{mode}(e) \subseteq S.$$

When multiple transportation modes are available, such as $\{\text{bike}, \text{car}\}$, the edge weight is not static anymore, as a **car** can travel the distance faster than a **bike**. To break the ties, we always choose the fastest transportation mode, referring to the order

$$\text{foot} \sqsubset \text{bike} \sqsubset \text{tram} \sqsubset \text{car}.$$

The edge weight w in **line 11** is then computed as if the fastest, on this edge available, transportation mode is used:

$$\max_{\sqsubset} \text{mode}(e)$$

The modified **DIJKSTRA** accepts the transportation mode model shown by **Fig. 14**.

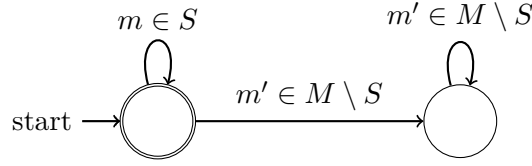


Fig. 14: The transportation mode constraints of **DIJKSTRA**, adapted to **multi-modal** routing.

While this modification works perfectly fine for **DIJKSTRA**, it does impair the effectiveness of **A*** and **ALT**. The problem is that the heuristic of **A*** can not know the transportation mode restrictions S beforehand. Because of that, a heuristic must always assume that the fastest possible transportation mode is chosen. Else, it might be possible that the actual shortest path uses a faster mode than the heuristic assumed, in which case the heuristic would overestimate the travel time and violate **Definition 26**.

For asTheCrowFlies this means that it must assume that the straight-line distance is traveled using a **car**, or more general:

$$\max_{\sqsubset} M$$

For **ALT** all precomputation must be done under the assumption that, at query time,

there are no transportation mode restrictions, i.e.

$$S = M.$$

The actual impact on the effectiveness heavily depends on the type of network. It has no effect at all, if all edges on the shortest path for $S = M$ can also be taken with the actual restricted version of S . It gets worse if edges are not available anymore, for example a highway that can not be taken for $S = \{\text{foot}\}$, although the heuristic assumed it can be taken using a **car**.

In a typical road network most edges support all road-type transportation modes, i.e. $\{\text{foot}, \text{bike}, \text{car}\}$. The most common exceptions are highways, pedestrian zones and bikeways. However, the latter two do typically not cover big distances and a regular road connecting the same locations is often available too. Because of that **A*** and **ALT** typically perform worse only on long-distance routes, which make heavy usage of highways, if the transportation modes are restricted to modes not available on highways. A similar observation can be done for combined networks, like a link graph (see **Section 3.3**).

For **ALT** this problem can be tackled by precomputing the distances to the landmarks for every possible transportation mode restriction S individually. However, this results in

$$|\mathcal{P}(M)| = 2^{|M|}$$

combinations, which is usually not feasible.

5.3.2 Access nodes

Often, combining multiple networks of different types into one representation, such as a graph, is not appropriate. We have seen that graph representations for public transit networks dramatically scale in size, due to representing time information. A timetable is more suited for such a network type and algorithms optimized to a specific network type, such as **CSA**, perform much better than a generic approach like **DIJKSTRA**.

In this section, we elaborate on a generic technique that allows to combine any networks with corresponding algorithms for a restricted variant of the **SHORTEST PATH PROBLEM**. We describe the algorithm by combining a road with a public transit network, using the **multi-modal** variant of **ALT** and **CSA** respectively. The general technique is known as **ACCESS-NODE ROUTING (ANR)** [19, 14].

Given a source and a destination node in the road network, we first compute *access nodes*. Those are nodes where we will switch from the road into the public transit network. Therefore, the access nodes are computed as the k -nearest neighbors (see **Definition 20**) for both, the source and the destination node, in the public transit network. The amount k should be kept small in order to keep query time low, we use 3 in our implementation.

In the best case, the access nodes are *important*, i.e. they maximize the amount of

shortest paths, from the source to the destination, of which they are part of. Because of that, typically they are precomputed, using a ranking among the nodes. For example, a train main station is preferred over a small tram stop. The computation can be optimized further by using heuristics and techniques like **ALT** where some paths are already precomputed. See [19] for details on how to obtain *good* access nodes.

Given the access nodes for source and destination, a path is computed piecewise, by computing shortest paths from

1. the source to all its access nodes,
2. the access nodes of the source to all access nodes of the destination, and
3. the access nodes of the destination to the destination.

We denote the corresponding sets of paths by P_s , P_{st} and P_t respectively. The resulting path is chosen as the concatenation of paths from those sets, such that the cost is minimized. That is, we receive a path

$$p = p_1 p_2 p_3$$

with $p_1 \in P_s$, $p_2 \in P_{st}$ and $p_3 \in P_t$ such that

$$\begin{aligned} \text{dest}(p_1) &= \text{src}(p_2), \\ \text{dest}(p_2) &= \text{src}(p_3). \end{aligned}$$

Of all paths satisfying this constraints, p is chosen as the path with the smallest cost. Additionally, we consider the shortest path q between the source and destination that only uses the road network. The final path is again the one with the smaller cost.

Fig. 15 illustrates the scheme of this approach.

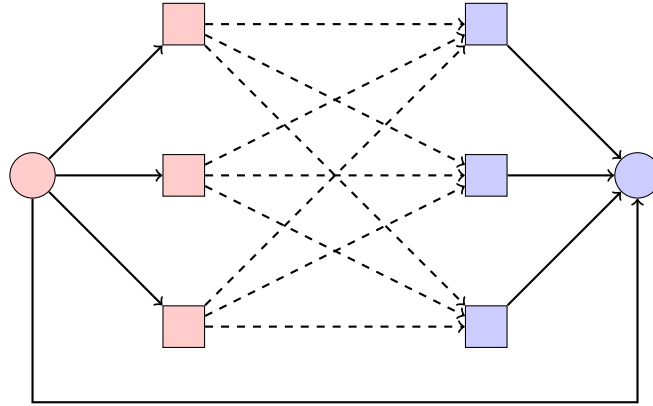


Fig. 15: Scheme of **ACCESS-NODE ROUTING**. Circular nodes represent the source and destination node, rectangular nodes are their corresponding access nodes. Solid edges indicate shortest paths in the first network, dashed lines are in the second network.

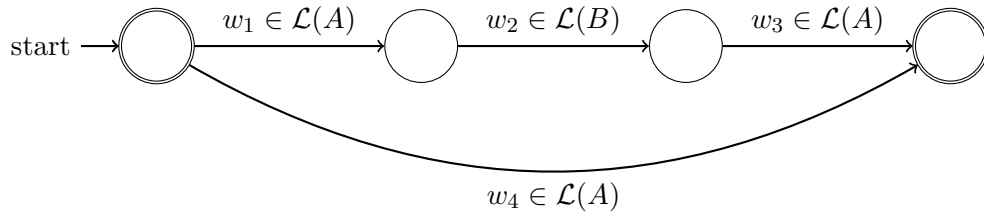


Fig. 16: The transportation mode constraints of **ACCESS-NODE ROUTING** with two networks. A represents the transportation mode model accepted by the algorithm on the first network, B refers to the automaton of the algorithm on the second network.

The accepted transportation mode model is shown by **Fig. 16**.

Note that the resulting path is not necessarily a valid solution to the **SHORTEST PATH PROBLEM** anymore. A correct solution may not even contain any of the used access nodes. However, if access nodes are chosen well, the resulting path is likely to be appropriate and a good approximation to the actual solution.

6 Evaluation

In this section we report on our experimental results for the presented algorithms on three data sets of increasing size. Therefore, we first give insights on the data sets and how the network models are obtained. Afterwards we evaluate **COVER TREES**, **DIJKSTRA**, **A*** (with asTheCrowFlies), **ALT**, **CSA** and **multi-modal** methods such as the adopted **DIJKSTRA** and our simplified version of **ANR** on the given data sets.

When evaluating shortest path queries on randomly chosen source and target nodes, the resulting paths tend to be long-range. However, in practice most queries are only local and algorithms like **DIJKSTRA** do not scale well with increasing range. To overcome this measurement problem, we introduce the notion of a *Dijkstra rank* [32].

Definition 29. Given a graph $G = (V, E)$, the Dijkstra rank of a node $v \in V$ is the number of the iteration in which, when running **DIJKSTRA** on the graph, it is polled from the priority queue (see **line 7** of **Algorithm 5**).

That is the position i for v_i in the order of vertices when sorted ascending by their distance to the source, i.e.

$$v_1, v_2, \dots, v_{|V|}$$

with $\text{dist}(v_i) \leq \text{dist}(v_{i+1})$ for all i .

Instead of choosing queries randomly, we only choose source nodes randomly and then select targets by their *Dijkstra rank* to the source. Queries can then be sorted by the *Dijkstra rank* and, by that, evaluated in terms of increasing range.

6.1 Input data

We consider three data sets, consisting of road and public transit data. The road network is extracted from **OSM** [27] formatted data and transit data is given in the **GTFS** [11] format.

Our data sets represent the region around the german cities **Freiburg** and **Stuttgart**. Their road network is of similar size, while our transit data for **Freiburg** only includes tram data, whereas the data for **Stuttgart** also includes train and bus connections. The size of our transit network for **Stuttgart** is about ten times the size of the network for **Freiburg**.

Furthermore, we include a road and transit network for the country **Switzerland**. The transit data consists of train, tram and bus connections. Both networks are about three times the size of the **Stuttgarts**.

We obtain our road networks from [3, 5, 7] and our transit networks from [2, 6]. The transit data used for **Stuttgart** is under restricted public access (refer to [8]).

6.1.1 OSM

OSM [27] (OpenStreetMap) data is represented in a **XML** structure describing

1. *nodes*, with an unique identifier and a coordinate given as pair of latitude and longitude;
2. *ways*, also with an unique identifier, consisting of multiple nodes referenced by their identifier;
3. *relations*, consisting of nodes, ways and other relations, representing relationships between the referenced data;
4. *tags* as key-value pairs, storing metadata about the other items.

A small **OSM** example data set is shown by **Lst. 1**. Ways are used to represent roads consisting of nodes. Tags are used to describe metadata like speed limits for a road or whether it is a one-way street or not. However, the format also contains a lot of data not directly relevant for route planning, like shapes of buildings and outlines of public parks. Therefore, we filter **OSM** data and only keep relevant information.

As we are only interested in the road network itself, we start by reading the ways. We filter them based on the tags described by **Lst. 2**. Ways having at least one of the key-value pairs described under *--KEEP* and none of the pairs under *--DROP* are kept, as they represent roads of the network. All other ways are rejected, as well as all relations. After that, we read the nodes and only keep nodes that occurred at least once in any of the ways that passed the filter. Our road network is then build using the remaining nodes as graph nodes, translating the ways into edges between the nodes.

```

1 <?xml version='1.0' encoding='UTF-8'?>
2 <osm version="0.6">
3   <bounds minlon="7.253190" minlat="47.299090" maxlon="9.246965" maxlat="
4     48.751520"/>
5   <node id="29764598" lat="47.8512831" lon="7.9230269"/>
6   <node id="669209525" lat="47.8513215" lon="7.9231227"/>
7   <node id="3993821274" lat="47.8513342" lon="7.923183"/>
8   <node id="832450227" lat="47.8157938" lon="8.8487527">
9     <tag k="highway" v="motorway_junction"/>
10    <tag k="name" v="Kreuz Hegau"/>
11  </node>
12  <node id="100036455" lat="47.5728421" lon="8.0365409">
13    <tag k="name" v="Niederhof"/>
14    <tag k="traffic_sign" v="city_limit"/>
15  </node>
16  <way id="29764598">
17    <nd ref="669209525"/>
18    <nd ref="3993821274"/>
19    <tag k="highway" v="motorway"/>
20    <tag k="oneway" v="yes"/>
21  </way>
22  <relation id="56688">
23    <member type="node" ref="29764598" role=""/>
24    <member type="node" ref="669209525" role=""/>
25    <member type="way" ref="29764598" role=""/>
26    <tag k="name" v="Bus line 1"/>
27    <tag k="network" v="VWV"/>
28    <tag k="ref" v="1"/>
29    <tag k="route" v="bus"/>
30    <tag k="type" v="route"/>
31  </relation>
32 </osm>

```

Listing 1: OSM example data set, derived from [4].

```
1  --KEEP
2
3  #highways
4  highway=motorway
5  highway=trunk
6  highway=primary
7  highway=secondary
8  highway=tertiary
9  highway=residential
10 highway=living_street
11 highway=unclassified
12 highway=cycleway
13
14 #highwaylinks
15 highway=motorway_link
16 highway=trunk_link
17 highway=primary_link
18 highway=secondary_link
19 highway=tertiary_link
20 highway=residential_link
21
22 #non-standard
23 way=primary
24 way=seconday
25
26 --DROP
27
28 area=yes
29 train=yes
30 access=no
31 type=multipolygon
32 railway=platform
33 railway=station
34 highway=proposed
35 highway=construction
36 building=yes
37 building=train_station
```

Listing 2: Tag filter for OSM ways.

Ways with a positive *oneway* tag are translated into edges only going into the given direction, else we generate both edges for both directions. The cost of an edge is computed as the time it needs to travel the direct distance between the source and destination coordinates (see **Definition 13**) with a certain speed. The speed is determined either by a given *maxspeed* tag or the average speed for the road type defined by the *highway* tag. Therefore, we use the average speed references shown by **Table 1**.

tag value	Ø km/h
motorway	120
trunk	110
primary	100
secondary	80
tertiary	70
motorway_link	50
trunk_link	50
primary_link	50
secondary_link	50
residential	50
unclassified	40
unsurfaced	30
road	20
cycleway	14
living_street	7
service	7

Table 1: Average speed in km/h for a **OSM** way with the corresponding value for the *highway* tag.

	data (MB)		Road graph	
	raw	filtered	nodes	edges
Freiburg	2 260	86	743 003	1 494 883
Stuttgart	2 420	118	973 142	1 950 978
Switzerland	5 530	279	2 627 645	5 226 060

Table 2: Size of the **OSM** data sets, in megabyte (MB) before and after filtering, and the size of the resulting road graphs in amount of nodes $|V|$ and edges $|E|$.

The size of the resulting road graphs (see **Section 3.1**) for all three data sets is reported in **Table 2**. As seen, filtering the **OSM** data sets beforehand reduces the size of

data that is to be processed by 95% to 97%. The road graphs have approximately two edges per node. This is due to most streets being two-way streets, thus generating two edges per connection between two nodes. Obviously, road junctions are, compared to the amount of nodes, rare and thus, multiple edges do only rarely share the same node. The in- and outdegree of nodes is extremely low, mostly 2 ($\approx 80\%$), as seen in **Table 3**.

	indegree \deg^-						
	0	1	2	3	4	5	6
Freiburg	90	64 990	611 055	59 751	7 057	58	2
Stuttgart	145	109 808	759 157	93 354	10 599	76	3
Switzerland	325	235 069	2 201 945	174 333	15 767	202	4

	outdegree \deg^+							
	0	1	2	3	4	5	6	7
Freiburg	105	65 336	610 353	60 059	7 088	60	2	0
Stuttgart	162	110 002	758 740	93 545	10 607	83	3	0
Switzerland	328	235 255	2 201 711	174 247	15 884	215	4	1

Table 3: Table showing the number of nodes of the corresponding road graph that have a certain in- or outdegree. That is, the number of ingoing and outgoing edges respectively.

6.1.2 GTFS

GTFS [11] is short for General Transit Feed Specification, it defines a common format for public transit schedules. It comes compressed as **ZIP** archive, consisting multiple text files formatted as **CSV** tables. The mandatory tables are

1. *agency.txt*, defining metadata about the transit agency;
2. *routes.txt*, containing information about complete routes, like all trips belonging to a bus line;
3. *trips.txt*, consisting of single trips, belonging to a route;
4. *stop_times.txt*, having departure and arrival times at the stops for all connections in the network;
5. *stops.txt*, providing metadata and coordinates of all stops;
6. *calendar.txt* defining the service pattern at which routes are available.

Furthermore, there are a couple of optional tables of which we are only interested in

7. *transfer.txt*, provides transfer possibilities between stops and their duration.

An example feed can be seen in **Lst. 3**. The format is similar to our definition of timetables (see **Section 3.4**), with the difference that connections are not directly given as edges departing from one stop and another, but as pair of arrival and departure time at stops. Also, it contains a lot of metadata which we do not process.

Construction of a realistic time expanded transit graph (see **Definition 16**) is straightforward and mainly involves around parsing *stop_times.txt*. We build two nodes for every entry, one representing the arrival event at the stop and another for the departure. Furthermore, we create a transfer node for every arrival node, indicating a transfer at the given stop. Each arrival node is then connected by an edge with its corresponding departure and transfer node.

After parsing all data, we connect departure nodes with the arrival nodes at the next stop in a trip. Therefore, we process each trip and follow the *stop_times.txt* entries belonging to that trip in the order defined by the *stop_sequence* field.

As a next step, waiting edges are created by sorting transfer nodes of a stop ascending in time and then creating edges connecting them in that order. Finally, every departure node is connected to its previous transfer node. We find the transfer node by using a *binary search* [28] on the sorted list of transfer nodes for this stop.

Timetables (see **Definition 18**) are received similar. But simpler, as transfer nodes are not present. We process all stops and trips defined in *stops.txt* and *trips.txt* and obtain the sets S and T respectively. Connections are created by again processing entries in *stop_times.txt*, belonging to one trip, in the sequence defined by *stop_sequence*. We create one connection for every departure node with the corresponding next arrival node.

For the footpaths, we initially take the transfers given in *transfers.txt*. In order to increase the quality of our footpath model, we also connect stops with footpaths if they are within 600 meters to each other.

However, our footpaths need to fulfill strong properties (see **Section 3.4**), which the given transfers usually not obey. Therefore, we have to add self-loop footpaths, if not present. And we need to compute the transitive closure of the given footpaths in order to ensure that they are transitively closed. Therefore, it is crucial that the range, for which close stops are connected, is kept low. Else, the amount of footpaths dramatically increases due to the transitive closure.

The *triangle inequality* property is ensured by rejecting given transfer durations and approximating all durations by using `asTheCrowFlies`. Additionally, all footpath durations must not be lower than the transfer buffer used for the self-loop footpaths. We do so by taking the max of the transfer buffer and the calculated duration.

Table 4 reports the size of the feed and the resulting network. It can be clearly seen that a timetable has a much smaller amount of objects, compared to a realistic time expanded transit graph. In particular compared to the size of a road graph (see **Table 2**). This even becomes worse if we use it to construct a link graph, as seen in **Section**

```

1 // agency.txt
2 agency_id, agency_name, agency_url, agency_timezone, agency_phone,
  agency_lang
3 FunBus, The Fun Bus, , (310) 555-0222, en
4
5 // routes.txt
6 route_id, route_short_name, route_long_name, route_desc, route_type
7 A, 17, Mission, From lower Mission to Downtown., 3
8
9 // trips.txt
10 route_id, service_id, trip_id, trip_headsign, block_id
11 A, WE, AWE1, Downtown, 1
12 A, WE, AWE2, Downtown, 2
13
14 // stop_times.txt
15 trip_id, arrival_time, departure_time, stop_id, stop_sequence,
  pickup_type, drop_off_type
16 AWE1, 0:06:10, 0:06:10, S1, 1, 0, 0
17 AWE1, 0:06:20, 0:06:30, S3, 3, 0, 0
18 AWE1, 0:06:45, 0:06:45, S6, 5, 0, 0
19 AWD1, 0:06:10, 0:06:10, S1, 1, 0, 0
20 AWD1, 0:06:20, 0:06:20, S3, 3, 0, 0
21 AWD1, 0:06:45, 0:06:45, S6, 6, 0, 0
22
23 // stops.txt
24 stop_id, stop_name, stop_desc, stop_lat, stop_lon, stop_url,
  location_type, parent_station
25 S1, Mission St. & Silver Ave., , 37.728631, -122.431282, , ,
26 S3, Mission St. & 24th St., , 37.75223, -122.418581, , ,
27 S6, Mission St. & 15th St., , 37.766629, -122.419782, , ,
28
29 // calendar.txt
30 service_id, monday, tuesday, wednesday, thursday, friday, saturday,
  sunday, start_date, end_date
31 WE, 0, 0, 0, 0, 0, 1, 1, 20060701, 20060731
32 WD, 1, 1, 1, 1, 1, 0, 0, 20060701, 20060731
33
34 // transfers.txt
35 from_stop_id, to_stop_id, transfer_type, min_transfer_time
36 S3, S6, 2, 300
37 S6, S3 3, 180

```

Listing 3: GTFS example data set, inspired by [1].

	data (KB)	Transit graph	
		nodes	edges
Freiburg	1 713	613 329	1 006 862
Stuttgart	32 213	4 517 511	7 415 894
Switzerland	75 477	32 688 498	53 370 236

	Timetable			
	stops	trips	connections	footpaths
Freiburg	713	13 249	191 194	255 495
Stuttgart	7 877	90 475	1 415 362	1 926 611
Switzerland	30 227	1 014 699	9 881 467	3 793 581

	Footpaths			
	given	self-loops	close	closure
Freiburg	0	713	9 008	245 774
Stuttgart	6 080	7 877	73 730	1 838 924
Switzerland	22 402	30 227	174 698	3 566 254

Table 4: Size of the **GTFS** feeds, in kilobyte (KB) and the size of the resulting realistic time expanded transit graphs in amount of nodes $|V|$ and edges $|E|$. Also, the size of the obtained timetable and details about the footpath generation.

The column *given* denotes the amount of footpaths already given in the *transfer.txt* file, *self-loops* represents how many missing self-loop paths were added. Likewise does *close* report how many footpaths we added for connecting close stops with each other. And *closure* denotes the amount of paths added to ensure that the model is transitively closed.

3.3, as we need to add an incoming and outgoing edge for each arrival node, in order to connect it with the road graph. **Table 5** reports the exact amount of added link edges.

6.2 Experiments

This section shows our experimental results for the algorithms presented in **Section 4** and **Section 5**. The algorithms are implemented in the context of the **COBWEB** [34] project, which is an open-source **multi-modal** route planner written in **JAVA**.

Results are measured from a sequential execution on a 6-core Intel Xeon E5649 machine running at 2.53 GHz. The maximal heap size of **JAVA**s virtual machine is restricted to 85 GB.

	link edges
Freiburg	306 906
Stuttgart	1 944 388
Switzerland	19 584 786

Table 5: Amount of link edges that are added when combining road with transit graphs to create a link graph.

6.2.1 Nearest neighbor computation

For solving the **NEAREST NEIGHBOR PROBLEM** we implemented a **COVER TREE** data-structure with corresponding retrieval methods, as explained in **Section 22**. It operates on nodes of the road network obtained from the data sets **Freiburg**, **Stuttgart** and **Switzerland**, using asTheCrowFlies as metric on the nodes.

The experiment contains of continuous insertion of nodes, for each of the three networks respectively, and then measuring random nearest neighbor queries, i.e. the execution time of **Algorithm 2**. Measurements are done for tree sizes of 1, 10 000 and then in steps of 10 000. Each measurement is averaged over 1 000 queries using randomly selected nodes.

Fig. 17 shows the results of the experiment. The method is comparably fast, even for large road networks like **Switzerland**. The graph appears to be similar for all three data sets. This is obviously due to the fact that they all represent the same type of network, with a similar distribution of nodes.

In a road network, nodes are typically close to each other and appear in local groups, representing cities and structured road segments. In particular, they are not uniformly distributed. A **COVER TREE** benefits from this, as a node can be the parent of many other, locally close nodes. And as such, the tree is balanced well, resulting in efficient queries that are able to quickly find the correct path in the tree that leads to the nearest neighbor.

Due to the same reason, the running time scales approximately logarithmic with increasing size. Queries take longer, if the depth of the tree increases. In a well balanced **COVER TREE**, the depth is logarithmic to its size.

6.2.2 Uni-modal routing

The first experiment for **uni-modal** routing compares time independent methods for solving the **SHORTEST PATH PROBLEM**. It measures an implementation of **DIJKSTRA** (see **Algorithm 5**), the **A*** algorithm (see **Section 5.1.2**) using asTheCrowFlies as heuristic and **ALT** with the precomputed heuristic shown in **Definition 27**.

Queries are performed on the road graphs obtained by the data sets **Freiburg**, **Stuttgart** and **Switzerland**. We choose 50 random source nodes and then determine the *Dijkstra*

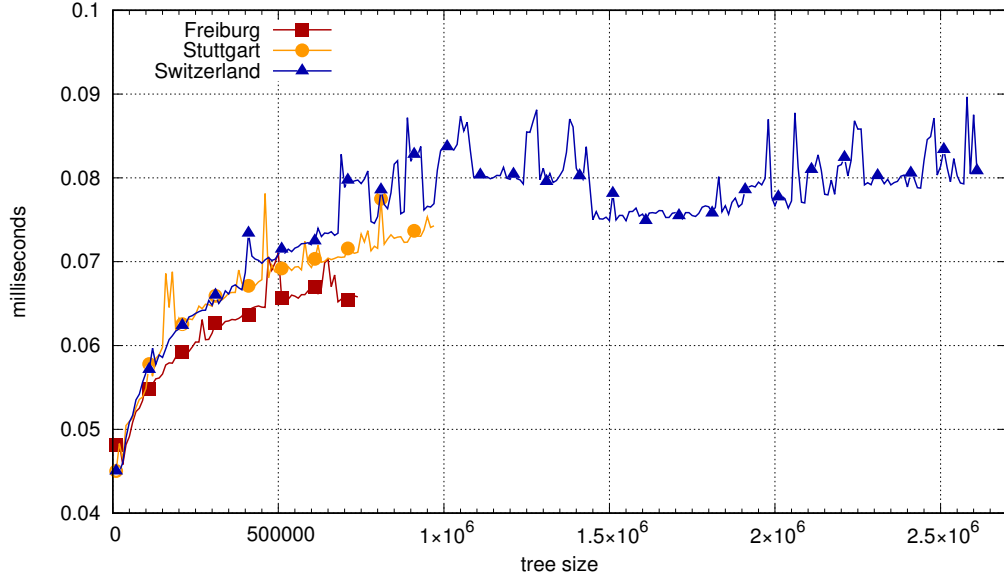


Fig. 17: Query durations for **Algorithm 2** in a **COVER TREE** with increasing size, for three road networks respectively. Measurements are done at a size of 1, 10 000 and then in steps of 10 000, averaged over 1 000 random queries. Running time is stated in milliseconds.

rank (see **Definition 29**) for the source nodes to all other nodes in the graph. Source nodes with a bad connectivity are rejected and exchanged against another random source node. This is determined by a source node having no node in the graph with a rank of at least 2^{15} which is only rarely the case for randomly chosen nodes. We then choose nodes as destinations that have a Dijkstra of

$$2^0, 2^1, \dots, 2^k$$

where $k \geq 15$ is the maximal rank all source nodes have in common. By that, the queries cover all types of ranges, highlighting how well the algorithms scale with queries of increasing ranges. By that, we receive for every rank 2^i in total 50 different queries of which we average the measured running time over.

Fig. 18 shows the results of the experiment. First of all, it can be seen that all three methods do not scale well with queries of increasing ranges. Long range queries, like for a rank of 2^{20} or 2^{21} range from 1 to 10 seconds. In fact, the running time scales exponentially for increasing ranges. Further, **A*** and **ALT** are slower than **DIJKSTRA** for short range queries. This is due to the increased overhead of the modified **DIJKSTRA**

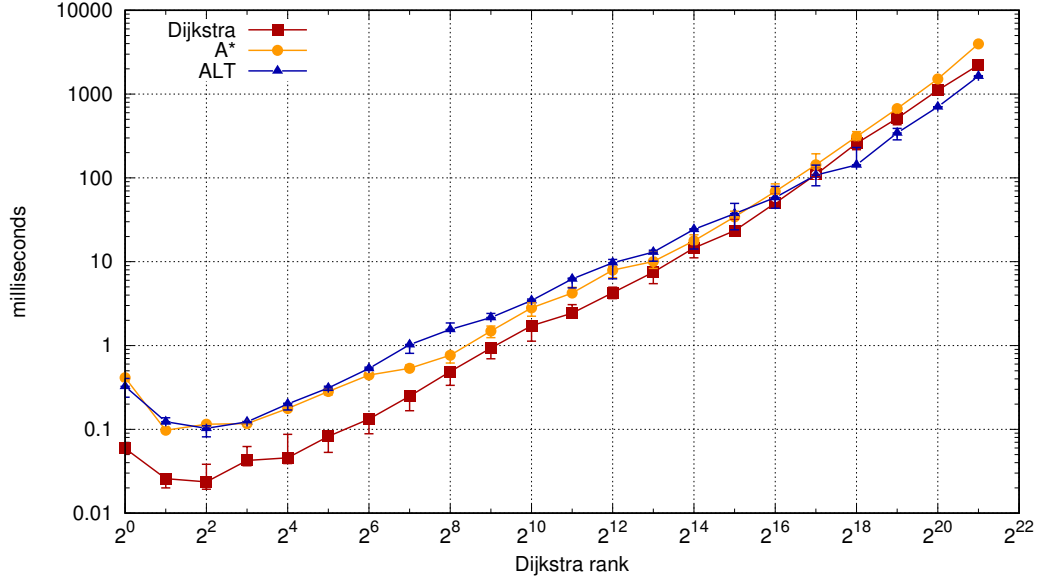


Fig. 18: Query durations for **uni-modal** time independent route planning algorithms computing shortest paths. Running time is measured in milliseconds, presented on a logarithmic scale. Every point represents 50 queries from a random source to a random target with the given *Dijkstra rank* over which the measurement is averaged over. *Errorbars* indicate the results on the three data sets. The upper end of the bar represents **Switzerland**, the dot **Stuttgart** and the lower end **Freiburg**.

variants. Both need to additionally evaluate their corresponding heuristic on every relaxed edge. However, for mid and, in particular, for long range queries, **A*** performs similar to **DIJKSTRA** and **ALT** even is about twice as fast. At this point the additional overhead is negligible and the benefit of a good heuristic pays off. It can also be seen that asTheCrowFlies, which is used by **A***, is not a good heuristic for road networks and does not improve over the ordinary **DIJKSTRA** approach, as already explained in **Section 5.1.2**.

Furthermore, if **ALT** is implemented very carefully and optimized, it can outperform **DIJKSTRA** earlier. For a comparison, we include the results from [14] of similar measured experiments for highly optimized variants of **DIJKSTRA** and other techniques for **uni-modal** time independent route planning in **Fig. 19**. The results show that **DIJKSTRAS** performance can be increased by approximately a factor of 1000, compared to our implementation, if heavily optimized. However, the running time for long range

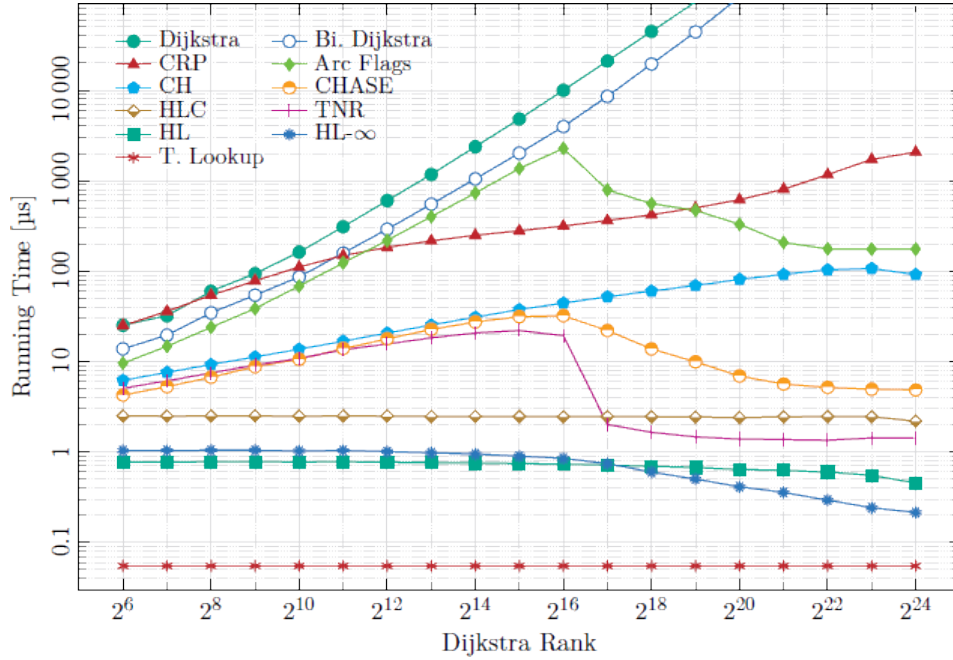


Fig. 19: Experimental results from [14] measured similar to **Fig. 18** for carefully implemented **uni-modal** time independent route planning algorithms.

queries is still not feasible. Fortunately, there exist other approaches which tackle this problem, like seen in the figure. The presented algorithms are referenced and briefly explained in [14].

Additionally, they give a general overview of **uni-modal** time independent route planning techniques, comparing their average query time and their necessary preprocessing time. We include their overview in **Fig. 20**.

The second experiment compares time dependent solutions to the **SHORTEST PATH PROBLEM**. We measure the performance of an adopted **DIJKSTRA** variant (see **Section 5.2**) against **CSA** (using **Algorithm 6**) over the duration of one day, with changing time. The experiment is measured for the 10.10.2018, which is a Wednesday, representing an average day in the schedule of the transit network. **DIJKSTRA** runs on a realistic time expanded transit graph (see **Definition 16**) and **CSA** on a timetable (see **Definition 18**), both obtained from the public transit data of **Freiburg**, **Stuttgart** and **Switzerland**.

Measurements are taken in steps of 10 minutes over the whole day, averaged over 50 randomly chosen queries. The only exception is **DIJKSTRA** for **Switzerland**, which is done in steps of 30 minutes, due to very long running times.

The algorithms are compared in **Fig. 21**, with their single performance highlighted by **Fig. 22**.

Both algorithms perform worse if the size of the time schedule increases, roughly increasing by a factor of 10 for all three data sets. However, **CSA** runs on **Switzerland** 10

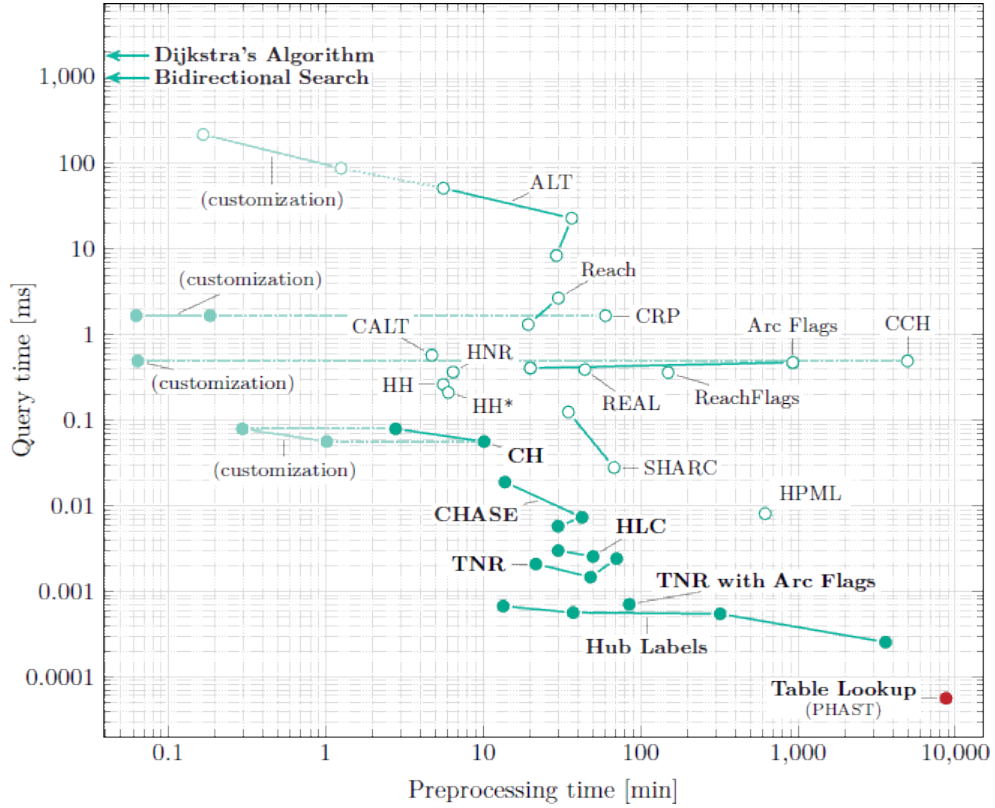


Fig. 20: Overview from [14] of uni-modal time independent route planning techniques, comparing their average query time in milliseconds and their necessary preprocessing time in minutes.

times faster than DIJKSTRA on the small schedule of Freiburg, where CSA even performs better by a factor of 1000. Clearly, CSA outperforms DIJKSTRA for time dependent routing, making it a very viable choice. CSA can even successfully compete against other approaches designed especially for time dependent route planning, as shown by [21].

It can also be seen that CSA is subject to the traffic congestion of the time schedule. Yielding better running times in the evening and night from 6:00 pm to 6:00 am, than in the morning, noon and afternoon from 6:00 am to 6:00 pm. This is due to the fact that CSA needs to iterate all connections from a given time, not only relevant connections. In a rush hour, the schedule has way more connections that need to be processed, leading to a worse performance.

DIJKSTRA, on the other hand, only needs to scan connections available from the already processed routes. Thus, it is not affected by traffic congestion as much as CSA and is still more subject to the range of queries, which is not captured by this experiment.

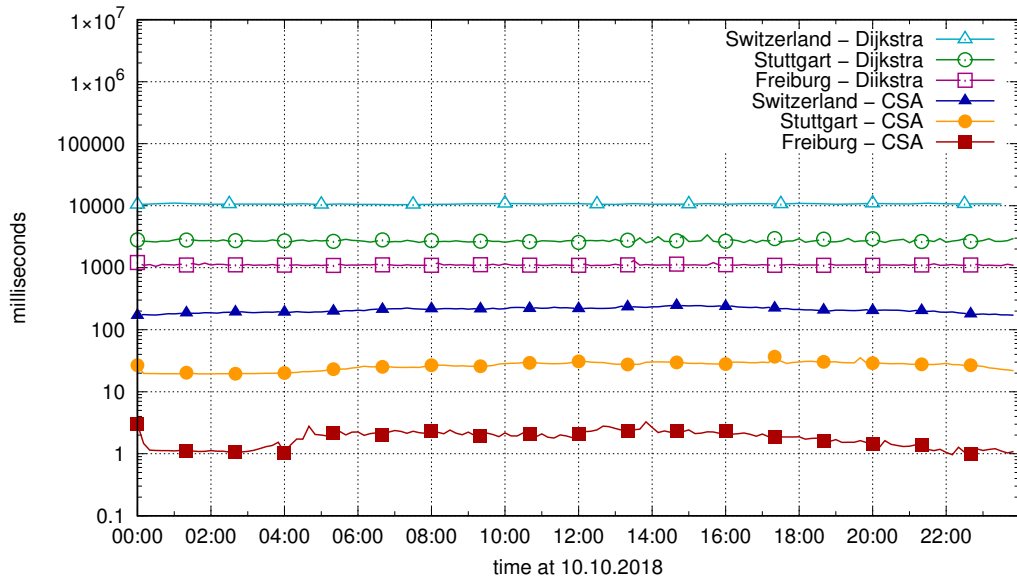


Fig. 21: Query durations of an time-independent variant of **DIJKSTRA** and **CSA** for three data sets, measured in milliseconds on a logarithmic scale. Measurements are done for every 10 minutes of the 10.10.2018, averaged over 50 random queries. **DIJKSTRA** for **Switzerland** is measured in steps of 30 minutes.

6.2.3 Multi-modal routing

Blabla

6.3 Summary

Blabla

7 Conclusion

Blabla

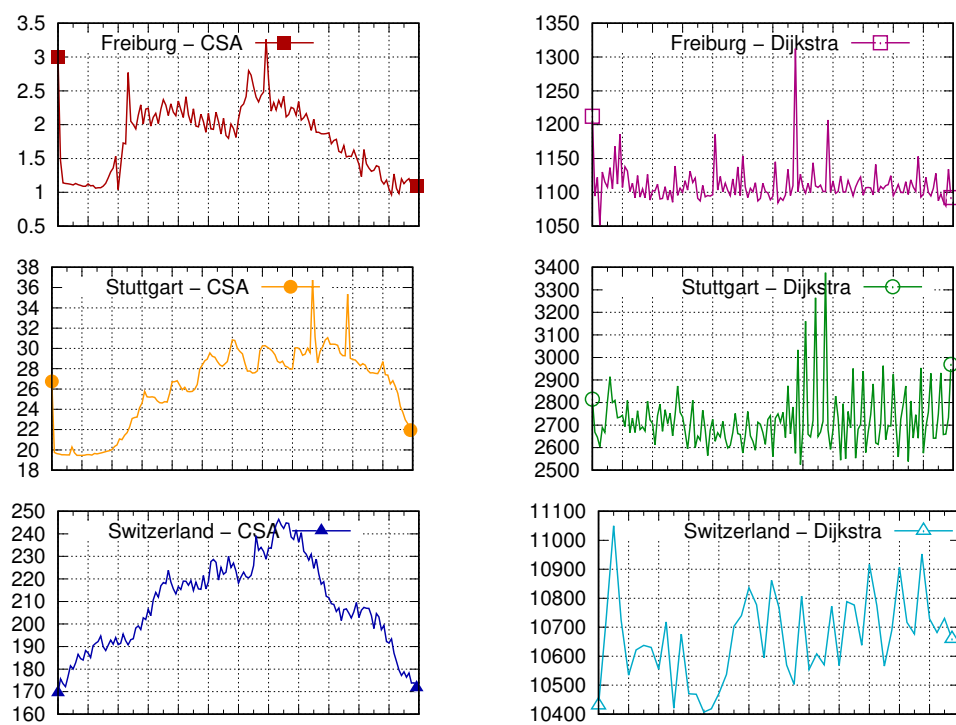


Fig. 22: Results from **Fig. 21**, but isolated and with a linear scale for the query duration. The duration is measured in milliseconds and all graphs range from 12:00 *am* to 11:59 *pm* for the 10.10.2018.

References

- [1] Example gtfs feed | static transit | google developers. <https://developers.google.com/transit/gtfs/examples/gtfs-feed>. Accessed: 2018-08-22.
- [2] Freiburg (gtfs): Fritz informationsportal - open data - vag fahrplandaten. https://fritz.freiburg.de/csv_Downloads/VAGFR.zip. Accessed: 2018-08-22.
- [3] Freiburg (osm): Geofabrik download server. <http://download.geofabrik.de/europe/germany/baden-wuerttemberg/freiburg-regbez.html>. Accessed: 2018-08-22.
- [4] Osm xml - openstreetmap wiki. https://wiki.openstreetmap.org/wiki/OSM_XML. Accessed: 2018-08-22.
- [5] Stuttgart (osm): Geofabrik download server. <http://download.geofabrik.de/europe/germany/baden-wuerttemberg/stuttgart-regbez.html>. Accessed: 2018-08-22.
- [6] Switzerland (gtfs): Fahrplan 2018 (gtfs) - daten | open-data-plattform öv schweiz. <https://opentransportdata.swiss/dataset/timetable-2018-gtfs>. Accessed: 2018-08-22.
- [7] Switzerland (osm): Geofabrik download server. <http://download.geofabrik.de/europe/switzerland.html>. Accessed: 2018-08-22.
- [8] Vvs verkehrs- und tarifverbund stuttgart. <http://www.vvs.de/>. Accessed: 2018-08-22.
- [9] Mohammad Reza Abbasifard, Bijan Ghahremani, and Hassan Naderi. A survey on nearest neighbor search methods. 2014.
- [10] Alexandr Andoni. Nearest neighbor search : the old , the new , and the impossible by alexandr andoni. 2009.
- [11] Aaron Antrim, Sean J Barbeau, et al. The many uses of gtfs data—opening the door to transit and multimodal applications. *Location-Aware Information Systems Laboratory at the University of South Florida*, 4, 2013.
- [12] Chris Barrett, Riko Jacob, and Madhav Marathe. Formal-language-constrained path problems. *SIAM J. Comput.*, 30(3):809–837, May 2000.
- [13] Hannah Bast, Erik Carlsson, Arno Eigenwillig, Robert Geisberger, Chris Harrelson, Veselin Raychev, and Fabien Viger. Fast routing in very large public transportation networks using transfer patterns. In Mark de Berg and Ulrich Meyer, editors, *Algorithms – ESA 2010*, pages 290–301, Berlin, Heidelberg, 2010. Springer Berlin Heidelberg.

References

- [14] Hannah Bast, Daniel Delling, Andrew Goldberg, Matthias Müller-Hannemann, Thomas Pajor, Peter Sanders, Dorothea Wagner, and Renato F. Werneck. *Route Planning in Transportation Networks*, pages 19–80. Springer International Publishing, Cham, 2016.
- [15] Jon Louis Bentley. Multidimensional binary search trees used for associative searching. *Commun. ACM*, 18(9):509–517, September 1975.
- [16] Alina Beygelzimer, Sham Kakade, and John Langford. Cover trees for nearest neighbor. In *Proceedings of the 23rd International Conference on Machine Learning, ICML '06*, pages 97–104, New York, NY, USA, 2006. ACM.
- [17] W. A. Burkhard and R. M. Keller. Some approaches to best-match file searching. *Commun. ACM*, 16(4):230–236, April 1973.
- [18] Thomas H. Cormen, Charles E. Leiserson, Ronald L. Rivest, and Clifford Stein. *Introduction to Algorithms, Third Edition*. The MIT Press, 3rd edition, 2009.
- [19] Daniel Delling, Thomas Pajor, and Dorothea Wagner. Accelerating multi-modal route planning by access-nodes. In Amos Fiat and Peter Sanders, editors, *Algorithms - ESA 2009*, pages 587–598, Berlin, Heidelberg, 2009. Springer Berlin Heidelberg.
- [20] Daniel Delling, Peter Sanders, Dominik Schultes, and Dorothea Wagner. *Engineering Route Planning Algorithms*, pages 117–139. Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- [21] Julian Dibbelt, Thomas Pajor, Ben Strasser, and Dorothea Wagner. Connection scan algorithm. *CoRR*, abs/1703.05997, 2017.
- [22] Reinhard Diestel. *Graph Theory, 4th Edition*, volume 173 of *Graduate texts in mathematics*. Springer, 2012.
- [23] Wei Dong. An overview of in-vehicle route guidance system. In *Australasian Transport Research Forum*, volume 2011. Citeseer, 2011.
- [24] R. L. French. Historical overview of automobile navigation technology. In *36th IEEE Vehicular Technology Conference*, volume 36, pages 350–358, May 1986.
- [25] Andrew V. Goldberg and Chris Harrelson. Computing the shortest path: A search meets graph theory. In *Proceedings of the Sixteenth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA '05*, pages 156–165, Philadelphia, PA, USA, 2005. Society for Industrial and Applied Mathematics.
- [26] Dirk Grunwald, Benjamin Zorn, and Robert Henderson. Improving the cache locality of memory allocation. In *ACM SIGPLAN Notices*, volume 28, pages 177–186. ACM, 1993.
- [27] Mordechai Haklay and Patrick Weber. Openstreetmap: User-generated street maps. *Ieee Pervas Comput*, 7(4):12–18, 2008.

References

- [28] Donald E. Knuth. *The Art of Computer Programming, Volume 3: (2Nd Ed.) Sorting and Searching*. Addison Wesley Longman Publishing Co., Inc., Redwood City, CA, USA, 1998.
- [29] Matthias Müller-Hannemann, Frank Schulz, Dorothea Wagner, and Christos Zaroliagis. Timetable information: Models and algorithms. In Frank Geraets, Leo Kroon, Anita Schoebel, Dorothea Wagner, and Christos D. Zaroliagis, editors, *Algorithmic Methods for Railway Optimization*, pages 67–90, Berlin, Heidelberg, 2007. Springer Berlin Heidelberg.
- [30] John P. Snyder. Flattening the earth: Two thousand years of map projections. 10 1994.
- [31] C. C. Robusto. The cosine-haversine formula. *The American Mathematical Monthly*, 64(1):38–40, 1957.
- [32] Peter Sanders and Dominik Schultes. Highway hierarchies hasten exact shortest path queries. In Gerth Stølting Brodal and Stefano Leonardi, editors, *Algorithms – ESA 2005*, pages 568–579, Berlin, Heidelberg, 2005. Springer Berlin Heidelberg.
- [33] Frank Schulz, Dorothea Wagner, and Karsten Weihe. Dijkstra’s algorithm on-line: An empirical case study from public railroad transport. *J. Exp. Algorithmics*, 5, December 2000.
- [34] Daniel Tischner. Cobweb. <https://github.com/ZabuzaW/Cobweb>, 2018.
- [35] Dirck Van Vliet. Improved shortest path algorithms for transport networks. *Transportation Research*, 12(1):7 – 20, 1978.
- [36] Peter N. Yianilos. Data structures and algorithms for nearest neighbor search in general metric spaces. In *Proceedings of the Fifth Annual ACM-SIAM Symposium on Discrete Algorithms (SODA)*, 1993.
- [37] Yilin Zhao. *Vehicle location and navigation systems*. 1997.