

Git for Dr. Wartell's Courses

Author: Dr. Zachary Wartell

Contributors: ???

Revision: 9/17/2015 11:29:35 AM

Copyright 2013, Zachary Wartell @ University of North Carolina at Charlotte
All Rights Reserved.

Table of Contents

1.	Prerequisites	2
2.	Guide to Reading these Instructions	2
3.	Installing Git	3
3.1.	Installation and Setup of Command-Line Git	3
4.	Installation and Setup of OpenSSH	4
4.1.1.	Download and Install OpenSSH	4
4.1.2.	Create an SSH private and public key	5
4.1.3.	[Windows] Create PuTTY Private Key	9
4.2.	Installation and Setup of TortoiseGit	9
5.	Full Git Tutorial	10
6.	Micro Git Tutorial	15
7.	Git Server Access	16
7.1.	git-viscenter Server URL	16
7.2.	Bitbucket Server URL	17
7.3.	cci-git Server URL	18
7.4.	Accessing Git Server Using SSH Keys	19
7.4.1.	[Linux/Mac] Starting the ssh-agent daemon	19
7.4.2.	[Windows] Starting the ssh-agent daemon	21
7.5.	Accessing Git Server Using HTTPS and Git Credentials	25
7.5.1.	Using Git Credentials	25
8.	Common Git Operations	26
8.1.	Basic Git Operations	26
8.2.	Other Git Operations	31
9.	Course Git Policies	31
9.1.	Submitting Class Assignments	31
9.2.	Keep the repository clean!!!	32
9.3.	Verify Your Remote Repository	33
9.4.	Tips	35
9.5.	Common Error Messages	35
9.6.	Common Errors	35
10.	Citations	36
11.	Appendix	36

11.1.	TortoiseGit - MsysGit Incompatibility	36
11.2.	.bash_profile, GIT_SSH	37
11.3.	Document Maintenance	37

1. Prerequisites

This document assumes the reader has the following prerequisite knowledge:

- P1. Basic knowledge of Unix style command-line shell.
 - Note: You should understand Unix style shells at the level discussed in [1]. Section 3 discusses installing a suitable command-line shell for OS's that do not automatically come with one. Section 4 assumes knowledge at the level of [1].
- P2. Knowledge of environment variables, what they are and how to set them.
 - Note: You should understand environment variables at the level discussed in [5] and specifically PATH [6]. See also [3] for Windows and [7] for Mac specifics.

2. Guide to Reading these Instructions

Various section, sub-sections and specific numbered instructions are either “generic” or operating system specific or Git server specific. Generic instructions apply to all operating systems and all Git servers while specific ones apply only specific systems.

Your instructor will have told you which Git server you must use for your course work. It will be one of the following:

1. `git-viscenter@cci-subv.uncc.edu`
2. `bitbucket.org`
3. `cci-git.uncc.edu`

Instructions that are specific to one of the above Git servers will have the following headings:

- `[YourServer=git-viscenter]`
- `[YourServer=Bitbucket]`
- `[YourServer=cci-git]`

Your instructor will have told you which operating systems you must use for your course work. Instructions that are specific to a specific operating system will have the following headings:

- `[YourOS=Windows]`
- `[YourOS=Linux]`
- `[YourOS=Mac]`

Depending on the course you are taking you may be required to use only one designated operating system. This information will be given to you in class.

Screen shots in this document are optimized for electronic viewing only where you can zoom in on the image to see full detail. Printing this document is not recommended.

Fonts:

- `your_user_id` – this indicates you should input a specific text string. The specifics will be indicated in the instructions.
- `path_to_a_directory_where_you_can_save_your_work` – this indicates you should input a specific text string. It is assumed the reader can interpret what to type based on the context and their general computer science knowledge.
- *[...additional output will appear...]* – this is a comment describing output from a command-line command.

3. Installing Git

Git is a command-line program. Git servers use various access protocols for security and authorization. Depending on what access protocol your designated Git server uses you may need to have or install additional software beyond command-line Git. You will be told which access protocol your designated Git server uses by your instructor.

First you need to install the Git command-line tools.

Woodward Labs: Windows computers in Woodward labs should have both the command-line Git, OpenSSH and TortoiseGit installed. If you are working in this lab, you can skip Section 4.1.1, and 4.2.

You must still perform 4.1.2 however.

Computers Elsewhere: If you are working on computers elsewhere, you need to install Git and TortoiseGit. Installation instructions are below. Depending on your Git server access protocol you may need to also perform Section 4.

3.1. **Installation and Setup of Command-Line Git**

This section applies to all operating systems
--


If you are working from a UNCC computer that already has Git installed you can skip this section.

Instructions below vary with your operating system.

[YourOS=Windows]

1. Download and Install msysgit <http://msysgit.github.io/>.

This installs a minimal Unix style shell (called ‘git-bash’), the basic OpenSSH tools as well as git. During install select the following:

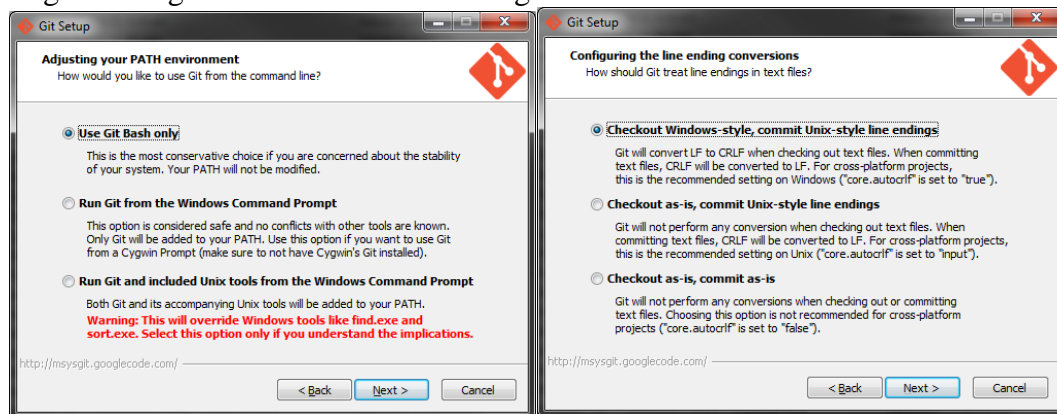

(Note: If you are an **expert** with Cygwin tools, you can alternatively install OpenSSH via cygwin setup, but see caveat¹).

[YourOS=Linux] Download and install Git from <http://git-scm.com/>.

[YourOS=Mac] Download and Install Git from <http://git-scm.com/>

4. Installation and Setup of OpenSSH

This section is only for servers using the SSH protocol:
git-viscenter and **Bitbucket**

(use of the SSH protocol for **cci-git** is no longer recommended)

The Git server uses the SSH public-key mechanism for security and authorization. Hence you need to install OpenSSH.

4.1.1. Download and Install OpenSSH

If you are working from a UNCC lab computer that already has Msysgit and Putty installed, skip this section.

Instructions below vary with your operating system.

[YourOS=Windows]

1. Download and install PuTTY. Specifically:

¹ ZJW: Circa August 2013, Cygwin git doesn't play nicely with TortoiseGit. A possible solution is ssh-pageant (see Section 11.1).

- a. Download the Windows installer, putty-*x.xx*-installer.exe, from <http://www.putty.org/>. Install it.
- b. Modify the PATH environment variable (Read Prerequisite P2).

Add to the end of PATH the directory to where PuTTY is installed. Typically PuTTY is at "C:\Program Files (x86)\PuTTY".

- c. To verify the PATH setting:
 - i. Open a `git-bash` shell via Start Menu→Git→Git Bash
 - ii. In the shell run `plink`:

```
$ plink
PuTTY Link: command-line connection utility
Release 0.63
Usage: plink [options] [user@]host [command]
      ("host" can also be a PuTTY saved session name)
[...misc additional output will appear...]
```

[*YourOS*=**Linux**]

Generally this OS already has OpenSSH installed; if not see <http://www.openssh.org/>.

[*YourOS*=**Mac**]

Download and Install OpenSSH from <http://www.openssh.org/>

4.1.2. Create an SSH private and public key

This section applies to all operating systems
--

If you are already familiar with SSH private and public keys and you already have a public SSH key that you use regularly, then skip to step 4, but still do Section 4.1.3 if you are using Windows.

Key creation has to be done only once. Afterwards, you can re-use your private key file for authorized access to the Git server from multiple computers.

The instructions below are fairly generic to any Unix like shell and assume basic knowledge as per Prerequisite P2.

1. Open a shell prompt:

[*YourOS*=**Windows**]: Run: Start => All Programs => Git => Git Bash

[*YourOS*=**Linux/Mac**]: Open a terminal window.

2. Check for SSH Keys

```
$ cd ~/.ssh  
$ ls  
[This is list files in your .ssh directory]
```

Check the directory listing for a file named `id_rsa.pub`. This file should *not* exist, unless you must have previously created a public/private key pair. If you already created one, goto step 4. Otherwise proceed with step 3.

3. Generate a new SSH Key

```
$ ssh-keygen -t rsa -C "your_email@uncc.edu" [You must use you UNCC email]  
Generating public/private rsa key pair.  
Enter file in which to save the key (/home/Zachary/.ssh/id_rsa): [Press Enter]
```

Now you need to enter a passphrase. Enter one and write it down in a safe place. When using Git, you will have to enter this each time you login to your computer.

```
Enter passphrase (empty for no passphrase): [Type a passphrase]  
Enter same passphrase again: [Type the passphrase again]
```

You will see output similar to this:

```
Your identification has been saved in id_rsa.  
Your public key has been saved in id_rsa.pub.  
The key fingerprint is:  
60:4d:47:66:9e:98:d7:26:1d:de:b0:9a:d3:30:3d:00 your_email@uncc.edu  
[...additional output maybe displayed...]
```

This creates two files a private key file `id_rsa` and a public key file `id_rsa.pub`. The private key file must be kept in a secure directory and must be available on any computer from which you plan to access the Git server.

Securing Your Private Key:

Best practices for private key management are that you never store the private key on a public computer or in shared home directories (H: drive, etc.). Rather you store them on your personal computer(s) and on a USB device used solely as a SSH key backup device. A reasonable way to transfer the private key to another personal computer is using a USB device.

If you intend to use Git on multiple, different public or shared computers on campus, keeping the private key on a USB stick or drive that you regularly carry is a reasonable compromise. (If you are *certain* you will never use this key again outside of one particular course, it's acceptable to store it on your H: drive since the course TA will disable your Git account at the end of the semester.)

4. Examine Your Public Key:

The public key is the file named `id_rsa.pub`. Type the following:

```
$ cat id_rsa.pub
ssh-rsa
AAAAB3NzaC1yc2EAAAADAQABAAQACurna4/V+HzilLaUCUL1A8x9X3Y7814EoUE+Je3joeI
BrKGWHy/LkB3jCm5GY2QaSGHyYKsFEeW+kvGhYzsgxkiUiLxD0XLYXDrH1fjkVeX+BJ10E1T
1LxVDgY21RjVq8kvEAG+/0nrU6Lj908Sbu/nWtQo8J8w+afHAWBQDpVMRONaSqvjB/NF4Iry
KaG0AXsh0QkaRthIutjhmPfMmYfYMKH7MvRF2ER7IFTFMhcoNSDoXYLIQZanYSLHdm63ML1D
T1e0DbPa6fuaMP5z4NPCS04Se0FbwmLuw3mVnzVuoCqk0SVIwF7yT+H4V034sK5nLdeYJR2W
S5tC0We8Vjrn student4120_wartell
```

[your output should look similar]

`id_rsa.pub` is a plain text file. (Some operating systems may incorrectly identify the file as some other type of file). Open `id_rsa.pub` using your preferred text editor (such as notepad.exe, etc.). If you ever need to copy and paste the public key into another application (web browser, etc.) you can do that from within the text editor.

5. Submit Your Public Key:

Instructions below vary based on your server.

a. [YourServer=git-viscenter]


The file you submit must be renamed from `id_rsa.pub` to `your_uncc_id.pub` where your standard UNCC email is `your_uncc_id@uncc.edu`.

You submit your `your_uncc_id.pub` file via a Moodle assignment indicated by your instructor.


b. [YourServer=Bitbucket]

i. Create a Bitbucket account as described in Section 7.2 Bitbucket Server URL.

ii. Login to Bitbucket and goto Manage Account:

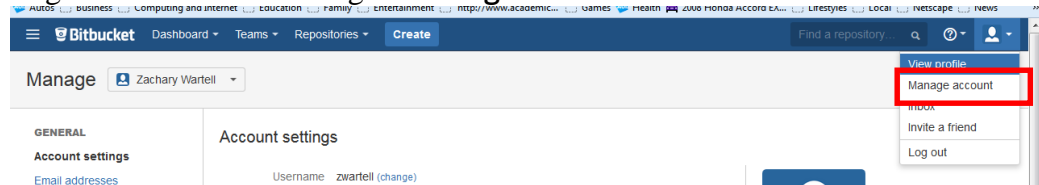

iii. Select SSH keys:

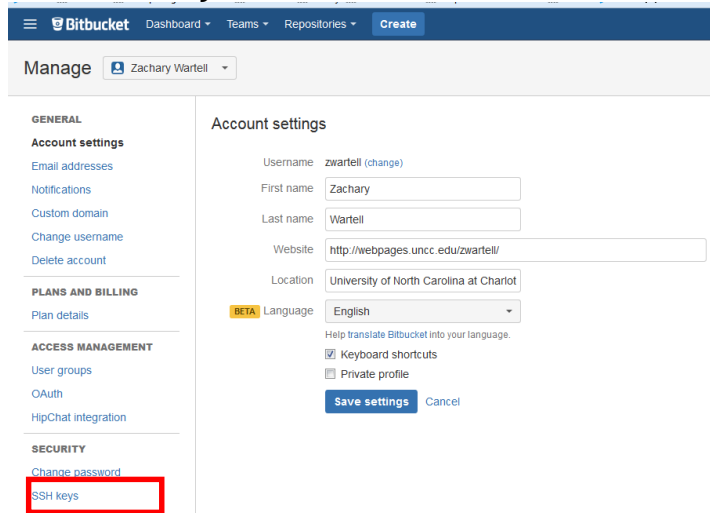


iv. Follow the Bitbucket's instructions to Add key

- v. Submit your Bitbucket user id to the TA and instructor via the Moodle assignment indicated by your instructor.


c. [YourServer=cci-git]

Warning: cci-git SSH protocol is no longer recommended, see instead this document's Section *cci-git* Server URL and Section 7.5 Accessing Git Server Using HTTPS and Git Credentials.


- i. Login to <https://cci-git.uncc.edu/> using your standard UNCC username and password
- ii. Select "Profile Settings":

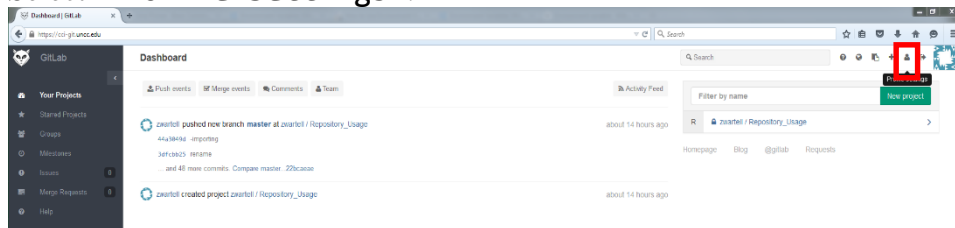


iii. Select "SSH Keys"

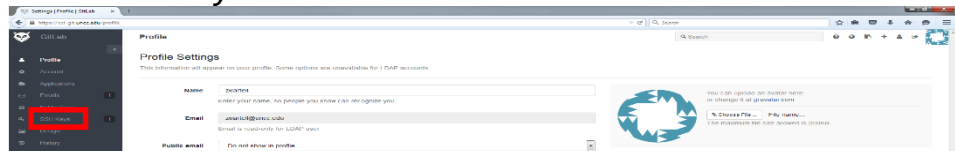

iv. Select "Add SSH Key"



- v. Cut and paste the text from your public key file into the dialog box and give the key a title.

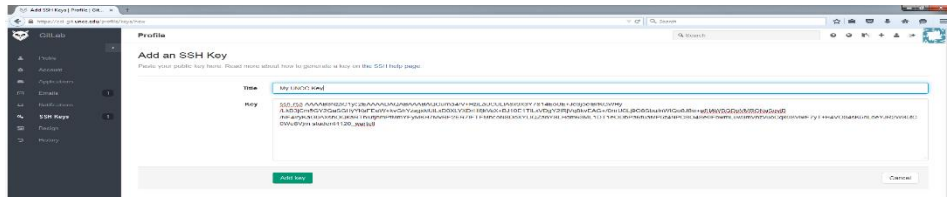

6. [YourOS=Windows] Window users also need to perform the next section, 4.1.3 [Windows] Create PuTTY Private Key.

4.1.3. [Windows] Create PuTTY Private Key

This section is for Windows only

After:

- installing PuTTY (Section 4.1.1, Step #1)
- and after following the general key generation instructions in 4.1.2 Create an SSH private and public key

the following is required to generate PuTTY compatible version of your private key.

1. Run PuTTYgen:
General: Start Menu→Putty→PuTTYgen
2. Select MenuBar→Conversions and then Import Key on the drop-down menu.
This pop's up dialog: Load Private Key.
3. In Load Private Key find the private key file you created in Section 4.1.2 and open it.
You will be prompted for your passphrase.
4. In the PuTTY Key Generator window select Save Private Key.
 - a. Save the key to a file named `id_rsa.ppk` in the same directory as where you stored your standard private key file.

You should keep the PuTTY private key and the standard private key safe as described in Section 4.1.2.

4.2. *Installation and Setup of TortoiseGit*

If you are working from a UNCC computer that already has TortoiseGit installed you can skip this section.

Generally, the Git instruction in this document and any Git instructions given in this course will

be given on using Git command-line examples for generality. But many GUI Git tools are available as well. Use of GUI Git tools is optional.

[YourOS=Windows]

Download and install TortoiseGit from <https://code.google.com/p/tortoisegit/>.

[YourOS=Mac/Linux]

Various Git GUIs are found here <http://git-scm.com/downloads/guis>.

5. Full Git Tutorial

If Unix style shells are new for you, you should read through [1] after you install a suitable command-line shell and before you proceed through this section.

- Read the following chapters from the ProGit book by Scott Chacon available on-line [2].
- Do the exercises in the outline below.

You can perform 99% of the exercises even without access to the Git server, but to complete exercises you must submit (`git push`) the final results to your designated Git server (Step 4).

Note: The instructions below are based on ProGit Book, 2nd Edition at <http://git-scm.com/book/en/v2/>. The instructions may conflict with other editions.

Exercise: Anywhere below that says Exercise: you should actually do what the book instructs and save your work. You will submit the entire set of exercises with a final `git push`.

1. Create `git-tutorial` directory

- Open a shell prompt (as installed in Section 3).
- Create a directory called ‘git-tutorial’ for performing and saving the exercises.

```
$ cd path_to_a_directory_where_you_can_save_your_work
$ mkdir git-tutorial
$ cd git-tutorial
```

2. ProGit - Chapter 1:

- Read ProGit 1.1 – 1.4
- Skip ProGit 1.5 (this was covered in this tutorial’s Section 3).
- Read ProGit 1.6 and do all the exercises with command-line git, but with the noted substitutions.
 - Exercise: “[Your Identity](#)”
 - Exercise: “[Your Editor](#)”
Note: use whatever simple editor you prefer (notepad.exe perhaps)
 - Exercise: “[Checking Your Settings](#)”
- Read ProGit 1.7, 1.8

3. ProGit - Chapter 2:

a. Read ProGit 2.1:

- i. From the class website download `helloworld.tar.gz` to `git-tutorial` and uncompress it.

```
$ tar -xf helloworld.tar.gz
$ ls -R
.:
HelloWorld HelloWorld.tar.gz

./HelloWorld:
HelloWorld.sln HelloWorld.vcxproj
HelloWorld.vcxproj.filters HelloWorld.vcxproj.user
main.c README
$ rm HelloWorld.tar.gz [don't need this anymore]
$ cd HelloWorld
```

- ii. Exercise: “[Initializing a Repository in an Existing Directory](#)”

Perform the instructions inside the directory `HelloWorld`. This will add the provided files to a new local repo. Go ahead and `git add` all the provided files to this repo.

- iii. Exercise: “[Cloning an Existing Repository](#)”

Return to your `git-tutorial` directory:

```
$ cd ..
```

Perform the book’s exercises. This will create various clones of the remote repo mentioned in the book under your `git-tutorial` directory.

b. Read ProGit 2.2:

- i. From the class website, download `ProGit_Chapter_2_2.tar.gz` to your `git-tutorial` directory and uncompress it. Perform the exercises in Chapter 2.2 from this in that directory:

```
$ pwd [return to your git-tutorial directory]
/home/zwartell/git-tutorial
$ tar -xf ProGit_Chapter_2_2.tar.gz
$ rm ProGit_Chapter_2_2.tar.gz [don't need this anymore]
$ cd Chapter_2_2
```

- ii. Exercise: “[Checking the Status of Your Files](#)”

Notes: Use whatever text file editor you are familiar with instead of `vim` for the “`$vim README`” and similar examples in the ProGit chapter.

- iii. Exercise: [Tracking New Files](#)

- iv. GUI Git Tool

[YourOS=Windows]

Exercise:

Using TortoiseGit, open an Explorer window and goto the chapter_2_2 directory. Right-click to see the TortoiseGit shell extension commands. Test and explore the following TortoiseGit operations from the menu: Show Log, Check for Modifications, Repo-Browser and Diff, Diff with previous and Help.

TortoiseGit Help “Chapter 3. Daily Use Guide” discusses TortoiseGit (the earlier TortoiseGit Help chapters are largely redundant with the ProGit book)

[*YourOS*=**Linux/Mac**]

The instructor does not proscribe any particular GUI Git tool. Feel free to experiment with whatever one you prefer. This step (iv. GUI Git Tool) has no deliverables, so you can skip this step if you want.

v. Exercise: [Staging Modified Files](#)

Note: When the book discusses making changes to various files, just make any small change to each file.

vi. Exercise: [Short Status](#)

vii. Exercise: [Ignoring Files](#)

viii. Exercise: [Viewing Your Staged and Unstaged Changes](#)

Note: When the book discusses making changes to various files, just make any small change to each file.

ix. Exercise: [Committing Your Changes](#)

x. Exercise: [Skipping the Staging Area](#)

xi. Exercise: [Removing Files](#)

xii. Exercise: [Moving Files](#)

c. Read 2.3

i. Exercise: [Viewing the Commit History](#)

Do the first two exercises cloning `simplegit-progit` into:

```
git-tutorial\simplegit-progit
```

Stop at the example code “`$ git log -p -2`”.

ii. Exercise:

[**cci-git**] Only if your designated Git server is **cci-git** do the following:

1. Read (but do not perform the steps in) ProGit [Git Tools - Credential Storage](#). Stop at section [Under the Hood](#).

2. Based on your operating system pick the appropriate credential system as described in the above ProGit chapter.

Warning: Do **NOT** use **store** mode because this will save your UNCC password unencrypted on disk!

- a. **[Windows]** Assuming you are using Git-Bash

```
$ git config --global credential.helper wincred
```

- b. **[Other Operating Systems]** Follow links discussed in [Git Tools - Credential Storage](#).

4. git-push your git-tutorial

- a. Read this tutorial's Section 7 Git Server Access, in particular read the sections corresponding to your designated Git Server (one of 7.1 through 7.3 plus either 7.4 or 7.5). Then use the shell you opened based on that section's instructions to perform the following.
- b. Compress git-tutorial

```
$ cd parent_directory_of_git-tutorial
$ tar -zcf git-tutorial.tar.gz git-tutorial
[This compresses the directory to a .tar.gz file]
$ tar -tf git-tutorial.tar.gz
[This will just list the .tar.gz file contents to verify them]
```

Note, in real world Git usage you would **never** create a .tar.gz file. But to simplify the TA's grading of your tutorial, we have you put all the tutorial directories that you created (which include multiple local Git repo's) into one .gz file and then you submit the single .gz file to a remote repo on the Git server. Normally, every local repo would be push to a separate remote repo.

- c. Create a new remote repo for submission:
[YourServer=**git-viscenter**]

```
$ git clone git-viscenter@cci-
subv.uncc.edu:wartell/ITCS_XXXX/students/John_Doe/git-full-tutorial
Cloning into 'git-full-tutorial'...
Initialized empty Git repository in /home/git-
viscenter/repositories/wartell/ITCS_4120/students/John_Doe/git-micro-
tutorial.git/
warning: You appear to have cloned an empty repository
[ ... your output will differ slightly..]
$ rm -rf git-full-tutorial
[yes, this is a bit silly, but to simplify common instructions with Bitbucket delete
the local repo now]
```

[YourServer=**Bitbucket**]

Create new remote repo on cci-git called:

`git-full-tutorial`

Review this tutorial's Section 7.2 Bitbucket Server URL and see this tutorial's Section 8.1 instruction Item #2. Make sure to **share** your repo with the TA and Dr. Wartell's UNCC accounts.

[YourServer=**cci-git**]

Create new remote repo on cci-git called:

`git-full-tutorial`

Review this tutorial's Section 7.3 cci-git Server URL and see this tutorial's Section 8.1 instruction Item #2. Make sure to **share** your repo with the TA and Dr. Wartell's UNCC accounts.

- d. Create local repo and link to your new remote repo:

Below, for input text `remote_repo_path`, substitute the following:

[**bitbucket**] `git@bitbucket.org:your_user_id`

[**cci-git**] `https://cci-git.uncc.edu/your_user_id`

[**git-viscenter**] `git-viscenter@cci-subv.uncc.edu:wartell/ITCS_XXXX/students/FirstName_LastName`

```
$ mkdir git-full-tutorial
$ cd git-full-tutorial
$ git init
Initialized empty Git repository in git-full-tutorial/.git/
$ git remote add origin remote_repo_path/git-full-tutorial.git
```

- e. Move `git-tutorial.tar.gz` to the new local repo directory.

```
$ mv ../git-tutorial.tar.gz git-full-tutorial
```

- f. Add, commit and push to the Git server's remote repo.

```
$ git add .
$ git commit -a -m "-added git-full-tutorial assignment"
$ git push -u origin master
```

- g. Verify the Git server's remote repository. (See below, Section 9.3 Verify Your Remote Repository).

5. Future Work: As you progress in learning and using Git, the next most important concept to learn is branching. This tutorial does not include any branching exercises. For future reference, the ProGit Chapter 3 [Git Branching](#) is good introduction.

6. Micro Git Tutorial

This section is only for students who are granted permission to skip Section 5 Full Git Tutorial.

The micro tutorial just verifies that you have full read/write access to your remote repository on the Git server. Students must ask the professor via email for permission to perform this micro tutorial and skip the full git tutorial.

1. Read this tutorial's Section 7 Git Server Access, in particular read the sections corresponding to your designated Git Server (one of 7.1 through 7.3 plus either 7.4 or 7.5). Then use the shell you opened based on that section's instructions to perform the following.

2. Create a new remote repo:

Instructions below vary based on your server.

- a. [*YourServer*=**git-viscenter**]

```
$ git clone git-viscenter@cci-  
subv.uncc.edu:wartell/ITCS_XXXX/students/John_Doe/git-micro-tutorial  
Cloning into 'git-micro-tutorial'...  
Initialized empty Git repository in /home/git-  
viscenter/repositories/wartell/ITCS_4120/students/John_Doe/git-micro-tutorial.git/  
warning: You appear to have cloned an empty repository
```

[... your output will differ slightly..]

```
$ rm -rf git-micro-tutorial
```

[yes, this is a bit silly, but to simplify common instructions with Bitbucket delete the local repo now]

- b. [*YourServer*=**Bitbucket**]

Create new remote repo on Bitbucket called:

git-micro-tutorial

Review 7.2 Bitbucket Server URL and see Section 8.1 remote repo creation instructions Item #2. Make sure to share it with the TA and Dr. Wartell's Bitbucket accounts.

- c. [*YourServer*=**cci-git**]

Create new remote repo on **cci-git** called:

git-micro-tutorial

Review this tutorial's Section 7.3 *cci-git* Server URL and see Section 8.1 repo creation instructions Item #2. Make sure to share your repo with the TA and Dr. Wartell's UNCC accounts.

3. Create local repo and link to the new remote repo:

For input text `remote_repo_path` below, substitute the following:

[bitbucket] `git@bitbucket.org:your_user_id`

[cci-git] `https://cci-git.uncc.edu/your_user_id`

[git-viscenter] `git-viscenter@cci-subv.uncc.edu:wartell/ITCS_XXXX/students/FirstName.LastName`

```
$ mkdir git-micro-tutorial
$ cd git-micro-tutorial
$ git init
Initialized empty Git repository in git-micro-tutorial/.git/
$ git remote add origin remote_repo_path/git-micro-tutorial.git
```

4. Create a new file:

```
$ cd git-micro-tutorial
$ echo Hello > Test.txt
```

5. Add, commit and push to the Git server remote repo.

```
$ git add .
$ git commit -a -m "-submitted git-micro-tutorial assignment"
$ git push -u origin master
```

6. Verify your Git server's remote repository. (See below, Section 9.3 Verify Your Remote Repository).

7. Git Server Access

7.1. git-viscenter Server URL

This section is only for server `git-viscenter@cci-subv.uncc.edu`.

Each student (and/or team) in class has already had a repository directory created for them. The URL of a student's Git repository directory is as follows.

Assume your UNCC email address is:

johndoe@uncc.edu

and your first and last name as it appears in the UNCC BANNER system is:

John Doe

Then your Git username is johndoe and your course Git repository URL is:

```
git-viscenter@cci-subv.uncc.edu:wartell/ITCS XXXX/students/John_Doe
```

Throughout this document, the text ITCS XXXX would be replaced by appropriate string for the class you are taking. This will be given to you in class.

Note, if your UNCC BANNER name contains an initial, the initial is removed when creating the directory name of your course Git repository URL. If your UNCC BANNER first or last name contains multiple words, the spaces are removed from between the multiple words in your first or last name when creating the directory name. For example, if your UNCC BANNER name is:

Smith, Jim B.

Then your SVN repository URL is:

```
.../students/Jim_Smith
```

If your UNCC BANNER name is:

Van Winkle, Jim Bob

Then your Git repository URL is:

```
.../students/JimBob_VanWinkle
```

For team projects, all members of the team will be given access to a team directory with a name like:

```
git-viscenter@cci-subv.uncc.edu:wartell/ITCS XXXX/students/TeamName
```

Only the Professor and TA can adjust access permissions for repo's in git-viscenter.

7.2. Bitbucket Server URL

This section is only for server Bitbucket

1. Each team member: Create an academic account for yourself on <https://bitbucket.org/> (If you do not already have one, of course).
 - a. <https://bitbucket.org/account/signup/>
 - b. Details on their Academic Account Policy are at this [Link](#). It is much better than the non-academic account!
2. One team member should create a Private Repository for your Project then share that repo with:
 - a. all other team members

- b. Dr. Wartell (Bitbucket UserID: zwartell) and TA's Bitbucket UserID.
3. Instructions for setting access permission ("sharing") your Bitbucket repo are found the Bitbucket Website

Note, you will access Bitbucket using the ssh protocol. This means the Bitbucket URL you should use will be something like:

```
git@bitbucket.org:your_userid/your_reponame.git
```

The course repo's and material will be found at URL's such as:

```
git@bitbucket.org:zwartell/reponame.git
```

7.3. cci-git *Server URL*

This section is only for server `cci-git.uncc.edu`

VPN

If off-campus, UNCC requires you connect using VPN to access the server. Instructions to install VPN are at this link: <https://faq.uncc.edu/display/UK/VPN>

If you have trouble with VPN contact:

IT Service Desk

704-687-5500 (7-5500)

[HelpDesk Online](#)

faq.uncc.edu

Email us: help@uncc.edu

HTTPS cci-git

Access `cci-git` using the HTTPS protocol.

1. Student Repository: The Git URL is:

```
https://cci-git.uncc.edu/your_uncc_userid/your_repo_name.git
```

2. Course Repository: The course repo's and material will be found at URL's such as:

```
https://cci-git.uncc.edu/ITCS_Class_URL_Name/the_repo_name.git
```

The ITCS_Class_URL_Name will be given you with your assignments or tutorial instructions.

3. Web Server: <https://cci-git.uncc.edu>
Login using your UNCC id and password.

You only have to login to the website when creating new repositories and performing other GitLab specific operations. Most, git operations will be performed using the Git command-line or your preferred GUI for Git.

4. Team Repository: If your course use team projects, use the following instructions and conventions for creating a repository accessible by all team members:

9/9/2015: Instructions are yet to be written

7.4. *Accessing Git Server Using SSH Keys*

This section is only for Git server using the SSH protocol:
git-viscenter and **Bitbucket**

These section requires you already submitted your public key to your designated Git Server.

This section covers:

1. Starting and logging into an **ssh-agent** daemon in a command-line.
(this tutorial's Section Mac/Linux 7.4.1; Windows 7.4.2.)
2. Example Git operations using the Git server.

7.4.1. **[Linux/Mac] Starting the ssh-agent daemon**

This section is only for Linux and Mac

These steps much be done each time you login into a computer if you want to access the Git server. They start the **ssh-agent** daemon process which manages Git's authentication to the Git server.

These steps will only work after you submit you public key to the TA and he has confirmed that it has been added to the Git server.

1. Start your command-line shell
2. Start the **ssh-agent** daemon process

```
$ ssh-agent bash --login
```

This starts a **ssh-agent** daemon and a new bash shell that is setup to communicate with the **ssh-agent** daemon.

3. Load your private key into the **ssh-agent** daemon.

```
$ ssh-add .ssh/id_rsa
Enter passphrase for h:My Documents/cygwin_home/.ssh/id_rsa.uncc: [Enter
Password]
Identity added: ~/.ssh/ id_rsa ([...misc output...])
```

4. To verify ssh-agent access:

Instructions below vary based on your server.

- a. [YourServer=**git-viscenter**]

```
$ ssh git-viscenter@cci-subv.uncc.edu
The authenticity of host 'cci-subv.uncc.edu' (10.18.203.162) can't be
established.
RSA key fingerprint is e2:6f:ac:ff:a3:30:a2:0e:c2:d6:98:f4:78:55:c5:7f.
Are you sure you want to continue connecting (yes/no)? [type yes]
Warning: Permanently added 'cci-subv.uncc.edu,10.18.2013.162' (RSA) to
the list of known hosts.
[...the above will appear the first time you connect to
the git-viscenter ...]

hello johndoe, this is git-viscenter@cci-subv running gitolite3 v3.5.2-
3-g2515992 on git 1.7.5

R W    Repository_Usage
R W    sandbox
R W    wartell/ITCS_XXXX/John_Doe
R      wartell/ITCS_XXXX/public
[...other output may appear as well...]

Connection to cci-subv.uncc.edu closed.
```

This lists the repositories you have access to.

Possible Errors: If you are prompted for a password here, your public key has not been registered yet.

- b. [YourServer=**bitbucket**]

```
$ ssh git@bitbucket.org
Using username "git".
Server refused to allocate pty
logged in as zwartell.
[zwartell will be your bitbucket id]
You can use git or hg to connect to Bitbucket. Shell access is disabled.
```

The above verifies your **ssh-agent** is successfully passing your key through ssh to Bitbucket.

c. [YourServer=cci-git]

```
$ ssh git@cci-git.uncc.edu
The server's host key is not cached in the registry. You
have no guarantee that the server is the computer you
think it is.
The server's rsa2 key fingerprint is:
ssh-rsa 2048 aa:32:4a:f4:4e:96:bc:cb:46:3d:b9:de:64:bc:19:ef )
    [^ exact number may differ ^]
If you trust this host, enter "y" to add the key to
PuTTY's cache and carry on connecting.
If you want to carry on connecting just once, without
adding the key to the cache, enter "n".
If you do not trust this host, press Return to abandon the
connection.
Store key in cache? (y/n) [TYPE yes]
Warning: Permanently added 'cci-subv.uncc.edu,10.18.2013.162' (RSA) to
the list of known hosts.

Using username "git".
Server refused to allocate pty
Welcome to GitLab, zwartell.    [zwartell will be your username]
```

5. To verify read-access to the welcome repo:

For input text `welcome_repo_path` below, substitute the following:

[bitbucket] git@bitbucket.org:zwartell/welcome.git
[cci-git] git@cci-git.uncc.edu:zwartell/welcome.git
[git-viscenter] git-viscenter@cci-subv.uncc.edu:wartell/welcome.git

```
$ git clone welcome_repo_path
The authenticity of host 'cci-subv.uncc.edu' (10.18.203.162)' can't be
established.
RSA key fingerprint is e2:6f:ac:ff:a3:30:a2:0e:c2:d6:98:f4:78:55:c5:7f.
Are you sure you want to continue connecting (yes/no)? [type yes]
Warning: Permanently added 'cci-subv.uncc.edu,10.18.2013.162' (RSA) to
the list of known hosts.
    [...the above will only appear the first time you
connect to the git-viscenter ...]
Cloning into 'welcome'...
remote: Counting objects: 6, done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 0), reused 0 (delta 0)
Receiving objects: 100% (6/6), 5.50 KiB | 0 bytes/s, done.
```

Possible Errors: If you are prompted for a password here, either the ssh-agent daemon is not setup right or your public key has not been registered yet.

7.4.2. [Windows] Starting the ssh-agent daemon

This section is only for Windows operating system.

When you login into a computer from which want to connect to your Git server, you must perform these steps once. The steps start the `ssh-agent` daemon which manages Git's authentication to the Git server.

These steps will only work after you submit your public key to the Git server.

These instructions allow both TortoiseGit and command-line Git to use the same `ssh-agent` daemon.

Start Pageant

1. Run Pageant:
General: Start Menu→Putty→Pagent
This will create a Pageant system tray icon.
2. On the Pageant system tray icon, right-click and select Add Keys from the menu. This will open a dialog box.
3. Using the dialog, open your `id_rsa.ppk` file. You will be prompted for your passphrase.

This starts PuTTY's version of the `ssh-agent` daemon. The `ssh-agent` will continue to run until you log off your computer.

Start and Use the Command-Line Shell

4. Start the Git-Bash shell: Start Menu→Git→Git-Bash
5. To tell `git` to use the ssh client compatible with TortoiseGit type the following:

General:

```
$ export GIT_SSH=plink.exe
```

Optionally to avoid the requirement of setting the `GIT_SSH` variable each time you run Git-Bash, add the above line to the `.bash_profile` file (see Appendix 11.2).

6. To verify the Pagent `ssh-agent` daemon is working:

Instructions below vary based on your server.

- a. [YourServer=**git-viscenter**]

```
$ plink git-viscenter@cci-subv.uncc.edu info
The authenticity of host 'cci-subv.uncc.edu' (10.18.203.162)' can't be
established.
RSA key fingerprint is e2:6f:ac:ff:a3:30:a2:0e:c2:d6:98:f4:78:55:c5:7f.
Are you sure you want to continue connecting (yes/no)? [type yes]
Warning: Permanently added 'cci-subv.uncc.edu,10.18.2013.162' (RSA) to
the list of known hosts.
[...the above will only appear the first time you
connect to the git-viscenter ...]

hello johndoe, this is git-viscenter@cci-subv running gitolite3 v3.5.2-
3-g2515992 on git 1.7.5

R W    Repository_Usage
R W    sandbox
R W    wartell/ITCS.XXXX/John.Doe
R      wartell/ITCS.XXXX/public
[...other output may appear as well...]
Connection to cci-subv.uncc.edu closed.
```

This lists the repositories you have access to.

Possible Errors: If you are prompted for a password here, either the `ssh-agent` daemon is not setup right or your public key has not been registered yet.

- b. [YourServer=**bitbucket**]

```
$ plink git@bitbucket.org
Using username "git".
Server refused to allocate pty
logged in as zwartell.
[zwartell will be your bitbucket id]
You can use git or hg to connect to Bitbucket. Shell access is disabled.
```

The above verifies your `ssh-agent` is successfully passing your key through `ssh` to Bitbucket.

6. [YourServer=cci-git]

```
$ plink git@cci-git.uncc.edu
The server's host key is not cached in the registry. You
have no guarantee that the server is the computer you
think it is.
The server's rsa2 key fingerprint is:
ssh-rsa 2048 aa:32:4a:f4:4e:96:bc:cb:46:3d:b9:de:64:bc:19:ef )
[ ^ exact number may differ ^ ]
If you trust this host, enter "y" to add the key to
PuTTY's cache and carry on connecting.
If you want to carry on connecting just once, without
adding the key to the cache, enter "n".
If you do not trust this host, press Return to abandon the
connection.
Store key in cache? (y/n) [TYPE yes]
Warning: Permanently added 'cci-subv.uncc.edu,10.18.2013.162' (RSA) to
the list of known hosts.

Using username "git".
Server refused to allocate pty
Welcome to GitLab, zwartell. [zwartell will be your username]
```

The above verifies your `ssh-agent` is successfully passing your key through `ssh` the server.

To verify read-access to the `welcome` repo:

For the input text `welcome_repo_path` in the console example below, substitute the following as appropriate:

[bitbucket]	git@bitbucket.org:zwartell/welcome.git
[cci-git]	git@cci-git.uncc.edu:zwartell/welcome.git
[git-viscenter]	git-viscenter@cci-subv.uncc.edu:wartell/welcome.git

```
$ git clone welcome_repo_path
[...an authenticity check (below) may not appear if you already accepted
the rsa key]
The authenticity of host 'cci-subv.uncc.edu' (10.18.203.162)' can't be
established.
RSA key fingerprint is e2:6f:ac:ff:a3:30:a2:0e:c2:d6:98:f4:78:55:c5:7f.
Are you sure you want to continue connecting (yes/no)? [type yes]
Warning: Permanently added 'cci-subv.uncc.edu,10.18.2013.162' (RSA) to
the list of known hosts.
[the cloning message (below) should always appear]
Cloning into 'welcome'...
remote: Counting objects: 6, done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 0), reused 0 (delta 0)
Receiving objects: 100% (6/6), 5.50 KiB | 0 bytes/s, done.
```

Possible Errors: If you are prompted for a password here, either the `ssh-agent` daemon is not setup right or your public key has not been registered yet.

7.5. *Accessing Git Server Using HTTPS and Git Credentials*

This section is only for Git server using the HTTPS protocol:
cci-git

VPN

If off-campus, UNCC requires you connect using VPN to access the server. Instructions to install VPN are at this link: <https://faq.uncc.edu/display/UK/VPN>

If you have trouble with VPN contact:

IT Service Desk

704-687-5500 (7-5500)

[HelpDesk Online](#)

faq.uncc.edu

Email us: help@uncc.edu

HTTPS cci-git

As of September 2015, there is a problem with the server's SSL certificate. You must disable Git's automatic checking for a SSL certificate as follows:

```
$ git config --global http.sslverify false
```

(The above Git setting is saved on your computer, so you only need to set it once).

To test and verify read-access to the server, clone the welcome repo:

```
$ git clone https://cci-git.uncc.edu/zwartell/welcome.git
[...you will prompted for you UNCC user id and password]
Cloning into 'welcome'...
remote: Counting objects: 6, done.
remote: Compressing objects: 100% (4/4), done.
remote: Total 6 (delta 0), reused 0 (delta 0)
Unpacking objects: 100% (6/6), done.
Checking connectivitv... done.
```

7.5.1. **Using Git Credentials**

By itself, the HTTPS protocol will require you to enter your UNCC username and password everytime you perform a remote Git operation (clone, push, etc.). To save typing, you may use the Git Credential Storage mechanism to avoid typing in a password over and over again.

Note, the instructions below are a repetition of those found in this document Section 5 Full Git Tutorial.

1. Read ProGit [Git Tools - Credential Storage](#). Stop at section [Under the Hood](#).

2. Based on your operating system pick the appropriate credential system as described in the above ProGit chapter.

Warning: Do **NOT** use **store** mode because this will save your UNCC password unencrypted on disk!

- a. **[Windows]** Assuming you are using Git-Bash

```
$ git config --global credential.helper wincred
```

- b. *[Other Operating Systems]* Follow links discussed in [Git Tools - Credential Storage](#).

8. Common Git Operations

This section describes several operations referenced in the tutorial sections of this document. This section assumes you already open a command-line shell as described for your designated Git server.

8.1. *Basic Git Operations*

1. Clone Existing Repository

Below, for the input text `git_server_url` substitute the appropriate Server URL from Section 7 Git Server Access:

```
$ git clone git_server_url/RepoName.git
Cloning into 'RepoName'...
remote: Counting objects: 13, done.
remote: Compressing objects: 100% (13/13), done.
remote: Total 13 (delta 6), reused 0 (delta 0)
Receiving objects: 100% (13/13), 347.17 KiB | 0 bytes/s, done.
Resolving deltas: 100% (6/6), done.
```

2. Create New Remote Repository:

Instructions below vary based on your server.

a) [git-viscenter]


```
$ git clone git-viscenter@cci-  
subv.uncc.edu:wartell:/ITCS_XXXX/students/John_Doe/NewRepoName  
Cloning into 'NewRepoName'...  
Initialized empty Git repository in /home/git-viscenter/repositories/wartell/  
ITCS_XXXX/students/John_Doe/NewRepoName.git  
warning: You appear to have cloned an empty repository  
[ ... your output will differ slightly..]
```

The above works as long as you were give “Create” permissions under the indicated


Note, git-viscenter uses the gitolite server which has a special feature that creates a remote repo if it does not already exist when you attempt to clone it. git-viscenter access permissions are managed by the TA and generally already set-up for the course.

b) [Bitbucket]


i) Select create:



ii) Here are some recommended settings (assume you name the repo MyRepoName)

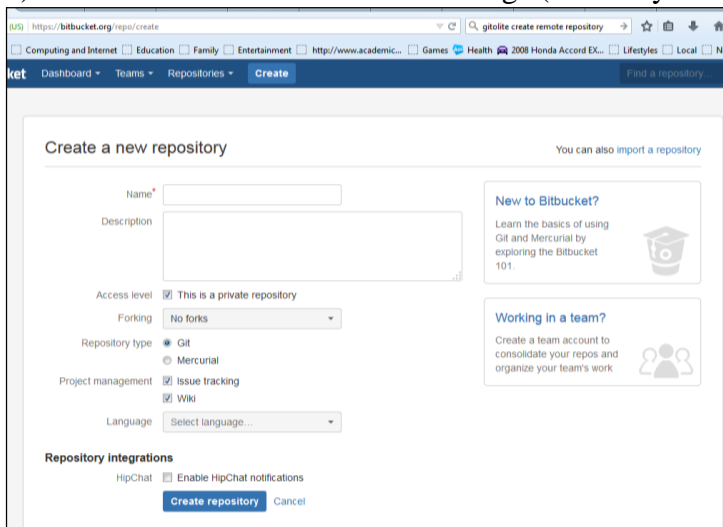

iii) Set up repo access permission (“sharing”):

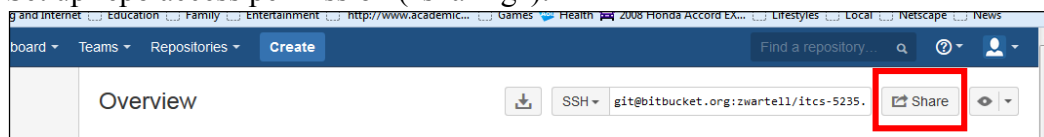

iv) Add your team members (if the project is a team project).

Dr. Wartell	zwartell
-------------	----------

TA	get their email from class website
----	------------------------------------

v) Add the course TA and

Professor


- vi) In general the steps to populate the remote repo is by creating a local repo and performing a **git push** as follows:

```
$ mkdir MyRepoName
$ cd MyRepoName
$ git init
Initialized empty Git repository in git-micro-tutorial/.git/
$ git remote add origin git@bitbucket.org:your_user_id/MyRepoName.git
Cloning into 'git-micro-tutorial'...
Initialized empty Git repository in /home/git-
viscenter/repositories/wartell/ITCS_4120/students/John_Doe/git-micro-tutorial.git/
warning: You appear to have cloned an empty repository
[ ... your output will differ slightly..]


$ git add .
$ git commit
$ echo "John Doe" >> contributors.txt
$ git add contributors.txt
$ git commit -m 'Initial commit with contributors'
$ git push -u origin master
```

c) **[cci-git]**

- Login to the **cci-git** Web Server (See 7.3 **cci-git** Server URL)
- To go the GitLab Dashboard, select “New Project”

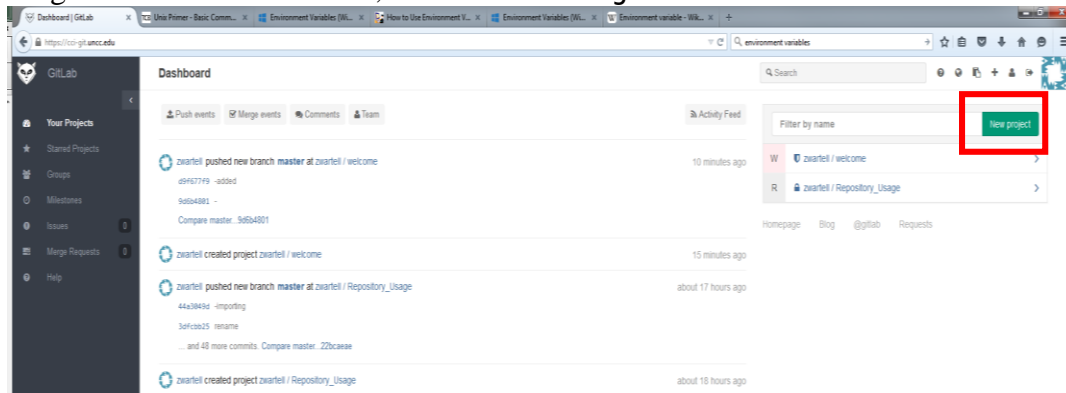

iii) Add project name as directed by your assignment's instructions:

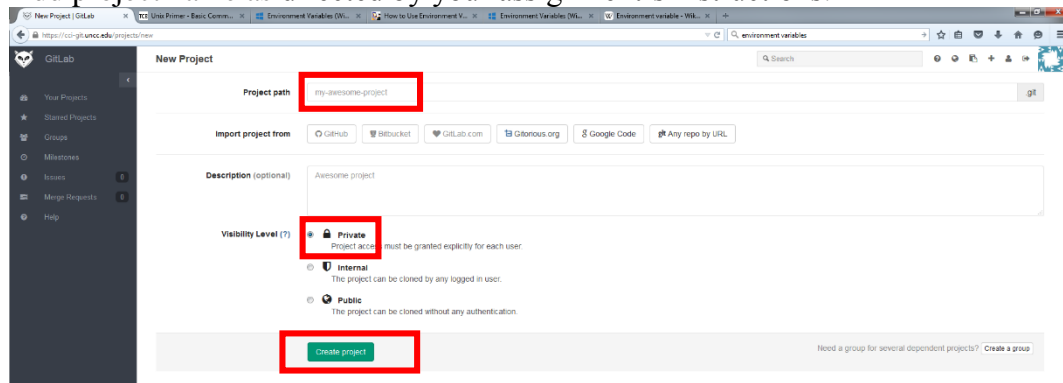


iv) Select “Private” (pictured above).


v) Select “Create Project” (pictured above).

This should display the image in the next step.


vi) Select “Settings”.

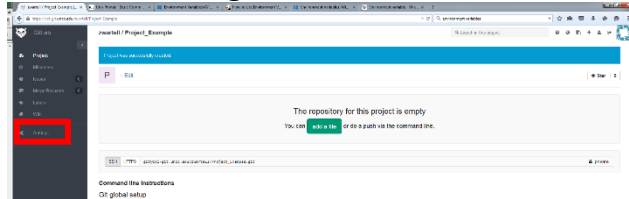

vii) Select "Add Members"

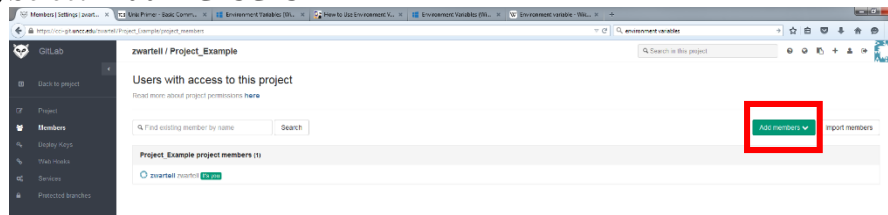

viii) Add the TA and Professor (get their UNCC user name from their email address) under People. Give both of them **Reporter** access in the “Project Access” menu. Select “Add Users to Project”.

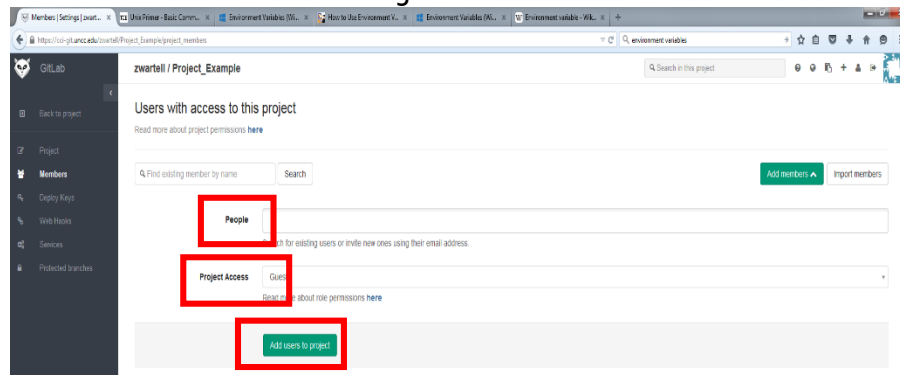

3. Push to New Remote Repository:

To push files to the new empty, remote repository created in following Item #2 (above), assume the remote is called `Project_Example.git`:

Instructions below vary based on your server.

a) **[cci-git]**

- i) **Option I:** If you have not already created files in a local directory that you want to import, performing the following:

```
$ git clone https://cci-git.uncc.edu/your_user_id/Project_Example.git
Cloning into 'Project_Example'...
warning: You appear to have cloned an empty repository.
Checking connectivity... done.
$ cd Project_Example
```

[... create, add and commit files... below is just an example]

```
$ touch README.md
$ git add README.md
$ git commit -m "add README"
[master (root-commit) dd8e1a0] add README
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 README.md
$ git push -u origin master
Counting objects: 3, done.
Writing objects: 100% (3/3), 219 bytes | 0 bytes/s, done.
Total 3 (delta 0), reused 0 (delta 0)
To git@cci-git.uncc.edu:your_user_id/Project_Example.git
```

- ii) **Option II:** If you already created files in a local directory (call it Project_Example) and that local directory is not already a local Git repo, perform the following to (1) initialize that directory as a local Git repo and (2) push it the remote Git repo:

```
$ cd Project_Example
$ git init
Initialized empty Git repository in Project_Example/.git/
$ git remote add origin https://cci-git.uncc.edu/your_user_id/Project_Example.git
$ git add -A
$ git commit -m "-initial import"
$ git push -u origin master
Counting objects: 3, done.
Writing objects: 100% (3/3), 219 bytes | 0 bytes/s, done.
Total 3 (delta 0), reused 0 (delta 0)
To git@cci-git.uncc.edu:your_user_id/Project_Example.git
```

b) **[git-viscenter, bitbucket]**

Perform the same instructions as above for **[cci-git]** but replace:

https://cci-git.uncc.edu/your_user_id/

with

[bitbucket] git@bitbucket.org:your_user_id

[git-viscenter] git-viscenter@cci-subv.uncc.edu:wartell/ITCS_XXXX/students/FirstName_LastName

3. To delete a remote repo:

[YourServer=git-viscenter]

```
$ ssh git-viscenter@cci-subv.uncc.edu D
```

[... help documentation will be displayed..]

(For Windows using Git-Bash substitute `ssh` above with `plink`)

[YourServer=**bitbucket**] See *Bitbucket Website*.

[YourServer=**cci-git**] See *cci-git Website*.

8.2. Other Git Operations

1. To open a second shell window that uses the an already running `ssh-agent` daemon.

a. Create New Shell:

[Windows with Git-Bash]:

Just start another Git-Bash shell (Start Menu→Git→Git-Bash) and repeat instructions in 7.4.2 in the new shell.

[Windows with Cygwin running without Pageant]:

In your first command shell window:

```
$ start sh --login
```

[Mac & Linux]:

In the first command shell window:

Type the command that starts the GUI command-line shell that you prefer to use, for example: `xterm`. Since the second shell was started from the first shell, the second shell will automatically have access to the first shell's `ssh-agent`.

b. Verify the Second Shell is connected to original SSH Agent:

In the second shell window, verify connection to your `ssh-agent` daemon:

```
$ ssh-add -l
2048 a3:c5:ec:be:c6:df:fa:80:3c:77:01:09:c0:af:7d:52 /h/My
Documents/cygwin_home
/.ssh/id_rsa.uncc (RSA)
```

9. Course Git Policies

9.1. Submitting Class Assignments

Submit all your assignments by using Git `add`, `commit` and `push` to upload your code to your Git repository subdirectory.

Your projects will be graded based on the version of your code that is **git-push'ed to the Git server at the time of the due date for the project.**

9.2. *Keep the repository clean!!!*

It is standard practice when using version control software to not commit intermediate or output files generated by the compiler into the repository. Intermediate or output compilation files are all regenerated when someone else checkout's the source code and recompiles it. Like all compilers MSVS 20xx C++ compiler generates lots of these (*.ncb, *.ilk, *.exe, *.obj, etc.).

Rule: Do not commit such intermediate files to your Git repository!

Fortunately, you can automate this process using the **.gitignore** mechanism (see [2]).

Reasoning:

Adding intermediate auto-generated files to the repository is wasteful, messy and can create subtle problems. Many intermediate files will create compilation problems if they are copied between different computers. Putting them in the repository is equivalent to such copying.

By convention, the following files should be put in the repository:

9.2.1. **C++ Code Rules**

The following files should be put in the repository:

- source code files (.cpp, .h, etc.)
- compilation scripts or project files
 - Under MSVS 2010 for C++:
 .vcxproj, .sln, .vcxproj.user
 - Under earlier MSVS versions:
 .vcproj, .sln, .vcproj.<username>.<machinename>.user
- a .txt file or .doc file describing what parts of the project you completed or left incomplete, etc.
- any input files such as image files or other data files required by your program
- any subdirectories containing the above files

When adding subdirectories, be careful not to blindly submit their entire contents because often they contain additional automatically generated files. If you make a mistake just delete the intermediate files from the repo.

9.2.2. **JavaScript and WebGL**

The following files should be put in the repository:

- source code files (...todo: fill in details)
- compilation scripts or project files
 - (...todo: fill in details)
- a .txt file or .doc file describing what parts of the project you completed or left incomplete, etc.
- any input files such as image files or other data files required by your program
- of course, any subdirectories containing the above files

When adding subdirectories, be careful not to blindly submit their entire contents because often they contain additional automatically generated files. If you make a mistake just delete the intermediate files from the repo.

9.3. ***Verify Your Remote Repository***

The TA only sees your remote Git server repo's.

Rule: Always make sure your assignment appears as you expect in the remote repo (on the Git server).

The Ultimate Verification:

The ultimate way to verify the remote repo contains the files you think it does is to clone it into to another directory and check that second cloned copy for completeness. You should do this when you are completely done with your assignment.

Some Safety Checks:

Performing *The Ultimate Verification* while you are developing code is tedious. During software development the following are good practices to keep track of your commit's and push's.

- `git-status`

Good Result:

```
$ git status
# On branch master
nothing to commit, working directory clean
```

The above indicates everything is good. You have no file changes that have not been committed to the local repo and no local repo commits that have not been pushed to the remote repo.

Maybe Bad:

If you get messages like:

```
$ git status
# On branch master
# Untracked files:
#   (use "git add <file>..." to include in what will be
#   committed)
#
#       junk_or_important.txt
```

then you have untracked files (but you have push'ed all your commits). This maybe ok as long as these files aren't files that belong in a repo (such as temporary files). You might consider adding to the .gitignore file (see [2]).


Bad:

If you get a message like:

```
$ git status
# On branch master
# Your branch is ahead of 'origin/master' by 1 commit.
#   (use "git push" to publish your local commits)
#
# nothing to commit, working directory clean
```

then you have **not** pushed all your latest changes to the remote repo. Do a git-push before the final assignment deadline.


- **[Optional]** TortoiseGit – Optionally, another good way to check with the TortoiseGit shell extension is using Check for Modifications. This will show you whether you have any changes not committed to the local repo (but make sure to check the box, Show Unversioned Files). Below we see one file is untracked.

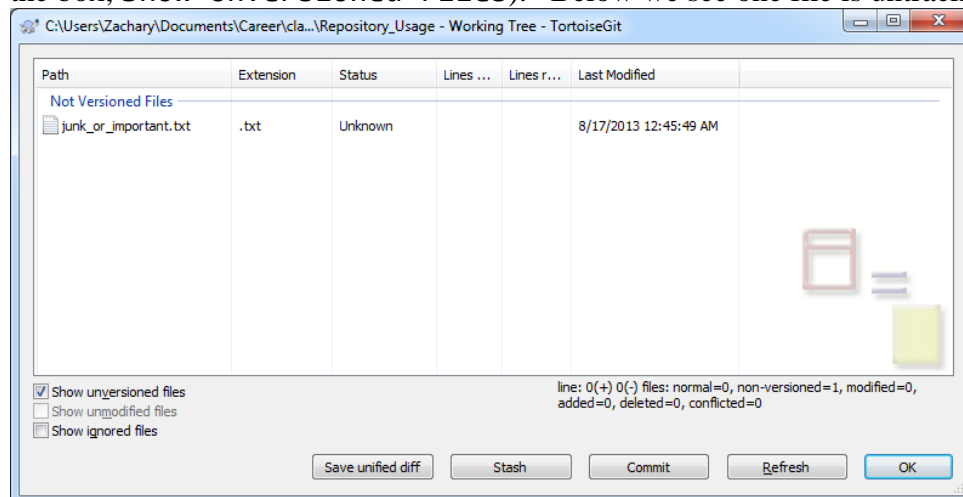

However, Check for Modifications will not tell you whether you have pushed all your commits to the remote repo.

For that use the TortoiseGit shell extension and select Git Sync. The following Git

Sync dialog box would indicate your local repo has committed changes that you have not pushed to the `git-viscenter` remote:

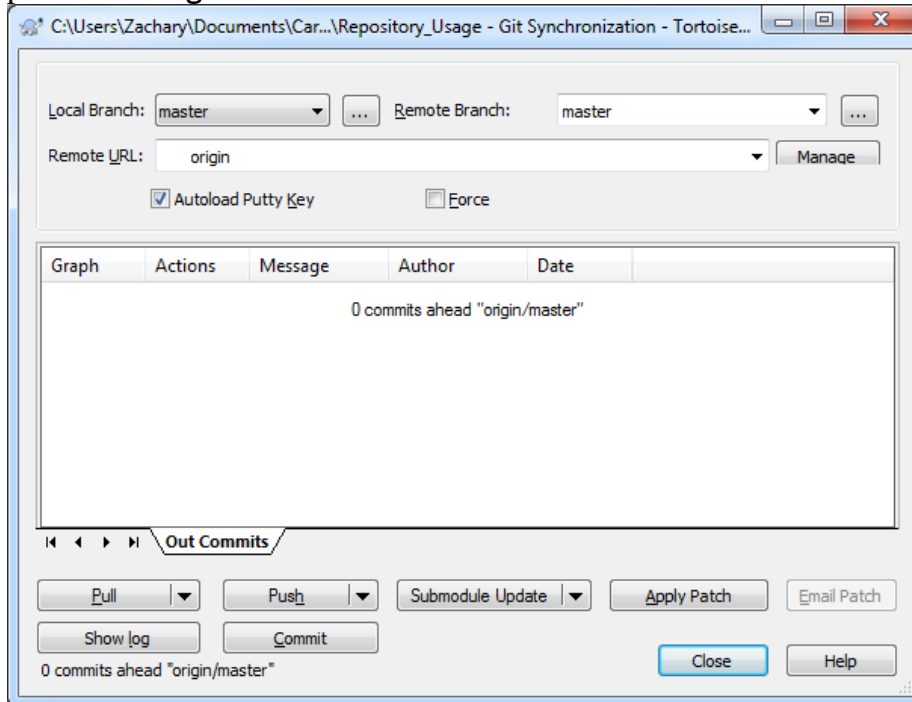

However, Git Sync does not show you if you have changes to local files that you have not committed to the local repo!

9.4. **Tips**

This section will be populated as more students use the Git and the TA gets feedback.

9.5. **Common Error Messages**

This section will be populated as more students use the Git and the TA gets feedback.

9.6. **Common Errors**

1. **Escape Characters – Especially for Spaces:** HTML escape character (e.g. `%20`) is not the shell escape character

Be careful with escape sequences in strings representing file names and paths. For example the HTML standard for URLs uses the `%` symbol as an escape character, so `http:\\www.no%20spaces%20here.com` is translated as

`http:\\www.no spaces here.com`

However, general file systems (Windows/Mac/Unix) and command-line shells for these OS do not use `%` as an escape sequence when creating files names or directory names. So if you

did the following at the Windows cmd.exe prompt:

```
c:\ mkdir "no%20space%20here"
```

you will actually get a directory with a nutty looking name including the %'s, and the file system commands, command-line tools, and MSVS compiler components will probably fail in some fashion when processing that directory name.

10. Citations

- [1] Unix Primer - Basic Commands In the Unix Shell,
<http://www.ks.uiuc.edu/Training/Tutorials/Reference/unixprimer.html>
- [2] Scott Chacon, Pro Git, Apress, <http://git-scm.com/book>.
- [3] "To add or change the values of environment variables", Windows XP Professional Product Documentation, Performance and maintenance.
http://www.microsoft.com/resources/documentation/windows/xp/all/proddocs/en-us/sysdm_advanced_environment_addchange_variable.msp?mfr=true
- [4] Bash Reference Manual, http://www.gnu.org/software/bash/manual/html_node/index.html
- [5] "Environment Variable : Details", Wikipedia.
https://en.wikipedia.org/wiki/Environment_variable#Details
- [6] "PATH (variable)", Wikipedia.
https://en.wikipedia.org/wiki/PATH_variable
- [7] "Environment Variables", Mac Developer Library.
<https://developer.apple.com/library/mac/documentation/MacOSX/Conceptual/BP/RuntimeConfiguration/Articles/EnvironmentVars.html>

11. Appendix I

11.1. *TortoiseGit - MsysGit Incompatibility*

TortoiseGit works best with PuTTY and Pageant rather than using Git Bash (MsysGit)'s default command-line ssh-agent. (Hence we use plink.exe instead of ssh.exe for Git-Bash).

Here is why:

Every Windows Explorer window runs within the same Explorer.exe process. Consequently, executing "\$ explorer ." from a command-line shell, *S*, creates an Explorer window, *W*, whose Explorer.exe process never sees the environment variables created by that shell process *S*; Explorer.exe only sees the environment variables that existed when Explorer.exe started at login. Therefore, TortoiseGit commands executed from the new Explorer window, *W*, cannot see the environment variables of the command-line shell (because these commands are executed within the sole Explorer.exe process).

An ssh-agent uses an environment variable, SSH_AUTH_SOCK, to tell an ssh process what socket that ssh process connects to talk to the ssh-agent. Therefore, it is not possible for TortoiseGit commands executed from the window W to know on which socket any ssh-agent started in the original command-line shell CLS is communicating.

Options:

1. Run two SSH Agents. One is Putty's pageant.exe used with TortoiseGit (set to use tortoiseplink instead of ssh) and the second is ssh-agent started from the msysgit Git-Bash shell used with the command-line Git in the bash shell. (This is what Dr. Wartell does; but this adds complications to the instructions, so I don't recommend it to students).
2. Set up Git-Bash shell to use Pageant & plink.exe (instead of ssh-agent & ssh). This is currently what the instructions in this document do. Disadvantage is the setup instructions for Windows are different than for Linux/Mac....
3. Install <http://cuviper.github.io/ssh-pageant/>. ZJW: I experimented with it, but circa 2014, it had it's own issues, so I personally used approach 1).

11.2. **.bash_profile, GIT_SSH**

.bash_profile is a bash script that is executed by bash each time you start a new bash shell [4]. It is located in your bash shell's home directory for your user account. Locate and edit it as follows:

```
$ cd ~
$ ls -la .bash_profile
[usually this file will already be exist, if not we'll create it]
$ notepad .bash_profile
```

Generally, the safest place to add the export command is the last line of the script (or add it wherever you see other export commands in the script). Add the line:

```
export GIT_SSH=NameOfYourSSHClient
```

NameOfYourSSHClient is the name of ssh client recommended for your OS in Section 7.4 (typically either ssh or plink).

12. Appendix II

Audience: Appendix II is for TA's and modifiers of this document

12.1. **Document Maintenance**

9/10/2015: Right now the Word Forms below aren't being used consistently in the main document anymore. So for now I'm pretty much back to manually editing the main document.

1. Instructions for instructors. Fill out the Word Forms in the column Form Entry. The rest of the document will be populated using these entries where appropriate.
2. Print this document to a PDF excluding this final page and distribute that PDF to students.

Field Name	Form Entry	Conditional Text Test	Comment/Options
DocumentTitle	Dr. Wartell's	Dr. Wartell's	<ul style="list-style-type: none"> • Dr. XXXX's or ITCS 5235, etc.
GitServer	BitBucket	BitBucket	<ul style="list-style-type: none"> • git-viscenter • bitbucket
GitURL	git@bitbucket.org	git@bitbucket.org	<ul style="list-style-type: none"> • git-viscenter@cci-subv.uncc.edu • git@bitbucket.org
GitURLClassSuffix			optional
GitStudentURL	git@bitbucket.org:/your_uid	git@bitbucket.org:/your_uid	<ul style="list-style-type: none"> • <u>git-viscenter:</u> • <u>bitbucket:</u> git@bitbucket.org:your_uid/
GitStudentURLSuffix			<ul style="list-style-type: none"> • <u>git-viscenter:</u> ITCS_xxxx/students/John_Doe/ • <u>bitbucket:</u> <empty>
RepoSuffix	.git	.git	<ul style="list-style-type: none"> • <u>git-viscenter:</u> <empty> • bitbucket: .git • cci-git: .git