

SIMF Control Panel

Operations manual — creating users, configuring the system, and deploying it

Audience	Control Panel administrators and the team deploying the system
Covers	Every Control Panel page, account creation end to end, and the server deployment with its configuration
Screenshots	Captured from the running application, not drawn
Volumes	English and Arabic, published separately

Contents

Contents	2
Signing in for the first time	5
The sign-in screen	5
The forced password change	5
The second factor	6
Recovery codes.....	8
The dashboard.....	8
Creating a user by hand	10
Creating an administrator	11
Creating a visitor.....	14
Creating a partner or staff account.....	18
Registering a VIP.....	18
The profile picture.....	20
Where a picture is set	20
What the system accepts.....	21
Replacing and removing.....	22
Changing an account after it exists.....	23
The approval queues.....	23
Editing an account	23
Moving an account between types	24
Resetting a lost second factor	24
Withdrawing access.....	25
Roles and permissions.....	26
Permission names.....	26
Creating a role	26
Granting permissions to a role	27
Giving a person a role.....	27
The guards	28
Building the programme	29

What a session actually needs.....	29
Seating is two levels, and the top one is the hall	31
Four kinds of meeting, and only two have a queue.....	32
Running the event day	33
Gates.....	33
Halls and who is inside them	34
Questions, and who may touch them.....	36
Session summaries	36
Ratings	36
The numbers.....	37
The lists everything else chooses from	38
What each list feeds	38
Deleting is not deleting.....	38
Profile types are not just labels	38
Deploying to a server	40
The estate	40
The four applications	40
Before the first deployment.....	40
The order of a deployment.....	41
The databases	41
The first administrator	42
Every configuration value.....	43
How a variable name is built	44
How to set one	44
The values that stop a server starting.....	44
The API.....	46
The Control Panel	53
The Website.....	53
The mobile edge.....	53
The public web application.....	54

Every host	55
Appendix — what writing this manual found	56
Documents that disagreed with the code — corrected	56
Wording in the product that no longer matched its behaviour — corrected	56
Behaviour worth knowing before it surprises somebody	56
Every page in the Control Panel	58
Overview	58
People	61
Access control	70
Programme	73
Scientific committee	92
Exhibition	95
Engagement	99
Knowledge & AI	101
Content	106
Public relations	113
Gates & arrivals	117
Reference data	121
System	127
Reports	135
Pages reached from inside another page	145

Signing in for the first time

The Control Panel is the operations console for the Saudi International Maritime Forum. Everything in this manual is done from it, so this chapter comes first: it covers the sign-in screen, the password change the system forces on a new account, the second factor, and the recovery codes you are shown exactly once.

The sign-in screen

Open the Control Panel address in a browser. The sign-in page asks for an email address and a password, and offers a language switch and a light/dark switch in the top corner. The language switch changes the whole application, not just this page.

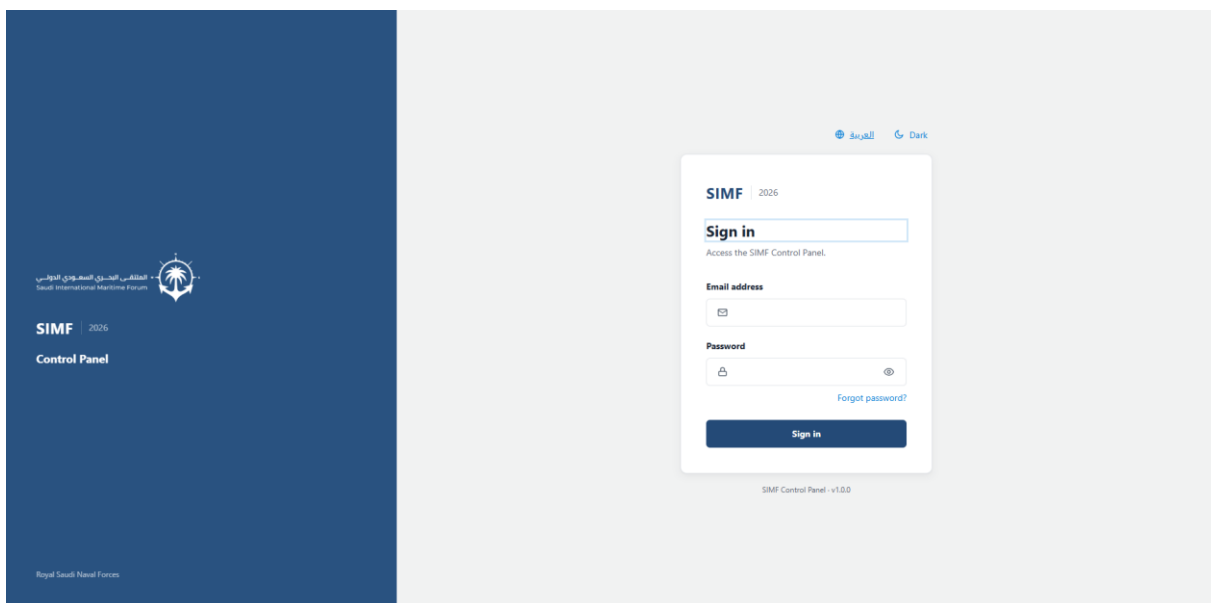


Figure 1 — The sign-in page as it opens.

The forced password change

A newly created account is issued a bootstrap password that the system insists is replaced. On the first sign-in the Control Panel therefore does not go to the dashboard: it opens a dialog over the sign-in page asking for a new password twice. Until that is done the account cannot get in.

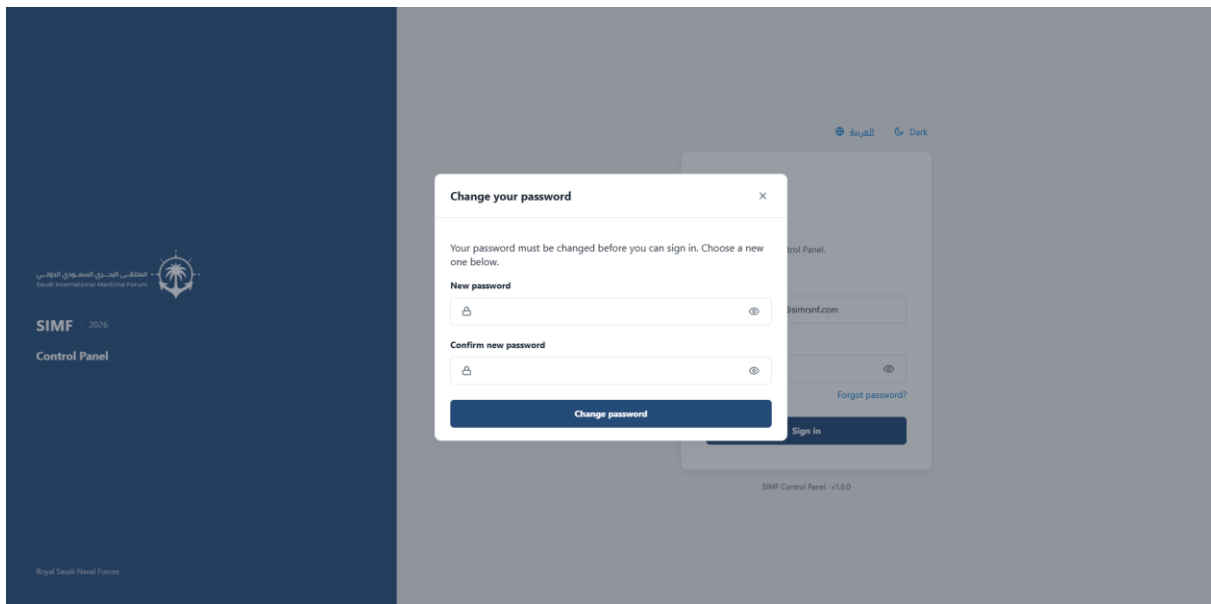


Figure 2 — The password change is a dialog over the sign-in page, not a separate address.

The new password must satisfy the rules the server applies to every password in the system. They are stricter than the length rule most people expect, and the two that surprise operators are the last two:

- Between 8 and 128 characters.
- At least one capital letter, one small letter, one digit and one symbol.
- No character repeated three times in a row — "aa" is allowed, "aaa" is not.
- No run of three characters in sequence within one class — "abc", "123", "cba" and "987" are all rejected.
- Not the account's own email address, and not a commonly used password (leet-speak spellings such as p@ssw0rd are folded back and rejected too).

These rules are enforced in PasswordPolicy.cs and applied by SimfPasswordValidator on every path that sets a password.

The second factor

The Control Panel requires two-factor authentication. After the password the system asks for the six-digit code from an authenticator application. If the account has never paired one, the system shows the pairing screen instead and will not let the account past it — enrolment is mandatory, not optional.

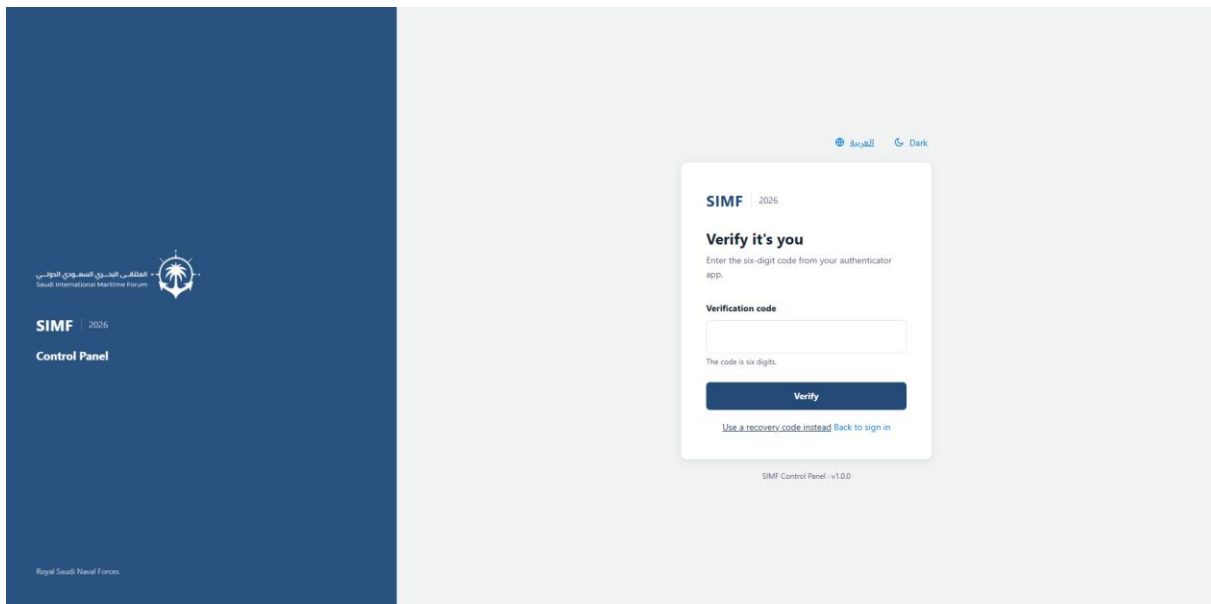


Figure 3 — The second-factor step, after the password has been accepted.

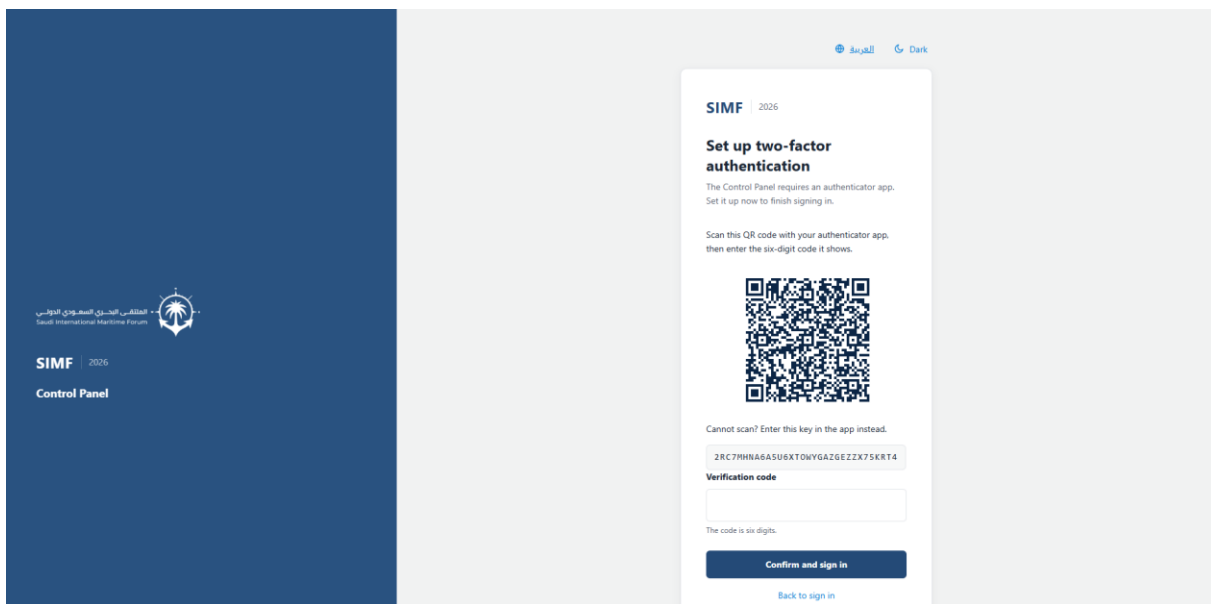


Figure 4 — The pairing screen an account meets when it has no authenticator yet. The QR code and the key beneath it are obscured here: they are a real credential, and a manual should never print one.

The requirement is controlled by `IdentityLifecycle:RequireControlPanelTwoFactorEnrolment`, which ships as `true`. It applies to the Control Panel only — the mobile application and the public website are not affected.

Recovery codes

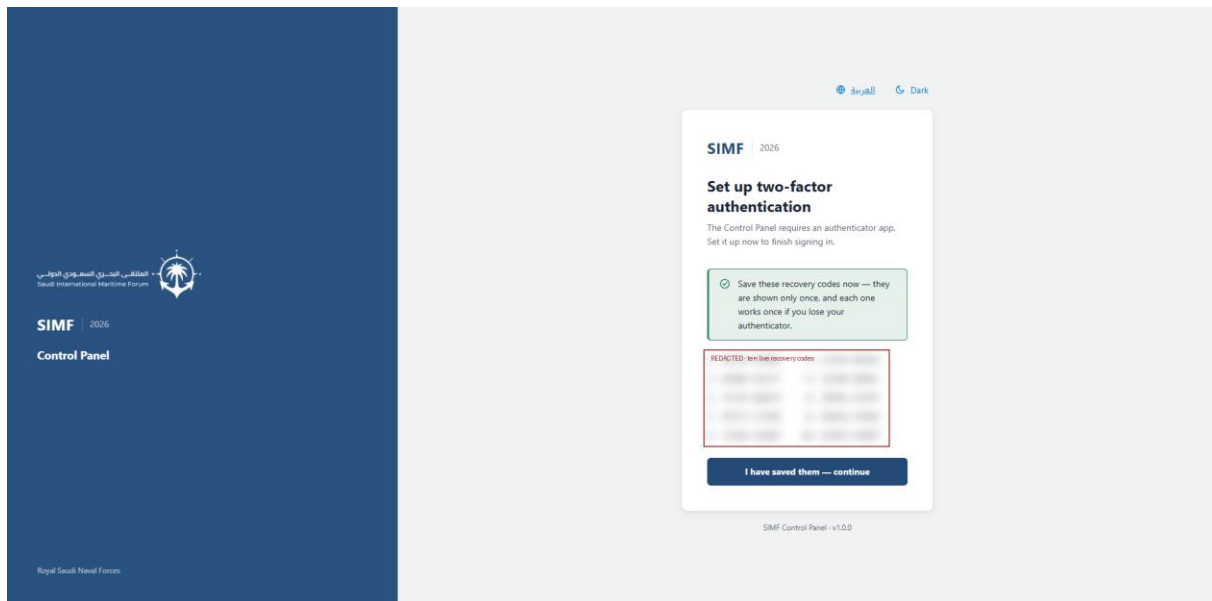


Figure 5 — The ten recovery codes, shown once and never again. They are obscured here because they were real when this was taken — a manual that printed a working set would be handing them out.

When an account pairs its authenticator the system displays ten single-use recovery codes. They are shown once and never again. Print them or store them somewhere safe: they are what gets the account back in when the phone is lost. If they are lost as well, an administrator must reset the account's second factor from Reset user 2FA, which is covered later in this manual.

The dashboard

A completed sign-in lands on the dashboard: a summary of the event and, down the left, the menu that this manual follows chapter by chapter.

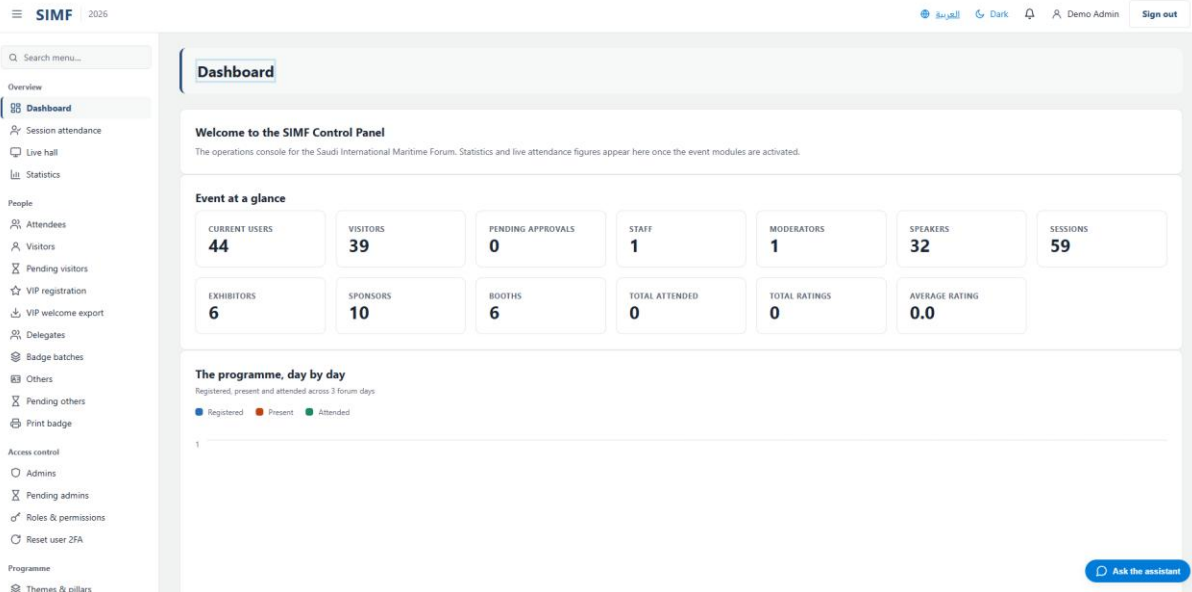


Figure 6 — The dashboard after signing in.

Creating a user by hand

The Control Panel creates three kinds of account, and they are not variations of one form — they are three separate pipelines with different screens, different fields, different rules and different outcomes. Choosing the wrong one is the most common mistake, so this chapter starts with how to choose.

To create	Use	Address	The account ends up
An operator of this Control Panel	Admins	/admin/admins	Awaiting approval, with a 7-day emailed invitation
A visitor or guest attending the forum	Visitors	/admin/visitors	Awaiting approval, with no password and no email
A partner, exhibitor, media or staff account	Others	/admin/others	Awaiting approval, always — never auto-approved
A VIP or VVIP guest	VIP registration	/admin/visitors/vip	As a visitor, plus the VIP protocol fields

The distinction that matters: an administrator receives an emailed invitation and sets a password. A visitor or partner receives neither — their credential is the QR badge, and the badge is only minted when the account is approved.

Creating an administrator

An administrator is somebody who signs in to this Control Panel. Open the menu group Access control, choose Admins, and use the Add button on the grid toolbar. The form is deliberately short — an administrator has no visitor profile, no badge and no identity documents.

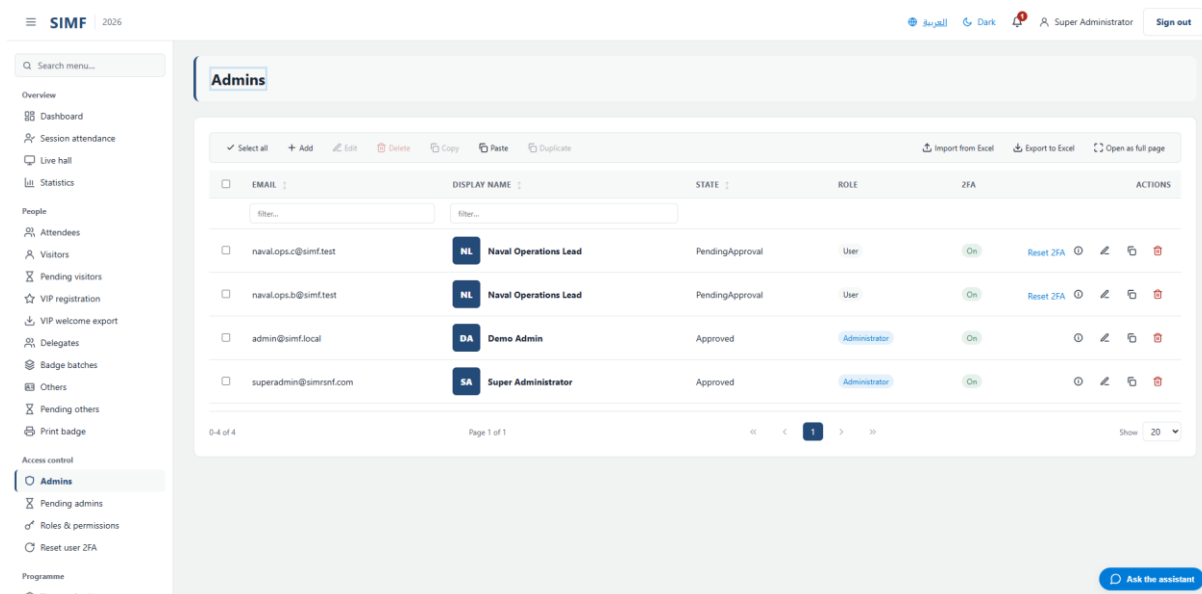


Figure 7 — The administrators list. The Add button opens the create form.

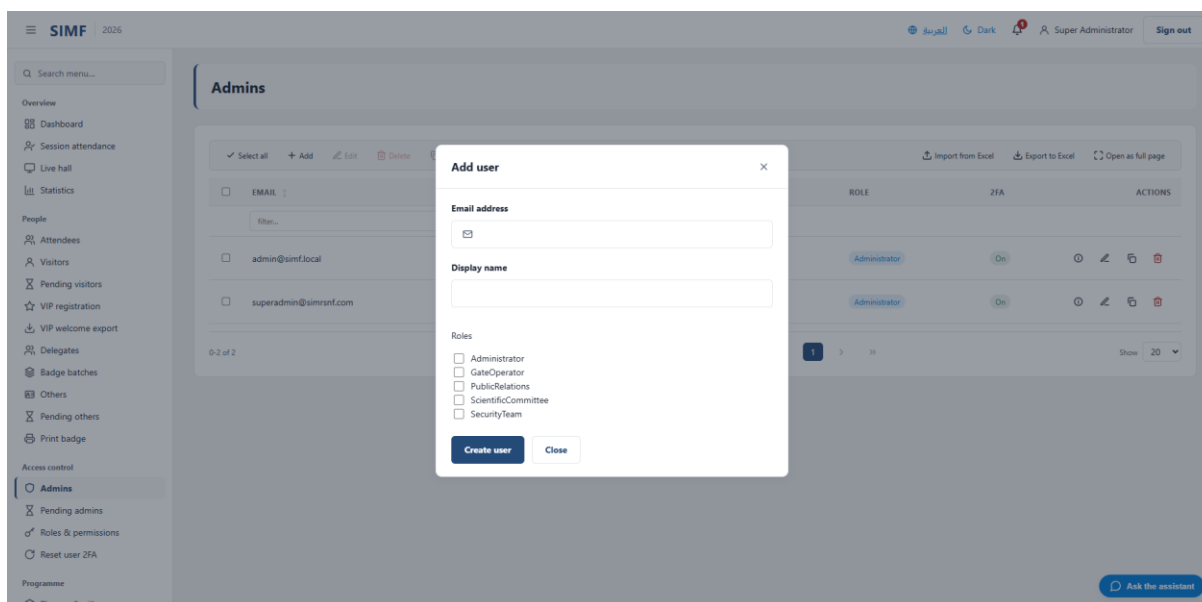


Figure 8 — The create form: an email address, a display name, and one tick box per role.

Field	Required	Limit	Rule the server enforces
Email address	Yes	256 characters	Must be a valid email address, and must not already belong to an account.
Display name	Yes	2 to 128 characters	The name shown

			throughout the Control Panel.
Roles	No	—	One tick box per role. Assigning a role here requires the role-assignment permission as well as the create permission.

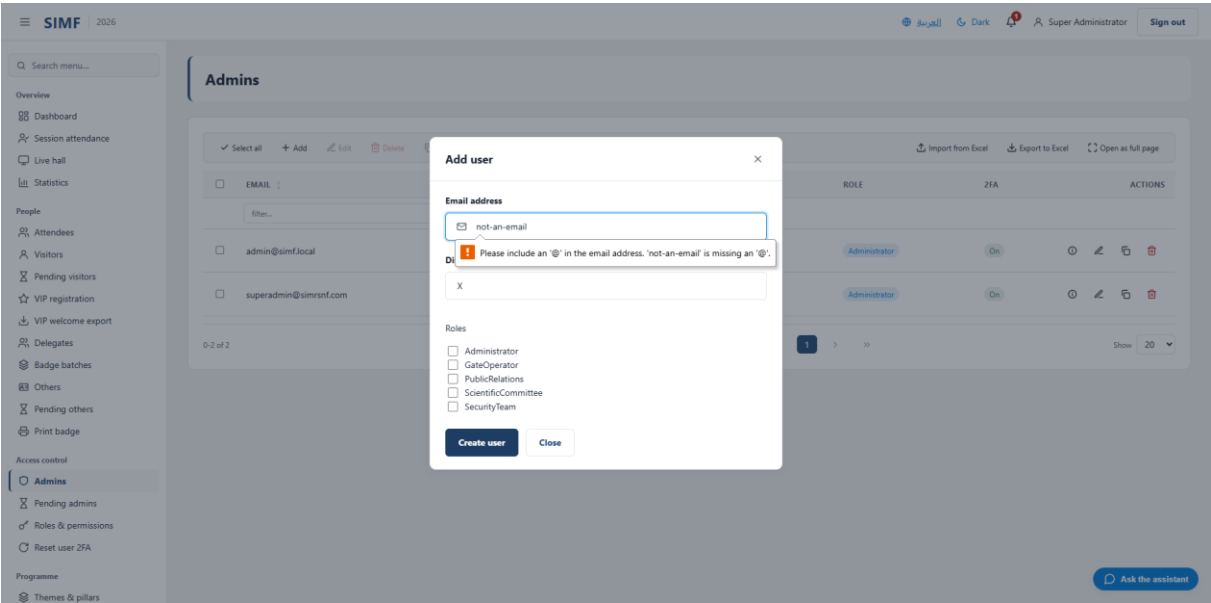


Figure 9 — A refused submission. The email box is a typed field, so the browser catches a malformed address before the form is sent at all; the form's own checks report a short display name and a missing address the same way, and nothing reaches the server until both are right.

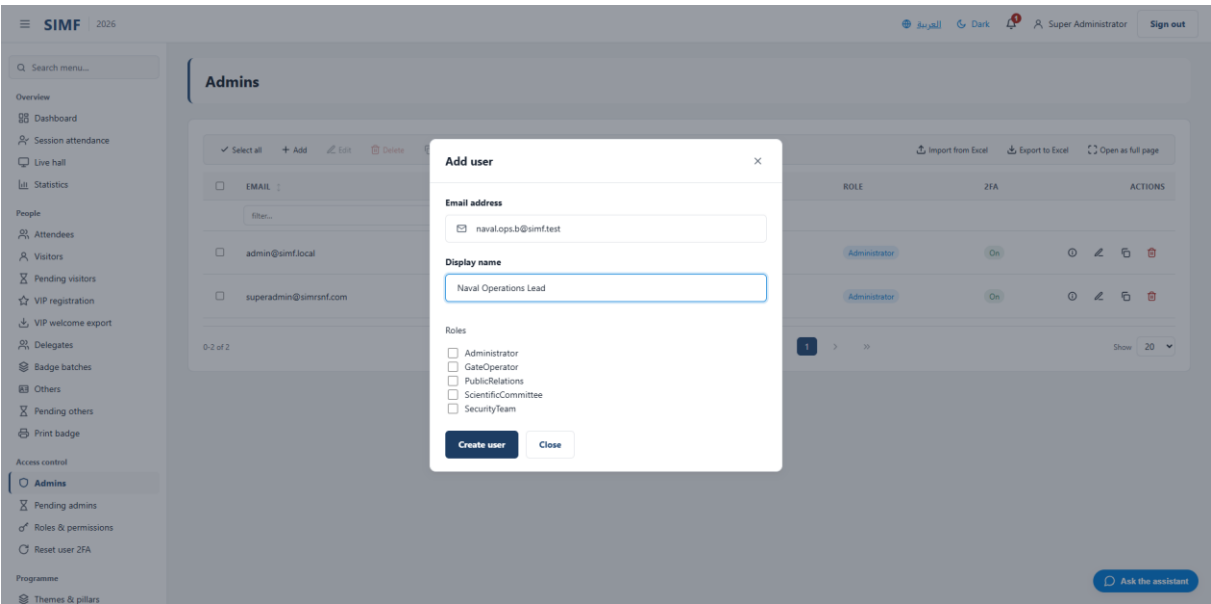


Figure 10 — The same form filled in and ready to submit.

On save the account is created in the awaiting-approval state, an invitation valid for seven days is emailed to the address, and every other approved administrator is notified that an account is waiting. Two-factor is armed on the account from the moment it is created, so the new administrator will be taken through the pairing screen on their first sign-in.

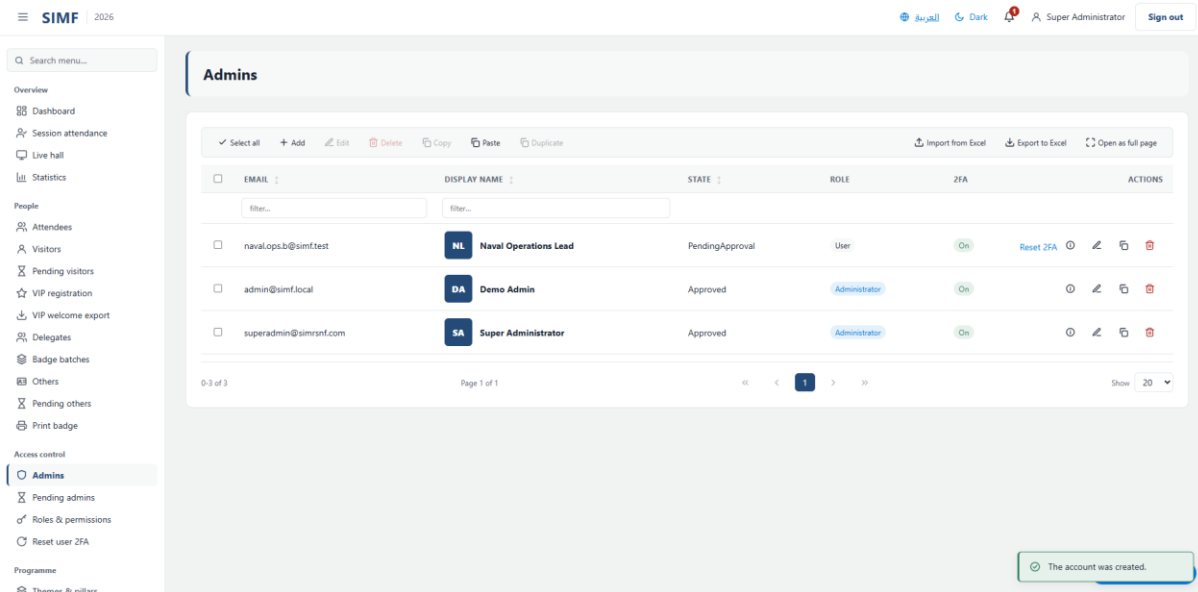


Figure 11 — The new account in the list, awaiting approval, with the confirmation message.

A duplicate email is refused with the error ADMIN_EMAIL_ALREADY_REGISTERED and the form stays open. If the mail server is not configured the account is still created — only the invitation fails to arrive, and it fails quietly, in the background.

Creating a visitor

A visitor is an attendee. The form is the on-site registration desk wizard, and it is long because it captures the identity the gate will check. It is organised into numbered sections; the fields that appear depend on two choices — the profile type, and whether the visitor is Saudi.

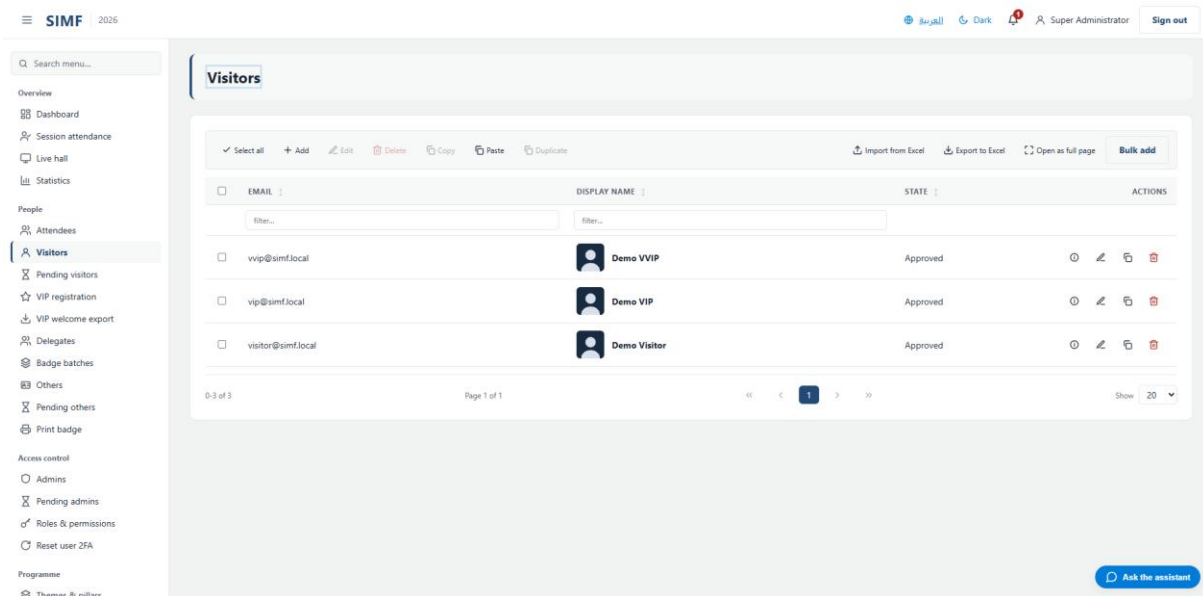


Figure 12 — The visitors list. Add opens the registration wizard.

Figure 13 — The wizard opens on the profile type, which decides much of what follows.

Figure 14 — The identity section.

Identity

Field	Required	Limit	Rule the server enforces
Name on badge	Yes	128 characters	—
Full name (Arabic)	No	50 characters	The form allows 128 characters; the server rejects anything over 50. Keep to 50.
Full name (English)	No	50 characters	Same 128-versus-50 mismatch as the Arabic name.
Job title (optional)	No	100 characters	—
Job title in Arabic (optional)	No	100 characters	—
Place of birth	No	128 characters	A region picker for a Saudi visitor; free text otherwise.

Nationality and identity document

Field	Required	Limit	Rule the server enforces
Saudi national ID	No	10 digits	Saudi visitors. Must start with 1 and pass the check-digit test; a number that fails it is refused.
Iqama number	No	10 digits	Non-Saudi residents. Must start with 2 and pass the same check-digit test.
Passport number	No	20 characters	Length only — the desk applies no format check, so a passport the mobile application would reject is accepted here.

One profile may hold one document of each kind. The same number may appear on more than one profile — the constraint that once made a number unique across all profiles was removed deliberately, because it blocked legitimate registrations.

The screenshot shows the SIMF registration interface. The main form area is titled 'Saudi mobile' and 'Email (optional)'. Below these are sections for 'ID document', 'ID document image (optional)', 'Profile photo (optional)', and 'Interests'. The 'Saudi mobile' field has a placeholder example: 'e.g. +966500000000'. The 'Email (optional)' field has a note: 'Leave blank if the visitor has no email — the QR badge is the access key.' The 'ID document' section has a note: 'Optional scan of the national ID, Iqama or passport. PNG / JPEG / WebP, up to 5 MB. Stored encrypted at rest.' The 'ID document image (optional)' and 'Profile photo (optional)' sections each have a 'Choose File' button and a note 'No file chosen'. The 'Interests' section has a note: 'Up to 10 topics the visitor wants to follow at the event. Optional.' Below this are several topic tags: 'Naval Defence Technologies', 'Maritime Security', 'Shipbuilding & Marine Industries', 'Ports & Maritime Logistics', 'Hydrography & Marine Survey', 'Marine Environment & Sustainability', 'Autonomous & Unmanned Systems', 'Maritime Cybersecurity', 'Investment & Local Content', and 'Research & Innovation'. At the bottom right are 'Register' and 'Cancel' buttons, and a blue button labeled 'Ask the assistant'.

Figure 15 — The nationality section, which decides whether a national ID, an Iqama or a passport is asked for.

Contact and organisation

Field	Required	Limit	Rule the server enforces
Saudi mobile	No	32 characters	Must be 05XXXXXXXX or +9665XXXXXXXX.
International mobile	No	32 characters	Must be the international format: a plus sign, the country code, then the number.
Email (optional)	No	256 characters	—
Organisation	Yes	150 characters	Chosen from the organisation list. If the employer is not listed, pick the "Other" entry and type the name — this is why that entry exists.

The screenshot displays the SIMF 2025 registration interface. The top navigation bar includes the SIMF logo, the year 2025, a language selector (العربية), a dark mode toggle, a user profile icon for 'Super Administrator', and a 'Sign out' button. A left sidebar contains a search menu and a list of navigation items: Overview, Dashboard, Session attendance, Live hall, Statistics, People, Attendees, **Visitors** (highlighted), Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge, Access control, Admins, Pending admins, Roles & permissions, Reset user 2FA, Programme, and Themes & pillars.

The main content area is a registration form with the following sections:

- Saudi mobile:** A text input field with a placeholder example: 'e.g. +966500000000'.
- Email (optional):** A text input field with a note: 'Leave blank if the visitor has no email — the QR badge is the access key.'
- ID document:** A section with a note: 'Optional scan of the national ID, Iqama or passport, PNG / JPEG / WebP, up to 5 MB. Stored encrypted at rest.'
- ID document image (optional):** A file upload area with a 'Choose File' button and the text 'No file chosen'.
- Profile photo (optional):** A file upload area with a 'Choose File' button and the text 'No file chosen'. A note below states: 'A photo or logo for the badge, PNG, JPEG or WebP, up to 2 MB.'
- Interests:** A section with a note: 'Up to 10 topics the visitor wants to follow at the event, Optional.' It features a horizontal scrollable list of interest tags: Naval Defence Technologies, Maritime Security, Shipbuilding & Marine Industries, Ports & Maritime Logistics, Hydrography & Marine Survey, Marine Environment & Sustainability, Autonomous & Unmanned Systems, Maritime Cybersecurity, Investment & Local Content, and Research & Innovation.

At the bottom right of the form are two buttons: 'Register' and 'Cancel'. A blue circular button with a speech bubble icon and the text 'Ask the assistant' is located at the bottom right corner of the page.

Figure 16 — The lower sections: contact, the identity document and the profile photo.

Interests are offered for visitors only, and at most ten may be chosen.

On save the visitor is created awaiting approval, with no password and no badge. The badge is minted when the account is approved from the pending queue. There is a configuration option that approves a walk-in visitor immediately and prints the badge at the desk, but it ships switched off, and it never applies to partner accounts.

Creating a partner or staff account

The Others page uses the same wizard as the visitor page, with two differences: there is no interests section, and the account is never approved automatically. Every account created here waits for a person to approve it.

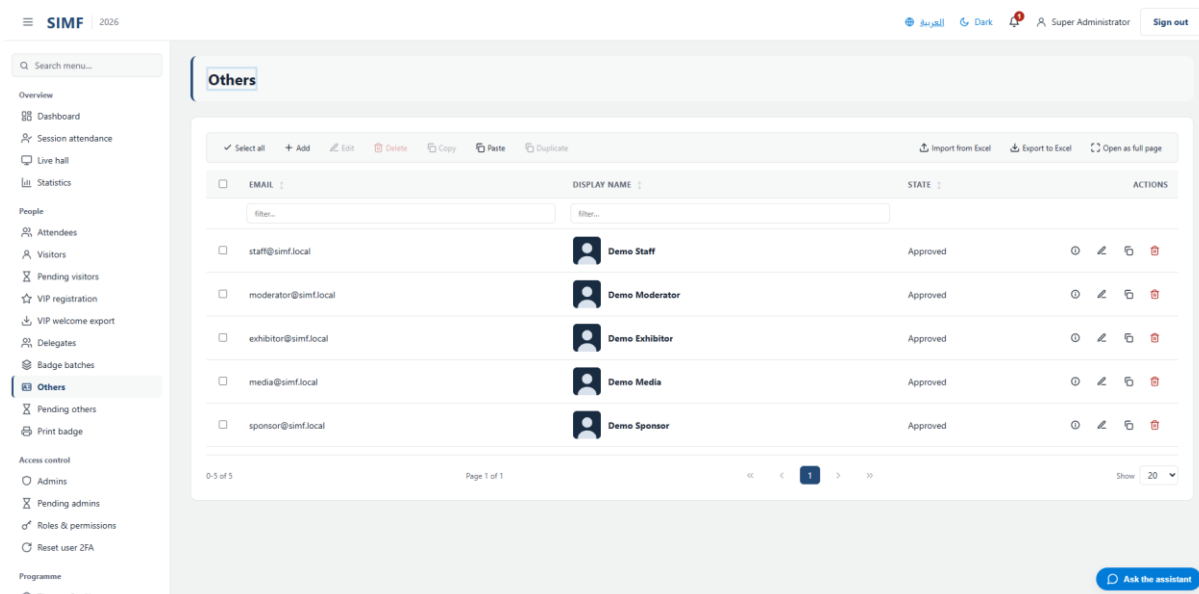


Figure 17 — The partner and staff accounts list.

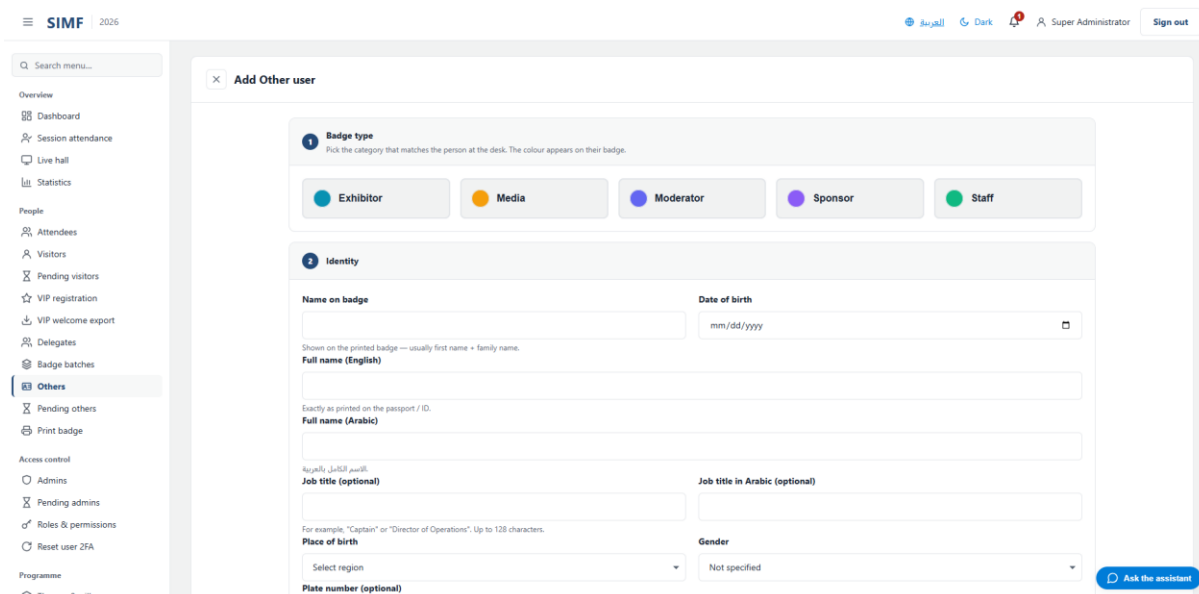


Figure 18 — The same wizard, without the interests section.

Registering a VIP

The VIP page is the visitor wizard with a protocol section added at the top, and a welcome photo alongside the profile photo.

Field	Required	Limit	Rule the server enforces
Mawj system ID (optional)	No	64 characters	—
Honorific / title (optional)	No	64 characters	—
Honorific / title in Arabic (optional)	No	64 characters	—
Preferred language (optional)	No	16 characters	Arabic or English.

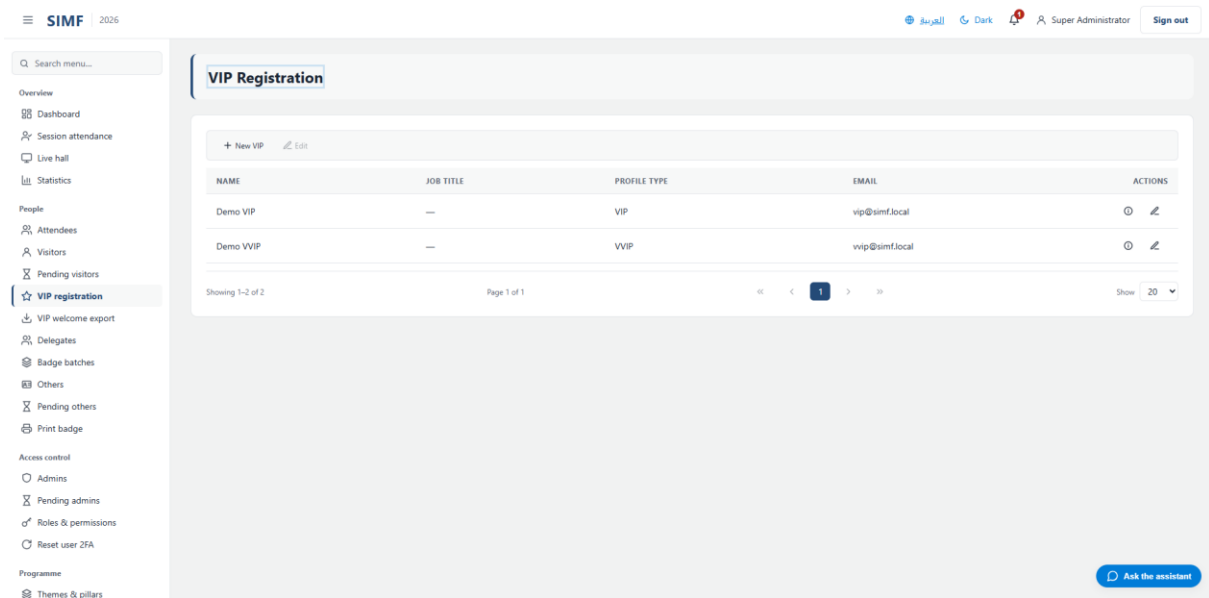


Figure 19 — The VIP registration page.

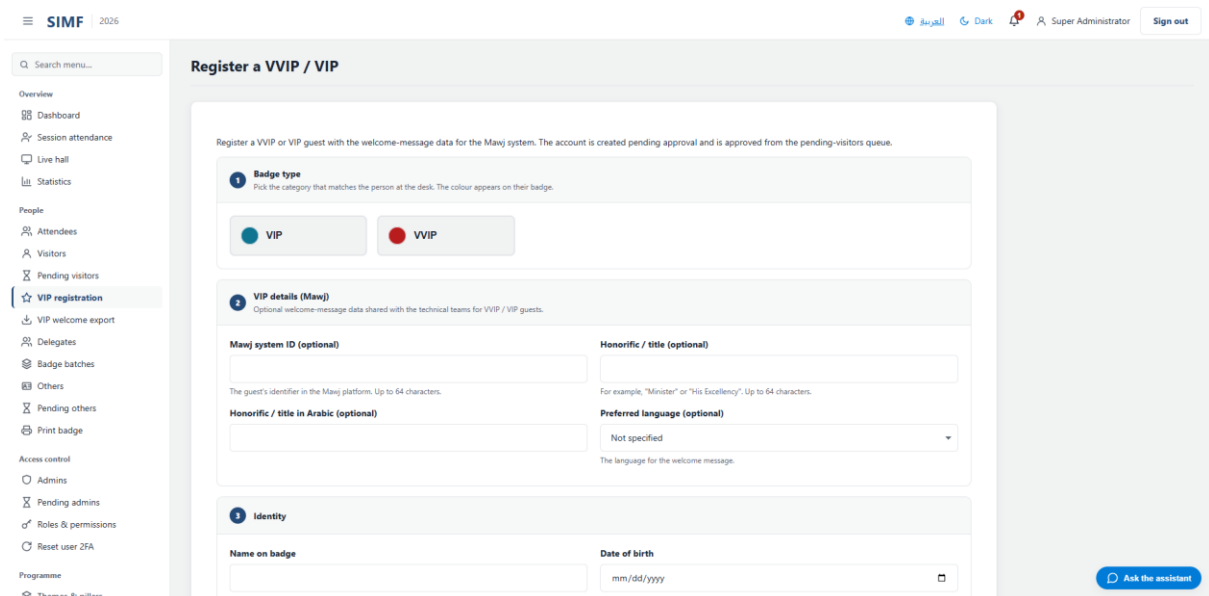


Figure 20 — The VIP wizard, with the protocol section above the identity section.

The profile picture

A profile picture is stored in the system's central file store, encrypted, and served back only to the account itself or to an administrator holding the right permission. It is not a file sitting in a public folder, and it cannot be reached by guessing an address.

Where a picture is set

- By the account owner, from My profile — this is the only place with a cropping tool.
- By an administrator, on the edit form of a visitor or partner account.
- By the registration desk, as part of the create wizard, alongside the identity document.

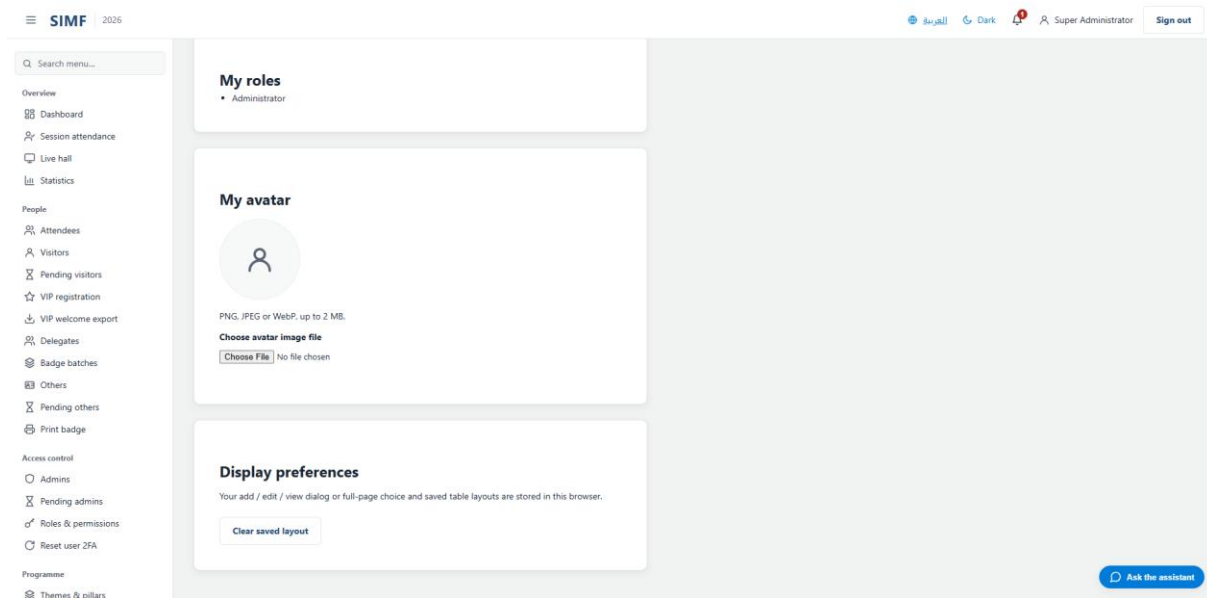


Figure 21 — The avatar card before a picture is set: a placeholder, the accepted formats and the size ceiling, and the file picker.

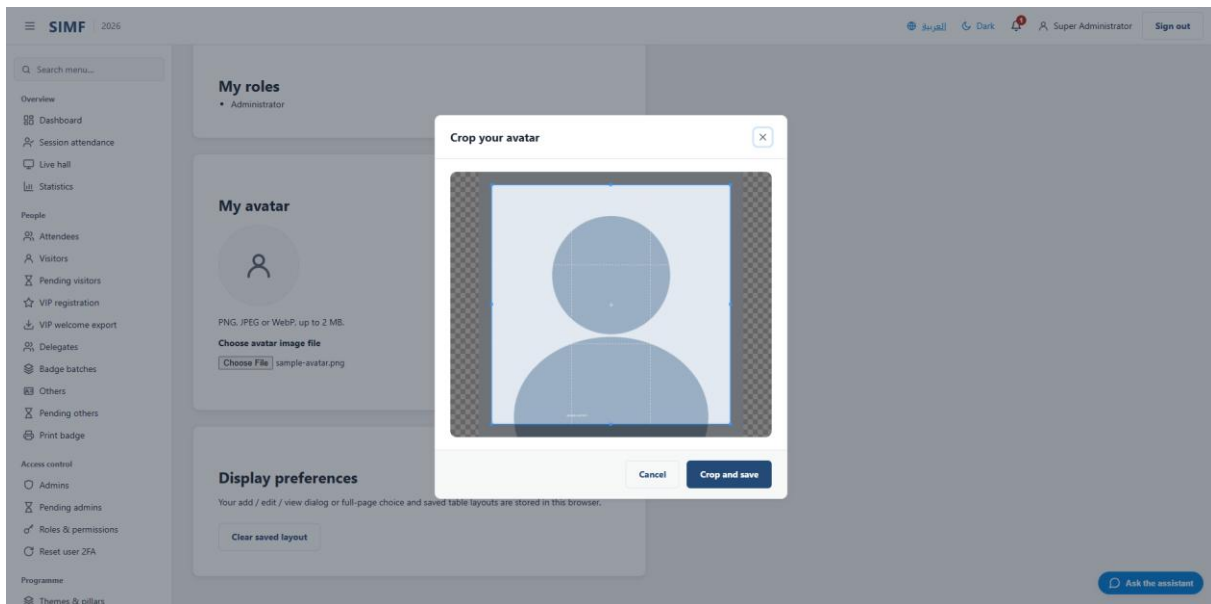


Figure 22 — Choosing a file opens the cropper straight away. The frame is square because the stored picture is square; there is no separate upload button, and nothing is sent until this is saved.

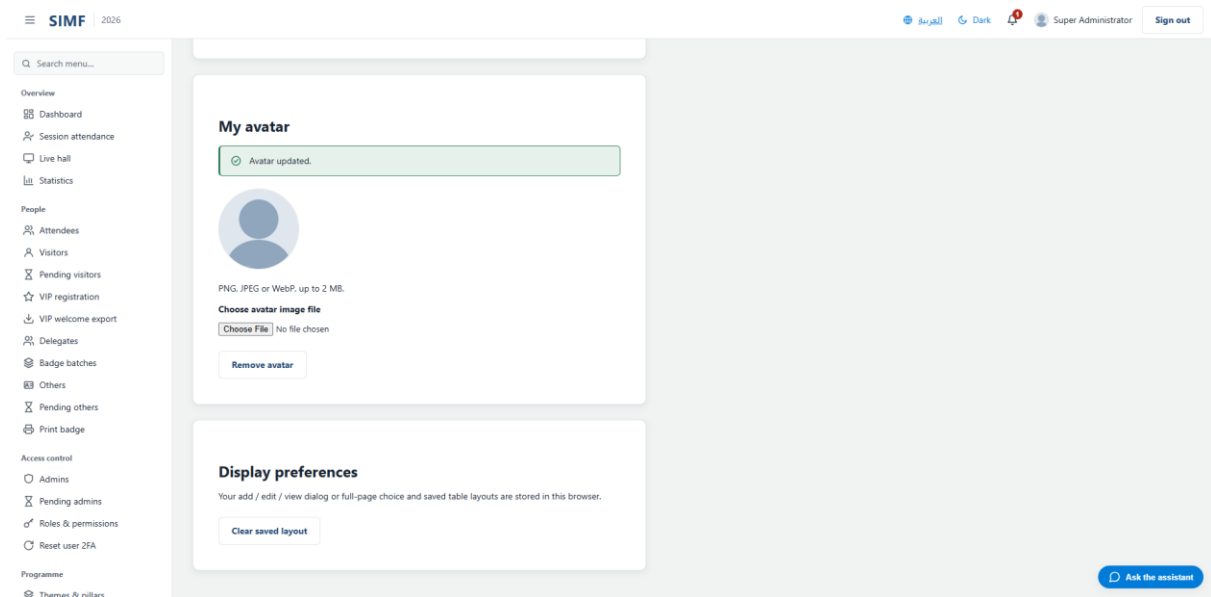


Figure 23 — The picture in place, with the option to remove it.

What the system accepts

Rule	Value
File types	PNG, JPEG or WebP — nothing else
Maximum size	2 MB for a profile picture; 5 MB for an identity document
Checked how	The file's declared type must match its actual content, so renaming a file to .png does not get it past the check
Cropping	Square, produced at 400 by 400 pixels
Stored	Encrypted, one active picture per account

There is no size check in the browser: an oversized file is uploaded and then refused by the server, so the failure appears after the wait rather than before it.

Replacing and removing

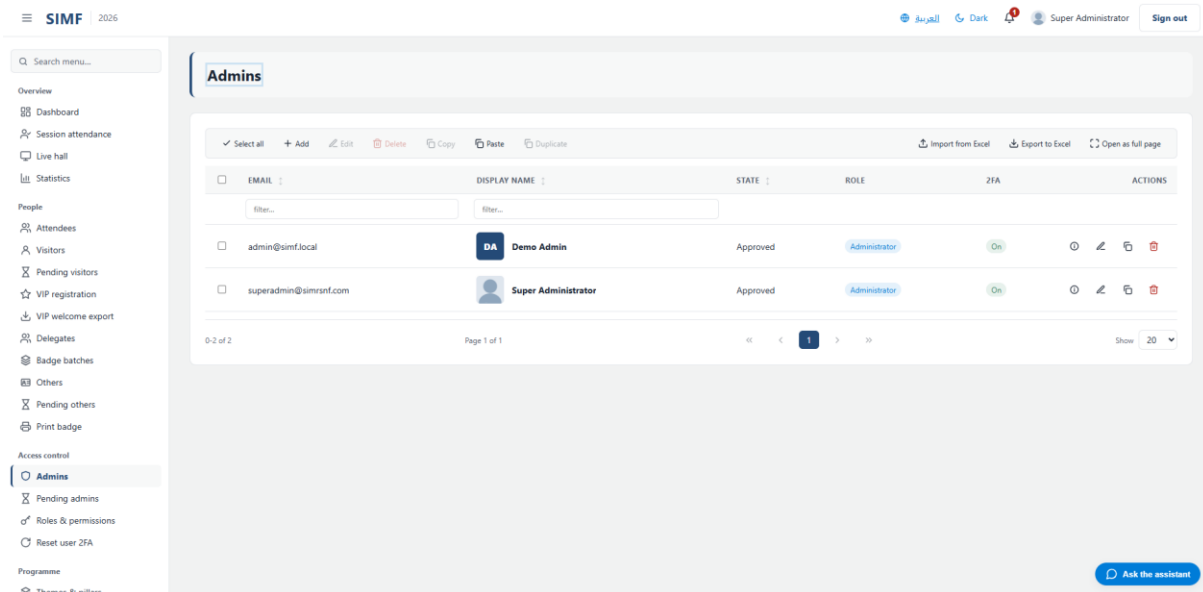


Figure 24 — The difference in a list: an account with a picture shows a thumbnail, one without shows a tile of its initials. An empty cell therefore means no picture was ever set, not a picture that failed to load.

Uploading a new picture retires the previous one in the same step; there is never more than one active picture on an account. Where an account has no picture the Control Panel shows a tile with the person's initials rather than a broken image, so an empty grid cell means no picture was ever set.

Changing an account after it exists

A new account is not usable yet. It waits in a queue until somebody approves it, and only then does it get its badge. This chapter covers the approval queues, editing an account, moving it between types, resetting a lost second factor, and withdrawing access.

The approval queues

There is one queue per kind of account, and each is a separate page with its own permissions. Approving is what mints the QR badge, so until it happens the person cannot pass a gate.

Queue	Address	Approve needs	Reject needs
Pending visitors	/admin/visitors/pending	Visitors.Approve	Visitors.Reject
Pending others	/admin/others/pending	Others.Approve	Others.Reject
Pending admins	/admin/admins/pending	Admins.Approve	Admins.Reject

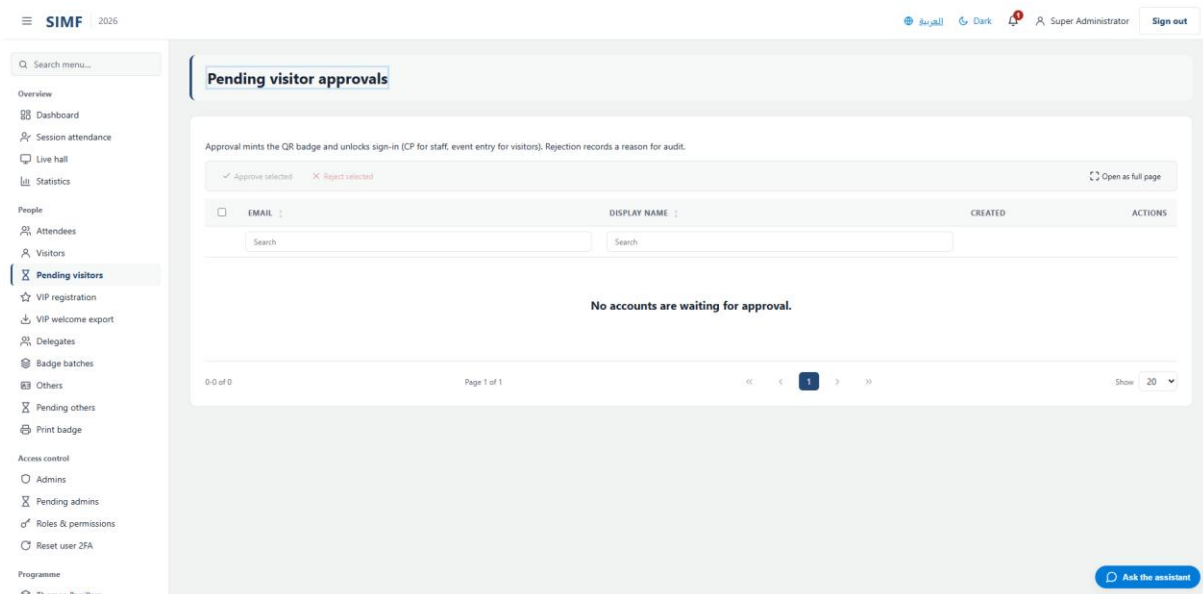


Figure 25 — The pending visitors queue.

Rows can be handled one at a time or in bulk. Rejecting requires a written reason of between 10 and 500 characters, and the button stays disabled until the reason is long enough. The reason is audited, so write something a colleague reading it in six months can act on.

When approving a visitor you may also set the tier at the same time, which saves editing the account afterwards.

Editing an account

The edit form is reached from the row actions on any of the account lists. It changes the email address, the display name, the profile type, the nationality, the two mobile numbers, the meeting

preferences and the pictures. It does not change the password — nobody can set another person's password; the account resets its own from the sign-in page.

For a partner or staff account the profile type is required, and the form will not save without one. For a visitor it is optional.

Moving an account between types

An account created in the wrong pipeline does not have to be deleted and rebuilt. The account details view carries a change type control, gated by its own permission, which moves the account between the visitor and partner sides and asks for the profile type it should land on.

Resetting a lost second factor

When somebody loses the phone holding their authenticator, and has no recovery code left, an administrator clears the second factor from Reset user 2FA. The person then pairs a new authenticator on their next sign-in.

The screenshot shows the SIMF 2025 web application interface. On the left is a sidebar menu with categories: Overview (Dashboard, Session attendance, Live hall, Statistics), People (Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge), Access control (Admins, Pending admins, Roles & permissions), and Programme (Themes & pillars). The 'Reset user 2FA' option is highlighted in the sidebar. The main content area is titled 'Reset another user's 2FA'. It contains a form with the following fields: 'User email' (with an email icon), 'Reason (audited)' (with a text area), and a question 'How did you verify the user's identity? Who reported the loss?' followed by a text input field. A 'Reset 2FA' button is at the bottom of the form. At the top right of the page, there are links for 'العربية', 'Dark', a user profile icon labeled 'Super Administrator', and a 'Sign out' button. At the bottom right, there is a blue button labeled 'Ask the assistant'.

Figure 26 — Resetting a user's second factor.

- A reason is required, 10 to 500 characters, and it is audited.
- You cannot reset your own second factor here — use a recovery code, or ask another administrator.
- You cannot reset another administrator's second factor. The most privileged accounts are re-paired through configuration on the server, deliberately, so that no single administrator can take over another.

Withdrawing access

Delete on an account list is not a deletion. It disables the account, revokes its sessions and notifies the person by email. The row action and the bulk action open the same dialog, which asks for an audited reason of 10 to 500 characters.

Your own row is skipped if you include it, and the result reports it as skipped rather than failing — so a bulk action that reports one fewer than you selected is usually this.

Roles and permissions

What an administrator can see and do is decided by permissions, and permissions are granted to roles, never to a person. To give somebody an ability you put them in a role that holds it. This is the whole model, and it has one deliberate exception: the Administrator role holds a wildcard that grants everything.

Permission names

A permission is written as the page it governs, a full stop, and the action — Visitors.Approve, Roles.AssignPermissions, Admins.ResetTwoFactor. Two permissions guard every page: one lets the page open at all, and one puts it in the menu. They are usually the same, and where they differ the manual's page reference lists both.

A button is gated by the permission of the endpoint it calls, which is not always the page's own. On a page holding two grids over two different things they differ, and on the partner queue the bulk approve and the per-row approve are gated separately because the server gates them separately.

Creating a role

Open Roles and permissions and use Add. A role needs only a name, between 1 and 64 characters, and the name must be unique. A new role starts with no permissions at all, so it grants nothing until permissions are assigned to it.

NAME	TYPE	USERS	PERMISSIONS	ACTIONS
Administrator	Built-in	2	0	Permissions
GateOperator	Built-in	0	3	Permissions
PublicRelations	Built-in	0	13	Permissions
ScientificCommittee	Built-in	0	32	Permissions
SecurityTeam	Built-in	0	9	Permissions

Figure 27 — The roles list.

Granting permissions to a role

The permissions editor lists every permission in the system, grouped by the page it governs, with the ones the role already holds ticked. Tick, untick, and save.

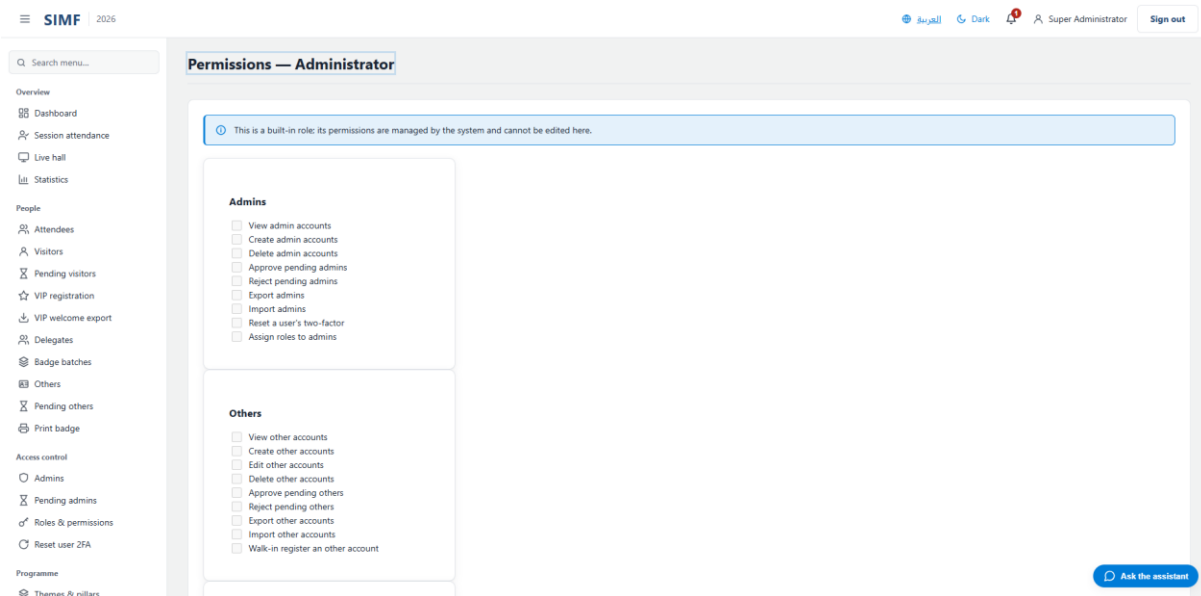


Figure 28 — The permissions editor for one role.

The baseline roles that ship with the system are read-only here. They cannot be edited, renamed or deleted, because the system's own behaviour depends on them.

Giving a person a role

Roles are assigned to administrators only — a visitor or partner account carries none, because it does not sign in to this Control Panel. Assign them either when creating the administrator, or afterwards from the Edit action on the administrators list.

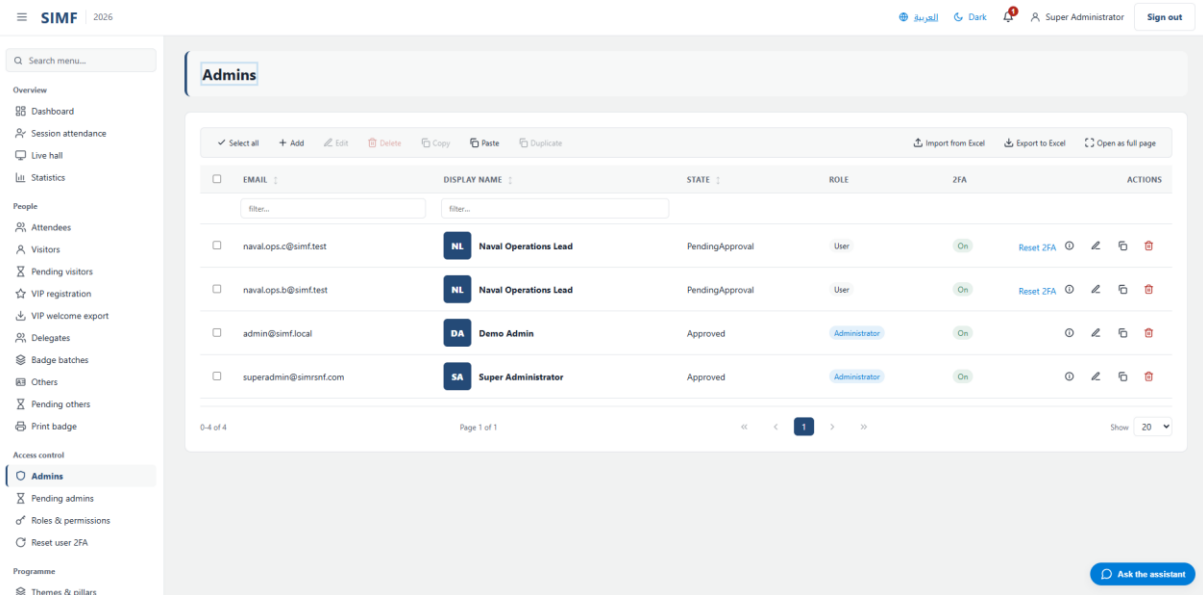


Figure 29 — The administrators list, where roles are assigned.

The guards

- The last administrator cannot have the Administrator role taken away. The system refuses, rather than leaving itself with nobody who can administer it.
- A role still held by somebody cannot be deleted; the error says how many people hold it.
- Assigning a role while creating an account needs the role-assignment permission on top of the create permission, so somebody who may add administrators cannot silently make one powerful.

Building the programme

The Programme menu lists twenty pages in a sensible reading order, and it is easy to take that order for a wizard. It is not. The actual dependencies are far sparser than the menu suggests, and knowing which is which saves an afternoon of filling in screens nothing was waiting for.

What a session actually needs

To create a session you need	Required?
A hall, and it must be active	Yes — the only hard link a session has
A type: Workshop, Session or Event	Yes
At least one speaker	Yes, unless the type is Event
A unique code	Yes — and it stays taken by a deleted session
One or more themes	No
A session category	No
A programme day covering its date	No — sessions are matched to a day by DATE, not by a link

Two rules catch people out. A session code stays reserved after the session is deleted, because deletion deactivates rather than removes — so reusing a code from a cancelled session is refused. And two active sessions cannot overlap in the same hall; the second one is rejected outright rather than flagged.

The requirements document says a session's theme, hall and category are all required. The code requires only the hall. Where the two disagree, the system does what the code says.

Themes and categories are not the same thing

A theme is one of the forum's pillars: a code, a bilingual name, an order and an accent colour, and a session may carry several. A category is a single, separate label, and its list ships EMPTY on purpose — the values are the client's to decide, which is why it is a table you fill rather than a fixed set in the code. Neither is required, so a session with no theme and no category is legal and will simply appear ungrouped wherever the programme is shown.

CODE	TITLE	TITLE (ARABIC)	HALL	START (SAUDI TIME)	END (SAUDI TIME)	CAPACITY	STATUS	LIFECYCLE	ACTIONS
D1-01	Reception & Registration	الاستقبال والتسجيل	Main Hall	23-11-2026 07:00 AM	23-11-2026 08:15 AM	500	Active	Scheduled	[Icons]
D1-02	Arrival of the Chief of General Staff & Forum Opening	وصول معالي رئيس هيئة الأركان العامة وبدء فعاليات افتتاح المنتدى	Main Hall	23-11-2026 08:30 AM	23-11-2026 08:35 AM	500	Active	Scheduled	[Icons]
D1-03	Holy Quran Recitation	تلوة آيات من القرآن الكريم	Main Hall	23-11-2026 08:35 AM	23-11-2026 08:38 AM	500	Active	Scheduled	[Icons]
D1-04	Patron Inaugurates the Forum	ندشني راعي النخيل لأعمال المنتدى	Main Hall	23-11-2026 08:38 AM	23-11-2026 08:40 AM	500	Active	Scheduled	[Icons]
D1-05	Forum Visual Presentation	العرض المرئي للمنتدى المرئي	Main Hall	23-11-2026 08:40 AM	23-11-2026 08:50 AM	500	Active	Scheduled	[Icons]
D1-06	Speech by the Chief of Naval Forces Staff	كلمة معالي رئيس أركان القوات البحرية	Main Hall	23-11-2026 08:50 AM	23-11-2026 09:00 AM	500	Active	Scheduled	[Icons]
D1-07	Commemorative Photo with the Patron	الصورة التذكارية مع راعي النخيل	Main Hall	23-11-2026 09:00 AM	23-11-2026 09:05 AM	500	Active	Scheduled	[Icons]
D1-08	Opening of the Accompanying Exhibition	افتتاح المعرض المصاحب	Main Hall	23-11-2026 09:05 AM	23-11-2026 09:06 AM	500	Active	Scheduled	[Icons]
D1-09	Tour of the Accompanying Exhibition	جولة على المعرض المصاحب	Main Hall	23-11-2026 09:06 AM	23-11-2026 09:20 AM	500	Active	Scheduled	[Icons]

Figure 30 — The sessions list, with the real programme in it.

Programme days matter — but not where you would expect

Because a session finds its day by date, a missing programme day does not stop anybody scheduling anything. What it does instead is quiet and worse. The forum's own date boundary is calculated as the earliest and latest ACTIVE programme day, and every meeting slot and availability window must fall inside it. When there are no active days that boundary is nothing at all, and the check stops applying — so an administrator can set a speaker's availability in the wrong month and nothing objects.

The boundary is read from the programme days deliberately, and not from the event start and end dates on the organisation profile — those hold a placeholder range that has been stale for some time. If meetings are landing outside the forum, check the programme days are present AND active before anything else.

Run of Show is a read-only view. It groups the same sessions by day on one screen and authors nothing — there is no edit permission for it because there is nothing to edit.

Publishing a session needs a recording

A session moves Scheduled → Held → Recorded → Published, one step at a time; it cannot jump. It cannot be marked Held before its start time has passed, and it cannot reach Recorded or Published at all until a recording file has been uploaded. Un-publishing means stepping back to Recorded — that is the only retraction.

Seating is two levels, and the top one is the hall

The hall owns the seat map; the session only paints reservations on it. There is no per-session layout: the session seat plan draws the hall's rows and shows what is held on them for that session.

- Define the hall's rows once, on Hall seat layouts: row labels, seats per row, and a tier per row. The seats across all rows may not exceed the hall's capacity.
- Then, per session, use Session seat plans to block a whole row, hold a single seat for a VIP, or release something held.
- A hall with NO layout has no seat picker at all. The session silently becomes open seating and allocates against the hall's capacity number — it does not fail, it just stops being a seat map.

A newly added row starts as VVIP, deliberately: nobody may book it until an administrator downgrades it to VIP or Normal. That default has a history — a layout re-saved without its tiers once shifted every row's tier by one, and a row that had been bookable the day before began refusing every visitor with no explanation that the tiers had moved. When you edit a layout, check the tiers afterwards.

Three ways a seat can be unavailable

What it is	What it means
An admin-reserved row	A whole row painted off-limits for one session. It is written as one record per seat, and it holds nobody — it just blocks
A VIP tier row	A property of the HALL layout, not of a session. Only a visitor whose profile type is a VIP tier may pick it
A VVIP seat with a guest note	Nobody may self-pick it. There is no registration behind it, so the note you type IS the occupant record — "Reserved for the Minister" is what the app and the seating desk show

A booking IS a seat

There is no separate booking record. When a visitor books a session on a hall that has a layout, the booking is the seat; on an open-seating session it is the same record with no seat on it. A visitor cannot hold two bookings for sessions that overlap in time — the second is refused.

The Bookings page is a monitor, not a desk. Its approve and reject actions were removed when the approval queue was retired, so a booking is confirmed the moment it is made. Releasing a held seat is done on Session seat plans — the server's own error message says so, because people looked for it here first.

A held seat whose holder has not arrived is released automatically three minutes before the session starts. Blocked rows are exempt — they are not waiting for anybody.

Four kinds of meeting, and only two have a queue

Kind	Who asks	Who decides
Speaker meeting request	An attendee, from the app	An administrator accepts — then the SPEAKER confirms by email before it is really booked
Delegation meeting request	A delegate, for their country	The team accepts, then the target delegation confirms. Any eligible member's click confirms for all of them
Business meeting	Nobody — there is no request	An administrator creates it, already confirmed
Meeting table	Not a request at all — it is a resource	An administrator adds tables to a meeting hall

The state that causes the most confusion is the one between accept and confirm. When an administrator accepts a speaker request and binds it to a slot, the request is not yet booked: it waits for the speaker's own click on an emailed link, and while it waits the ATTENDEE'S APP STILL SHOWS IT AS PENDING. Telling them it is confirmed at that point is telling them something the app contradicts. The slot is held throughout, so offering it to somebody else will fail.

The three availability pages — speaker, hall and delegation — exist to produce the bookable slots those requests choose from. Each window is a start and an end divided into fixed slots, half an hour by default, and each must fall inside the forum days. Deleting a window does not cancel a meeting already booked in it; the meeting keeps its time.

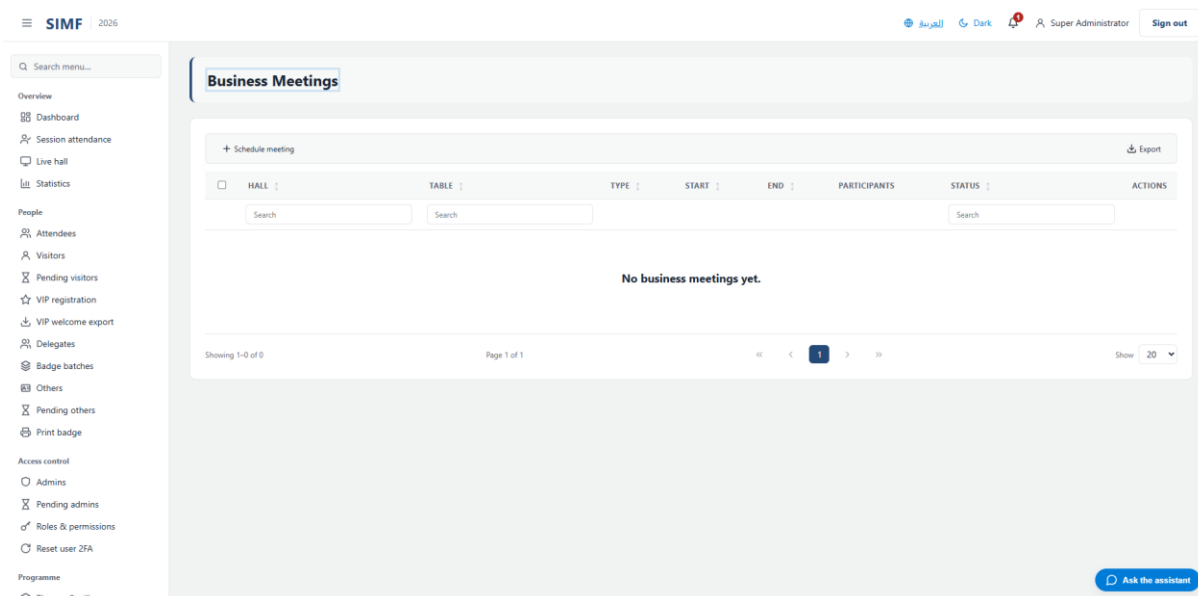


Figure 31 — Business meetings — created here, never requested.

Running the event day

On the day, four groups of pages matter: the gates that let people in, the halls that record where they went, the question and summary desks the scientific committee works, and the numbers everybody asks for. This chapter is about those, in that order.

Gates

A gate is a physical way in. Each one carries a direction — in, out, or both — a list of profile types it admits, and the operators assigned to work it. A gate attached to a hall is a hall door, and an allowed scan there opens or closes the attendee's attendance for that hall; a gate with no hall is a perimeter gate.

The allow-list is the single most dangerous control on this page, because it is not read the way it looks. An EMPTY list admits everybody. A list with entries admits only those. And a list whose every entry has been DEACTIVATED admits nobody at all — it does not fall back to allow-all. That is deliberate: denying visibly was judged safer than silently turning a VIP gate into a public one. The consequence on the day is that the gate refuses everyone, and because ten refusals inside a minute trip the gate's failure circuit, it then starts refusing its own operator too.

CODE	NAME	NAME (ARABIC)	DIRECTION	ALLOWED TYPES	OPERATORS	STATUS	ACTIONS
MAIN-GATE	Main Venue Gate	البوابة الرئيسية	Both	All	1	Active	Edit Delete
VIP-GATE	VIP Gate	بوابة كبار الشخصيات	Both	2	1	Active	Edit Delete

Figure 32 — The gates list. Each row is an entrance with its own direction and allow-list.

A refused scan is not an error

This is the distinction to hold on to. If the request itself failed — the operator is not assigned to this gate, or the gate's circuit has tripped — the console shows an error. If the badge was simply not admitted, the request SUCCEEDED and the refusal comes back as a reason on a normal response. So "it worked" is never evidence that anybody got in, and the operator should be reading the reason, not the status.

The scan was refused because	What to do
The code matched no attendee	Wrong or damaged badge — re-issue from Print badge
The gate was deactivated between the scan and the check	Somebody edited the gate mid-shift; re-activate it
The holder is not approved	Approve them from the pending queue
The account is disabled, or locked out	An administrator disabled it, or it hit the sign-in lockout
The holder's profile type is inactive	Re-activate the type in Reference data
The badge belongs to a closed edition	A badge from last year. Deliberately not distinguished to the holder
The profile type is not on this gate's list	Either genuinely the wrong entrance, or the allow-list problem above
A hall door, and they are not registered for anything it admits for	They need a booking, or walk-in mode opened for the day

Two behaviours that look like faults and are not. The same badge scanned twice within five seconds replays the first result instead of recording a second movement — unless the operator deliberately flipped the direction on a both-way gate, which is a real movement and is recorded. And the badge is never told WHICH check it failed; a refusal is deliberately vague to the person holding it, and specific only on the operator's screen.

Halls and who is inside them

Hall attendance is a different record from a gate scan. A scan is the audit of an entrance; attendance is one row per attendee per session, opened when they arrive and closed when they leave. A row with no leaving time is somebody still in the room. Attendance is keyed to the PROFILE, not to an account, because a walk-in visitor may have no account at all.

- Hall arrivals is the door console for a hall.
- Live hall is the read-only monitor: the seat map and everyone currently in the room, refreshing itself every fifteen seconds. It writes nothing.
- The gates dashboard shows who is currently inside the venue, worked out from each visitor's most recent allowed scan.

"Currently inside" is derived, not stored, and it is bounded by a rolling window on purpose. An entrance that only ever records arrivals never records a departure, so without that bound a visitor who came in once would be counted as present forever.

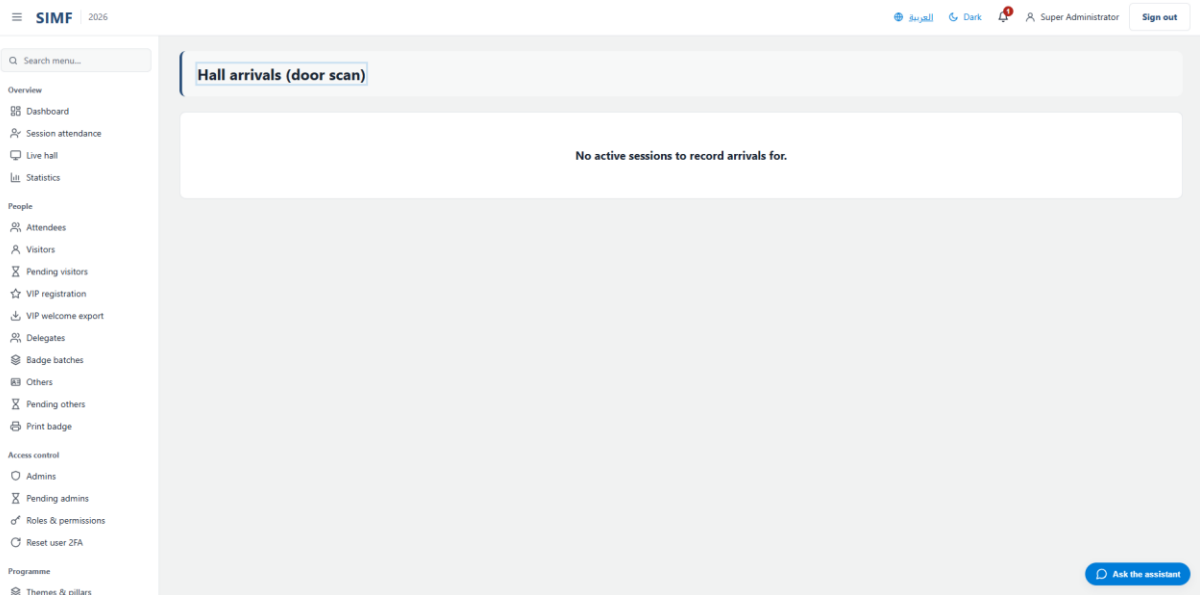


Figure 33 — The hall arrivals console.

Questions, and who may touch them

Attendees submit questions from the app while a session is on. They travel through three hands: an AI screen, the scientific committee, and then the session's own moderator. Each of those is a different page and a different permission.

- The AI verdict is ADVISORY. It blocks nothing and hides nothing, and in the shipped configuration the filter is a stub until it is switched on.
- The committee works the central question queue: approve, hide, or escalate to a ROLE — never to a named person.
- The moderator works only their own session's approved set: reorder, hide, push to stage, mark answered. Questions still waiting for the committee are not readable from that desk, on purpose.
- Un-hiding restores a question to where it was, so a rejected question returns to pending rather than jumping to the stage.

Moderator authority is granted PER SESSION, on the Session moderators page. The mobile application's own Moderator role grants none of it. Somebody given the app role and no grant opens an empty desk and reports the system as broken; somebody given the grant moderates exactly the session it names.

A question is only accepted while its session is open to them: shortly before the start and until the end. Where the hall has a geofence the attendee must actually be recorded as present, so somebody watching remotely is refused — which is the intended behaviour, not a fault.

Session summaries

The committee's minutes for a session are drafted by the AI service and then approved by a person. The draft the model produced is kept separately and never overwritten by an edit, so there is always a record of where the text started.

In the shipped configuration the AI provider is a stub that echoes the prompt back. It produces something that looks like minutes and is not, and the system refuses to publish it — which reads as a bug unless you know a real provider has not been configured yet. Configuring one is a change to the prompt's provider in the Control Panel, not a code change.

Approval is not permanent. Any edit to the content clears it, and the summary must be approved again — so a small correction after sign-off quietly returns it to the queue.

Ratings

Five rating forms ship with the system: one for the application, one for the event, one for the exhibition, one per day, and one per session. Their scope decides how often somebody may answer — once overall, once a day, or once per session — and the rule throughout is that you may only rate what you attended.

A rating is asked for automatically: at the end of a day to everybody who checked in that day, at the end of the programme, when a session's clock runs out, when somebody leaves a hall, and when

they close the live stream. Leaving the venue through a gate is NOT one of the triggers, because a gate belongs to the venue and knows nothing about which session anybody was in.

The five built-in forms can be renamed and their questions changed, but they cannot be deleted and they cannot be deactivated — the switch is ignored on a built-in type. Only forms an administrator added can be turned off.

The numbers

The dashboard and the statistics page compute every figure the moment you open them. There is no snapshot, no overnight rollup and no "as at" time — two people opening the page seconds apart can legitimately see different numbers, and there is nothing to re-run when a figure looks stale.

- Attendees are counted from PROFILES, not from accounts, because a walk-in or a pre-printed badge may have no account behind it — and at a real event that is a large share of the room.
- "Total arrivals" counts distinct attendee-and-session pairs, not scans: somebody who steps out of a hall and comes back counts once. It will therefore never equal the gate scan count, and the two should not be reconciled.
- Exhibitors and sponsors are counted as organisations the team manages, not as accounts.

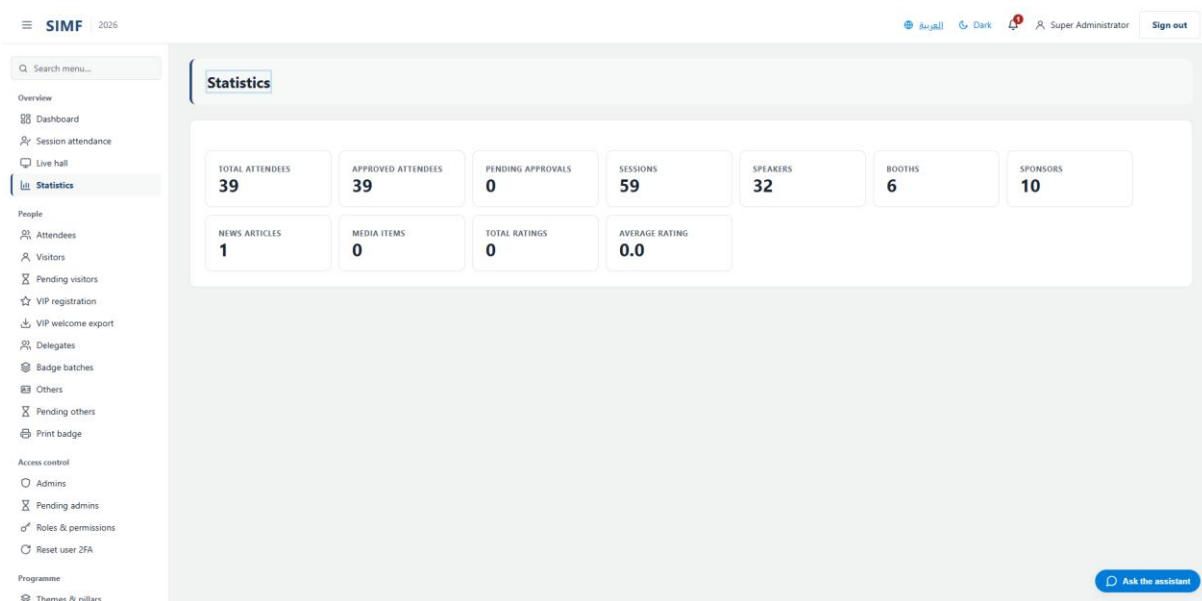


Figure 34 — The statistics page. Every figure on it was calculated when the page opened.

The lists everything else chooses from

Six pages hold lists that nothing else works without. They look like the least interesting screens in the Control Panel and they are the ones that stop a registration dead when they are empty: a visitor cannot finish signing up without an organisation to belong to, and cannot be given a badge without a profile type. Fill these before an event opens, not during it.

What each list feeds

List	Read by	What an empty list does
Interests	The mobile app's interests step, and the "meet people like you" matching	The picker offers nothing; a visitor cannot pick the one to ten interests the app asks for
Organisations	The organisation picker on every registration, in the app and at the desk	Registration cannot be completed — an organisation is required. This is not hypothetical: it happened on the first production install
Countries	Nationality on every profile, and the calling-code picker	A non-Saudi visitor cannot state a nationality
Regions	Place of birth for a Saudi visitor	The place-of-birth picker is empty; the field is optional, so registration still completes
Visitor profile types	Which tier a visitor is approved into, and what the badge says	An account cannot be approved into a tier, so no badge is issued
Other profile types	The same, for partner, exhibitor, media and staff accounts	A partner account cannot be saved — its profile type is required

The organisation list is a curated government import matched on commercial registration, which is why the Control Panel is the only place it is edited and why the app cannot add to it. When somebody's employer is genuinely absent they pick the "Other" entry and type the name; that text is read later by a person, not merged automatically.

Deleting is not deleting

Removing an entry from any of these lists deactivates it. It stops being offered to anybody choosing from now on, and every profile that already points at it keeps pointing at it — a visitor who chose an interest does not lose it because the interest was retired. Re-activating puts it back in the picker. This is why the lists can be tidied during an event without breaking the people already registered.

Profile types are not just labels

A profile type decides more than a word on a badge: whether the holder counts as a visitor, whether they appear in the app's meet-people list, whether they are a VIP tier, and — through the gate's allow-list — which entrances they may use. Creating one is quick; deciding what it means is the part worth doing carefully, because gates and badges are configured against it afterwards.

Deploying to a server

SIMF is installed on premises, on Windows Server with IIS and SQL Server. A deployment is three separate things, done in this order: the pipeline copies the built files onto the server, an operator sets that server's configuration, and the application creates or updates its own database the first time it starts. Nothing else creates the database, and nothing in the pipeline sets a single configuration value.

The estate

There are two servers, and each runs all four applications. The single most important thing to know before running a deployment is that the environment names are misleading:

Environment name	What it actually is	Address
SIMF-Prod	PRE-PRODUCTION	simf.zagali-ict.com
SIM-RNSF	PRODUCTION	web / cp / api.simrsnf.com

This is not a typo to be corrected. Those are the names as registered, and the one that reads like production is not. Anyone who "fixes" the mapping on sight deploys straight to production while believing they are rehearsing. Trust the job names in the pipeline, never the environment string.

The four applications

Application	IIS site	Folder on the server	Public address
API	SIMF.API	D:\System\v1.0.1\api	api.simrsnf.com (internal)
Control Panel	SIMF.CP	D:\System\v1.0.1\cp	cp.simrsnf.com
Website	SIMF.WEB	D:\System\v1.0.1\web	web.simrsnf.com
Mobile edge	SIMF.EDGE	D:\System\v1.0.1\edge	edge.simrsnf.com

The IIS sites and application pools must already exist. The deployment copies files into them; it does not create them. Create them by hand in IIS Manager before the first deployment, with the .NET CLR version set to No Managed Code.

Before the first deployment

- Windows Server with IIS and the ASP.NET Core hosting bundle installed — without the bundle the application pool starts and immediately stops.
- SQL Server, reachable from the application server on port 1433.
- A TLS certificate for each public host name. The one for the API is the one that gets forgotten, because it is internal.
- The host time zone set to Arab Standard Time.
- Write access, for each application pool identity, to the log directory and to the file-store directory.

- For the Flutter web bundle only: the IIS URL Rewrite and Application Request Routing modules, with proxying enabled.

The order of a deployment

- The pipeline builds all four applications and publishes them as one artefact.
- It confirms the target machine, and refuses to continue if the machine is the one named as forbidden for that job — this is what stops a pre-production run reaching production.
- For each application in turn — API first, edge last — it stops the site and its pool, mirrors the files into place, and starts them again, proving both reached the started state.
- The operator then runs that server's configuration scripts as an administrator.
- The operator restarts IIS. Recycling the pool is not enough: the worker process inherits its environment from the service that launched it, so a recycled pool keeps the old values.
- The API is started; it creates or migrates both databases and seeds the first administrator.

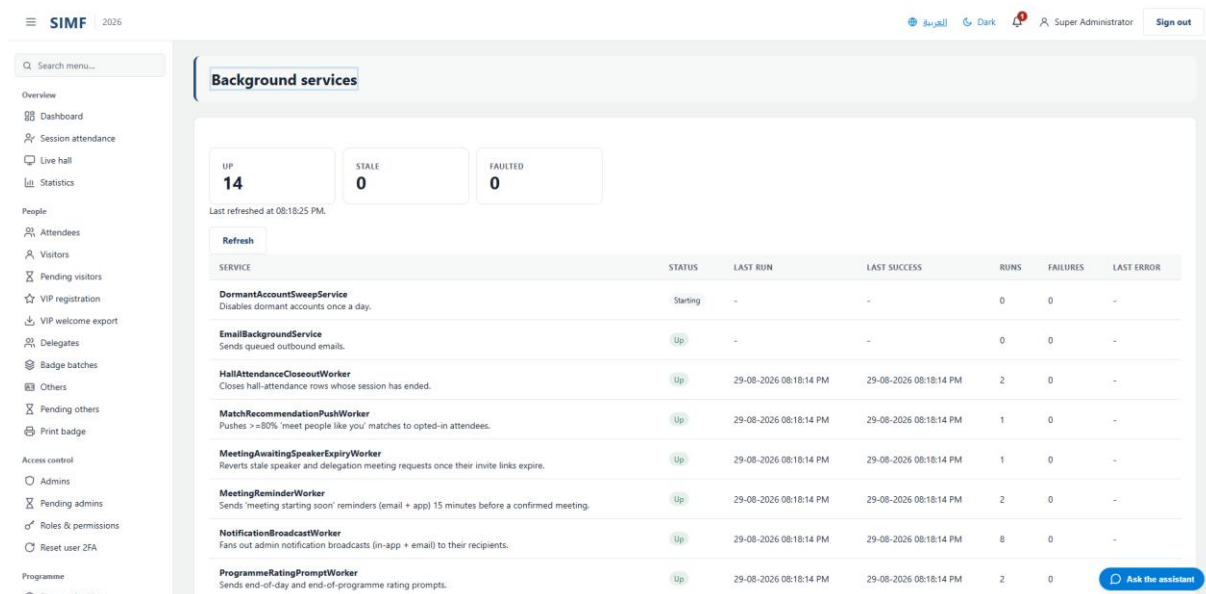


Figure 36 — After a deployment, this is where you confirm the background workers came up. They run inside the API process, so a healthy site with a dead worker looks fine from the outside.

The databases

There are two, deliberately kept apart: one holds accounts, roles and permissions, the other holds everything else. There is no manual migration step — the API applies its own migrations at startup, and it applies them to the second database before the first. That order is required, not incidental.

Booting the API against an empty database creates it. Content — the programme, the speakers, the news, the sponsors and the archive — is applied separately, by hand, from the seed scripts. One step in that process is copying the speaker photographs into the file store; without it every photograph returns not-found while the database rows look perfectly healthy.

The first administrator

The system creates exactly one administrator on first boot, from configuration. Its email, its starting password and its authenticator secret are all configuration values. Once it has signed in, change the password, pair a fresh authenticator, and then change those configuration values to new throwaway ones. That last step is the line between deployed and secure.

Two traps. If the configured password or email is blank the seeder writes no administrator, logs the reason, and the system starts up perfectly healthy — every sign-in then fails with nothing visibly wrong. And a password containing a run such as 12345 is rejected by the password rules, with exactly the same silent outcome.

Every configuration value

Configuration reaches the applications as machine-wide environment variables set on the server. The files shipped inside each application carry only non-secret defaults, and they are overwritten by every deployment, so nothing that matters may be edited there.

Not everything is an environment variable. Some settings are edited in the Control Panel itself and stored in the database, which is the right place for anything an administrator should be able to change without a deployment.

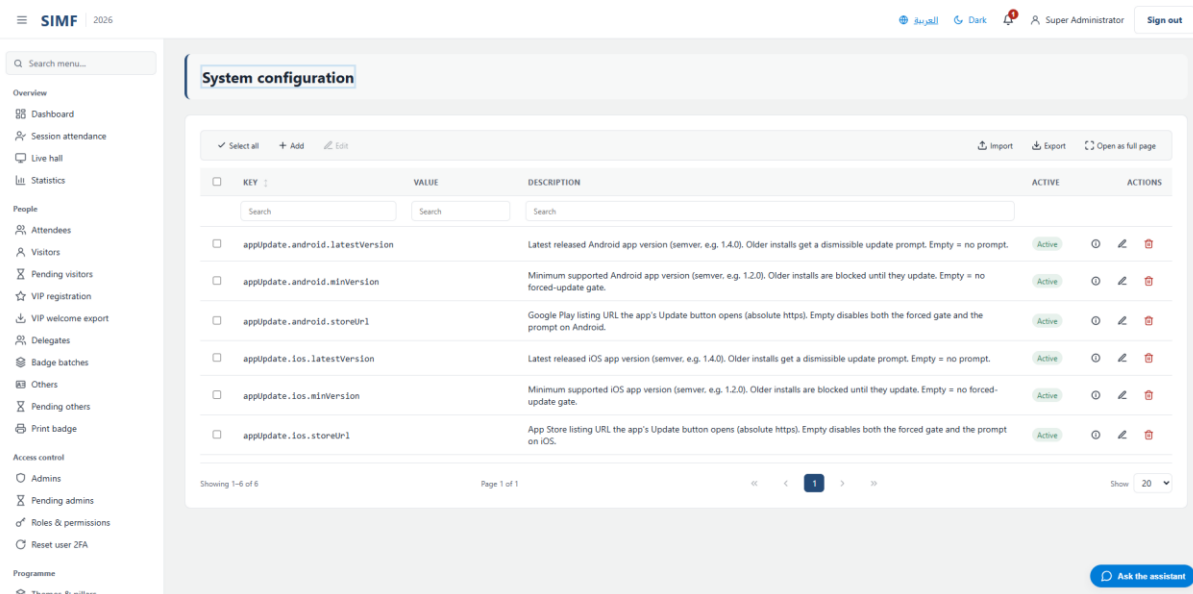


Figure 37 — The configuration list — key and value pairs the system reads at run time.

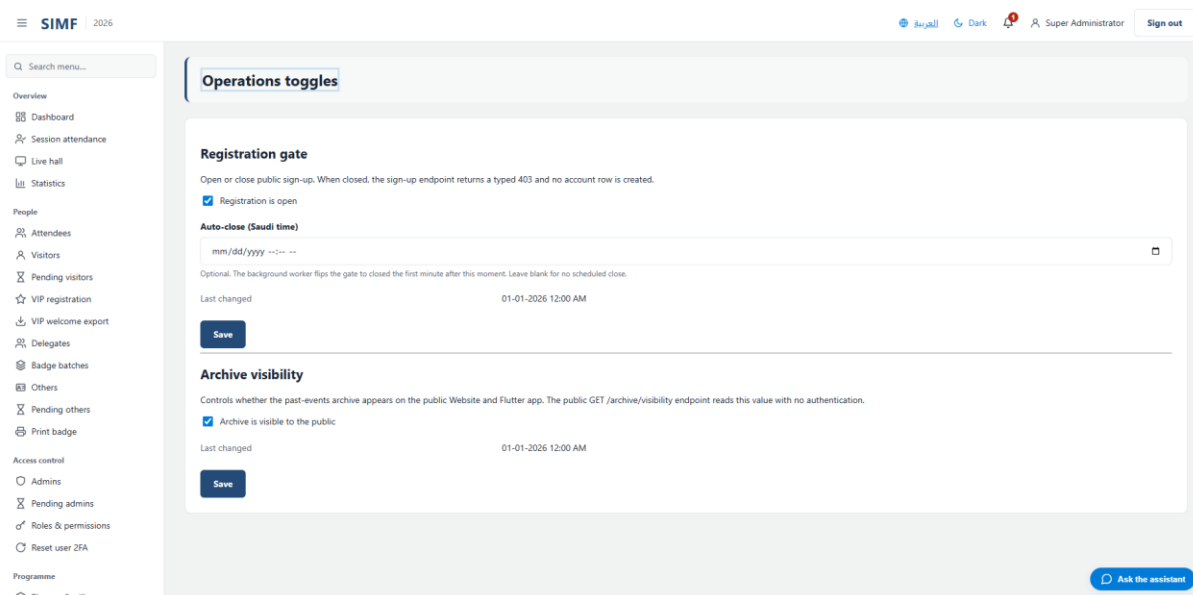


Figure 38 — The operations switches, which turn features on and off for an event day without touching the server.

How a variable name is built

Each application reads its own prefix, and a colon in the setting name becomes a double underscore in the variable name.

Application	Prefix	Example
API	SIMF_API_	SIMF_API_ConnectionStrings__SimfAppDb
Control Panel	SIMF_CP_	SIMF_CP_Api__BaseUrl
Website	SIMF_WEB_	SIMF_WEB_Api__BaseUrl
Mobile edge	SIMF_EDGE_	SIMF_EDGE_ReverseProxy__KnownProxies__0

A bare SIMF_ prefix binds to nothing. Worse, each application refuses to start if it finds variables using that retired prefix, naming them in the error — so an upgraded server must have the new variables written first and the old ones cleared afterwards, never the other way round. The one exception is ASPNETCORE_ENVIRONMENT, which is read before any prefix applies and stays unprefixed on every host.

How to set one

From an elevated PowerShell prompt on the server, machine scope, then restart IIS so the worker process picks up the new environment block:

```
[Environment]::SetEnvironmentVariable(
    'SIMF_API_ConnectionStrings__SimfAppDb',
    'Server=...;Database=SIMF_App;...',
    [EnvironmentVariableTarget]::Machine)
```

iisreset

Recycling the application pool is not enough, and this is the most common reason a correctly set value appears to have no effect.

The values that stop a server starting

Seven values are boot gates: in production, the application refuses to start without its own. This is deliberate — each one protects something that would otherwise fail silently and much later.

Variable	Application
SIMF_API_FileStorage__EncryptionKey	API
SIMF_API_Storage__UserIdDocumentEncryptionKey	API
SIMF_API_Ai__PromptHash__Secret	API
SIMF_CP_DataProtection__KeyRingPath	Control Panel
SIMF_WEB_DataProtection__KeyRingPath	Website
SIMF_EDGE_ReverseProxy__Clusters__api__Destinations__primary__Address	Mobile edge
SIMF_EDGE_ReverseProxy__KnownProxies__0	Mobile edge

Two of the API's three are encryption keys, and they behave differently under change. The file-store key wraps a per-file key, so it has a rotation path in principle — but the job that finishes a rotation has never been built, so treat it as set once. The identity-document key has no such path at all:

changing it strands every encrypted column permanently, with no way back. Escrow both, with the version number stamped alongside the file-store key, before the system carries any real data.

```
# Generate a 32-byte key, base64-encoded:
```

```
openssl rand -base64 32
```

```
# The JWT signing key wants more:
```

```
openssl rand -base64 48
```

The API

The API reads by far the most configuration — the connection strings, every key, the mail server, the bootstrap administrator and the AI provider. Its script on a provisioned server carries 82 variables.

Databases

Variable	What it controls	Ships as	Set it to
SIMF_API_ConnectionStrings__SimfIdentityDb	The accounts, roles and permissions database.	empty	Required
SIMF_API_ConnectionStrings__SimfAppDb	Everything else — profiles, programme, gates, meetings.	empty	Required

Both are required. The application throws on the first database access if either is missing — it does not start and then misbehave.

Keys and tokens

Variable	What it controls	Ships as	Set it to
SIMF_API_Jwt__SigningKey	Signs every access token. Also derives the one-time-code and meeting-link hashes, so changing it invalidates those too.	empty	At least 32 bytes; 48 recommended
SIMF_API_Jwt__Issuer	The token issuer name.	SIMF	SIMF
SIMF_API_Jwt__Audience	The token audience name.	SIMF	SIMF
SIMF_API_Jwt__AccessTokenMinutes	How long an access token stays valid.	5	5
SIMF_API_Jwt__SessionLifetimeHours	How long a signed-in session may be refreshed for.	24	24
SIMF_API_Storage__UserIdDocumentEncryptionKey	Encrypts the national ID, Iqama, passport and mobile columns. Cannot be changed once data exists.	empty	A secret — generate one per environment (32 bytes, base64)
SIMF_API_FileStorage__EncryptionKey	Wraps the key of every encrypted stored file.	empty	A secret — generate one per environment (32 bytes, base64)
SIMF_API_FileStorage__KekVersion	The version stamp written into every encrypted file. On a restore the right key under the wrong version fails every read.	1	1

SIMF_API_FileStorage__PreviousEncryptionKey	The superseded key, during a rotation only.	empty	Leave empty
SIMF_API_Ai__PromptHash__Secret	Signs the AI prompt fingerprints. Without it the application falls back to a publicly derivable key.	empty	A secret — generate one per environment

The first administrator

Variable	What it controls	Ships as	Set it to
SIMF_API_SuperAdmin__Email	The bootstrap administrator's address.	superadmin@simrsnf.com	The real address
SIMF_API_SuperAdmin__TempPassword	Its starting password. Must satisfy the password rules, including the no-sequential-run rule.	empty	A secret — generate one per environment
SIMF_API_SuperAdmin__TotpSecret	Its authenticator secret. Without it the most privileged account in the system is protected by a password alone.	empty	A secret — generate one per environment (base32)
SIMF_API_SuperAdmin__PasswordChangeRequired	Force a password change at the first sign-in.	true	true
SIMF_API_Seed__DemoPassword	The shared password of the sample accounts.	empty	Leave empty in production
SIMF_API_Seed__EnableDemoAccounts	Create the sample accounts outside development.	false	false

The sample accounts must not exist on a production system. They are created only in development, or when the switch above is turned on deliberately.

Mail

Variable	What it controls	Ships as	Set it to
SIMF_API_Email__Host	The mail server.	empty	Required
SIMF_API_Email__Port	Its port.	587	587
SIMF_API_Email__User	The mail account.	empty	Required
SIMF_API_Email__Password	Its password.	empty	A secret — generate one per environment

SIMF_API_Email__FromAddress	The address mail is sent from.	no-reply@ammn.com.sa	The verified sender
SIMF_API_Email__FromName	The display name on sent mail.	SIMF	SIMF
SIMF_API_Email__FailureAlertRecipients	Who is told when mail delivery starts failing.	empty	An operations address

Mail failure is invisible from the interface. Sending is queued in the background, so a wrong password does not throw, does not appear on screen, and does not stop an account being created — the messages simply never arrive. Set the alert recipients, and test delivery after every change.

An EMPTY mail host is worse than a wrong one, and this was observed rather than reasoned about. With no host configured the first message to be sent fails in a way the retry logic does not catch, the background sender stops for good, and the health check reports the API as unhealthy from that moment — while the site keeps serving pages normally. If a load balancer is watching that endpoint it will take a working server out of rotation because nobody filled in an SMTP host.

Network and limits

Variable	What it controls	Ships as	Set it to
SIMF_API_ReverseProxy__KnownProxies__0	The trusted proxy, so a visitor's real address is recovered.	empty	The proxy's IP ADDRESS
SIMF_API_Cors__WebAppOrigins__0	A browser origin allowed to call the API. Numbered from zero.	empty	Each public site address
SIMF_API_RateLimit__PermitLimit	Requests allowed per address in the window.	20	20
SIMF_API_RateLimit__WindowSeconds	The window, in seconds.	60	60
SIMF_API_Swagger__AllowSwagger	Publish the interactive API documentation in production.	false	false
SIMF_API_FileStorage__RootPath	Where uploaded files are written.	empty	An explicit path that is backed up
SIMF_API_Storage__LogDirectory	Where the log files are written.	logs	An explicit path

The trusted-proxy entry must be an IP address. A host name is read, fails to parse, and is dropped without a word — the setting then looks configured while every visitor shares one rate-limit bucket. If the file-store path is left empty the files land in a default location under ProgramData that nobody chose and that a backup may not cover.

Walk-in desk and offline badges

These govern the on-site registration desk. Every switch ships off, so the desk behaves conservatively until somebody deliberately opens it up for an event day.

Variable	What it controls	Ships as	Set it to
----------	------------------	----------	-----------

SIMF_API_WalkInMode__Enabled	The desk features as a whole.	false	true on event days
SIMF_API_WalkInMode__ExpiresAt	When the desk switches itself off again.	empty	Blank means never
SIMF_API_WalkInMode__QuickRegister	The shortened desk form.	false	false
SIMF_API_WalkInMode__QuickRegisterRequiresIdentityDocument	Whether the short form still demands an identity document.	true	true
SIMF_API_WalkInMode__AutoApprove	Approve a desk visitor immediately and print the badge. Never applies to partner accounts.	false	Only on an event day
SIMF_API_WalkInMode__SessionWalkIn	Admission to a session at the door.	false	false
SIMF_API_WalkInMode__ArrivalGraceMinutes	How late an arrival still counts. Capped at 240.	15	15
SIMF_API_WalkInMode__AcceptOfflineBadges	Honour badges issued by a desk with no network.	false	false
SIMF_API_WalkInMode__OfflineUpload	Accept a batch uploaded from an offline desk.	false	false
SIMF_API_WalkInMode__AllowBadgeActivation	Let a badge be activated at the desk.	false	false
SIMF_API_WalkInMode__BadgeKey	Signs offline badges. Only meaningful when offline badges are accepted.	empty	A secret — generate one per environment
SIMF_API_WalkInMode__BadgeKeyVersion	Its version stamp.	0	0
SIMF_API_WalkInMode__PreviousBadgeKey	The superseded badge key, during a rotation only.	empty	Leave empty
SIMF_API_WalkInMode__PreviousBadgeKeyVersion	Its version stamp.	0	0

The offline badge desk carries its own copy of the badge key and its version. The two must match the API values exactly, or every badge the desk issues is refused at the gate.

Account lifecycle and devices

Variable	What it controls	Ships as	Set it to
SIMF_API_IdentityLifecycle__RequireControlPanelTwoFactorEnrolment	Force every Control Panel account through authenticator enrolment.	true	true
SIMF_API_IdentityLifecycle__PasswordMaxAgeDays	Expire a password after this many days. Zero means never.	0	0
SIMF_API_IdentityLifecycle__PasswordHistoryCount	How many previous passwords may not be reused. Zero disables it.	0	0
SIMF_API_IdentityLifecycle__DormantAccountDisableDays	Disable an account unused for this long. Zero means never.	0	0
SIMF_API_DeviceKey__RequireStepUpForEnrol	Demand a second factor before a device key is enrolled.	true	true
SIMF_API_DeviceKey__MaxActiveKeysPerUser	How many devices one account may keep enrolled.	5	5
SIMF_API_Jwt__StreamAudience	The audience of the short-lived token that authorises a video stream.	simf-stream	simf-stream
SIMF_API_Jwt__StreamTokenMinutes	How long that token lasts.	180	180

Artificial intelligence

The AI features answer with a harmless echo until a provider is configured, so an unconfigured deployment degrades quietly rather than failing.

Variable	What it controls	Ships as	Set it to
SIMF_API_Ai__DefaultProvider	Which	Echo	Anthropic

	provider answers: Echo, Anthropic, Gemini or OpenAi.		
SIMF_API_Ai_Anthropic_ApiKey	The Anthropic key.	empty	A secret — generate one per environment
SIMF_API_Ai_Anthropic_DefaultModel	The model used by default.	claude-haiku-4-5-20251001	claude-haiku-4-5-20251001
SIMF_API_Ai_Anthropic_BaseUrl	The provider address.	https://api.anthropic.com	https://api.anthropic.com
SIMF_API_Ai_Anthropic_DefaultMaxTokens	The reply length ceiling.	2048	2048
SIMF_API_Ai_Gemini_ApiKey	The Gemini key, if used.	empty	Leave empty unless used
SIMF_API_Ai_OpenAi_ApiKey	The OpenAI key, if used.	empty	Leave empty unless used

Uploads, media and links

Variable	What it controls	Ships as	Set it to
SIMF_API_UploadScanning_Enabled	Scan every upload before it is stored.	true	true
SIMF_API_FaceDetection_Enabled	Check that an identity photograph contains a face.	true	true
SIMF_API_FaceDetection_MinConfidence	How sure that check must be.	0.5	0.5
SIMF_API_SessionRecordingStorage_MaxUploadBytes	The largest session recording accepted (1 GB).	1073741824	1073741824
SIMF_API_OrganizationHeroVideo_MaxUploadBytes	The largest banner video accepted (200 MB).	209715200	209715200
SIMF_API_OrganizationHeroVideo_PublicApiBaseUrl	The address that video is	empty	The edge address

	served from publicly.		
SIMF_API_MeetingLinks__PublicWebBaseUrl	The site a meeting confirmation link points at. Without it the links in those emails go nowhere.	empty	https://web.simrsnf.com
SIMF_API_MeetingLinks__TokenTtlHours	How long such a link stays valid.	72	72
SIMF_API_Swagger__Username	Guards the interactive documentation when it is published.	empty	Required only if the documentation is published
SIMF_API_Swagger__Password	Its password.	empty	A secret — generate one per environment
SIMF_API_Serilog__MinimumLevel__Default	How much is logged.	Information	Information
SIMF_API_AllowedHosts	The host names the API answers for.	*	api.simrsnf.com

The Control Panel

The Control Panel holds no database of its own. It talks to the API, and it needs somewhere shared to keep the keys that protect its session cookies.

Variable	What it controls	Ships as	Set it to
SIMF_CP_Api__BaseUrl	The API address, with a trailing slash.	http://localhost:5175/	https://api.simrsnf.com/
SIMF_CP_DataProtection__KeyRingPath	Where the cookie-protection keys live.	empty	A shared, backed-up path
SIMF_CP_Session__LifetimeHours	How long a session lasts.	8	8
SIMF_CP_Storage__LogDirectory	Where its logs are written.	logs	An explicit path
SIMF_CP_AllowedHosts	The host names it will answer for.	*	cp.simrsnf.com

The Control Panel and the Website must be given the SAME API address and the SAME key-ring path. A build-time test fails if the two disagree.

The Website

Variable	What it controls	Ships as	Set it to
SIMF_WEB_Api__BaseUrl	The API address; must match the Control Panel's.	http://localhost:5175/	https://api.simrsnf.com/
SIMF_WEB_DataProtection__KeyRingPath	Its key ring; must match the Control Panel's path.	empty	The same shared path
SIMF_WEB_AllowedHosts	The host names it will answer for.	*	web.simrsnf.com

The mobile edge

The edge is the only application the mobile app talks to. It is a reverse proxy in front of the API, and it exists so the API itself never has to be published to the internet.

Variable	What it controls	Ships as	Set it to
----------	------------------	----------	-----------

	Is		
SIMF_EDGE_ReverseProxy_Clusters_api_Destinations_primary_Address	Where the edge forwards to.	empty	https://api.simrsnf.com/
SIMF_EDGE_ReverseProxy_KnownProxies_0	The trusted hop in front of the edge.	empty	The load balancer's IP ADDRESS
SIMF_EDGE_AllowedHosts	The host names it will answer for.	*	edge.simrsnf.com

The public web application

The Flutter web bundle is different in kind: its settings are COMPILED INTO the build rather than read from the server, so changing one means rebuilding and redeploying the bundle, not setting a variable and restarting.

Variable	What it controls	Ships as	Set it to
ApiBase	The address the application calls. Must be https and must end in the API version path; the build refuses otherwise.	empty	https://edge.simrsnf.com/api/v1
OutDir	Where the built bundle is written.	empty	The site folder
AppKey	The application key, if the gate is in use.	empty	A secret — generate one per environment
SupportPhone	The support number shown in the application.	empty	The real number
SupportEmail	The support address.	empty	The real address
SocialX, SocialInstagram, SocialLinkedIn, SocialYouTube, SocialTikTok	The social links in the footer. Any left empty is hidden.	empty	The real profiles
VisitSaudiUrl	The tourism link.	https://www.visitsaudi.com	https://www.visitsaudi.com

Every host

Variable	What it controls	Ships as	Set it to
ASPNETCORE_ENVIRONMENT	Which environment the application believes it is in. Unprefixed, and identical on every server.	not set	Production

Setting this to anything other than Production disables the boot gates, turns on the sample-data seeding, and publishes the interactive API documentation. It is the single most consequential value on the server.

Appendix — what writing this manual found

This appendix records what was found while every page was opened and every constraint checked against the code. The first two groups were CORRECTED in the same change that produced this manual, and are kept here because the pattern matters more than any single line: a document and the code drift apart silently, and the drift is only visible to somebody reading both. The third group is behaviour, not error - nothing to fix, but worth knowing before it surprises somebody.

Documents that disagreed with the code — corrected

What a document says	What the code does
Thirteen page references described the page guard as a role check on Administrator — because the TEMPLATE they were copied from did, which is why one error appeared thirteen times	Pages are guarded by a named permission, not by a role. The template now says so, and says why
The administrator manual says the Edit action on the administrators list is an unbuilt placeholder	Edit opens a working role editor and saves through a live endpoint
The administrator manual gives the Control Panel address as cp.simf.local	The repository's own index gives localhost:5158 for a local run
The operations document describes one shared configuration prefix	There have been four, one per application, since August 2026
The operations document lists two storage paths as required	Both were removed; setting them does nothing
The operations document gives the access-token lifetime as 30 minutes	It is 5
The deployment guide says the API configuration script carries 62 values	It declares 82
The recovery procedure says the seeder re-applies the configured authenticator secret on every start	It re-applies it only while two-factor is still switched on for that account

Wording in the product that no longer matched its behaviour — corrected

- Saving a new visitor said an invitation had been sent. None is sent on that path — the wording predated the registration wizard that replaced it. It now says the visitor was registered.
- Saving a partner account showed the ADMINISTRATORS' message, which promises an invitation email that this path never queues. Partner accounts now have their own message, and it says the account is waiting for approval.
- The partner page's supporting line described a seven-day password invitation, which belongs to a create endpoint no page calls. It now describes what the page actually does.

Behaviour worth knowing before it surprises somebody

- With no mail host configured, the background sender stops for good the first time it is asked to send, and the health check reports the whole API as unhealthy from then on — while every page

keeps working. Seen during the writing of this manual, after creating an account triggered its first notification.

- On a fresh installation the organisation logo is absent, so its page requests an image that is not there. The page is unharmed; the logo simply has not been uploaded yet.
- The registration desk accepts a passport format that the mobile application would reject, because only the desk skips the format check.
- The Arabic and English name fields accept 128 characters in the browser and are refused above 50 by the server.
- Walking quickly from page to page exhausts the per-address request allowance, because every page fetches the signed-in profile for its header. Nothing breaks; the header request is refused until the window rolls over.

Every page in the Control Panel

This section lists every page the Control Panel serves, in the order the menu presents them. For each: the address, the file that implements it, the permission that gates the page, the permission that puts it in the menu, and a picture of the page as it renders. It is generated from the source code on every build, so it describes the system as it is rather than as it once was.

Overview

Dashboard (/)

Property	Value
Address	/
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Home.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Home.razor.cs
Page permission	Any signed-in user
Menu permission	-

It calls: `/account/api/admin/statistics` `/account/api/admin/statistics/programme`

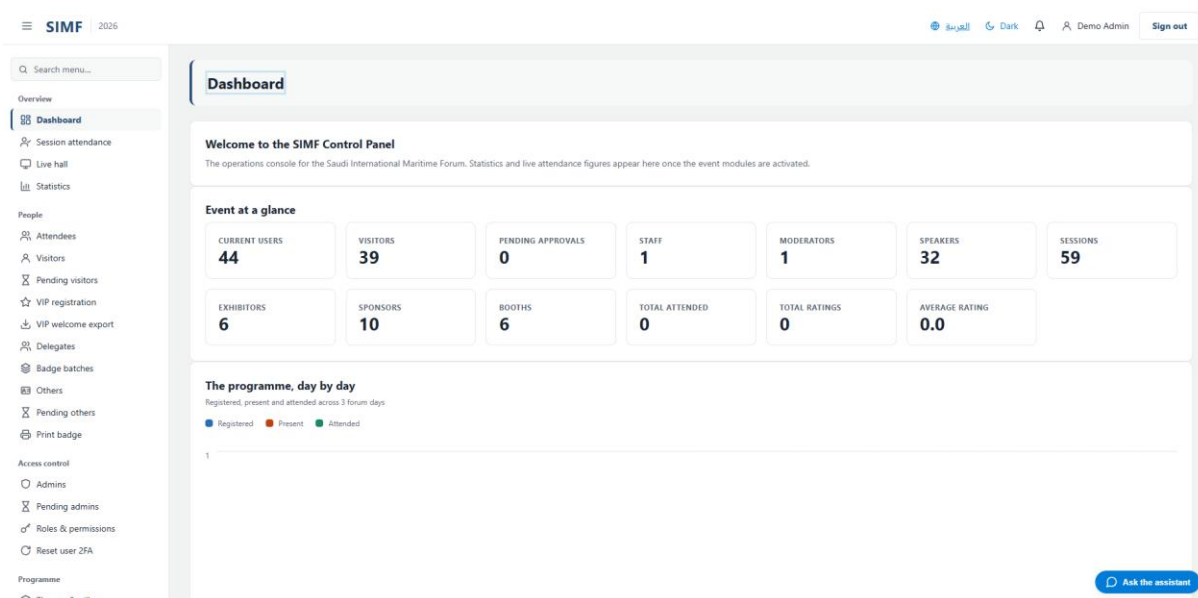


Figure 39 — Dashboard — /

Session attendance (/admin/attendance)

Property	Value
Address	/admin/attendance
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendanceDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendanceDashboard.razor.cs
Page permission	Attendance.View

Menu permission	Attendance.View
-----------------	-----------------

The list shows: Code · Session · Hall · Start (Saudi time) · Total attendees · Live now

It calls: /account/api/admin/attendance/sessions/list /account/api/admin/attendance/summary

Figure 40 — Session attendance — /admin/attendance

Live hall (/admin/sessions/live-hall)

Property	Value
Address	/admin/sessions/live-hall
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionLiveHall.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionLiveHall.razor.cs
Page permission	Attendance.View
Menu permission	Attendance.View

It calls: /account/api/admin/attendance/sessions/list
/account/api/admin/sessions/{session.SessionId}/present/list
/account/api/admin/sessions/{session.SessionId}/seat-map

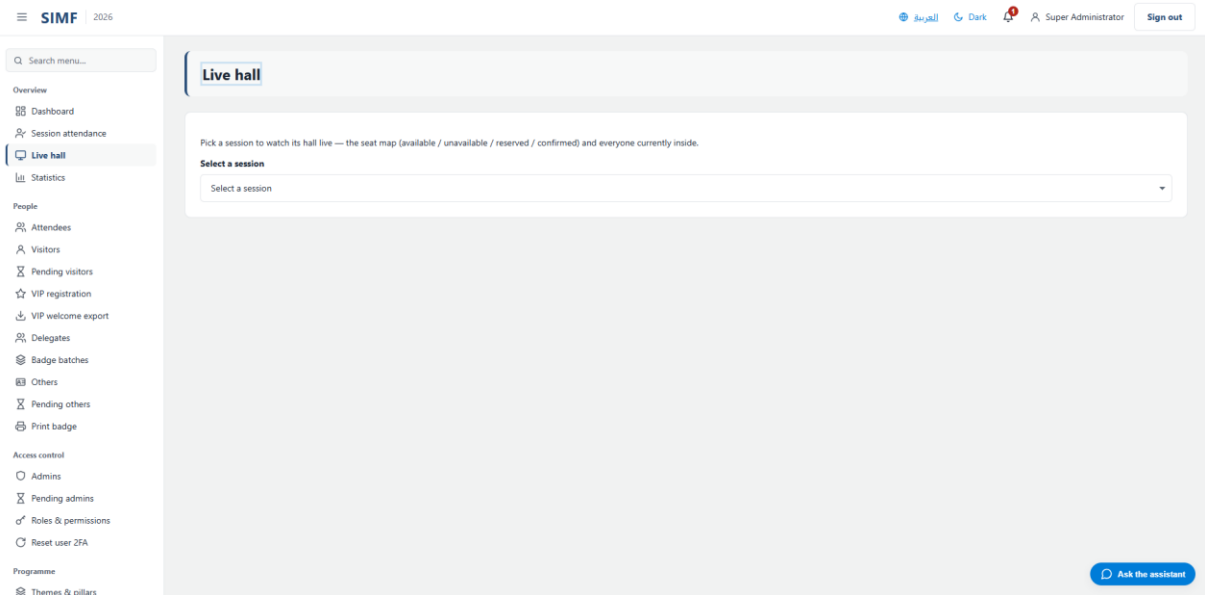


Figure 41 — Live hall — /admin/sessions/live-hall

Statistics (/admin/statistics)

Property	Value
Address	/admin/statistics
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/StatisticsDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/StatisticsDashboard.razor.cs
Page permission	Statistics.View
Menu permission	Statistics.View

It calls: /account/api/admin/statistics

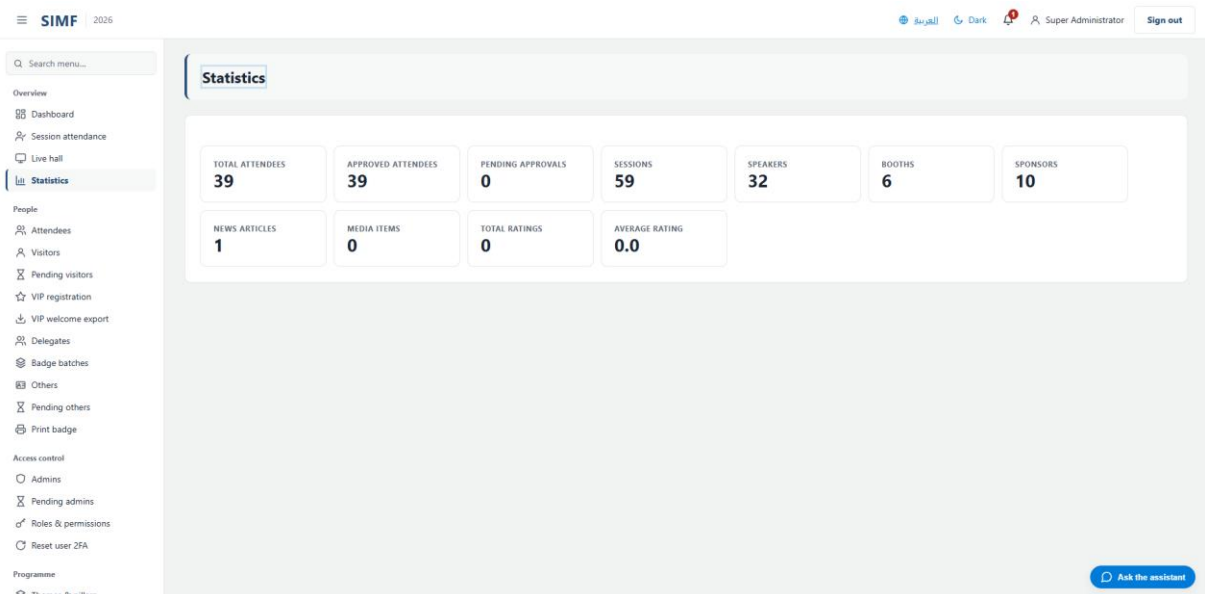


Figure 42 — Statistics — /admin/statistics

People

Attendees (/admin/attendees)

Property	Value
Address	/admin/attendees
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendeesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendeesList.razor.cs
Page permission	Attendees.View
Menu permission	Attendees.View

What you can do here

Action	Permission it needs
A button the page gates itself	Attendees.Export

The list shows: Email · Display name · Kind · Profile type · State · QR id · Registered

It calls: /account/api/admin/attendees/export /account/api/admin/attendees/list

The screenshot displays the 'Attendees' management page. On the left is a sidebar with navigation links like Overview, Dashboard, Session attendance, Live hall, Statistics, and a 'People' section containing 'Attendees', Visitors, Pending visitors, VIP registration, etc. The main area has a title 'Attendees' and a filter section with dropdowns for 'Kind' (All), 'State' (Any), a text input for 'Email or display name contains' (e.g. ahmed or @example.com), and date pickers for 'From date' and 'To date'. Below the filters are 'Apply filters', 'Clear', and 'Export' buttons. A table lists 8 attendees with columns: EMAIL, DISPLAY NAME, KIND, PROFILE TYPE, STATE, QR ID, and REGISTERED. All attendees are marked as 'Approved'. At the bottom, it shows 'Showing 1-8 of 8' and 'Page 1 of 1'.

Figure 43 — Attendees — /admin/attendees

Visitors (/admin/visitors)

Property	Value
Address	/admin/visitors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VisitorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VisitorsList.razor.cs
Page permission	Visitors.View
Menu permission	Visitors.View

What you can do here

Action	Permission it needs
Add	Visitors.Create
Edit	Visitors.Edit
Details	No permission of its own
Duplicate	Visitors.Create
Copy	No permission of its own
Copy (on the selected rows)	No permission of its own
Paste	Visitors.Create
Delete	Visitors.Delete
Delete (on the selected rows)	Visitors.Delete
Import from Excel	Visitors.Import
Export to Excel	Visitors.Export
A button the page gates itself	Visitors.BulkGenerate

The list shows: Email · Display name · State

It calls: /account/api/admin/visitors/bulk-delete /account/api/admin/visitors/duplicate
 /account/api/admin/visitors/export /account/api/admin/visitors/import
 /account/api/admin/visitors/list /account/api/admin/visitors/{row.Id}/avatar

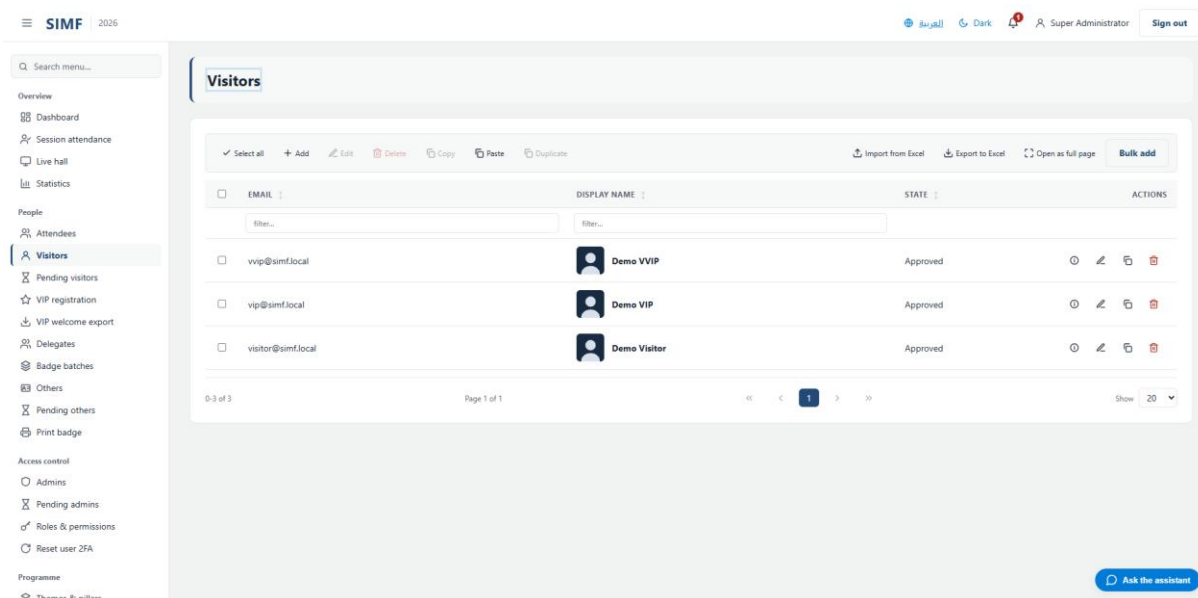


Figure 44 — Visitors — /admin/visitors

Pending visitors (/admin/visitors/pending)

Property	Value
Address	/admin/visitors/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingVisitors.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingVisitors.razor.cs
Page permission	Visitors.View
Menu permission	Visitors.View

What you can do here

Action	Permission it needs
Approve selected	Visitors.Approve
Reject selected	Visitors.Reject

The list shows: Email · Display name · Created

It calls: `/account/api/admin/visitors/{row.Id}/avatar` `/account/api/admin/visitors/{user.Id}/profile-for-approval`

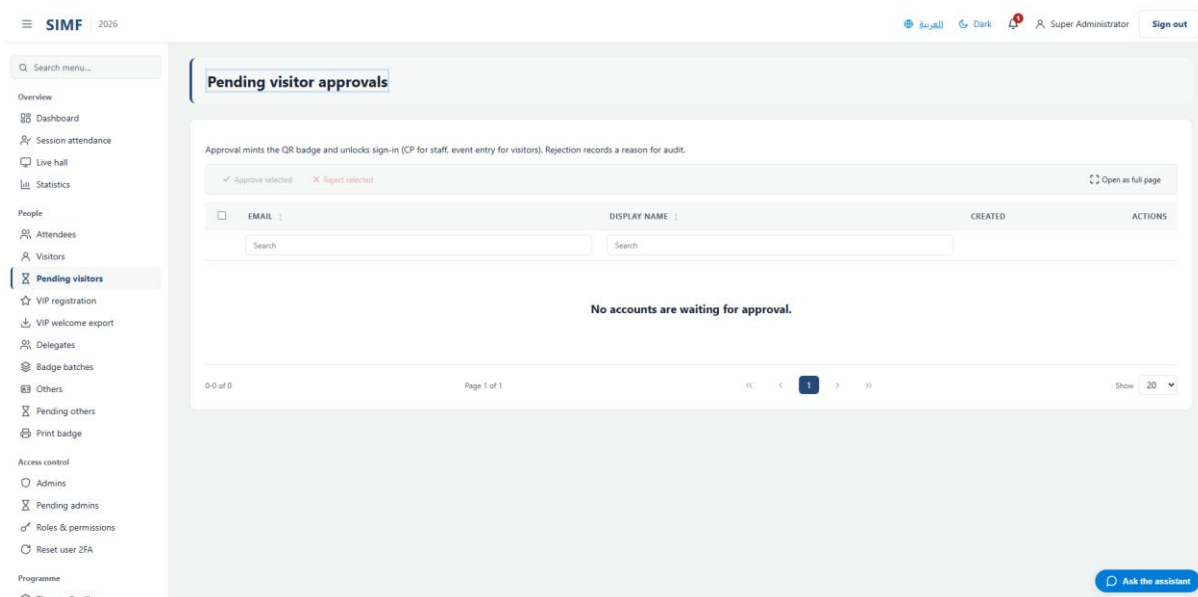


Figure 45 — Pending visitors — `/admin/visitors/pending`

VIP registration (`/admin/visitors/vip`)

Property	Value
Address	<code>/admin/visitors/vip</code>
Implemented by	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipRegistration.razor</code>
Code-behind	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipRegistration.razor.cs</code>
Page permission	<code>Visitors.RegisterOnsite</code>
Menu permission	<code>Visitors.RegisterOnsite</code>

What you can do here

Action	Permission it needs
New VIP	No permission of its own
Edit	No permission of its own
Details	No permission of its own

The list shows: Name · Job title · Profile type · Email

It calls: `/account/api/admin/vips/list`

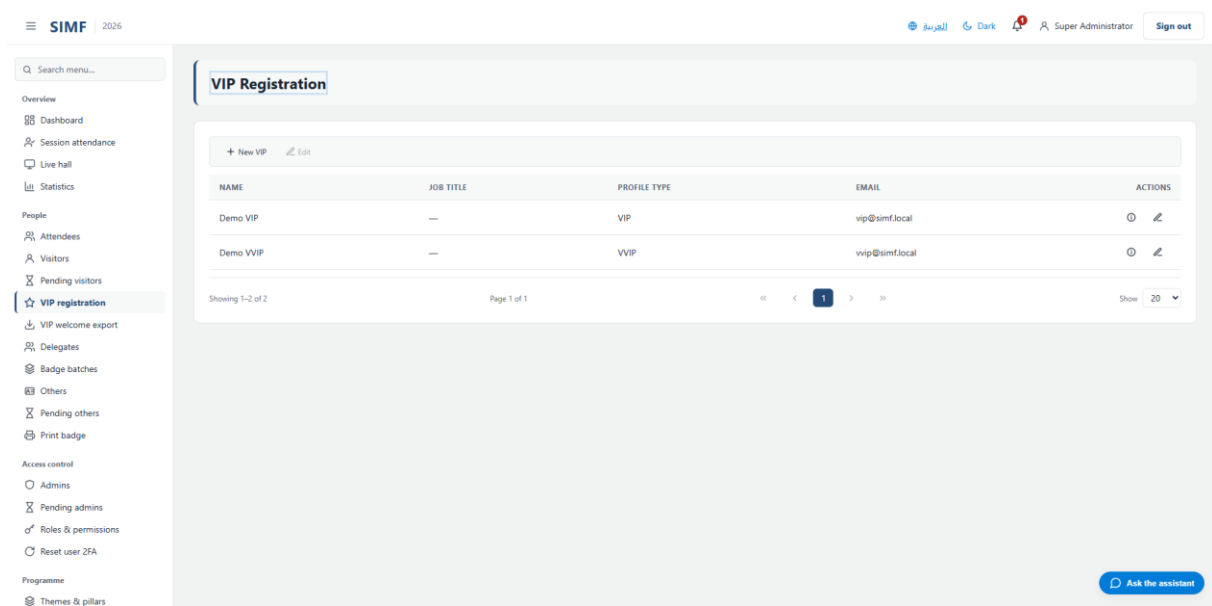


Figure 46 — VIP registration — /admin/visitors/vip

VIP welcome export (/admin/visitors/vip/export)

Property	Value
Address	/admin/visitors/vip/export
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipExport.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipExport.razor.cs
Page permission	Visitors.ExportVip
Menu permission	Visitors.ExportVip

The list shows: Photo · VIP welcome export (Mawj) · Full name (English) · Honorific / title (optional) · Job title (optional) · Mawj system ID (optional) · Preferred language (optional) · Email (optional) · Saudi mobile · Reference number

It calls: /account/api/admin/visitors/vip/roster /account/api/admin/visitors/vip/roster/list
/account/api/admin/visitors/{userId}/vip-photo

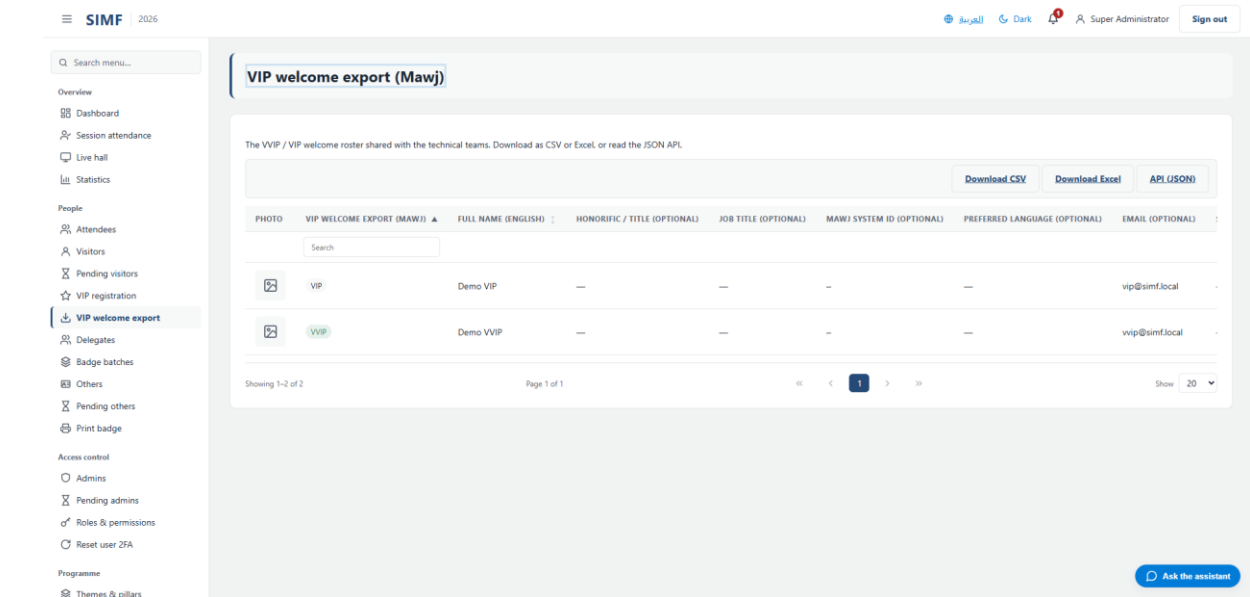


Figure 47 — VIP welcome export — /admin/visitors/vip/export

Delegates (/admin/delegates)

Property	Value
Address	/admin/delegates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegatesPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegatesPage.razor.cs
Page permission	Visitors.RegisterOnsite
Menu permission	Visitors.RegisterOnsite

What you can do here

Action	Permission it needs
A button the page gates itself	Visitors.BulkGenerate

Figure 48 — Delegates — /admin/delegates

Badge batches (/admin/visitors/badge-batches)

Property	Value
Address	/admin/visitors/badge-batches
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeBatchesPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeBatchesPage.razor.cs
Page permission	Visitors.ViewBatches
Menu permission	Visitors.ViewBatches

What you can do here

Action	Permission it needs
A button the page gates itself	Visitors.BulkGenerate
A button the page gates itself	Visitors.ManageBatches

The list shows: Order · Contents · Total · Delegation · Emailed to · Generated · Status

It calls: /account/api/admin/visitors/badge-batches/list /account/api/admin/visitors/badge-batches/re-email /account/api/admin/visitors/badge-batches/revoke /account/api/admin/visitors/badge-batches/top-up

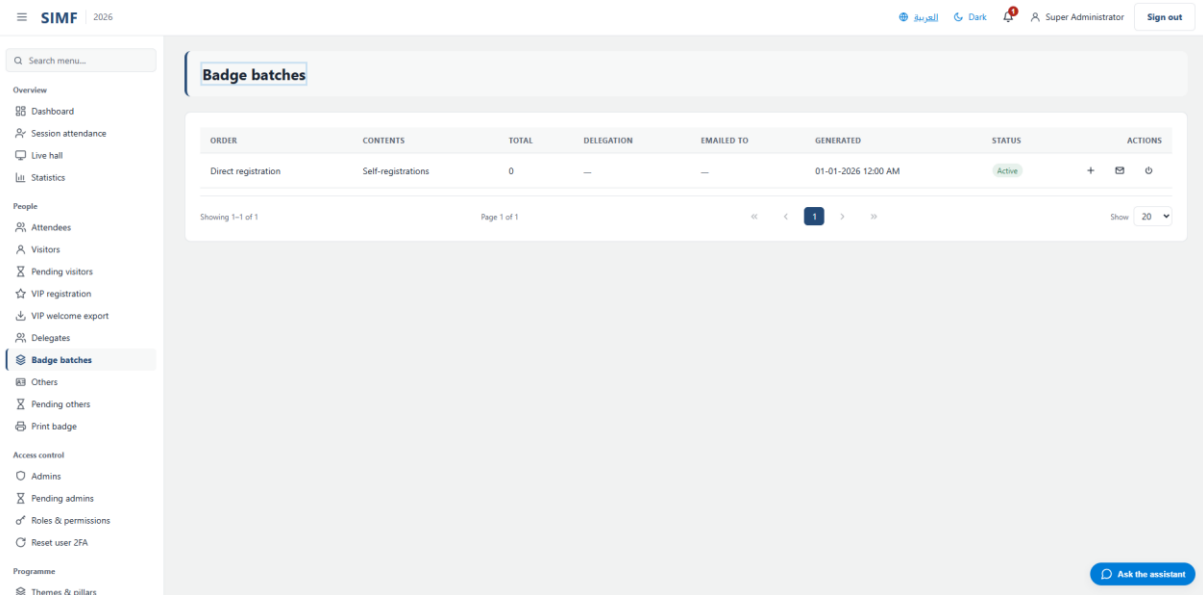


Figure 49 — Badge batches — /admin/visitors/badge-batches

Others (/admin/others)

Property	Value
Address	/admin/others
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OthersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OthersList.razor.cs
Page permission	Others.View
Menu permission	Others.View

What you can do here

Action	Permission it needs
Add	Others.Create
Edit	Others.Edit
Details	No permission of its own
Duplicate	Others.Create
Copy	No permission of its own
Copy (on the selected rows)	No permission of its own
Paste	Others.Create
Delete	Others.Delete
Delete (on the selected rows)	Others.Delete
Import from Excel	Others.Import
Export to Excel	Others.Export

The list shows: Email · Display name · State

It calls: /account/api/admin/others/bulk-delete /account/api/admin/others/duplicate
 /account/api/admin/others/export /account/api/admin/others/import /account/api/admin/others/list
 /account/api/admin/others/{id}/profile /account/api/admin/others/{row.Id}/avatar

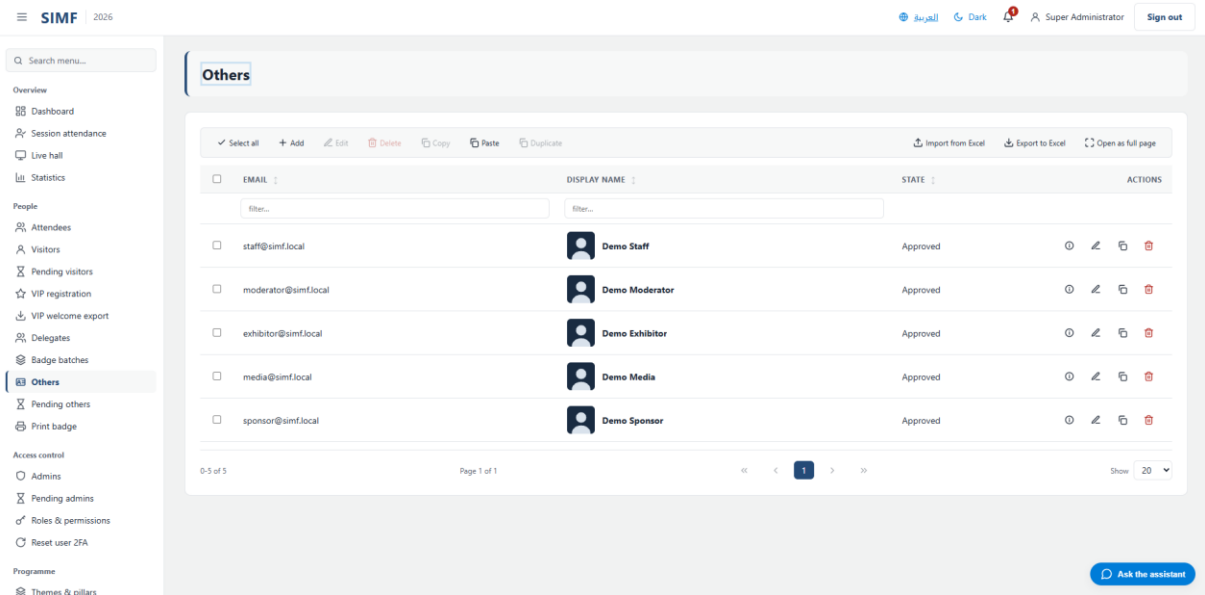


Figure 50 — Others — /admin/others

Pending others (/admin/others/pending)

Property	Value
Address	/admin/others/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingOthers.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingOthers.razor.cs
Page permission	Others.View
Menu permission	Others.View

What you can do here

Action	Permission it needs
Approve selected	Others.Approve
Reject selected	Others.Reject

The list shows: Email · Display name · Created

It calls: /account/api/admin/others/{row.Id}/avatar /account/api/admin/others/{user.Id}/profile-for-approval

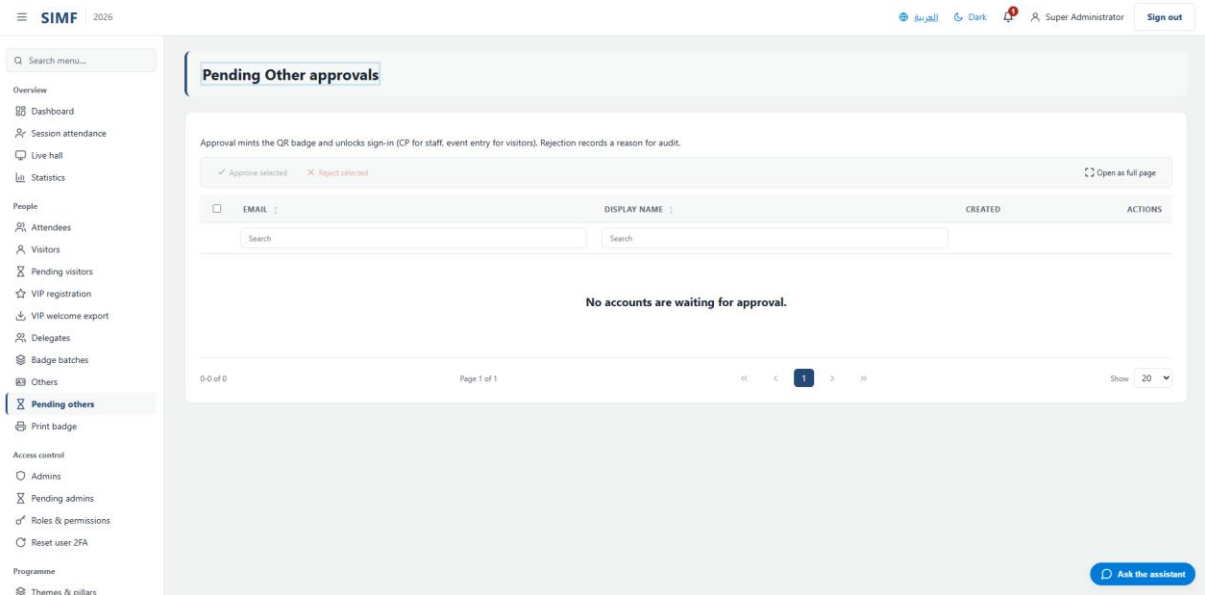


Figure 51 — Pending others — /admin/others/pending

Print badge (/admin/print-bag)

Property	Value
Address	/admin/print-bag
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PrintBag.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PrintBag.razor.cs
Page permission	Attendees.PrintBag
Menu permission	Attendees.PrintBag

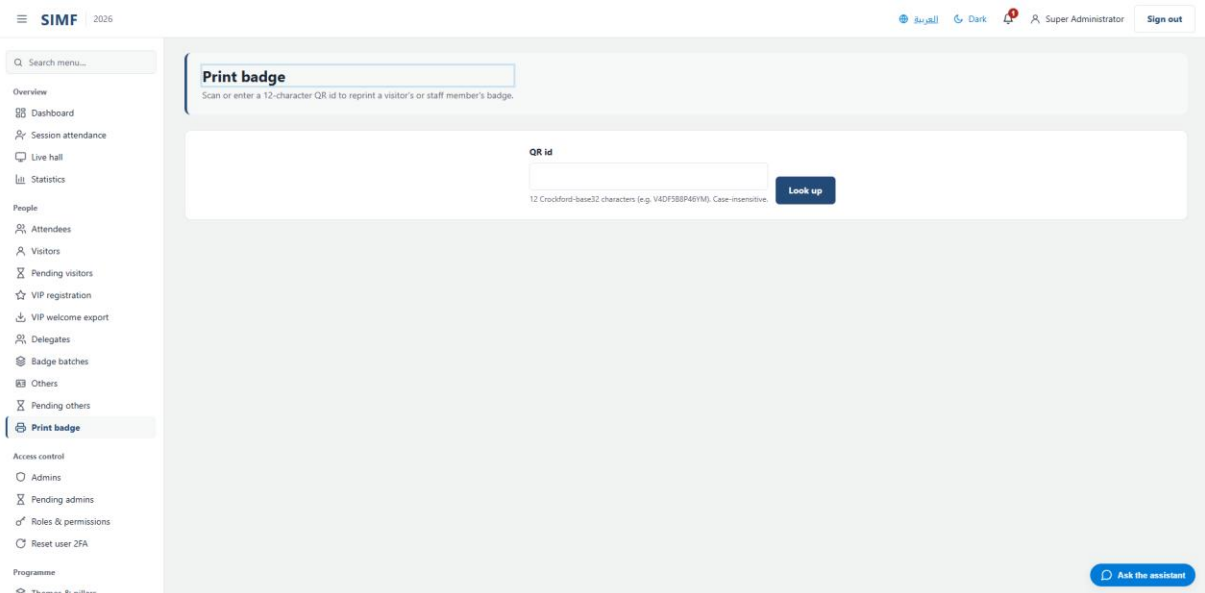


Figure 52 — Print badge — /admin/print-bag

Access control

Admins (/admin/admins)

Property	Value
Address	/admin/admins
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/UsersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/UsersList.razor.cs
Page permission	Admins.View
Menu permission	Admins.View

What you can do here

Action	Permission it needs
Add	Admins.Create
Edit	Admins.AssignRoles
Details	No permission of its own
Duplicate	Admins.Create
Copy	No permission of its own
Copy (on the selected rows)	No permission of its own
Paste	Admins.Create
Delete	Admins.Delete
Delete (on the selected rows)	Admins.Delete
Import from Excel	Admins.Import
Export to Excel	Admins.Export

The list shows: Email · Display name · State · Role · 2FA

It calls: /account/api/admin/admins/bulk-delete /account/api/admin/admins/duplicate
/account/api/admin/admins/export /account/api/admin/admins/import /account/api/admin/admins/list
/account/api/admin/admins/{row.Id}/avatar

The screenshot displays the 'Admins' management page in the SIMF application. The page title is 'Admins'. The table lists the following users:

EMAIL	DISPLAY NAME	STATE	ROLE	2FA	ACTIONS
navalops.c@simf.test	NL Naval Operations Lead	PendingApproval	User	On	Reset 2FA, Edit, Delete
navalops.b@simf.test	NL Naval Operations Lead	PendingApproval	User	On	Reset 2FA, Edit, Delete
admin@simf.local	DA Demo Admin	Approved	Administrator	On	Edit, Delete
superadmin@simsonf.com	SA Super Administrator	Approved	Administrator	On	Edit, Delete

The interface includes a sidebar with navigation options like Overview, Dashboard, Session attendance, Live hall, Statistics, People, Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, and Print badge. Under 'Access control', 'Admins' is selected, with sub-options for Pending admins, Roles & permissions, and Reset user 2FA. The bottom right corner features an 'Ask the assistant' button.

Figure 53 — Admins — /admin/admins

Pending admins (/admin/admins/pending)

Property	Value
Address	/admin/admins/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingStaff.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingStaff.razor.cs
Page permission	Admins.View
Menu permission	Admins.View

What you can do here

Action	Permission it needs
Approve selected	Admins.Approve
Reject selected	Admins.Reject

The list shows: Email · Display name · Created

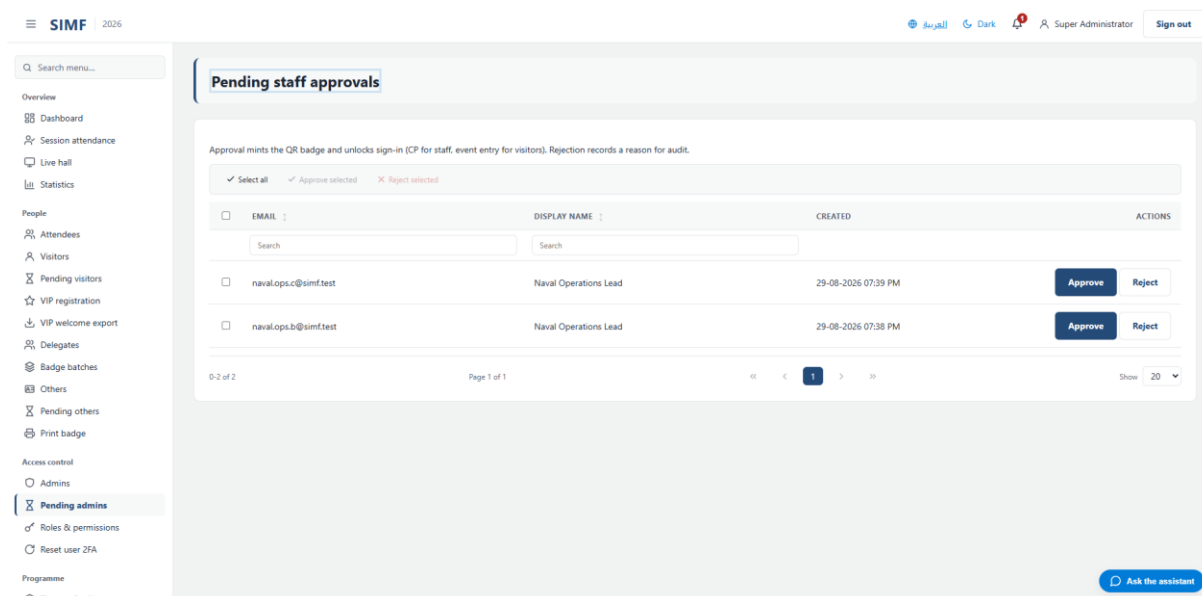


Figure 54 — Pending admins — /admin/admins/pending

Roles & permissions (/admin/roles)

Property	Value
Address	/admin/roles
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolesList.razor.cs
Page permission	Roles.View
Menu permission	Roles.View

What you can do here

Action	Permission it needs
Add role	Roles.Create
Edit	Roles.Edit

Details	No permission of its own
Delete	Roles.Delete
Import	Roles.Import
Export	Roles.Export
A button the page gates itself	Roles.AssignPermissions

The list shows: Name · Type · Users · Permissions

It calls: /account/api/admin/roles/list

The screenshot displays the 'Roles & permissions' management page in the SIMF system. The page features a sidebar on the left with navigation links such as Overview, Dashboard, Session attendance, Live hall, Statistics, People, Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge, Access control, Admins, Pending admins, Roles & permissions (selected), Reset user 2FA, Programme, and Themes & pillars. The main content area shows a table of roles with the following data:

NAME	TYPE	USERS	PERMISSIONS	ACTIONS
Administrator	Built-in	2	0	Permissions
GateOperator	Built-in	0	3	Permissions
PublicRelations	Built-in	0	13	Permissions
ScientificCommittee	Built-in	0	32	Permissions
SecurityTeam	Built-in	0	9	Permissions

The interface also includes a top bar with the SIMF logo, the year 2025, and user information (Super Administrator) with a Sign out button. A bottom bar contains a button to 'Ask the assistant'.

Figure 55 — Roles & permissions — /admin/roles

Reset user 2FA (/admin/reset-2fa)

Property	Value
Address	/admin/reset-2fa
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ResetTwoFactor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ResetTwoFactor.razor.cs
Page permission	Admins.ResetTwoFactor
Menu permission	Admins.ResetTwoFactor

It calls: /account/api/admin/reset-2fa

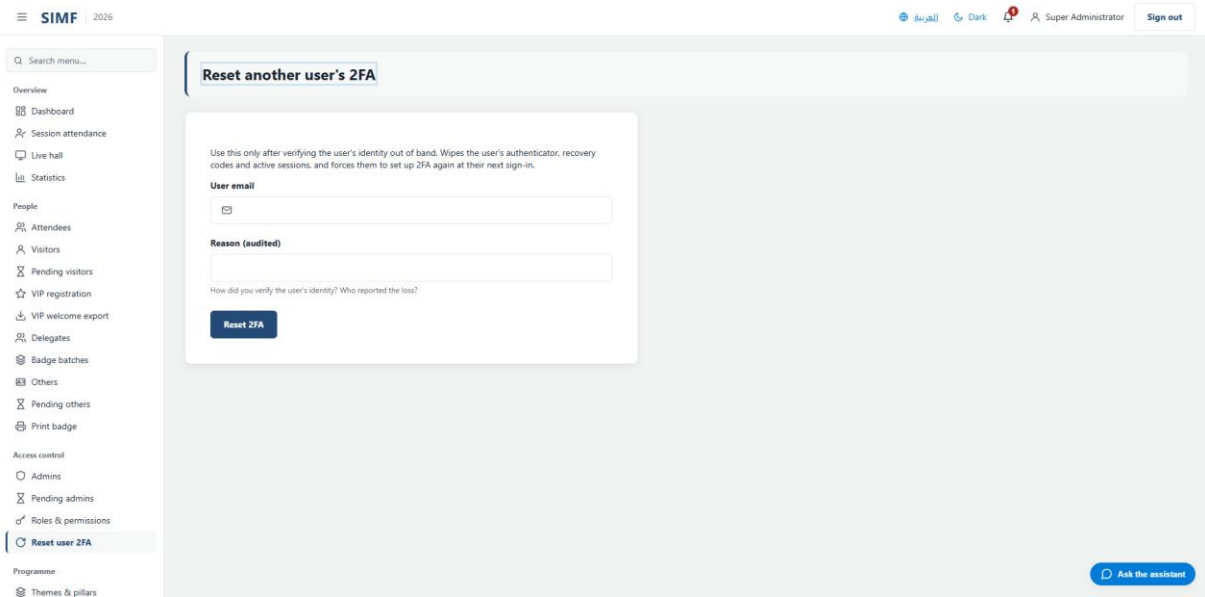


Figure 56 — Reset user 2FA — /admin/reset-2fa

Programme

Themes & pillars (/admin/themes)

Property	Value
Address	/admin/themes
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ThemesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ThemesList.razor.cs
Page permission	Themes.View
Menu permission	Themes.View

What you can do here

Action	Permission it needs
Add theme	Themes.Create
Edit	Themes.Edit
Details	No permission of its own
Deactivate	Themes.Delete
Import	Themes.Import
Export	Themes.Export

The list shows: Code · Name · Name (Arabic) · Order · Color · Status

It calls: /account/api/admin/themes/list /account/api/admin/themes/{id}

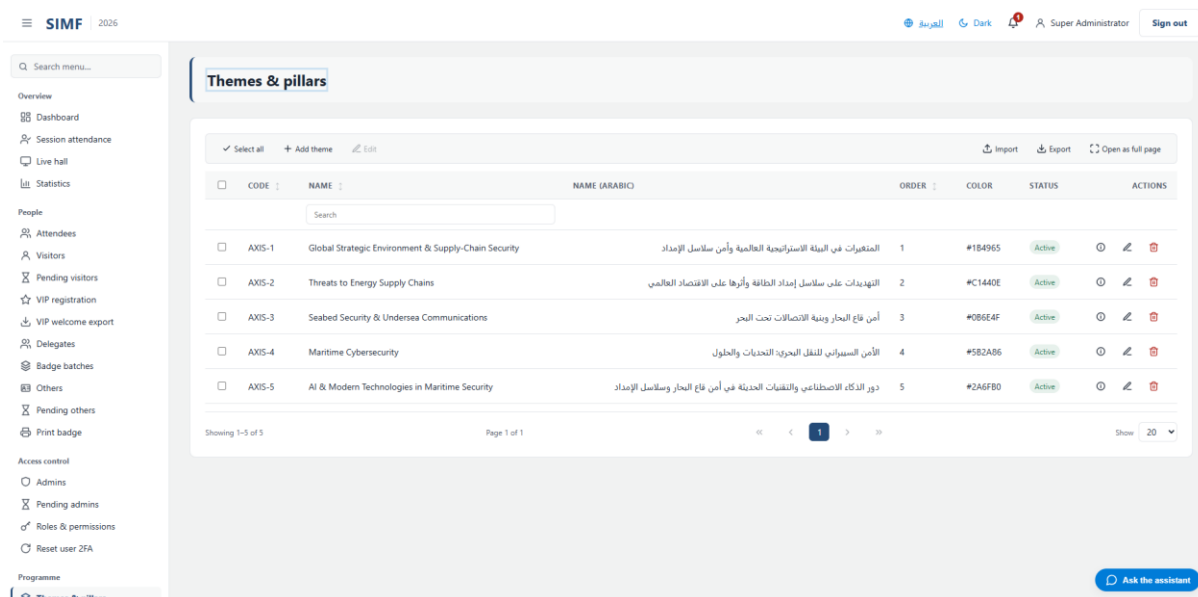


Figure 57 — Themes & pillars — /admin/themes

Sessions (/admin/sessions)

Property	Value
Address	/admin/sessions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionsList.razor.cs
Page permission	Sessions.View
Menu permission	Sessions.View

What you can do here

Action	Permission it needs
Add session	Sessions.Create
Edit	Sessions.Edit
Details	No permission of its own
Deactivate	Sessions.Delete
Import	Sessions.Import
Export	Sessions.Export
A button the page gates itself	Questions.Moderate

The list shows: Code · Title · Title (Arabic) · Hall · Start (Saudi time) · End (Saudi time) · Capacity · Status · Lifecycle

It calls: /account/api/admin/sessions/list /account/api/admin/sessions/{id}

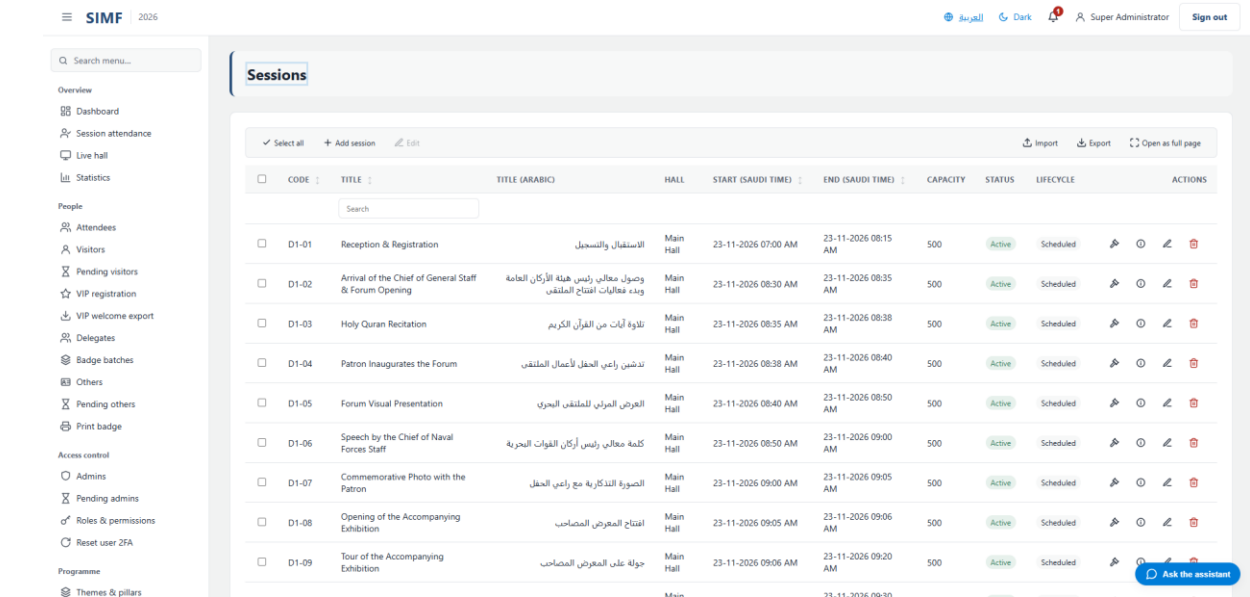


Figure 58 — Sessions — /admin/sessions

Session categories (/admin/session-categories)

Property	Value
Address	/admin/session-categories
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionCategoriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionCategoriesList.razor.cs
Page permission	SessionCategories.View
Menu permission	SessionCategories.View

What you can do here

Action	Permission it needs
Add	SessionCategories.Create
Edit	SessionCategories.Edit
Details	No permission of its own
Delete	SessionCategories.Delete
Import	SessionCategories.Import
Export	SessionCategories.Export

The list shows: Name (English) · Name (Arabic) · Order · Active

It calls: /account/api/admin/session-categories/list /account/api/admin/session-categories/{id}

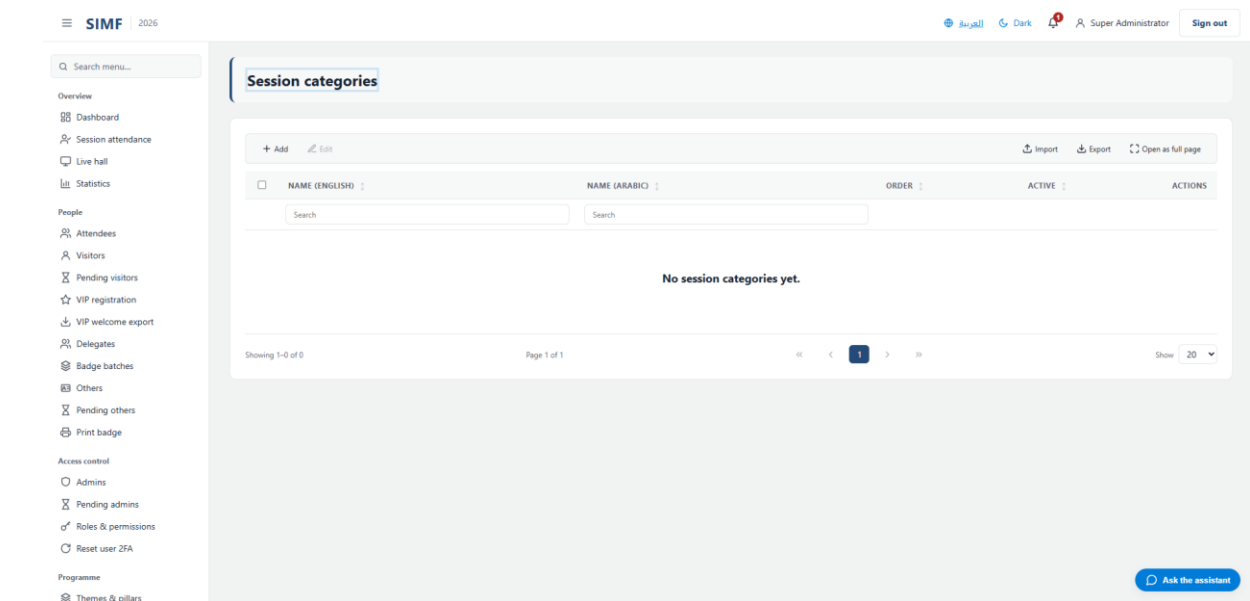


Figure 59 — Session categories — /admin/session-categories

Programme days (/admin/programme-days)

Property	Value
Address	/admin/programme-days
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeDaysList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeDaysList.razor.cs
Page permission	ProgrammeDays.View
Menu permission	ProgrammeDays.View

What you can do here

Action	Permission it needs
Add	ProgrammeDays.Create
Edit	ProgrammeDays.Edit
Details	No permission of its own
Delete	ProgrammeDays.Delete

The list shows: Date · Title (EN) · Title (AR) · Order · Logo · Active

It calls: /account/api/admin/programme-days/list /account/api/admin/programme-days/{id}

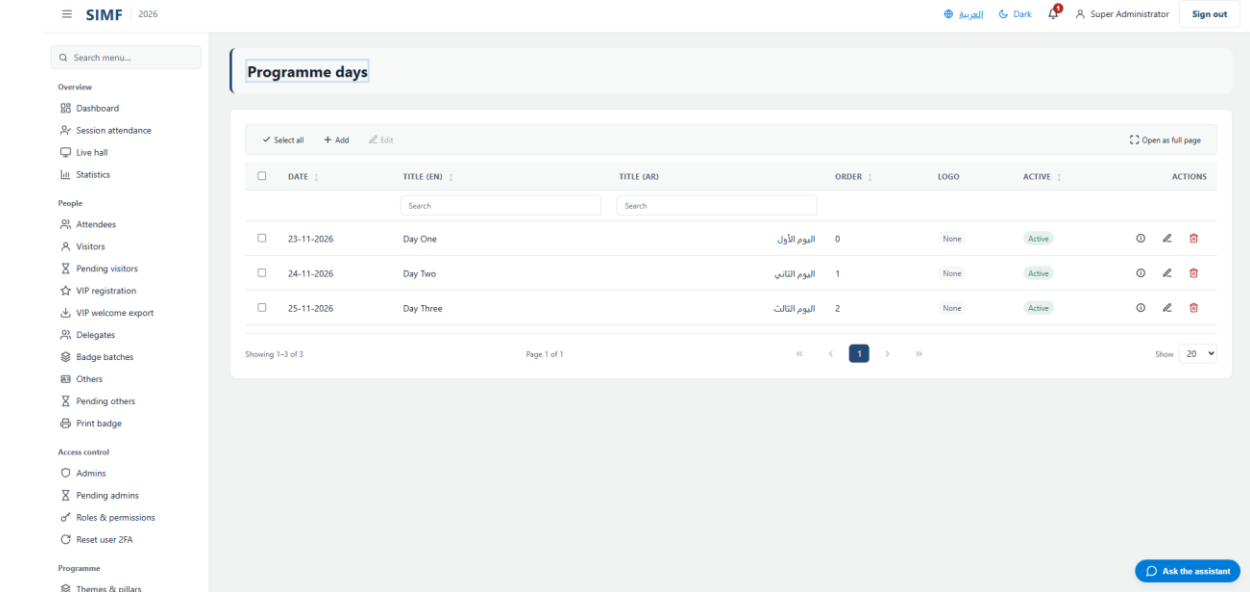


Figure 60 — Programme days — /admin/programme-days

Run of Show (/admin/programme/timeline)

Property	Value
Address	/admin/programme/timeline
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeTimeline.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeTimeline.razor.cs
Page permission	ProgrammeTimeline.View
Menu permission	ProgrammeTimeline.View

It calls: /account/api/admin/sessions/list

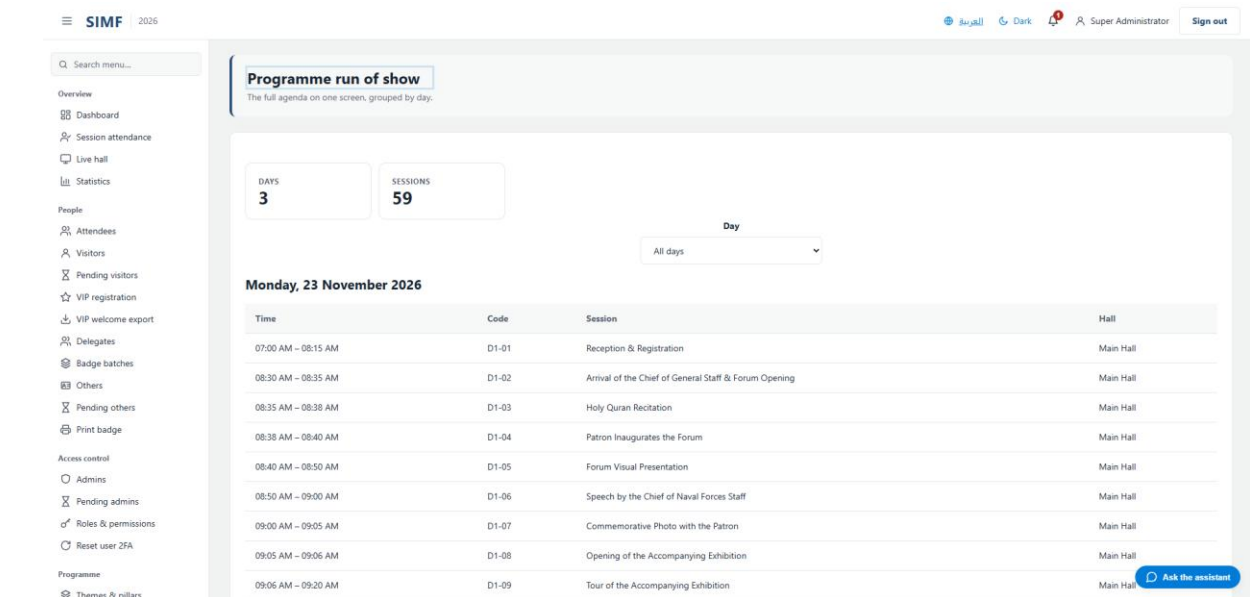


Figure 61 — Run of Show — /admin/programme/timeline

Halls & seating (/admin/halls)

Property	Value
Address	/admin/halls
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallsList.razor.cs
Page permission	Halls.View
Menu permission	Halls.View

What you can do here

Action	Permission it needs
Add hall	Halls.Create
Edit	Halls.Edit
Details	No permission of its own
Deactivate	Halls.Delete
Import	Halls.Import
Export	Halls.Export
A button the page gates itself	SeatLayouts.View

The list shows: Code · Name · Name (Arabic) · Capacity · Floor · Status

It calls: /account/api/admin/halls/list /account/api/admin/halls/{id}

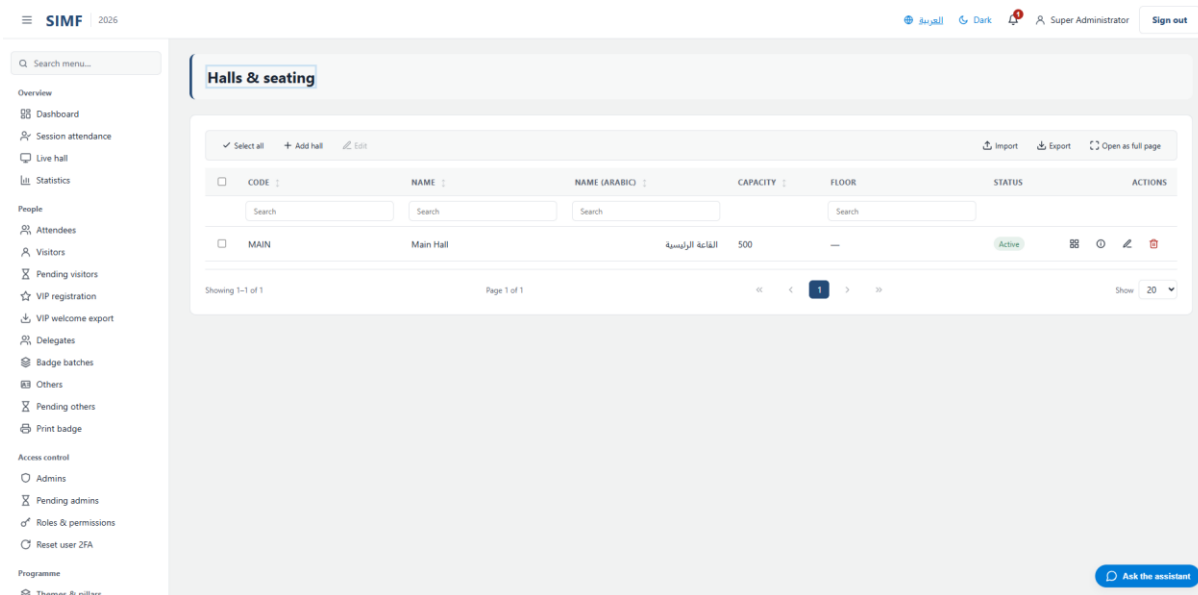


Figure 62 — Halls & seating — /admin/halls

Hall seat layouts (/admin/halls/seat-layouts)

Property	Value
Address	/admin/halls/seat-layouts
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallSeatLayoutEditor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallSeatLayoutEditor.razor.cs

Page permission	SeatLayouts.View
Menu permission	SeatLayouts.View

What you can do here

Action	Permission it needs
A button the page gates itself	SeatLayouts.Delete
A button the page gates itself	SeatLayouts.Edit

It calls: /account/api/admin/halls/list /account/api/admin/halls/{_selectedHallId}/seat-layout

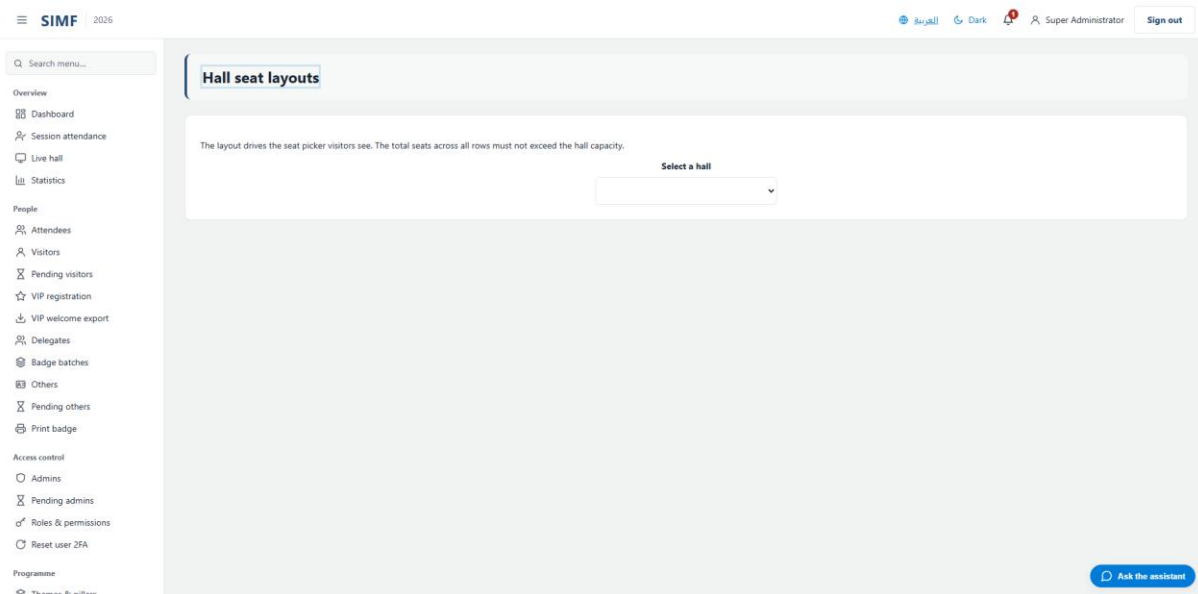


Figure 63 — Hall seat layouts — /admin/halls/seat-layouts

Session seat plans (/admin/sessions/seat-plans)

Property	Value
Address	/admin/sessions/seat-plans
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSeatPlan.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSeatPlan.razor.cs
Page permission	SeatPlans.View
Menu permission	SeatPlans.View

What you can do here

Action	Permission it needs
A button the page gates itself	SeatPlans.Edit

It calls: /account/api/admin/halls/{session.HallId}/seat-layout /account/api/admin/sessions/list
/account/api/admin/sessions/{_selectedSessionId}/seats/list
/account/api/admin/sessions/{_selectedSessionId}/seats/reserve-row

/account/api/admin/sessions/{_selectedSessionId}/seats/reserve-seat
/account/api/admin/sessions/{_selectedSessionId}/seats/{row.ReservationId}

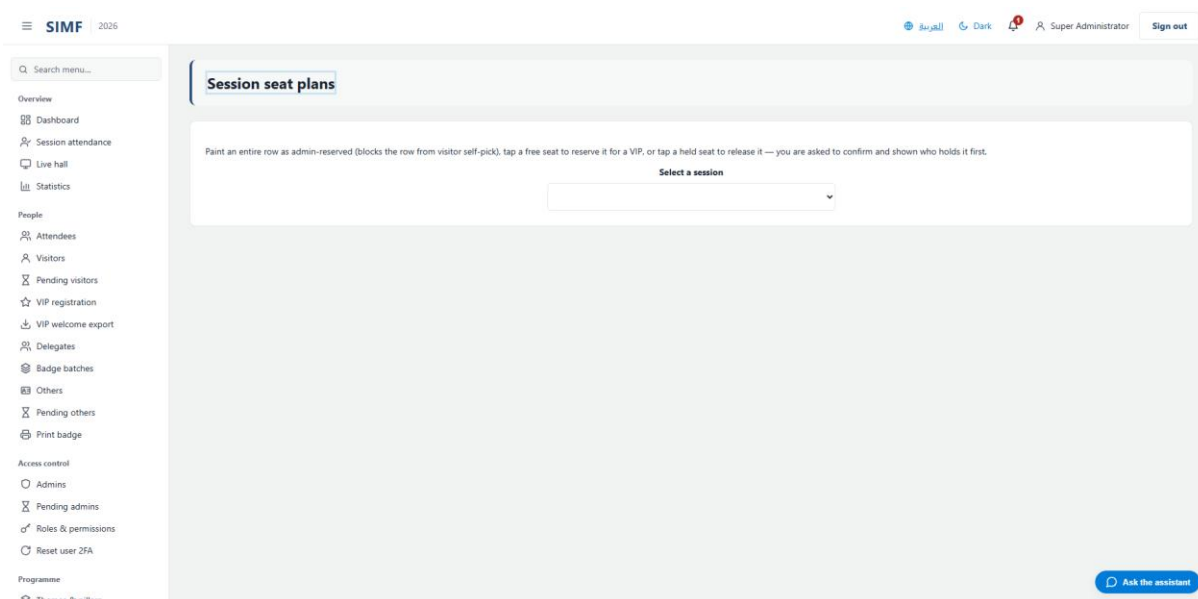


Figure 64 — Session seat plans — /admin/sessions/seat-plans

Speaker meeting requests (/admin/speaker-meeting-requests)

Property	Value
Address	/admin/speaker-meeting-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerMeetingRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerMeetingRequestsList.razor.cs
Page permission	SpeakerMeetingRequests.View
Menu permission	SpeakerMeetingRequests.View

What you can do here

Action	Permission it needs
Export	SpeakerMeetingRequests.Export
A button the page gates itself	SpeakerMeetingRequests.Manage

The list shows: Speaker · Requester · Subject · Status · Submitted · Responded

It calls: /account/api/admin/halls/list /account/api/admin/halls/{hallId}/available-slots
/account/api/admin/halls/{hallId}/meeting-tables/list /account/api/admin/speaker-meeting-requests/export /account/api/admin/speaker-meeting-requests/list /account/api/admin/speaker-meeting-requests/{_respondTarget.Id}/respond /account/api/admin/speaker-meeting-requests/{row.Id}/check-in /account/api/admin/speaker-meeting-requests/{row.Id}/reopen /account/api/admin/speaker-meeting-requests/{row.Id}/resend-confirmation

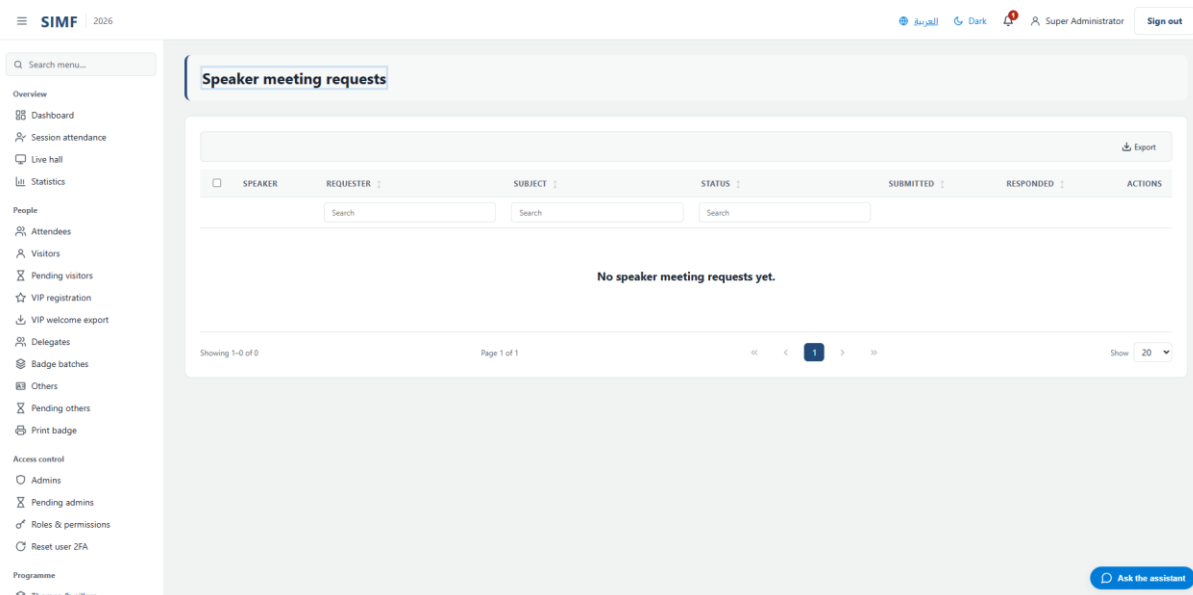


Figure 65 — Speaker meeting requests — /admin/speaker-meeting-requests

Speaker availability (/admin/speaker-availability)

Property	Value
Address	/admin/speaker-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerAvailabilityPage.razor.cs
Page permission	SpeakerMeetingRequests.Manage
Menu permission	SpeakerMeetingRequests.Manage

What you can do here

Action	Permission it needs
A button the page gates itself	SpeakerMeetingRequests.Manage

It calls: /account/api/admin/programme/forum-window /account/api/admin/speaker-availability-windows/{windowId} /account/api/admin/speakers/list /account/api/admin/speakers/{id}/availability-windows

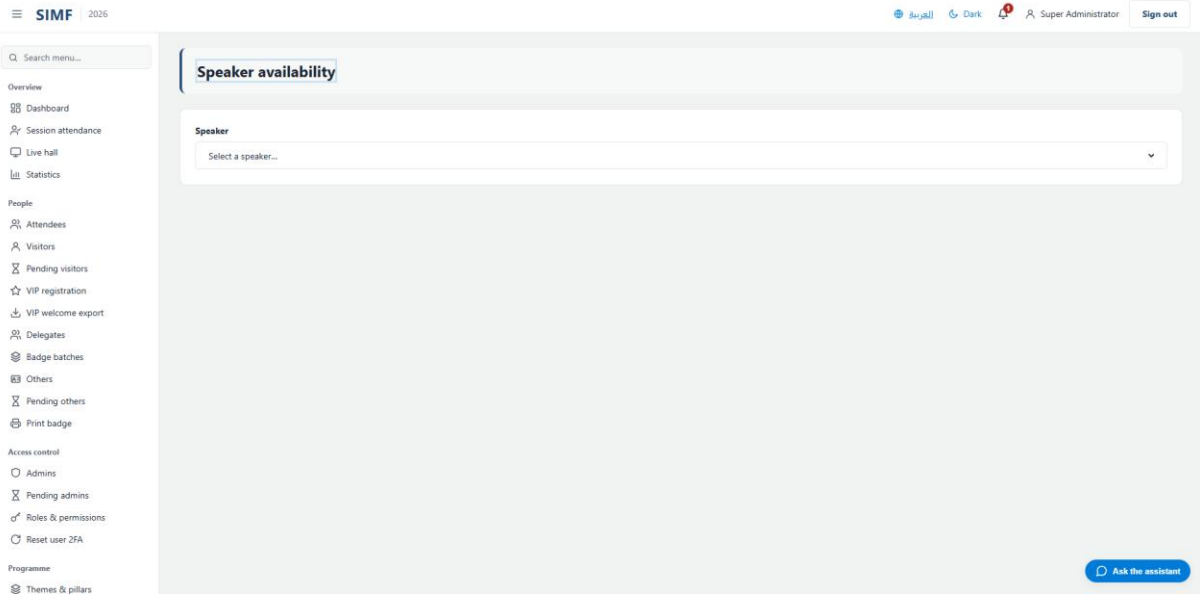


Figure 66 — Speaker availability — /admin/speaker-availability

Hall availability (/admin/hall-availability)

Property	Value
Address	/admin/hall-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallAvailabilityPage.razor.cs
Page permission	HallAvailability.Manage
Menu permission	HallAvailability.Manage

What you can do here

Action	Permission it needs
A button the page gates itself	HallAvailability.Manage

It calls: /account/api/admin/hall-availability-windows/{windowId} /account/api/admin/halls/list
/account/api/admin/halls/{id}/availability-windows

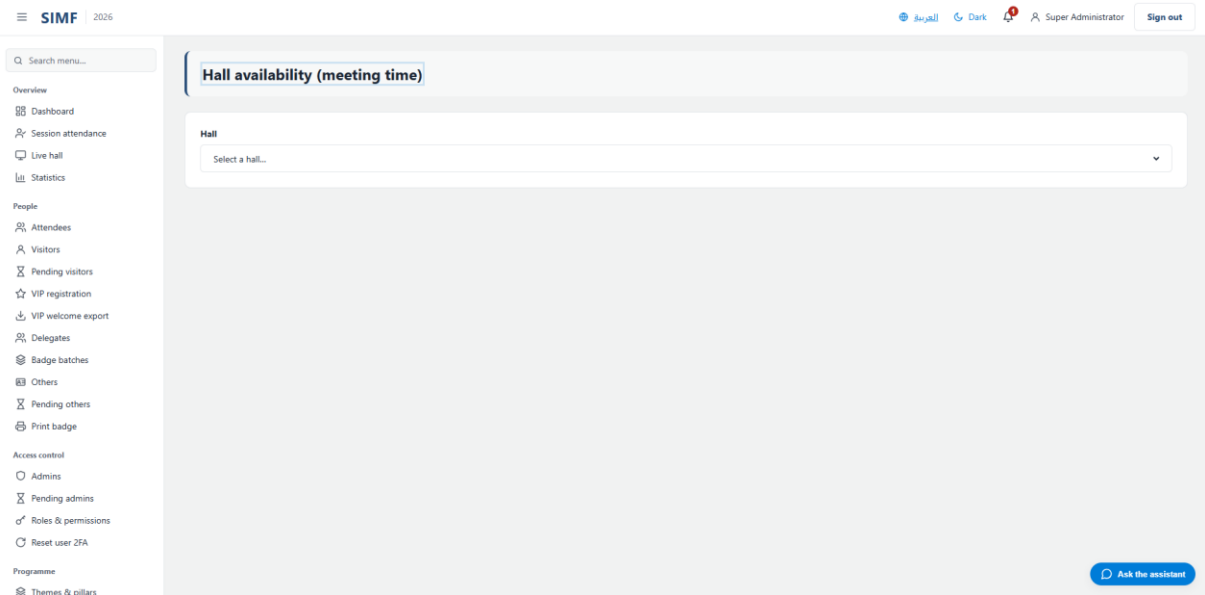


Figure 67 — Hall availability — /admin/hall-availability

Delegation meetings (/admin/delegation-meetings)

Property	Value
Address	/admin/delegation-meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationMeetingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationMeetingsList.razor.cs
Page permission	DelegationMeetings.View
Menu permission	DelegationMeetings.View

What you can do here

Action	Permission it needs
A button the page gates itself	DelegationMeetings.Manage

The list shows: From delegation · To delegation · Attendees · Subject · Status · Submitted

It calls: /account/api/admin/delegation-meeting-requests/list /account/api/admin/delegation-meeting-requests/{_respondTarget.Id}/respond /account/api/admin/delegation-meeting-requests/{row.Id} /account/api/admin/delegation-meeting-requests/{row.Id}/check-in /account/api/admin/halls/list /account/api/admin/halls/{hallId}/available-slots /account/api/admin/halls/{hallId}/meeting-tables/list

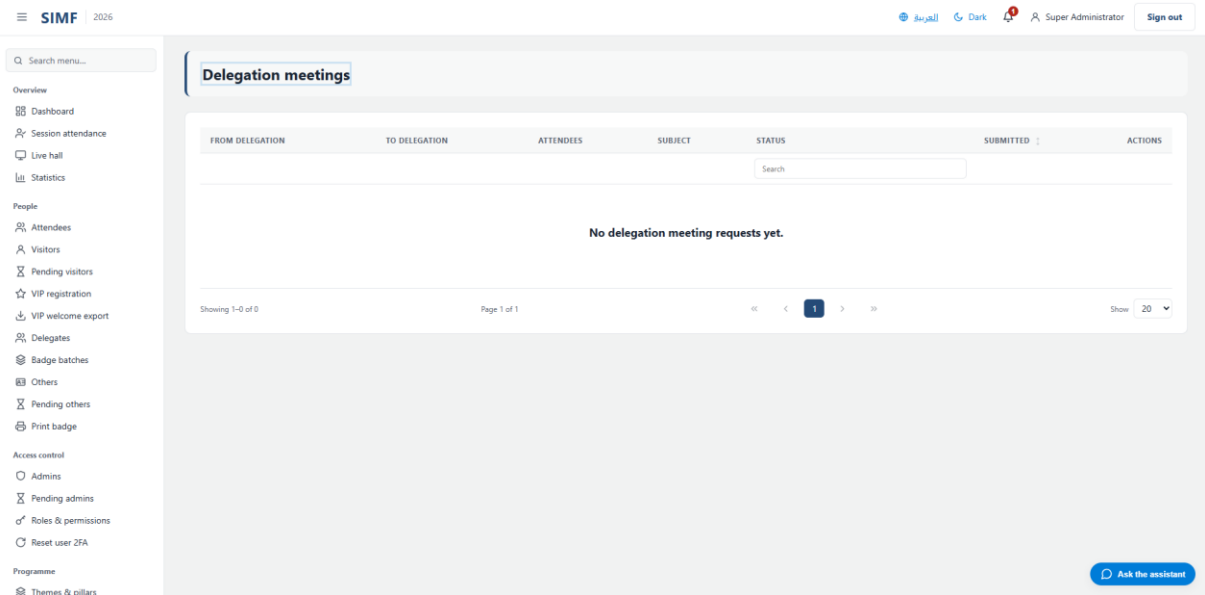


Figure 68 — Delegation meetings — /admin/delegation-meetings

Delegation availability (/admin/delegation-availability)

Property	Value
Address	/admin/delegation-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationAvailabilityPage.razor.cs
Page permission	DelegationMeetings.Manage
Menu permission	DelegationMeetings.Manage

What you can do here

Action	Permission it needs
A button the page gates itself	DelegationMeetings.Manage

It calls: /account/api/admin/countries/list /account/api/admin/countries/{id}/availability-windows
 /account/api/admin/delegation-availability-windows/{windowId} /account/api/admin/programme/forum-window

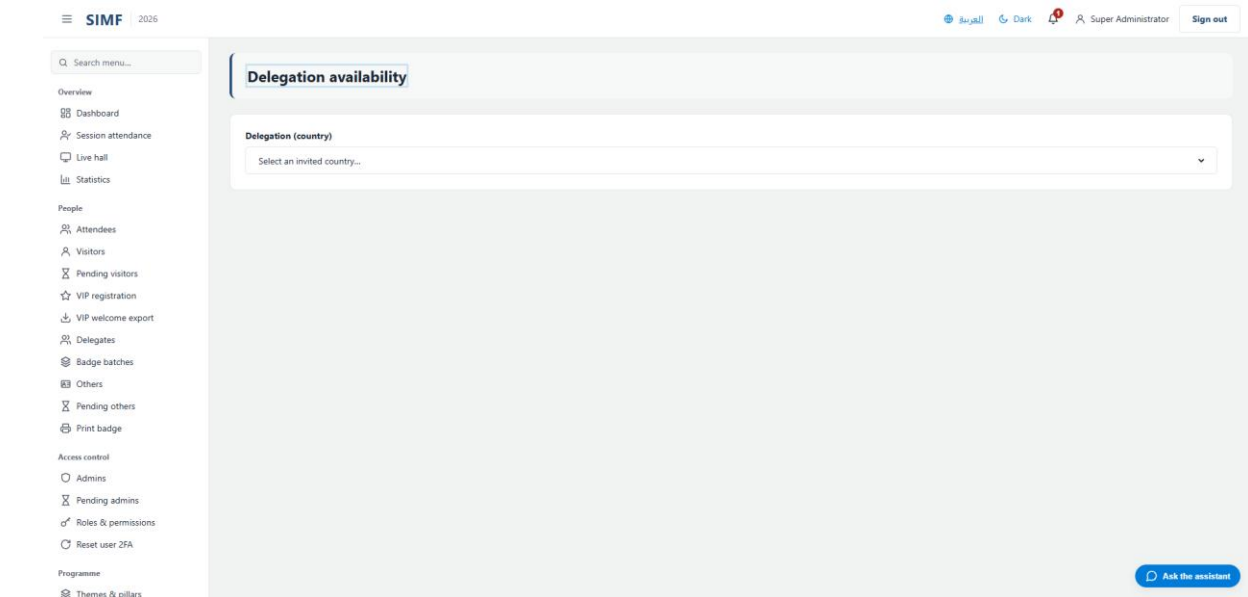


Figure 69 — Delegation availability — /admin/delegation-availability

Document requests (/admin/document-requests)

Property	Value
Address	/admin/document-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DocumentRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DocumentRequestsList.razor.cs
Page permission	ParticipationDocumentRequests.View
Menu permission	ParticipationDocumentRequests.View

What you can do here

Action	Permission it needs
A button the page gates itself	ParticipationDocumentRequests.Manage

The list shows: Requester · Document · Note · Status · Submitted · Responded

It calls: /account/api/admin/document-requests/list /account/api/admin/document-requests/{_respondTarget.Id}/respond /account/api/admin/document-requests/{row.Id}

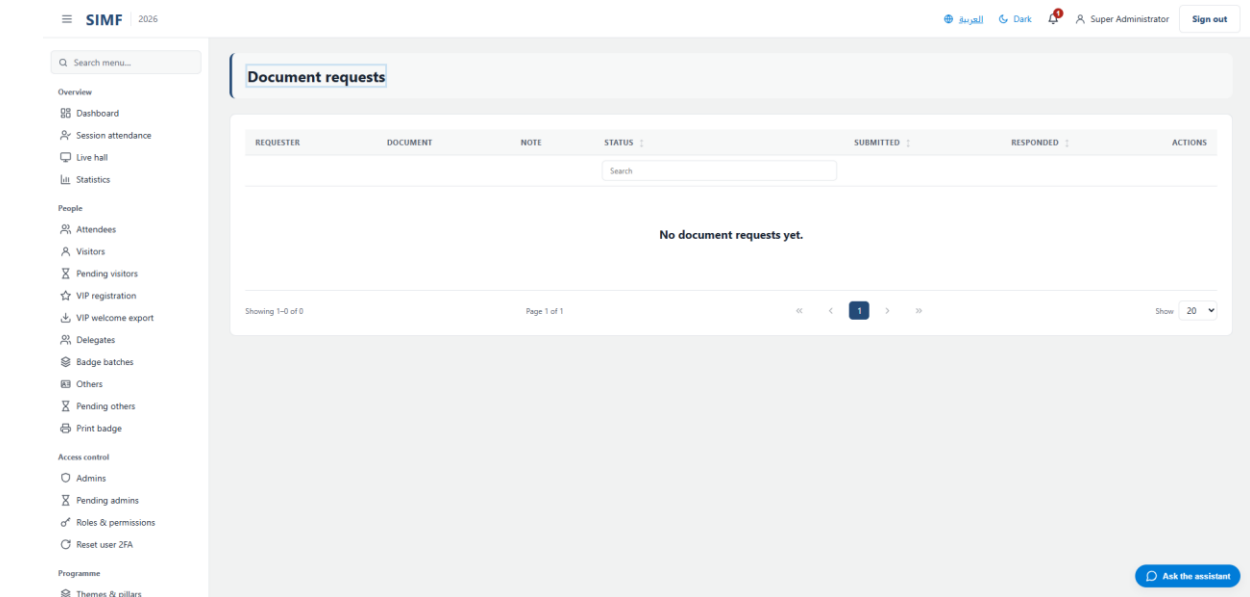


Figure 70 — Document requests — /admin/document-requests

Badge requests (/admin/badge-requests)

Property	Value
Address	/admin/badge-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeRequestsList.razor.cs
Page permission	BadgeUpdateRequests.View
Menu permission	BadgeUpdateRequests.View

What you can do here

Action	Permission it needs
A button the page gates itself	BadgeUpdateRequests.Manage

The list shows: Requester · Requested title · Current title · Status · Submitted · Responded

It calls: /account/api/admin/badge-requests/list /account/api/admin/badge-requests/{_respondTarget.Id}/respond /account/api/admin/badge-requests/{row.Id}

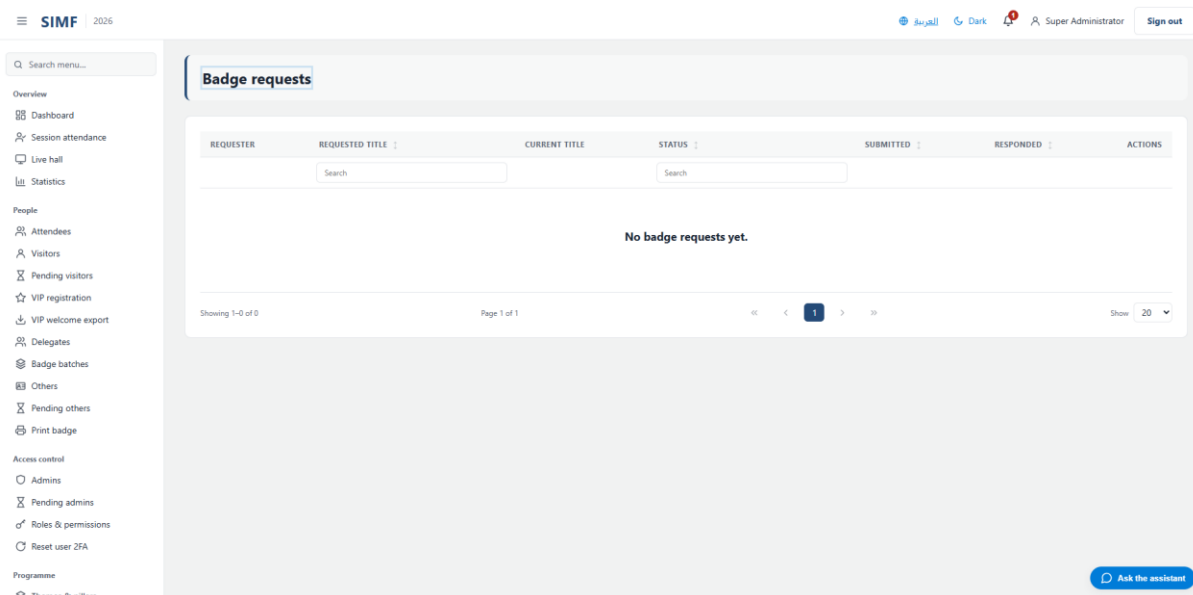


Figure 71 — Badge requests — /admin/badge-requests

Speakers (/admin/speakers)

Property	Value
Address	/admin/speakers
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakersList.razor.cs
Page permission	Speakers.View
Menu permission	Speakers.View

What you can do here

Action	Permission it needs
Add speaker	Speakers.Create
Edit	Speakers.Edit
Details	No permission of its own
Deactivate	Speakers.Delete
Import	Speakers.Import
Export	Speakers.Export

The list shows: Speaker · Country · Code · Order · Status

It calls: /account/api/admin/speakers/list /account/api/admin/speakers/{id}

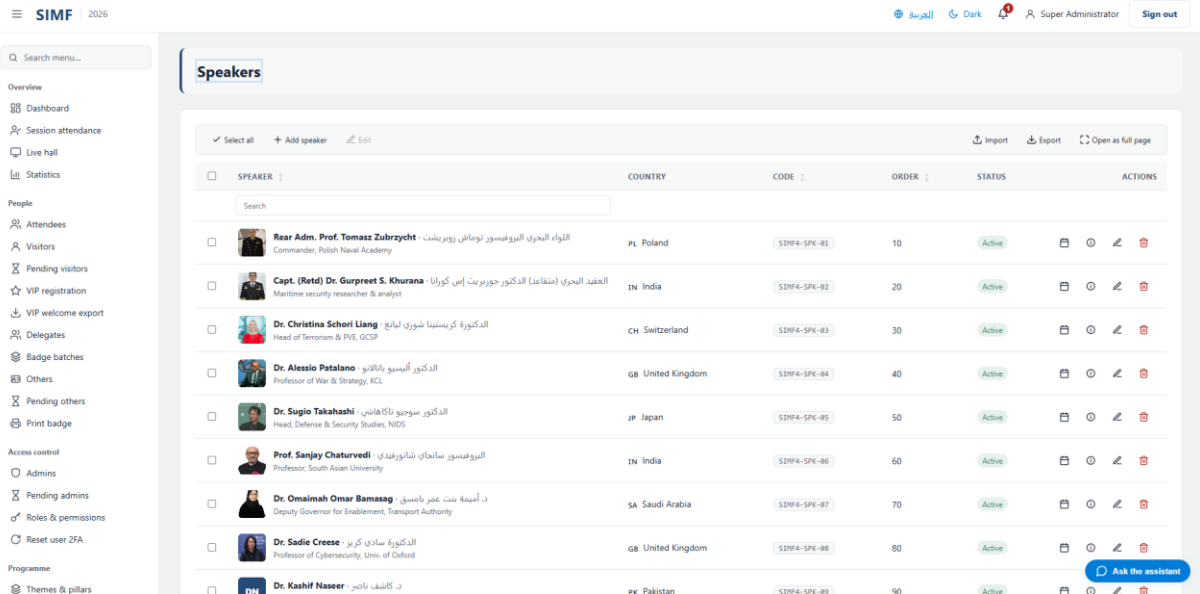


Figure 72 — Speakers — /admin/speakers

Speaker presentations (/admin/speaker-presentations)

Property	Value
Address	/admin/speaker-presentations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerPresentationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerPresentationsList.razor.cs
Page permission	Speakers.View
Menu permission	Speakers.View

What you can do here

Action	Permission it needs
Export	Speakers.Export
A button the page gates itself	Speakers.Edit
A button the page gates itself	Speakers.View

The list shows: File · Session · Size

It calls: /account/api/admin/sessions/list /account/api/admin/speaker-presentations/export
 /account/api/admin/speaker-presentations/{row.Id} /account/api/admin/speaker-presentations/{row.Id}/file /account/api/admin/speakers/list
 /account/api/admin/speakers/{_speakerId}/presentations

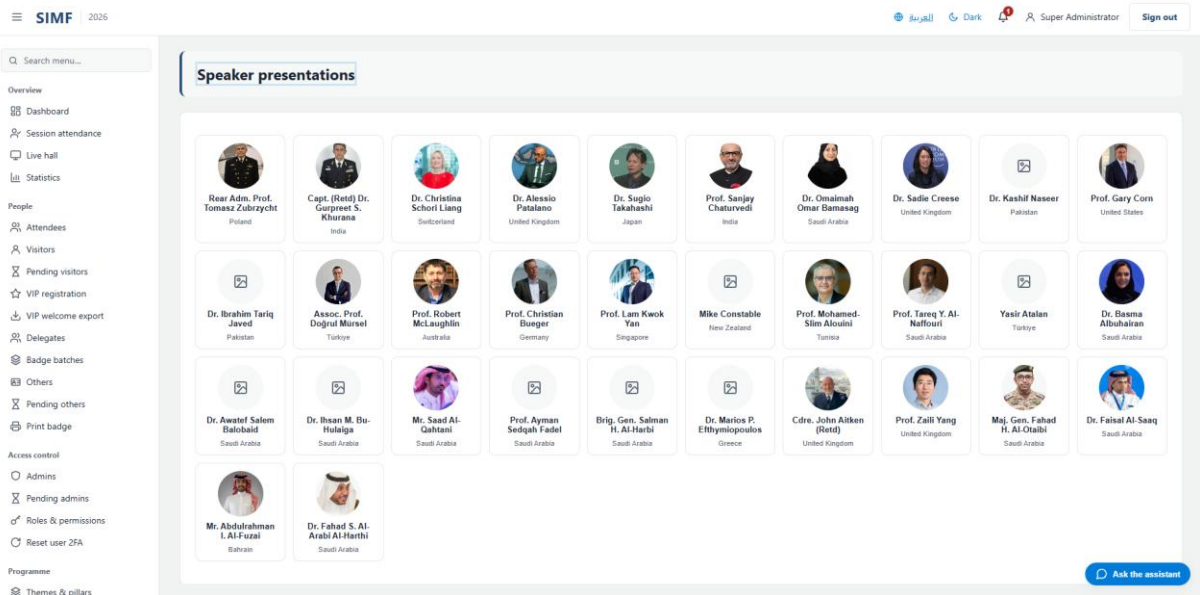


Figure 73 — Speaker presentations — /admin/speaker-presentations

Bookings (/admin/bookings)

Property	Value
Address	/admin/bookings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BookingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BookingsList.razor.cs
Page permission	Bookings.View
Menu permission	Bookings.View

What you can do here

Action	Permission it needs
Export	Bookings.Export

The list shows: Session · Starts (Saudi time) · Seat · Attendee · Booked (Saudi time)

It calls: /account/api/admin/bookings/export /account/api/admin/bookings/list

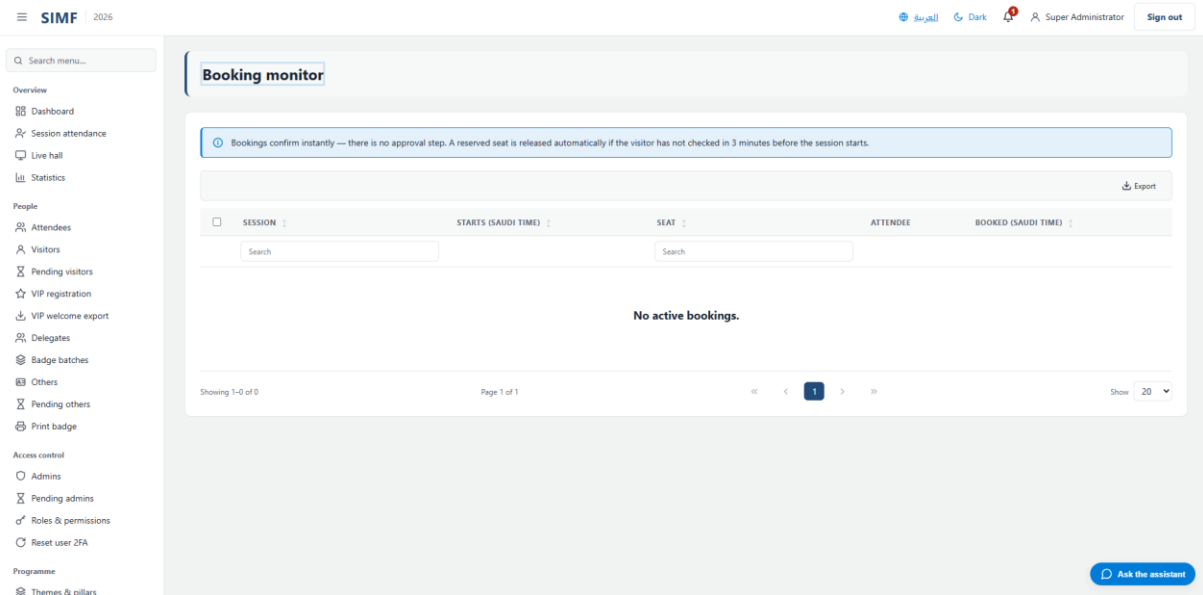


Figure 74 — Bookings — /admin/bookings

Meeting Tables (/admin/meeting-tables)

Property	Value
Address	/admin/meeting-tables
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MeetingTablesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MeetingTablesList.razor.cs
Page permission	MeetingTables.View
Menu permission	MeetingTables.View

What you can do here

Action	Permission it needs
Add table	MeetingTables.Edit
Edit	MeetingTables.Edit
Details	No permission of its own
Delete	MeetingTables.Edit
Export	MeetingTables.Export
A button the page gates itself	HallAllocations.Edit
A button the page gates itself	Halls.Edit

The list shows: Code · Row · Column · Capacity · Purpose · Mode · Start · End

It calls: /account/api/admin/hall-allocations/{row.Id} /account/api/admin/halls/list
 /account/api/admin/halls/{hid}/hall-allocations /account/api/admin/halls/{hid}/hall-allocations/list /account/api/admin/halls/{hid}/meeting-tables
 /account/api/admin/halls/{hid}/meeting-tables/generate /account/api/admin/halls/{hid}/meeting-tables/list /account/api/admin/halls/{hid}/purpose /account/api/admin/meeting-tables/export
 /account/api/admin/meeting-tables/{_editingTableId} /account/api/admin/meeting-tables/{row.Id}

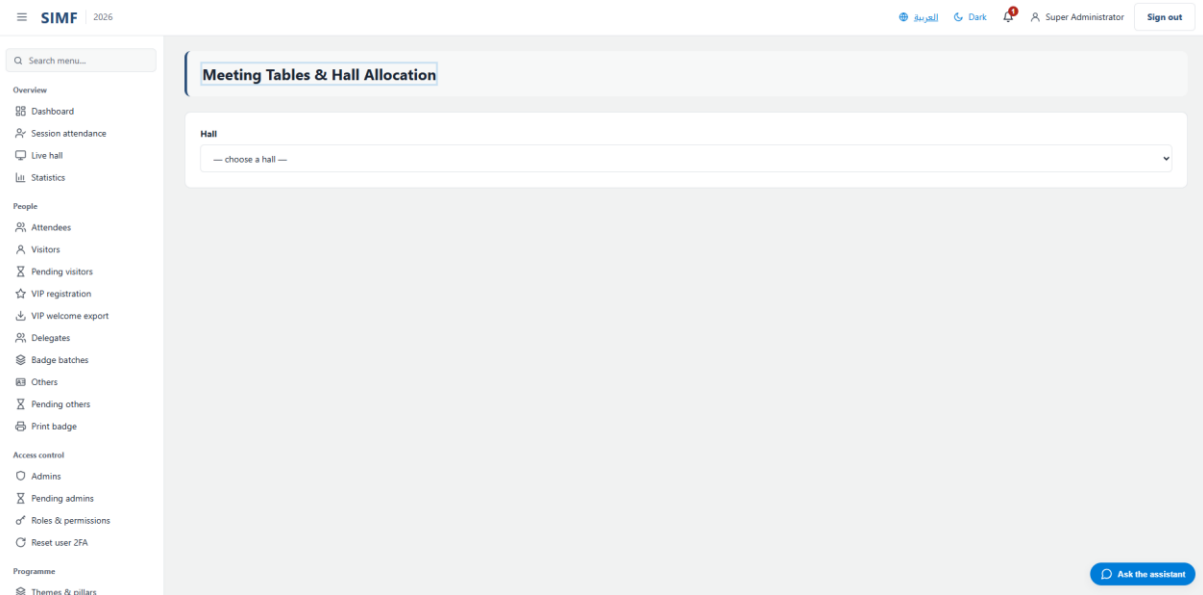


Figure 75 — Meeting Tables — /admin/meeting-tables

Business Meetings (/admin/business-meetings)

Property	Value
Address	/admin/business-meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BusinessMeetingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BusinessMeetingsList.razor.cs
Page permission	BusinessMeetings.View
Menu permission	BusinessMeetings.View

What you can do here

Action	Permission it needs
Schedule meeting	BusinessMeetings.Schedule
View	No permission of its own
Export	BusinessMeetings.Export
A button the page gates itself	BusinessMeetings.Cancel

The list shows: Hall · Table · Type · Start · End · Participants · Status

It calls: /account/api/admin/attendees/list /account/api/admin/business-meetings
 /account/api/admin/business-meetings/export /account/api/admin/business-meetings/list
 /account/api/admin/business-meetings/{_cancelTarget.Id}/cancel /account/api/admin/business-meetings/{row.Id} /account/api/admin/exhibitors/list /account/api/admin/halls/list
 /account/api/admin/halls/{hid}/meeting-tables/list /account/api/admin/programme/forum-window

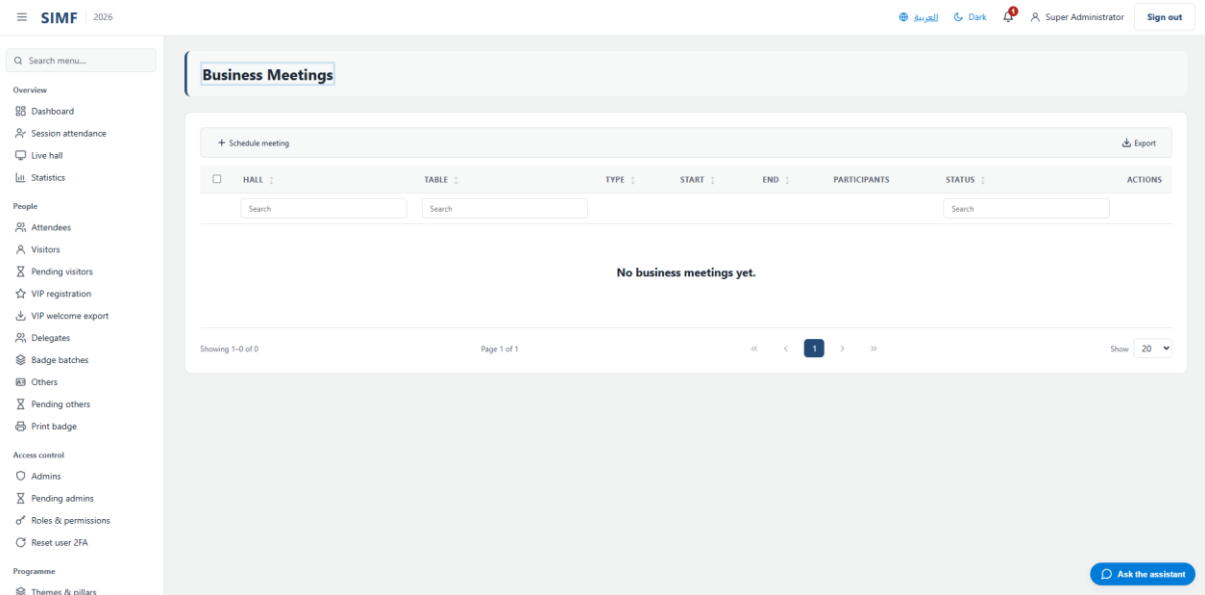


Figure 76 — Business Meetings — /admin/business-meetings

Scientific committee

Session moderators (/admin/session-moderators)

Property	Value
Address	/admin/session-moderators
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModeratorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModeratorsList.razor.cs
Page permission	SessionModerators.View
Menu permission	SessionModerators.View

What you can do here

Action	Permission it needs
Add	SessionModerators.Assign
Export	SessionModerators.Export
A button the page gates itself	SessionModerators.Revoke

The list shows: Session · Moderator · Assigned by · Assigned

It calls: /account/api/admin/session-moderators /account/api/admin/session-moderators/assign-options
 /account/api/admin/session-moderators/export /account/api/admin/session-moderators/list
 /account/api/admin/session-moderators/{row.SessionId}/{row.UserId}

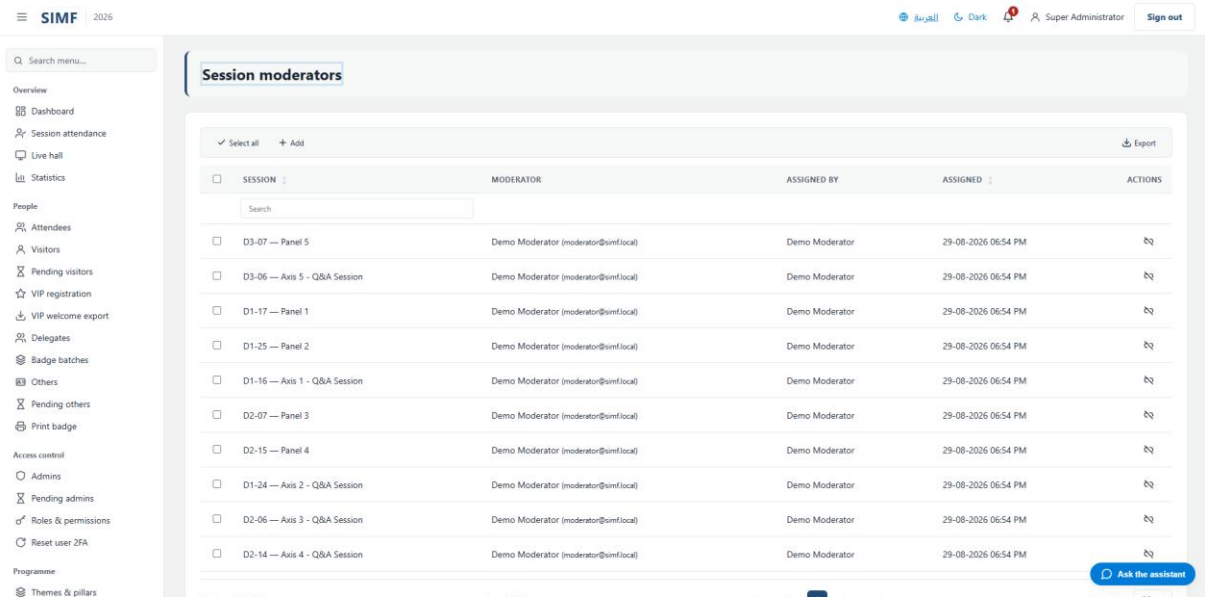


Figure 77 — Session moderators — /admin/session-moderators

Question queue (/admin/question-queue)

Property	Value
Address	/admin/question-queue
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/QuestionQueueList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/QuestionQueueList.razor.cs
Page permission	Questions.View
Menu permission	Questions.View

What you can do here

Action	Permission it needs
Export	Questions.Export
A button the page gates itself	Questions.Escalate
A button the page gates itself	Questions.Moderate

The list shows: Session · Question · Submitter · Phase · AI verdict

It calls: /account/api/admin/questions/export /account/api/admin/questions/list
 /account/api/admin/questions/{id}/approve /account/api/admin/questions/{id}/escalate
 /account/api/admin/questions/{id}/hide

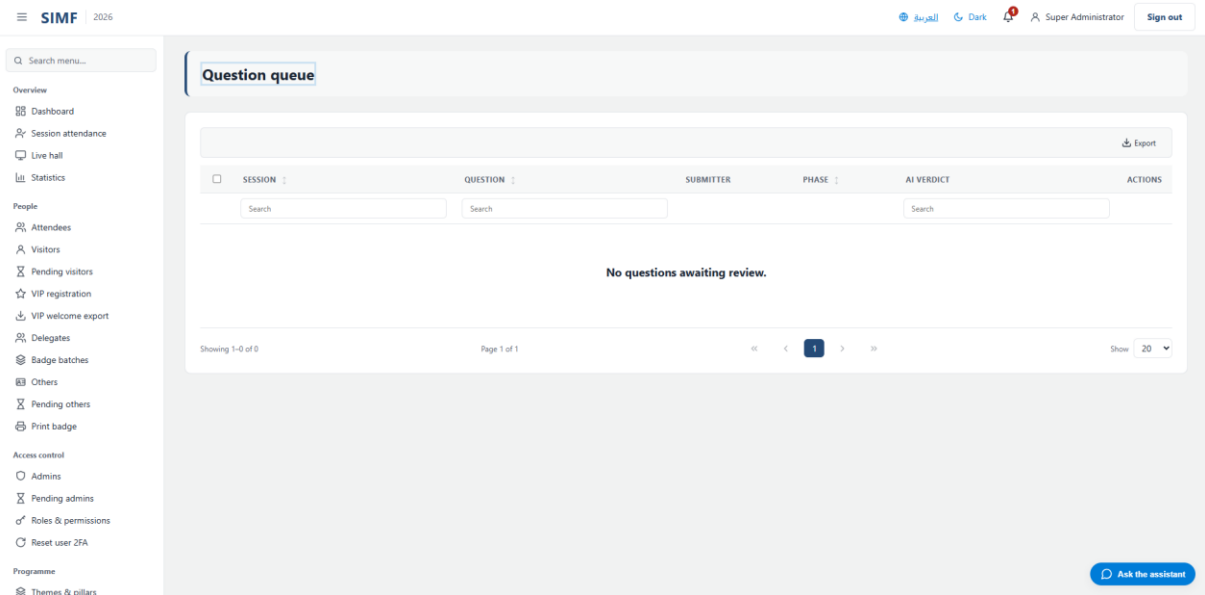


Figure 78 — Question queue — /admin/question-queue

Session summaries (/admin/session-summaries)

Property	Value
Address	/admin/session-summaries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSummariesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSummariesList.razor.cs
Page permission	SessionSummaries.View
Menu permission	SessionSummaries.View

What you can do here

Action	Permission it needs
Export	SessionSummaries.Export
A button the page gates itself	SessionSummaries.Approve
A button the page gates itself	SessionSummaries.Edit
A button the page gates itself	SessionSummaries.Publish

The list shows: Session · Status · Source

It calls: /account/api/admin/session-summaries/export /account/api/admin/session-summaries/list /account/api/admin/session-summaries/{_editSessionId} /account/api/admin/session-summaries/{sessionId} /account/api/admin/session-summaries/{sessionId}/generate /account/api/admin/session-summaries/{sessionId}/publish /account/api/admin/session-summaries/{sessionId}/unpublish /account/api/admin/session-summaries/{sessionId}/{action}

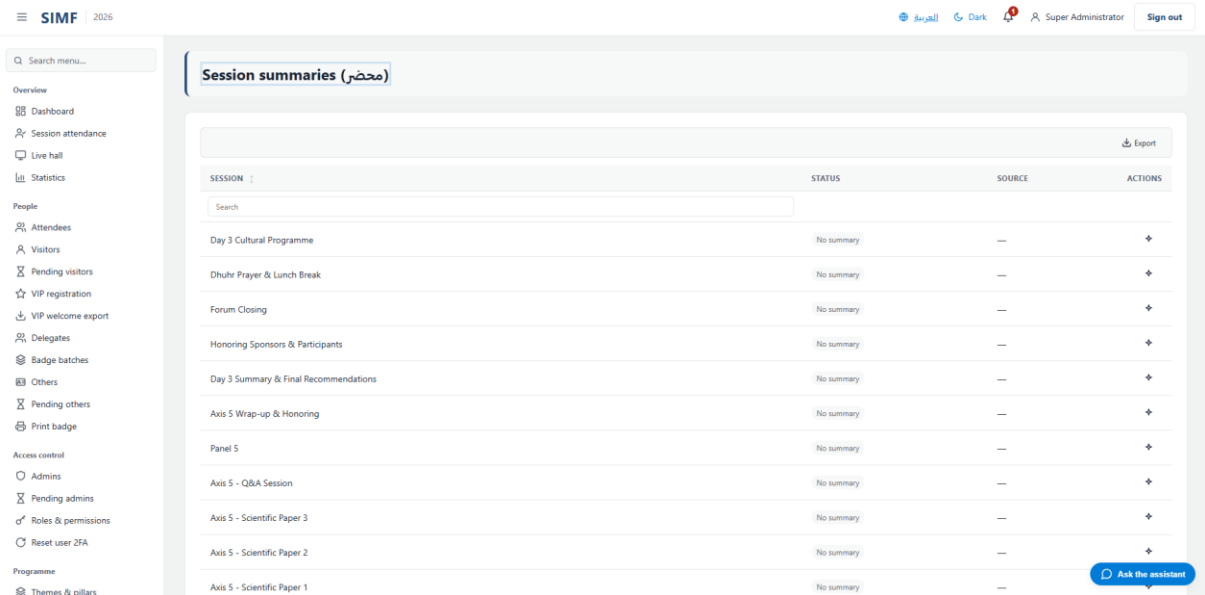


Figure 79 — Session summaries — /admin/session-summaries

Exhibition

Exhibitors (/admin/exhibitors)

Property	Value
Address	/admin/exhibitors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ExhibitorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ExhibitorsList.razor.cs
Page permission	Exhibitors.View
Menu permission	Exhibitors.View

What you can do here

Action	Permission it needs
Add	Exhibitors.Create
Edit	Exhibitors.Edit
Details	No permission of its own
Delete	Exhibitors.Delete
Import	Exhibitors.Import
Export	Exhibitors.Export
A button the page gates itself	Exhibitors.LinkAccount
A button the page gates itself	Exhibitors.RevokeAccount

The list shows: Name (English) · Name (Arabic) · Accounts · Active

It calls: /account/api/admin/exhibitors/list

/account/api/admin/exhibitors/{_accountsExhibitorId}/accounts

/account/api/admin/exhibitors/{_accountsExhibitorId}/accounts/link

/account/api/admin/exhibitors/{_accountsExhibitorId}/accounts/{membershipId}

/account/api/admin/exhibitors/{id}

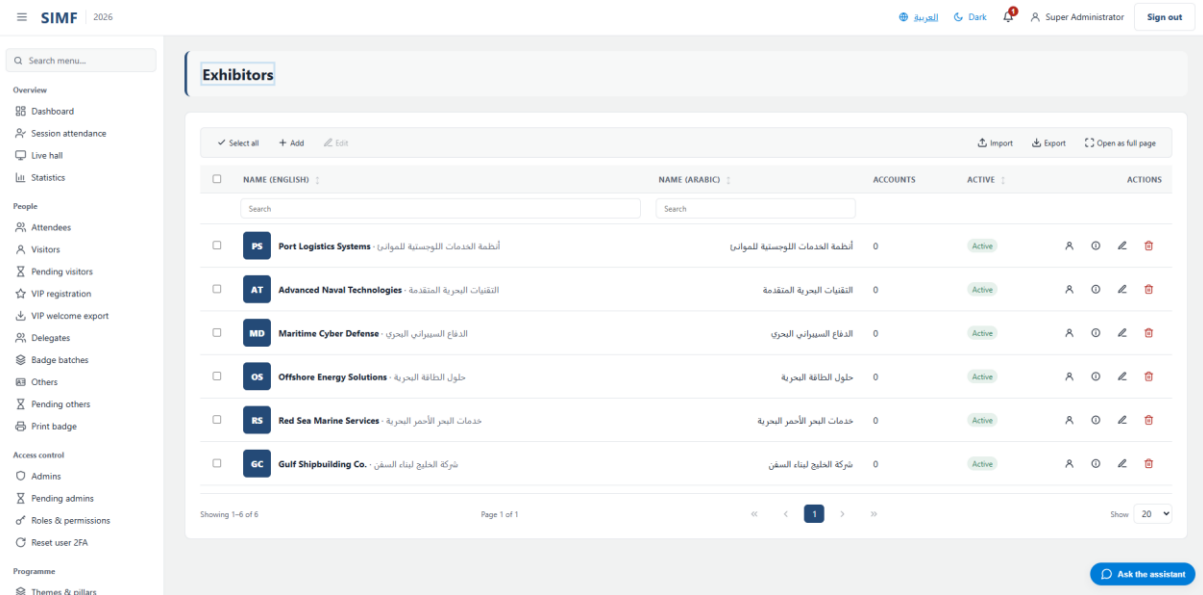


Figure 80 — Exhibitors — /admin/exhibitors

Booths (/admin/booths)

Property	Value
Address	/admin/booths
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BoothsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BoothsList.razor.cs
Page permission	Booths.View
Menu permission	Booths.View

What you can do here

Action	Permission it needs
Add	Booths.Create
Edit	Booths.Edit
Details	No permission of its own
Delete	Booths.Delete
Import	Booths.Import
Export	Booths.Export

The list shows: Code · Name (English) · Name (Arabic) · Exhibitor · Sector · Hall · Active

It calls: /account/api/admin/booths/list /account/api/admin/booths/{id}
/account/api/admin/exhibitors/list /account/api/admin/halls/list

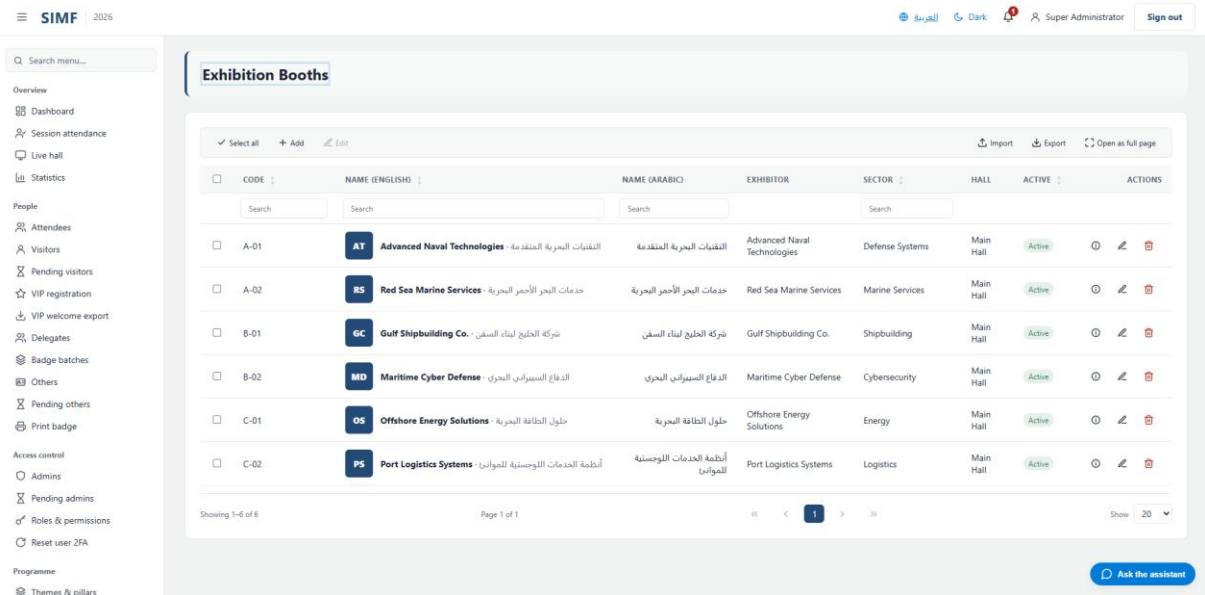


Figure 81 — Booths — /admin/booths

Sponsors (/admin/sponsors)

Property	Value
Address	/admin/sponsors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SponsorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SponsorsList.razor.cs
Page permission	Sponsors.View
Menu permission	Sponsors.View

What you can do here

Action	Permission it needs
Add	Sponsors.Create
Edit	Sponsors.Edit
Details	No permission of its own
Delete	Sponsors.Delete
Import	Sponsors.Import
Export	Sponsors.Export

The list shows: Name (English) · Tier · Link · Display order · Active

It calls: /account/api/admin/sponsors/list /account/api/admin/sponsors/{id}

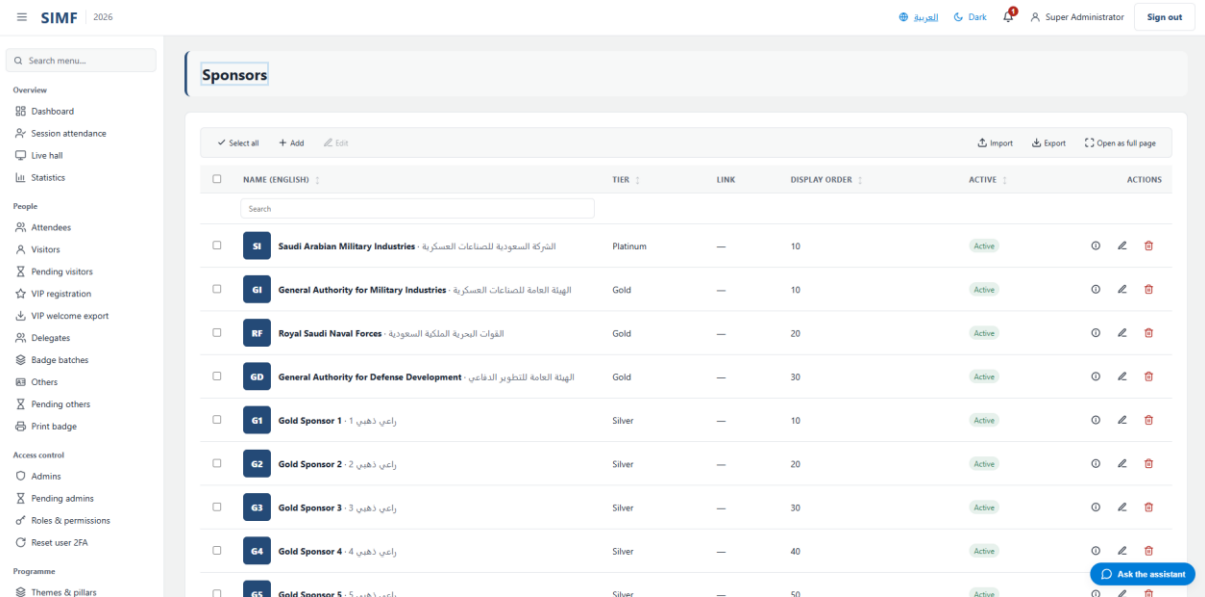


Figure 82 — Sponsors — /admin/sponsors

Venue map (/admin/venue-map)

Property	Value
Address	/admin/venue-map
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VenueMapList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VenueMapList.razor.cs
Page permission	VenueMap.View
Menu permission	VenueMap.View

What you can do here

Action	Permission it needs
Add	VenueMap.Create
Edit	VenueMap.Edit
Details	No permission of its own
Delete	VenueMap.Delete
Import	VenueMap.Import
Export	VenueMap.Export

The list shows: Label · Kind · Position (x, y) · Active

It calls: /account/api/admin/venue-map/list /account/api/admin/venue-map/{id}

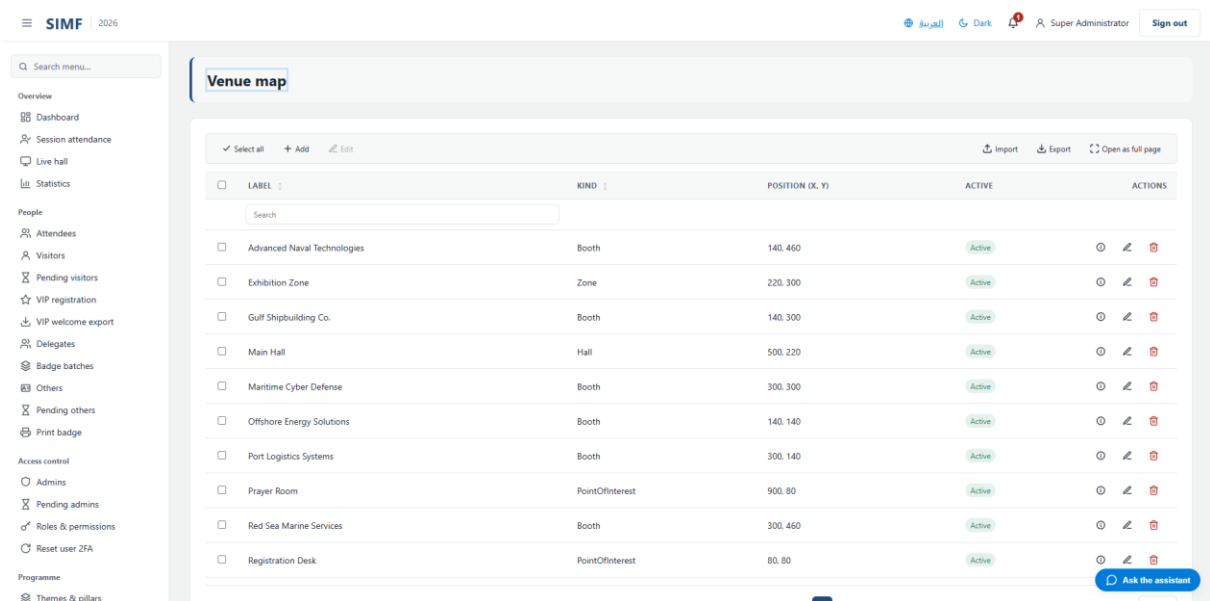


Figure 83 — Venue map — /admin/venue-map

Engagement

Live sessions (/m/live-sessions)

Property	Value
Address	/m/live-sessions
Implemented by	-
Code-behind	-
Page permission	-
Menu permission	Sessions.View
Placeholder	Yes — the module is not built yet

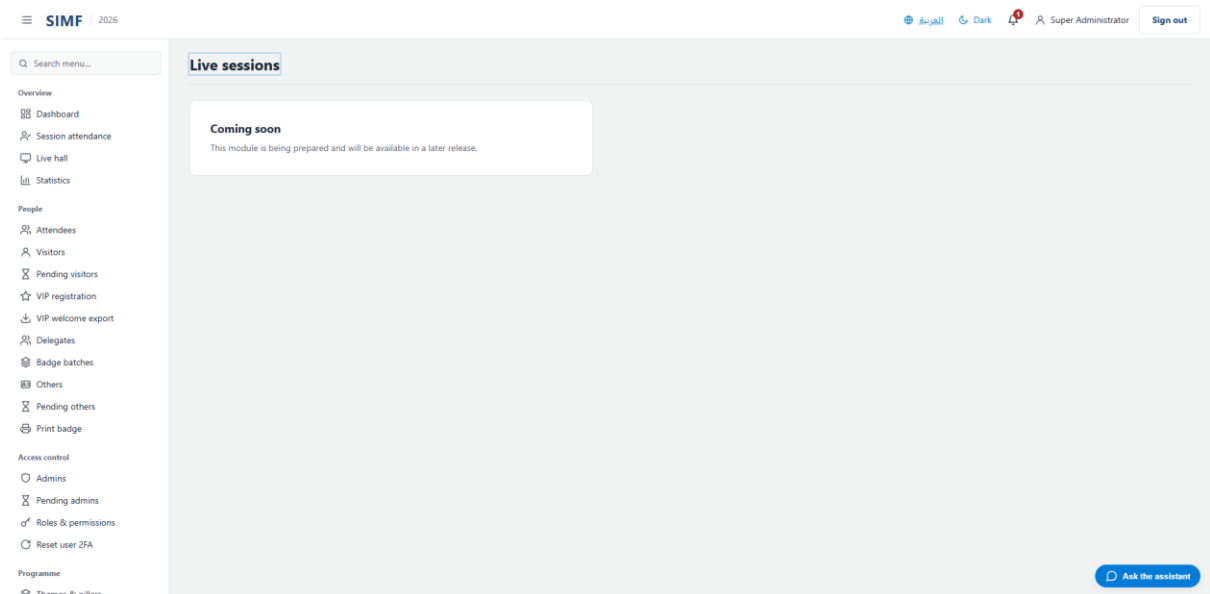


Figure 84 — Live sessions — /m/live-sessions

Ratings (/admin/ratings)

Property	Value
Address	/admin/ratings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingsList.razor.cs
Page permission	Ratings.View
Menu permission	Ratings.View

What you can do here

Action	Permission it needs
Export	Ratings.Export

The list shows: Type · Target · Overall · Answers · Comment · Active · Submitted at

It calls: /account/api/admin/feedback/ratings /account/api/admin/feedback/ratings/kpi
/account/api/admin/ratings/export

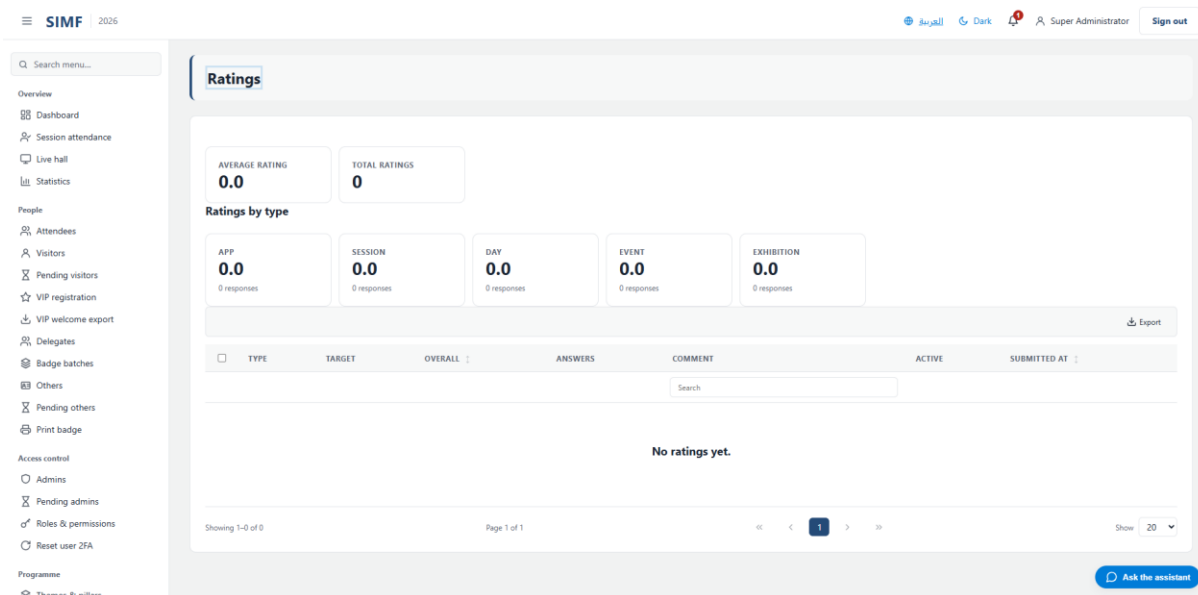


Figure 85 — Ratings — /admin/ratings

Rating configuration (/admin/rating-config)

Property	Value
Address	/admin/rating-config
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingConfig.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingConfig.razor.cs
Page permission	RatingConfig.View
Menu permission	RatingConfig.View

What you can do here

Action	Permission it needs
Add	RatingConfig.Create
Edit	RatingConfig.Edit
Details	No permission of its own
Delete	RatingConfig.Delete

The list shows: Code · Name · Scope · Built-in · Groups · Questions · Responses · Active · Name · Name (Arabic) · Order · Questions · Active · Question · Name (Arabic) · Group · Required · Order · Active

It calls: /account/api/admin/ratings/groups /account/api/admin/ratings/groups/{_groupEditId}
/account/api/admin/ratings/groups/{g.Id} /account/api/admin/ratings/questions
/account/api/admin/ratings/questions/{_questionEditId} /account/api/admin/ratings/questions/{q.Id}
/account/api/admin/ratings/types /account/api/admin/ratings/types/list
/account/api/admin/ratings/types/{_selectedType.Id}/groups/list
/account/api/admin/ratings/types/{_selectedType.Id}/questions/list
/account/api/admin/ratings/types/{_typeEditId} /account/api/admin/ratings/types/{t.Id}

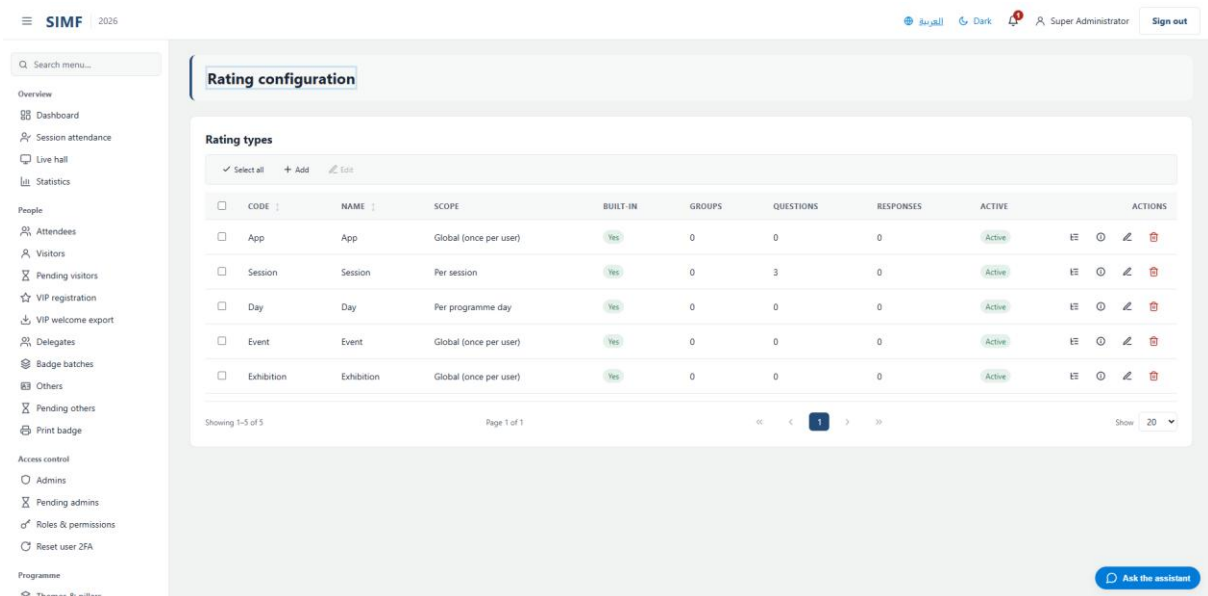


Figure 86 — Rating configuration — /admin/rating-config

Knowledge & AI

FAQ groups & entries (/admin/faq)

Property	Value
Address	/admin/faq
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/FaqManager.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/FaqManager.razor.cs
Page permission	Faq.View
Menu permission	Faq.View

What you can do here

Action	Permission it needs
Add	Faq.Create
Edit	Faq.Edit
Details	No permission of its own
Delete	Faq.Delete

The list shows: Name (EN) · Name (AR) · Order · Entries · Active · Question (EN) · Name (AR) · Order · Active

It calls: /account/api/admin/faq/entries /account/api/admin/faq/entries/{_entryEditId}
/account/api/admin/faq/entries/{e.Id} /account/api/admin/faq/groups
/account/api/admin/faq/groups/list /account/api/admin/faq/groups/{_groupEditId}
/account/api/admin/faq/groups/{_selectedGroupId}/entries/list /account/api/admin/faq/groups/{g.Id}

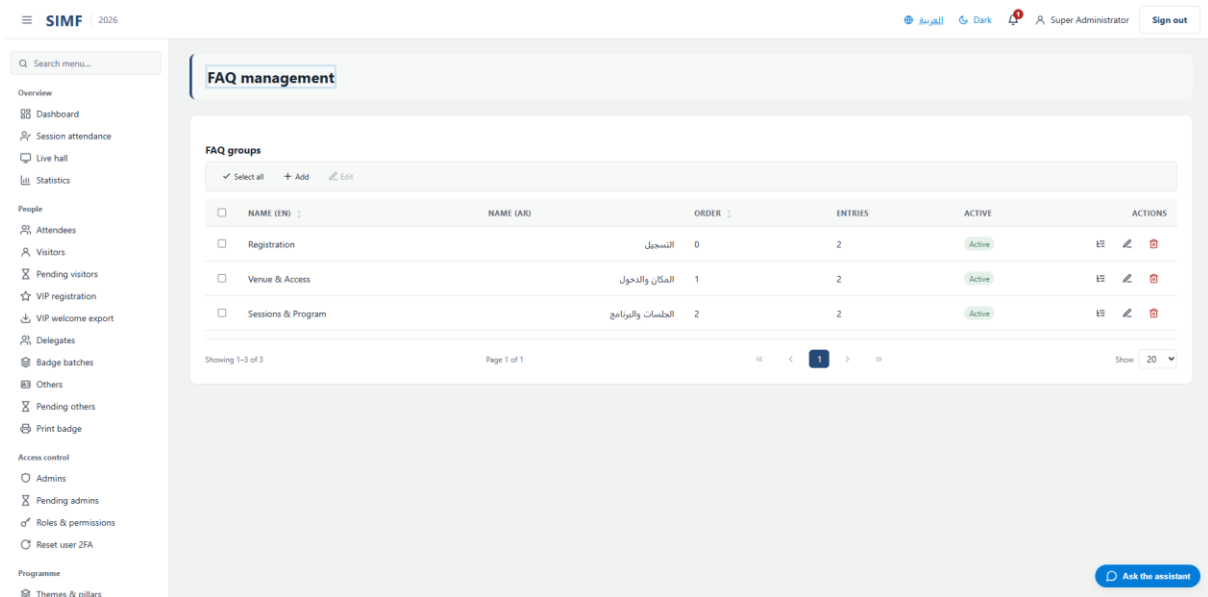


Figure 87 — FAQ groups & entries — /admin/faq

AI dashboard (/admin/ai)

Property	Value
Address	/admin/ai
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiDashboard.razor.cs
Page permission	AiDashboard.View
Menu permission	AiDashboard.View

It calls: /account/api/admin/ai/dashboard

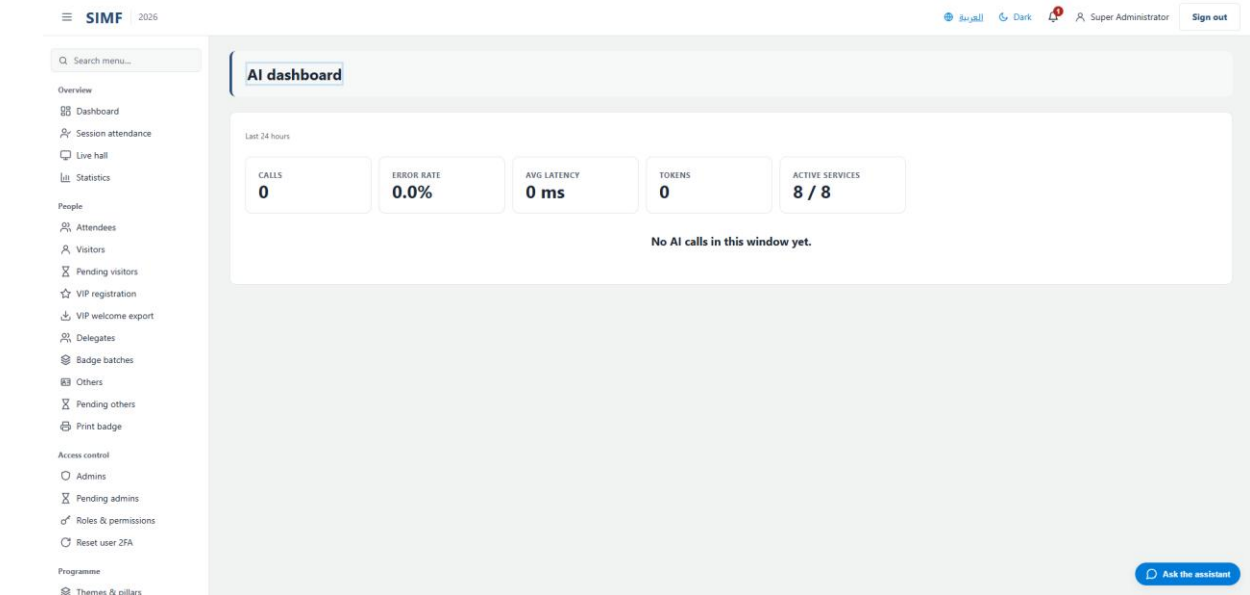


Figure 88 — AI dashboard — /admin/ai

AI services (/admin/ai/services)

Property	Value
Address	/admin/ai/services
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiServicesConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiServicesConsole.razor.cs
Page permission	AiPrompts.View
Menu permission	AiPrompts.View

What you can do here

Action	Permission it needs
A button the page gates itself	AiPrompts.Edit

The list shows: Service · Active prompt · Provider · Model · Hosting · Prompts

It calls: /account/api/admin/ai/prompts/list

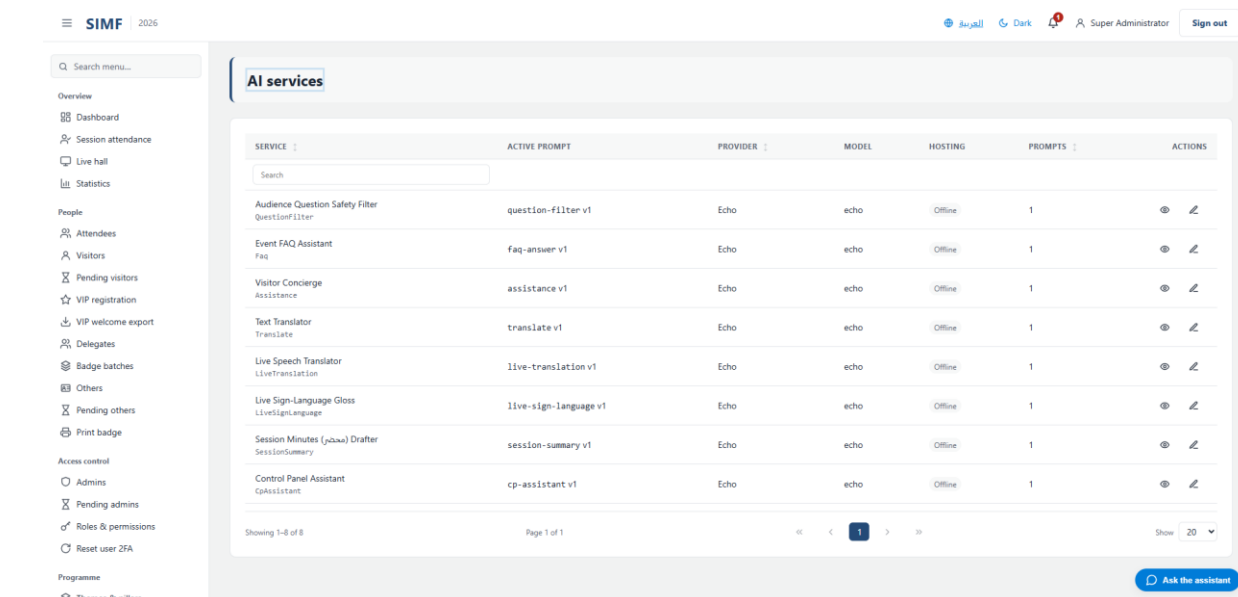


Figure 89 — AI services — /admin/ai/services

AI prompts (/admin/ai/prompts)

Property	Value
Address	/admin/ai/prompts
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiPromptsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiPromptsList.razor.cs
Page permission	AiPrompts.View
Menu permission	AiPrompts.View

What you can do here

Action	Permission it needs
Add	AiPrompts.Create
Edit	AiPrompts.Edit
Details	No permission of its own
Delete	AiPrompts.Delete
Import	AiPrompts.Import
Export	AiPrompts.Export
A button the page gates itself	AiPrompts.Test
A button the page gates itself	AiPrompts.View

The list shows: Key · Feature · Name · Provider · Model · Hosting · Version · Active

It calls: /account/api/admin/ai/prompts/list

/account/api/admin/ai/prompts/{_historyPromptId}/history/list

/account/api/admin/ai/prompts/{_testTargetId}/test /account/api/admin/ai/prompts/{id}

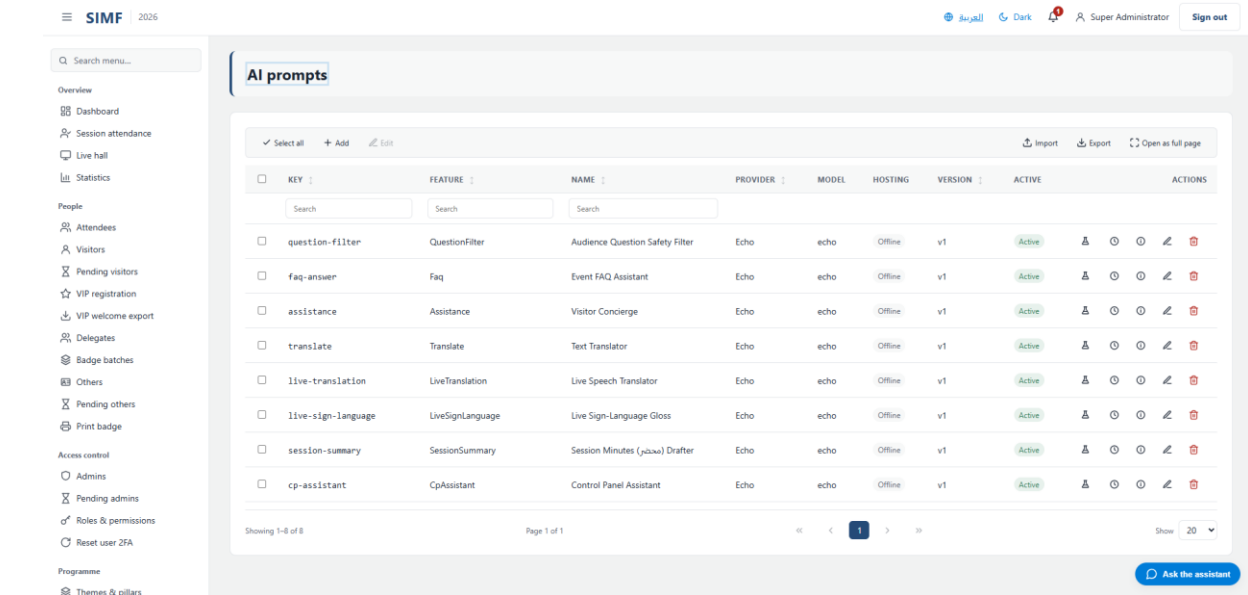


Figure 90 — AI prompts — /admin/ai/prompts

AI invocations (/admin/ai/invocations)

Property	Value
Address	/admin/ai/invocations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiInvocationsLog.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiInvocationsLog.razor.cs
Page permission	AiInvocations.View
Menu permission	AiInvocations.View

What you can do here

Action	Permission it needs
A button the page gates itself	AiInvocations.View

The list shows: Time · Prompt key · Feature · Provider · Caller · Latency · Tokens (in/out) · Error

It calls: /account/api/admin/ai/invocations/list /account/api/admin/ai/invocations/{row.Id}

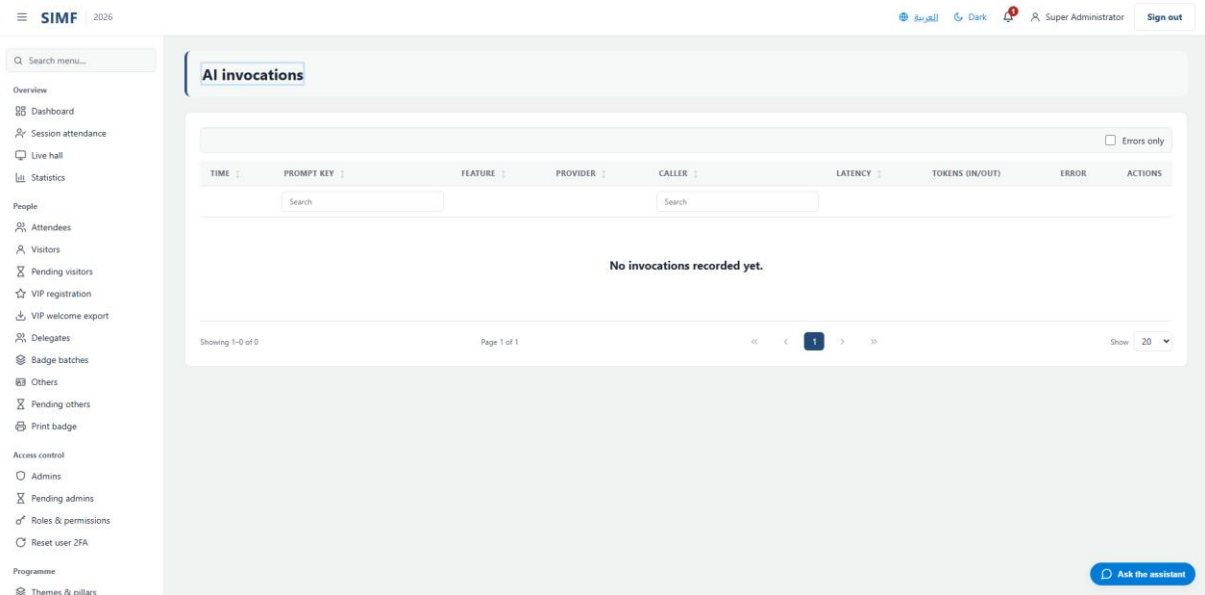


Figure 91 — AI invocations — /admin/ai/invocations

Content

Media library (/admin/media-library)

Property	Value
Address	/admin/media-library
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaLibraryList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaLibraryList.razor.cs
Page permission	MediaLibrary.View
Menu permission	MediaLibrary.View

What you can do here

Action	Permission it needs
Manage	No permission of its own
A button the page gates itself	MediaLibrary.Manage

The list shows: Category · Owner · Preview · Kind · Source · Active

It calls: /account/api/admin/assets/item/{_deactivateTarget.Id}
 /account/api/admin/assets/item/{_detailsTarget.Id}/restore /account/api/admin/assets/item/{row.Id}
 /account/api/admin/assets/list /account/api/admin/assets/{a.Category}/{a.OwnerId}/image

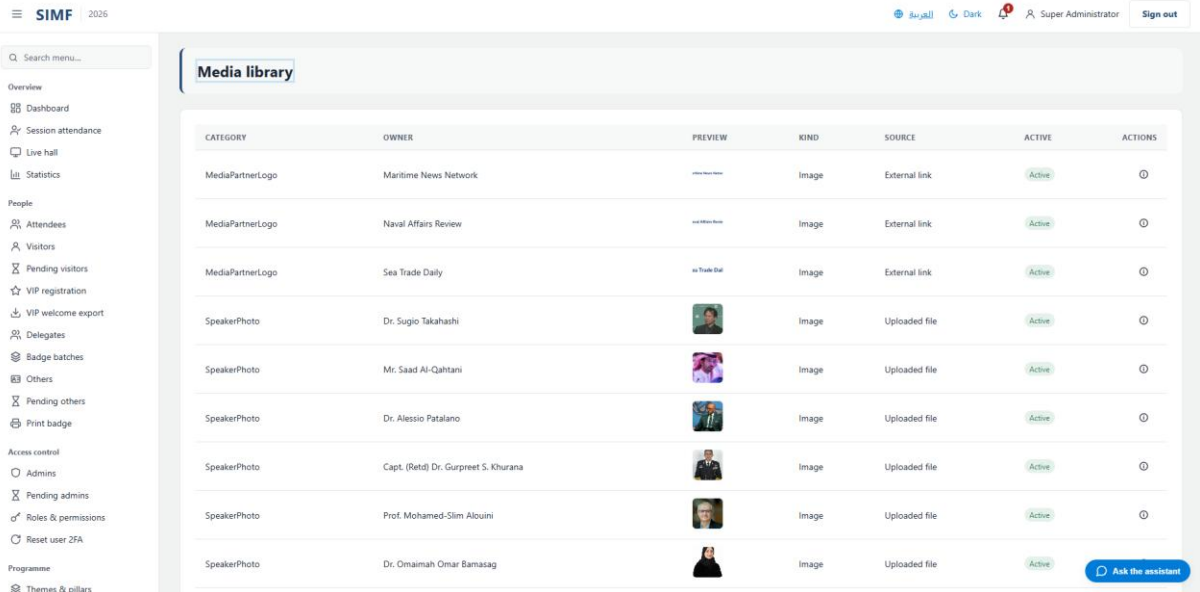


Figure 92 — Media library — /admin/media-library

Content blocks (/admin/content-blocks)

Property	Value
Address	/admin/content-blocks
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContentBlocksList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContentBlocksList.razor.cs
Page permission	ContentBlocks.View
Menu permission	ContentBlocks.View

What you can do here

Action	Permission it needs
Add	ContentBlocks.Edit
Edit	ContentBlocks.Edit
Details	No permission of its own
Delete	ContentBlocks.Delete
Import	ContentBlocks.Import
Export	ContentBlocks.Export

The list shows: Key · English · Last updated · Active

It calls: /account/api/admin/content-blocks/list

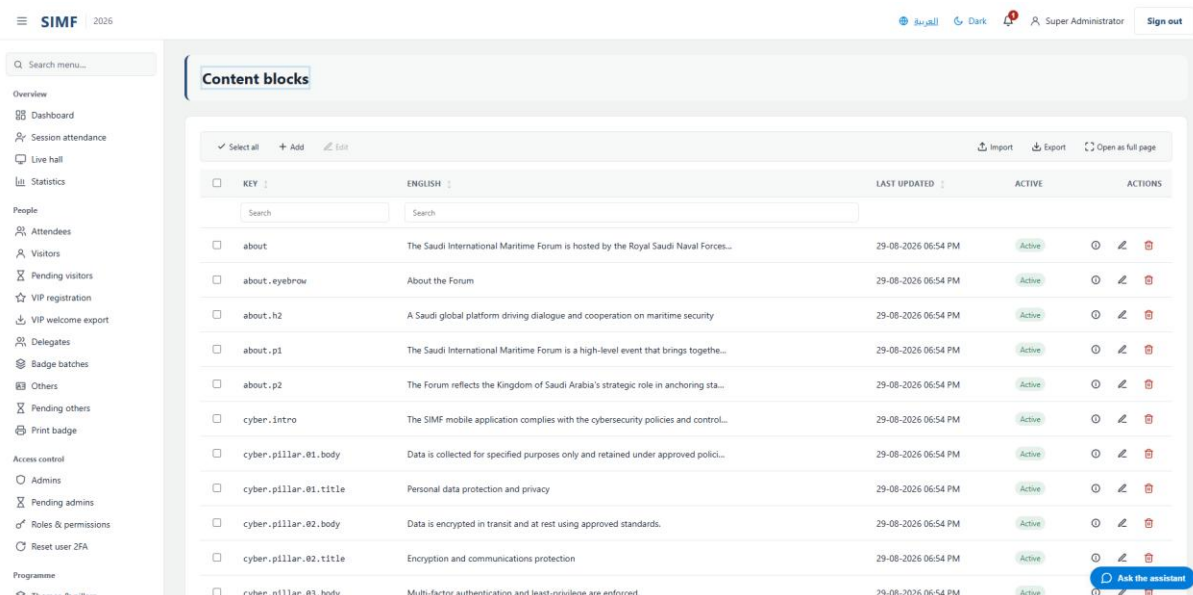


Figure 93 — Content blocks — /admin/content-blocks

Banners (/admin/banners)

Property	Value
Address	/admin/banners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BannersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BannersList.razor.cs
Page permission	Banners.View
Menu permission	Banners.View

What you can do here

Action	Permission it needs
Add	Banners.Create
Edit	Banners.Edit
Details	No permission of its own
Delete	Banners.Delete
Import	Banners.Import
Export	Banners.Export

The list shows: Title · Start · End · Order · Active

It calls: /account/api/admin/banners/list /account/api/admin/banners/{id}

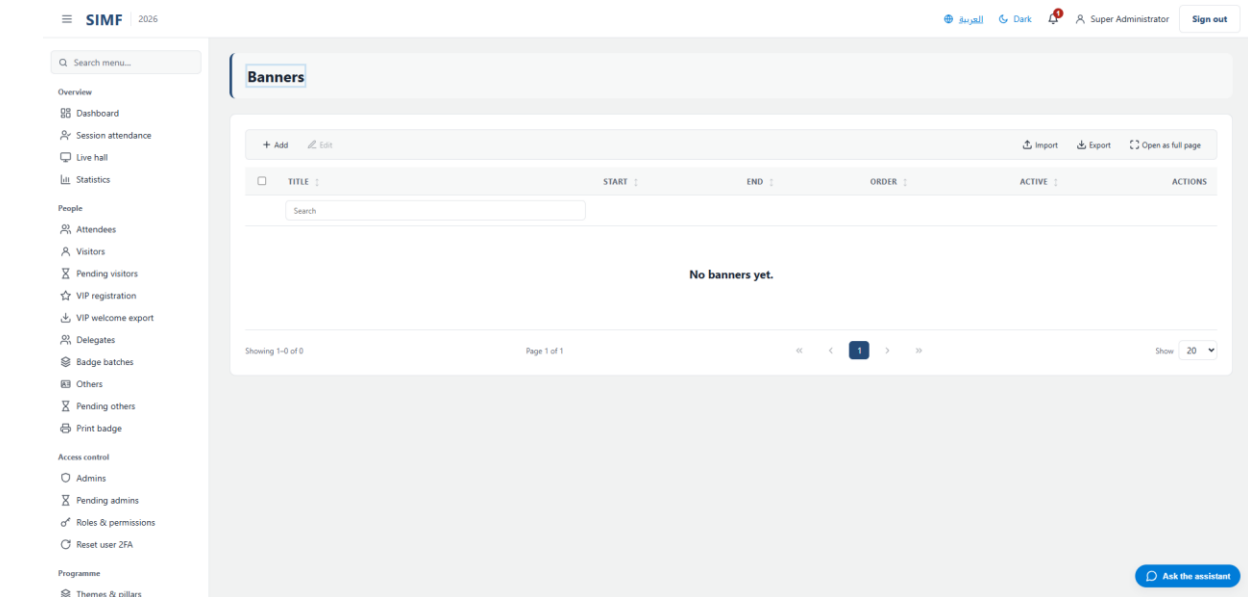


Figure 94 — Banners — /admin/banners

Media Center (/admin/media)

Property	Value
Address	/admin/media
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaList.razor.cs
Page permission	Media.View
Menu permission	Media.View

What you can do here

Action	Permission it needs
Add	Media.Create
Edit	Media.Edit
Details	No permission of its own
Delete	Media.Delete
Import	Media.Import
Export	Media.Export

The list shows: Type · Title (English) · Title (Arabic) · Album (English) · Album (Arabic) · Image · Order · Active

It calls: /account/api/admin/media/list /account/api/admin/media/{id}

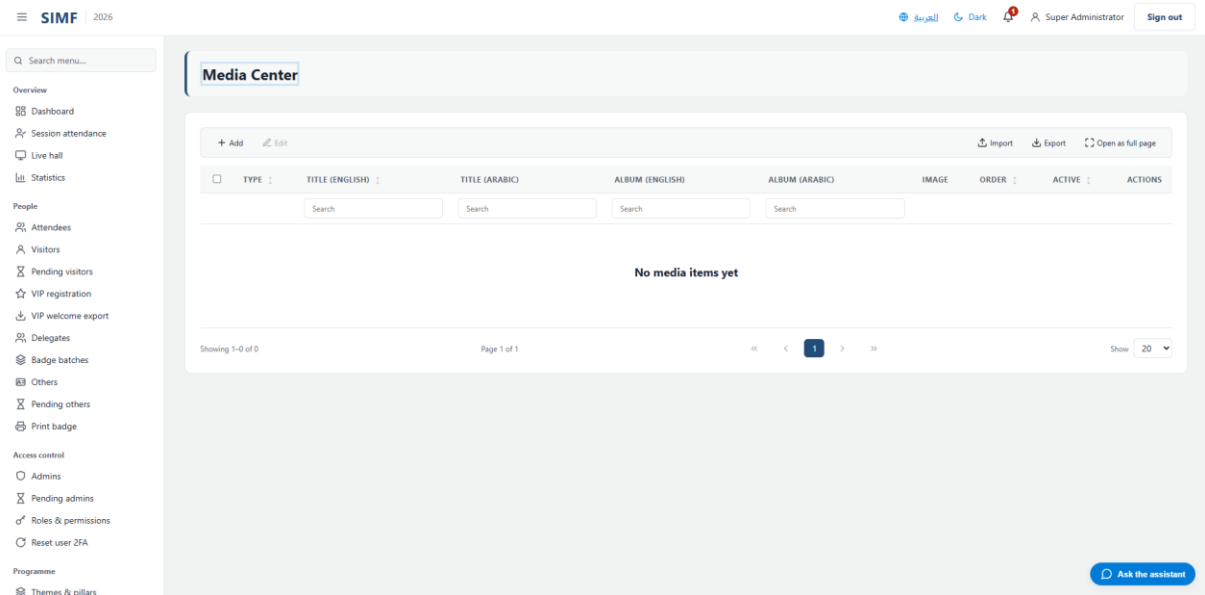


Figure 95 — Media Center — /admin/media

News (/admin/news)

Property	Value
Address	/admin/news
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/NewsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/NewsList.razor.cs
Page permission	News.View
Menu permission	News.View

What you can do here

Action	Permission it needs
Add	News.Create
Edit	News.Edit
Details	No permission of its own
Delete	News.Delete
Import	News.Import
Export	News.Export

The list shows: Title (EN) · Title (AR) · Category (EN) · Category (AR) · Published · Order · Active

It calls: /account/api/admin/news/list /account/api/admin/news/{id}

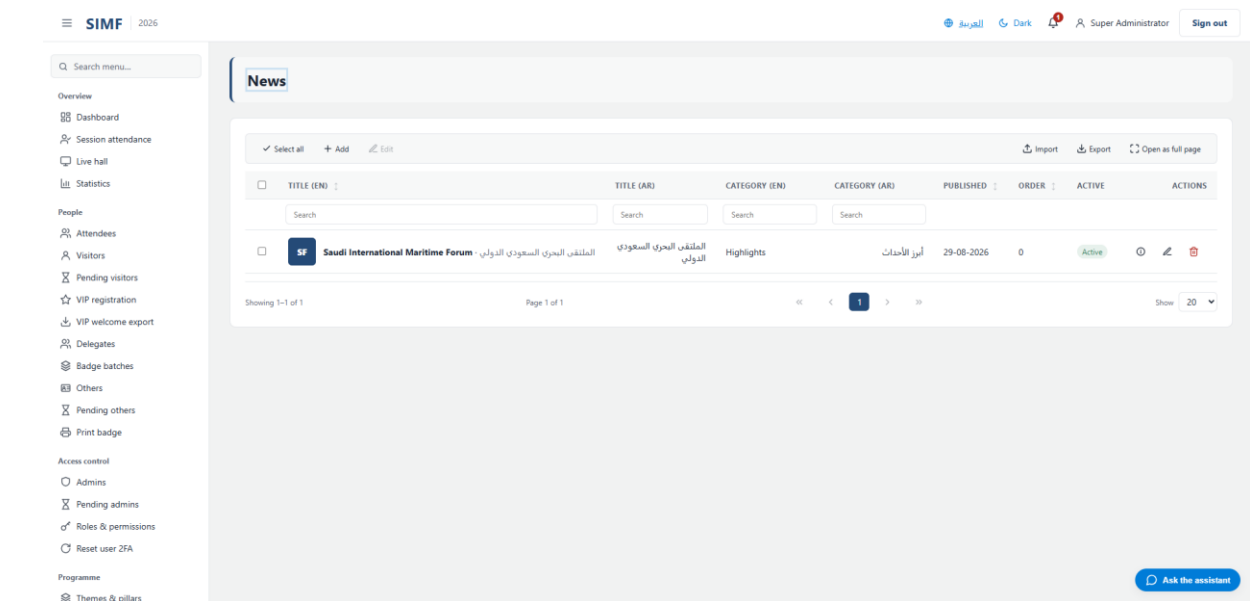


Figure 96 — News — /admin/news

Media Partners (/admin/media-partners)

Property	Value
Address	/admin/media-partners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaPartnersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaPartnersList.razor.cs
Page permission	MediaPartners.View
Menu permission	MediaPartners.View

What you can do here

Action	Permission it needs
Add	MediaPartners.Create
Edit	MediaPartners.Edit
Details	No permission of its own
Delete	MediaPartners.Delete
Import	MediaPartners.Import
Export	MediaPartners.Export

The list shows: Name (English) · Link · Display order · Active

It calls: /account/api/admin/media-partners/list /account/api/admin/media-partners/{id}

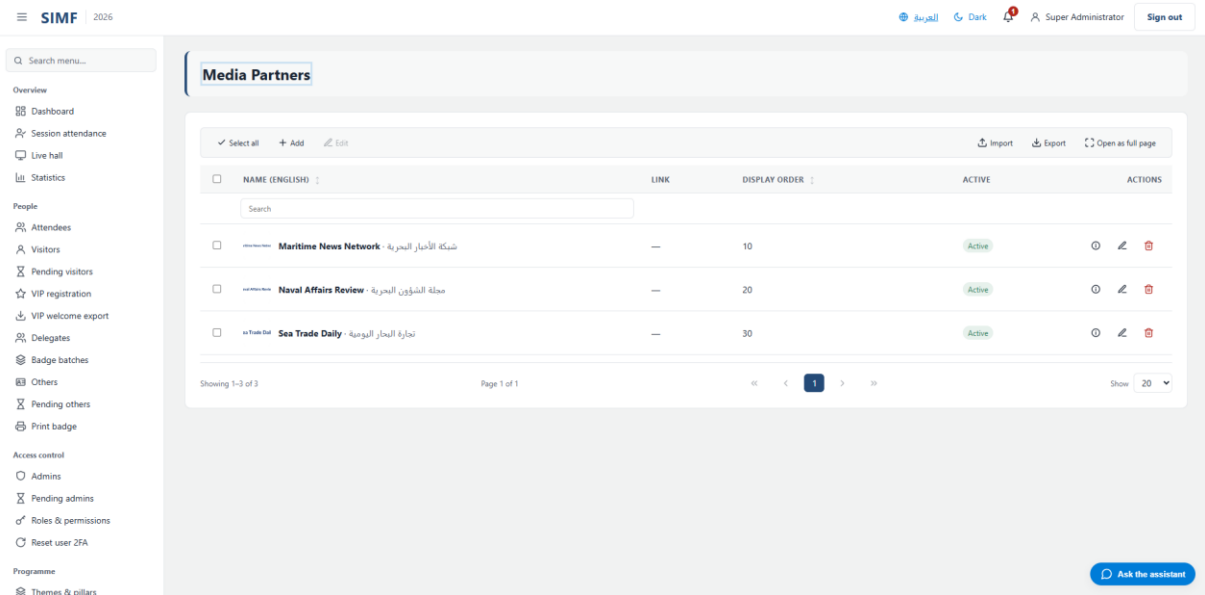


Figure 97 — Media Partners — /admin/media-partners

Previous editions (/admin/archive)

Property	Value
Address	/admin/archive
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ArchiveList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ArchiveList.razor.cs
Page permission	Archive.View
Menu permission	Archive.View

What you can do here

Action	Permission it needs
Add	Archive.Create
Edit	Archive.Edit
Details	No permission of its own
Delete	Archive.Delete
Import	Archive.Import
Export	Archive.Export
A button the page gates itself	Archive.Snapshot

The list shows: Year · Title (English) · Title (Arabic) · Attendees · Sessions · Speakers · Active

It calls: /account/api/admin/archive/list /account/api/admin/archive/snapshot-current

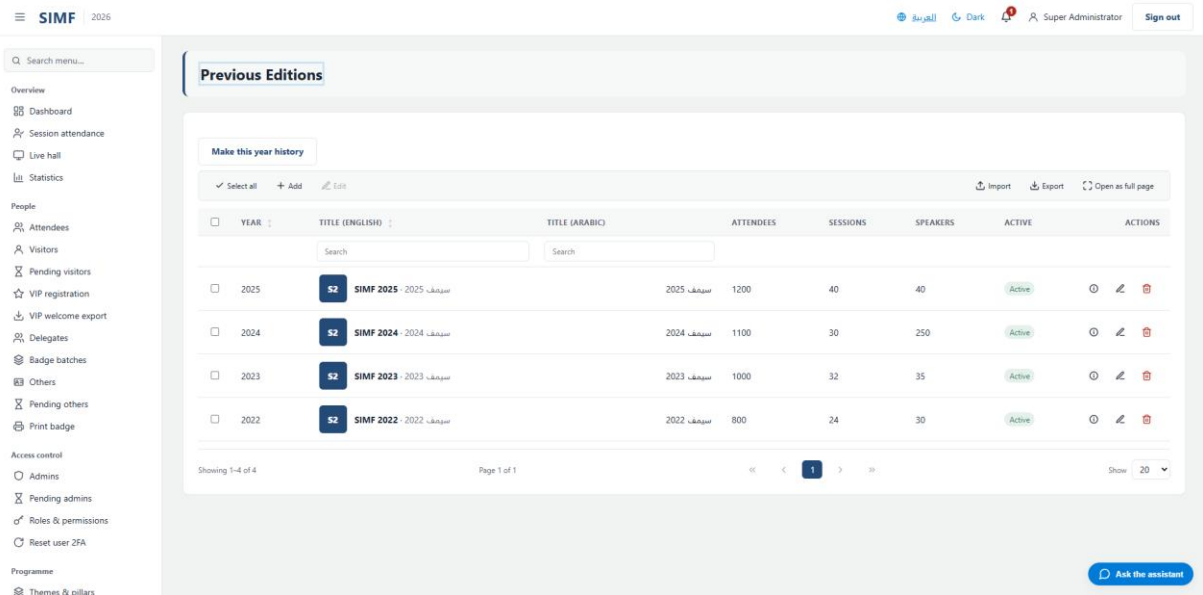


Figure 98 — Previous editions — /admin/archive

Public relations

Invitations (/admin/invitations)

Property	Value
Address	/admin/invitations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InvitationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InvitationsList.razor.cs
Page permission	Invitations.View
Menu permission	Invitations.View

What you can do here

Action	Permission it needs
New invitation	Invitations.Manage
Edit	Invitations.Manage
Details	No permission of its own
Cancel invitation	Invitations.Manage
Export	Invitations.Export

The list shows: Recipient · Profile type · State · Sent · Sent by · Active

It calls: /account/api/admin/invitations/export /account/api/admin/invitations/list
/account/api/admin/invitations/{id}

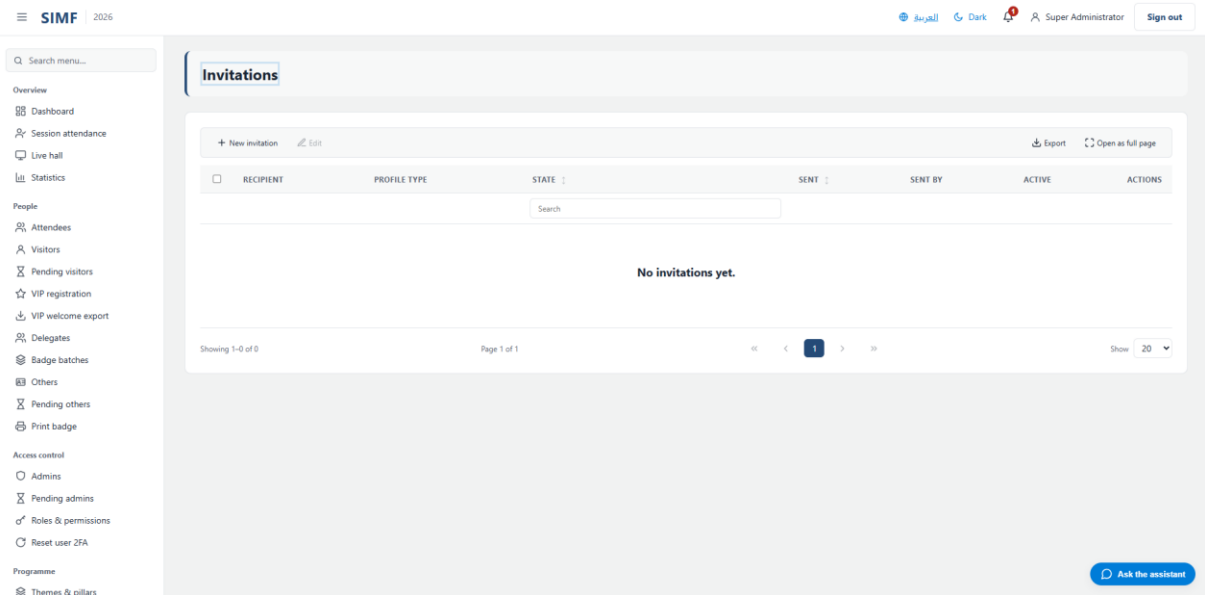


Figure 99 — Invitations — /admin/invitations

VIPs (/admin/vips)

Property	Value
Address	/admin/vips
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipsList.razor.cs
Page permission	Vips.View
Menu permission	Vips.View

What you can do here

Action	Permission it needs
Export	Vips.Export
A button the page gates itself	Vips.Notify

The list shows: Name · Job title · Profile type · Email

It calls: /account/api/admin/vips/export /account/api/admin/vips/list /account/api/admin/vips/notify

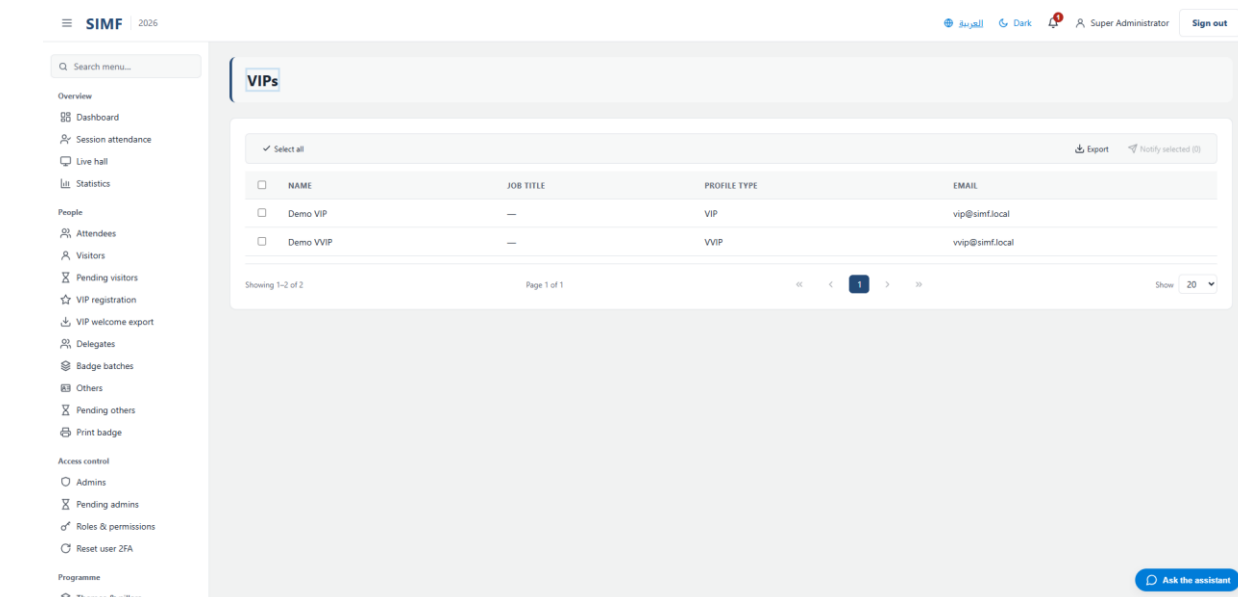


Figure 100 — VIPs — /admin/vips

Announcements (/admin/announcements)

Property	Value
Address	/admin/announcements
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Announcements.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Announcements.razor.cs
Page permission	Announcements.View
Menu permission	Announcements.View

What you can do here

Action	Permission it needs
A button the page gates itself	Announcements.Send

The list shows: When · Target · Message · Status · Recipients · Emails

It calls: /account/api/admin/notifications/broadcast

/account/api/admin/notifications/broadcast/estimate

/account/api/admin/notifications/broadcasts/list /account/api/admin/sessions/list

Figure 101 — Announcements — /admin/announcements

Contact inquiries (/admin/contact-inquiries)

Property	Value
Address	/admin/contact-inquiries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContactInquiriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContactInquiriesList.razor.cs
Page permission	ContactInquiries.View
Menu permission	ContactInquiries.View

What you can do here

Action	Permission it needs
A button the page gates itself	ContactInquiries.Manage

The list shows: Name · Email · Message · Status · Received

It calls: /account/api/admin/contact-inquiries/list /account/api/admin/contact-inquiries/{row.Id}/handled

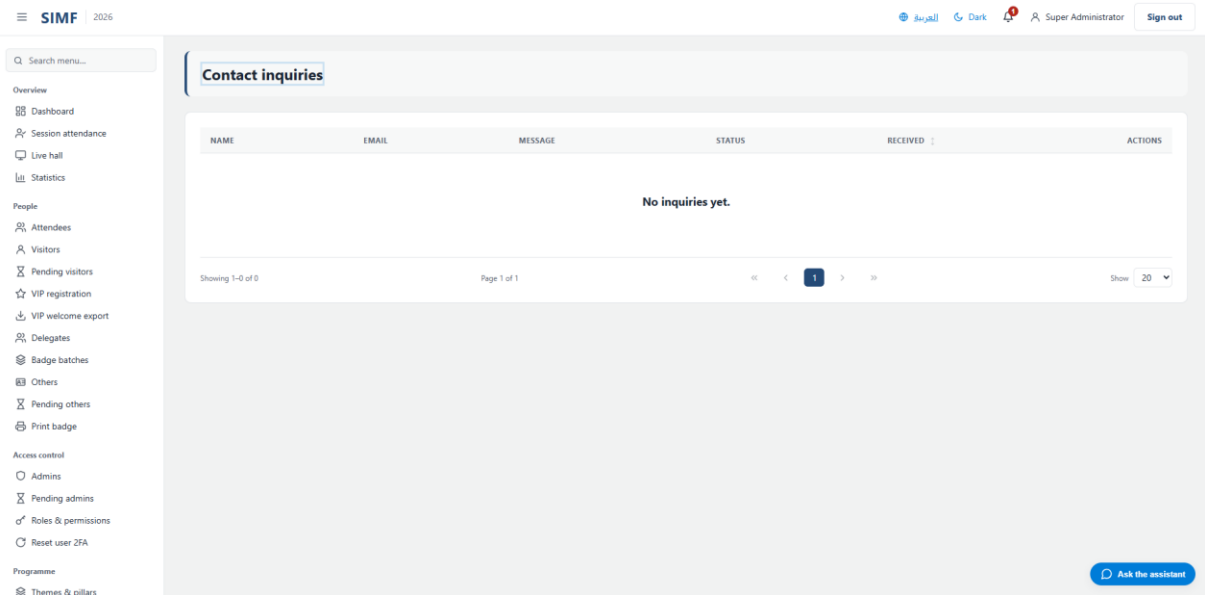


Figure 102 — Contact inquiries — /admin/contact-inquiries

Gates & arrivals

Gates (/admin/gates)

Property	Value
Address	/admin/gates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesList.razor.cs
Page permission	Gates.Manage
Menu permission	Gates.Manage

What you can do here

Action	Permission it needs
Add gate	Gates.Manage
Edit	Gates.Manage
Details	No permission of its own
Deactivate	Gates.Manage
Import	Gates.Import
Export	Gates.Export

The list shows: Code · Name · Name (Arabic) · Direction · Allowed types · Operators · Status

It calls: /account/api/admin/gates/list /account/api/admin/gates/{id}

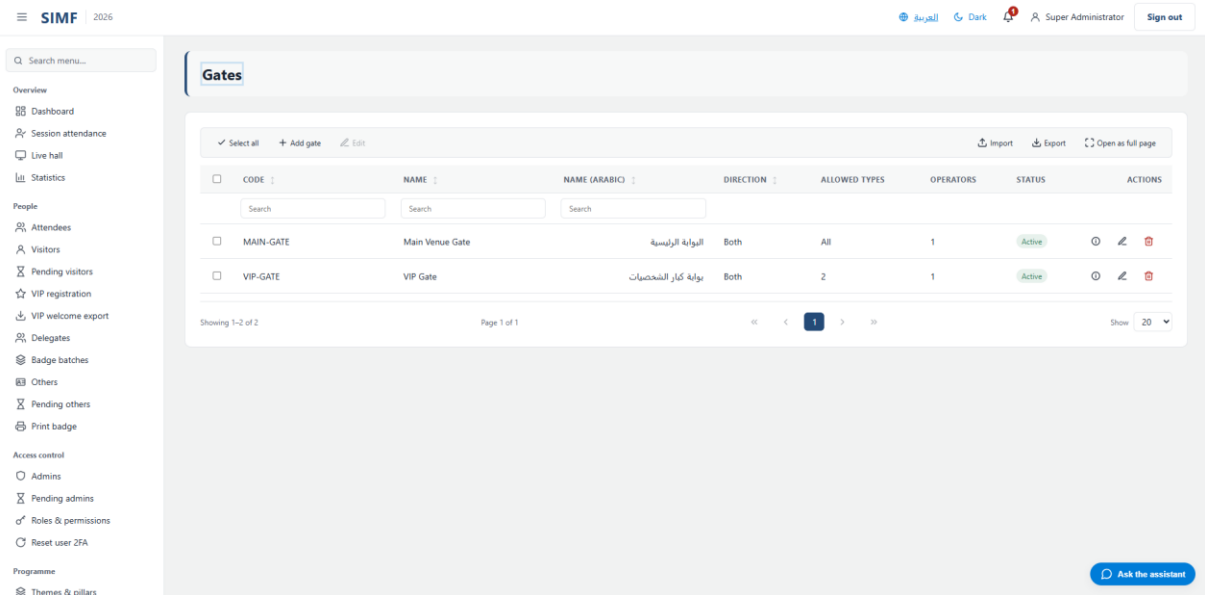


Figure 103 — Gates — /admin/gates

Gate operator (/admin/gates/operator)

Property	Value
Address	/admin/gates/operator
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GateOperatorConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GateOperatorConsole.razor.cs
Page permission	Gates.Operate
Menu permission	Gates.Operate

It calls: /account/api/gates/my-assignments /account/api/gates/my-reports/today
/account/api/gates/{_selectedGateId}/scans

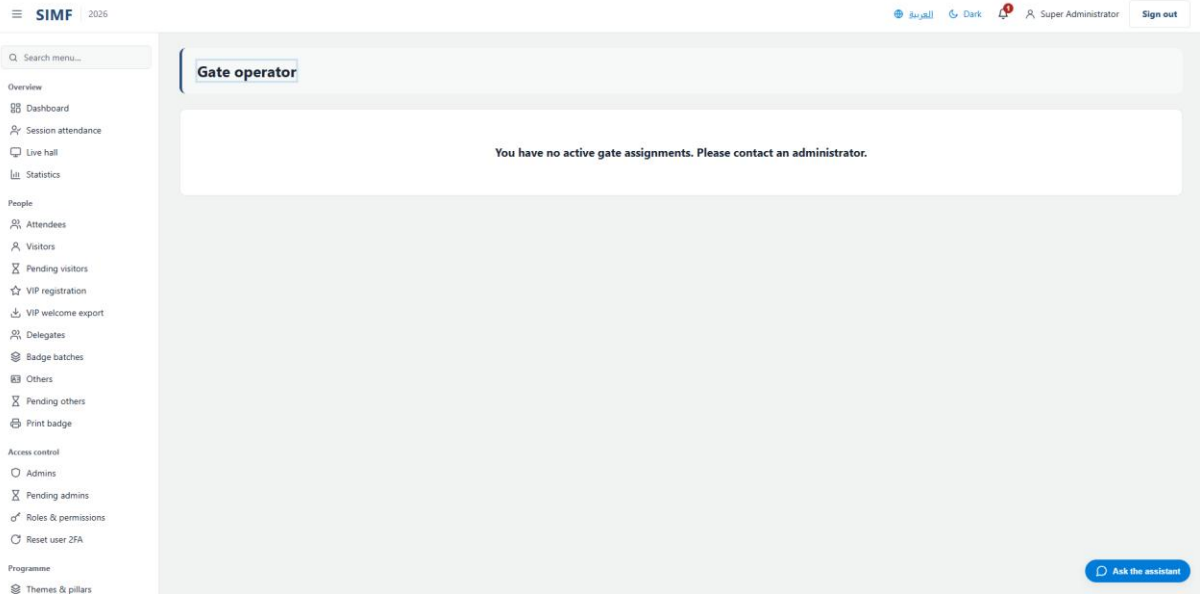


Figure 104 — Gate operator — /admin/gates/operator

Hall arrivals (/admin/hall-arrivals)

Property	Value
Address	/admin/hall-arrivals
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallArrivalsConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallArrivalsConsole.razor.cs
Page permission	HallArrivals.View
Menu permission	HallArrivals.View

What you can do here

Action	Permission it needs
A button the page gates itself	HallArrivals.Record

It calls: /account/api/admin/hall-arrivals/sessions/list
 /account/api/admin/sessions/{_selected.Id}/arrivals
 /account/api/admin/sessions/{_selected.Id}/departures

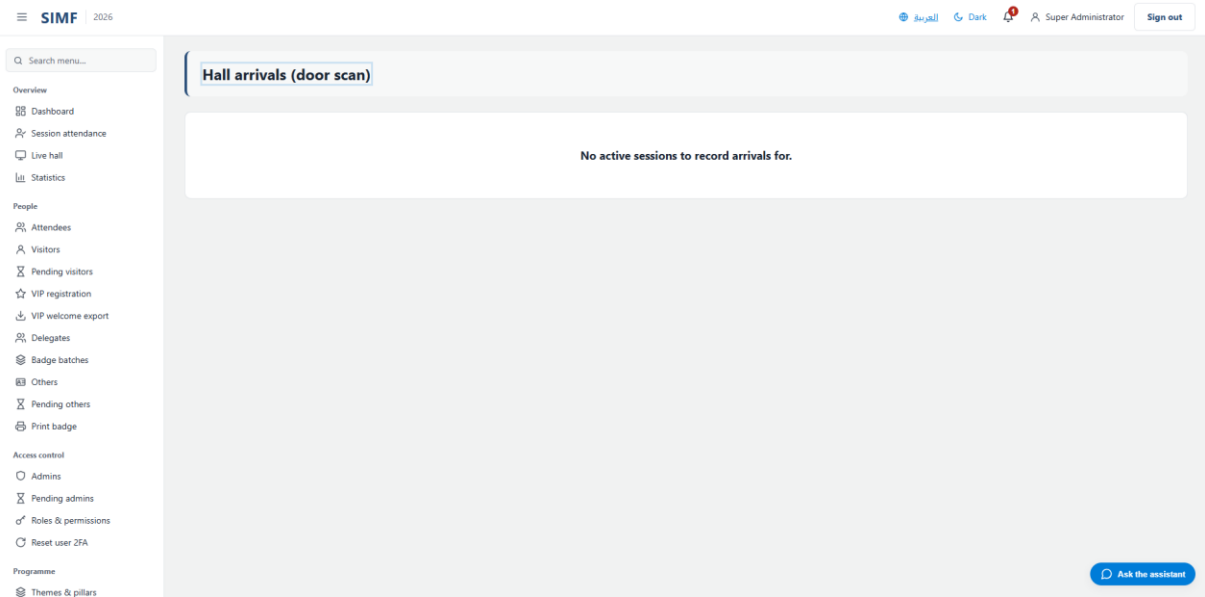


Figure 105 — Hall arrivals — /admin/hall-arrivals

Gates dashboard (/admin/gates/dashboard)

Property	Value
Address	/admin/gates/dashboard
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesOperationsDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesOperationsDashboard.razor.cs
Page permission	Gates.Manage
Menu permission	Gates.Manage

It calls: /account/api/admin/gates/list /account/api/admin/gates/reports/currently-inside/list

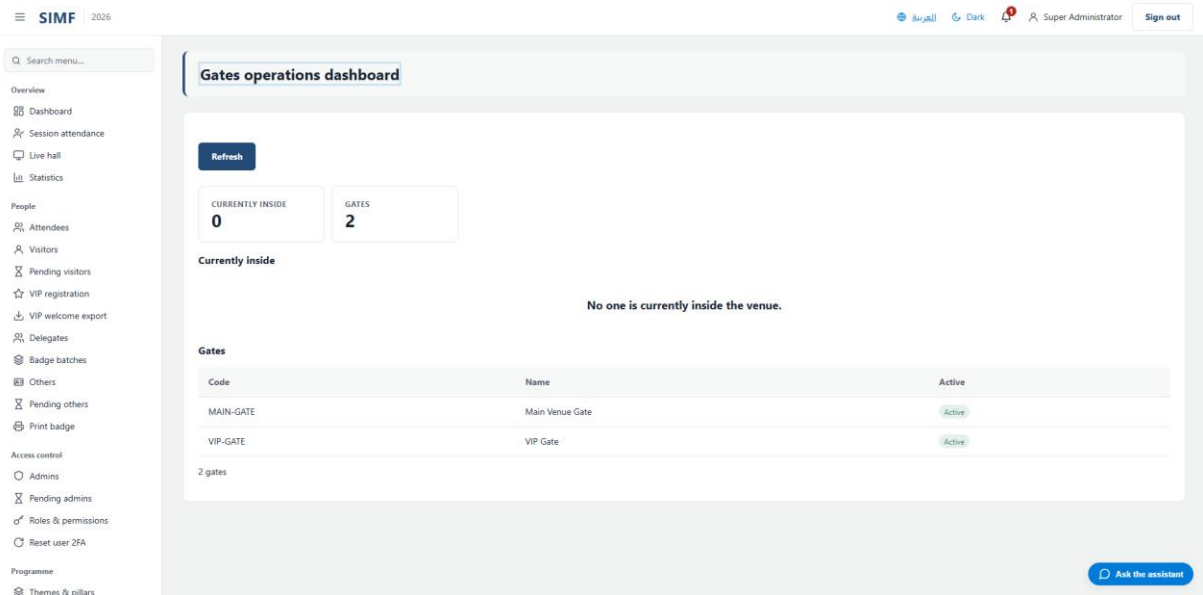


Figure 106 — Gates dashboard — /admin/gates/dashboard

Reference data

Interests (/admin/interests)

Property	Value
Address	/admin/interests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InterestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InterestsList.razor.cs
Page permission	Interests.View
Menu permission	Interests.View

What you can do here

Action	Permission it needs
Add interest	Interests.Create
Edit	Interests.Edit
Details	No permission of its own
Deactivate	Interests.Delete
Import	Interests.Import
Export	Interests.Export

The list shows: Name · Name (Arabic) · Order · Status

It calls: /account/api/admin/interests/list

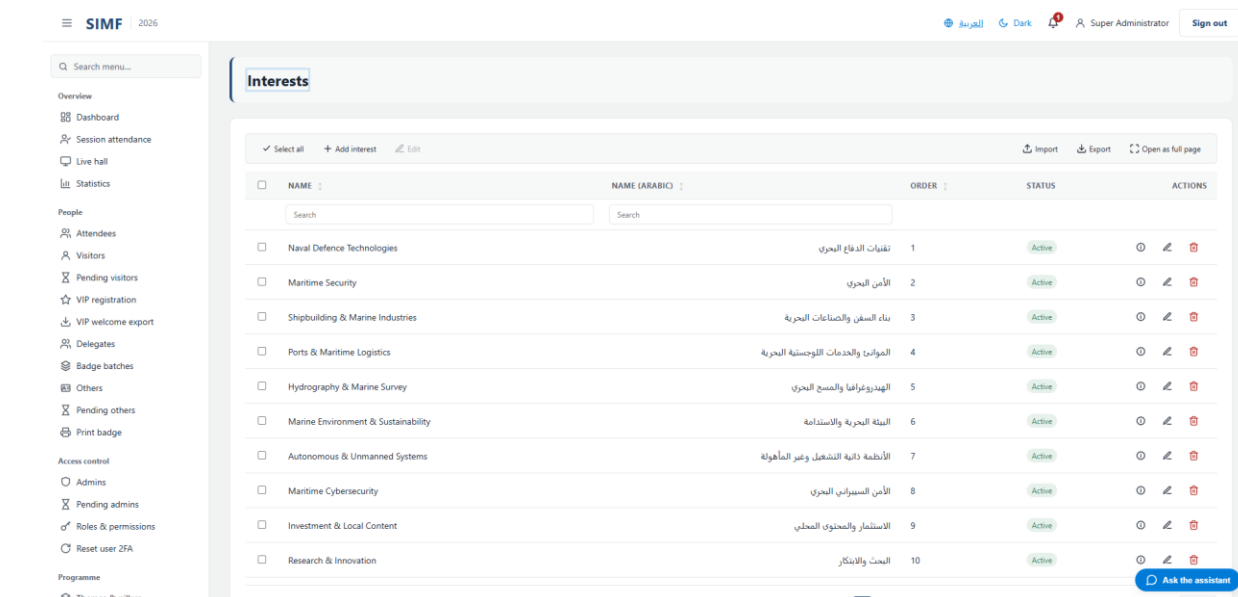


Figure 107 — Interests — /admin/interests

Countries (/admin/countries)

Property	Value
Address	/admin/countries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CountriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CountriesList.razor.cs
Page permission	Countries.View
Menu permission	Countries.View

What you can do here

Action	Permission it needs
Add country	Countries.Create
Edit	Countries.Edit
Details	No permission of its own
Deactivate	Countries.Delete
Import	Countries.Import
Export	Countries.Export

The list shows: ISO id · Code · Name (English) · Name (Arabic) · Dial code · Order · Status

It calls: /account/api/admin/countries/list /account/api/admin/countries/{id}

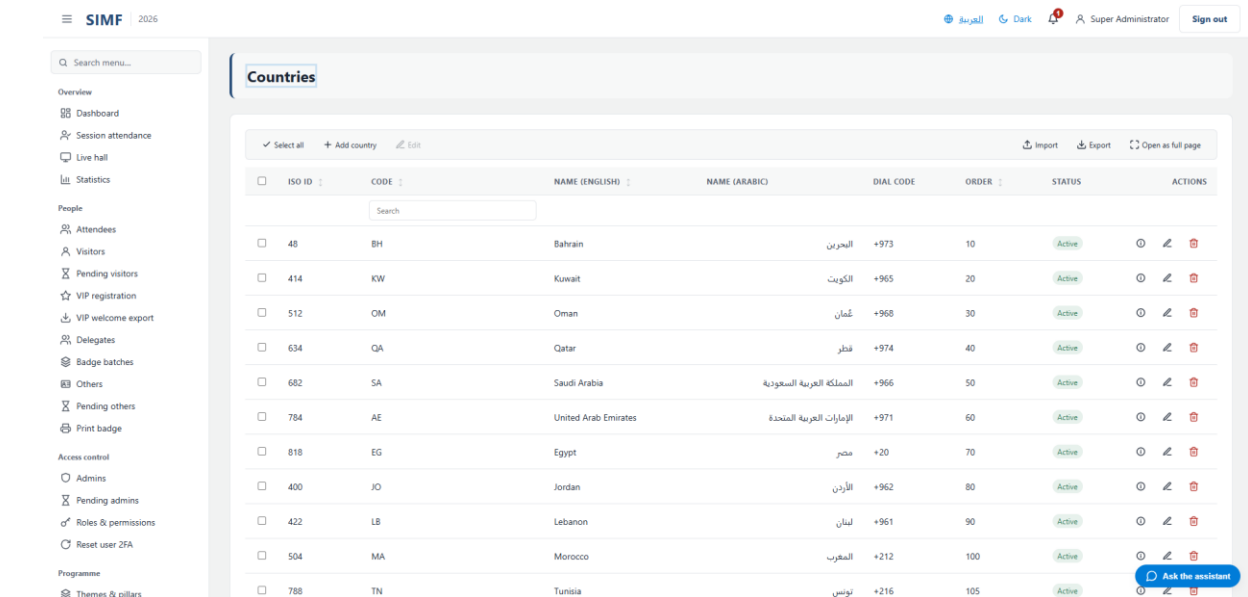


Figure 108 — Countries — /admin/countries

Organisations (/admin/organisations)

Property	Value
Address	/admin/organisations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganisationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganisationsList.razor.cs
Page permission	Organisations.View
Menu permission	Organisations.View

What you can do here

Action	Permission it needs
Add	Organisations.Create
Edit	Organisations.Edit
Details	No permission of its own
Delete	Organisations.Delete
Import Excel	Organisations.Import
Export	Organisations.Export

The list shows: Name (Arabic) · Name (English) · CR · Sector · City · Active

It calls: /account/api/admin/organisations/export /account/api/admin/organisations/import
/account/api/admin/organisations/list /account/api/admin/organisations/{id}

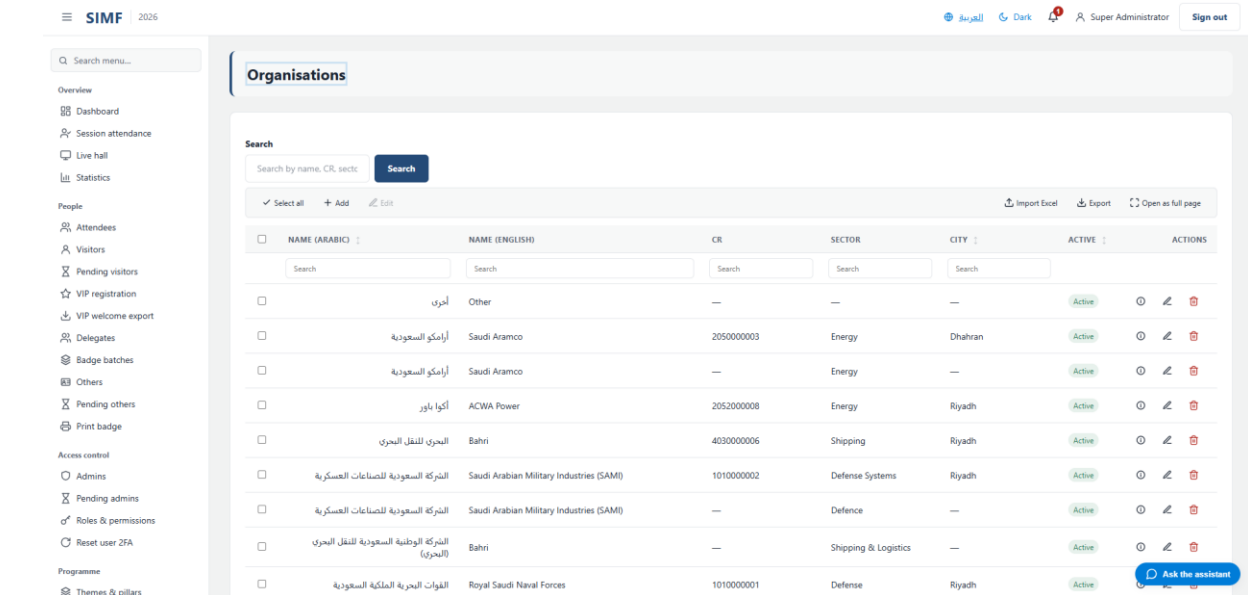


Figure 109 — Organisations — /admin/organisations

Regions (/admin/regions)

Property	Value
Address	/admin/regions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RegionsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RegionsList.razor.cs
Page permission	Regions.View
Menu permission	Regions.View

What you can do here

Action	Permission it needs
Add	Regions.Create
Edit	Regions.Edit
Details	No permission of its own
Delete	Regions.Delete

The list shows: Code · Name (Arabic) · Name (English) · Active

It calls: /account/api/admin/regions/list /account/api/admin/regions/{id}

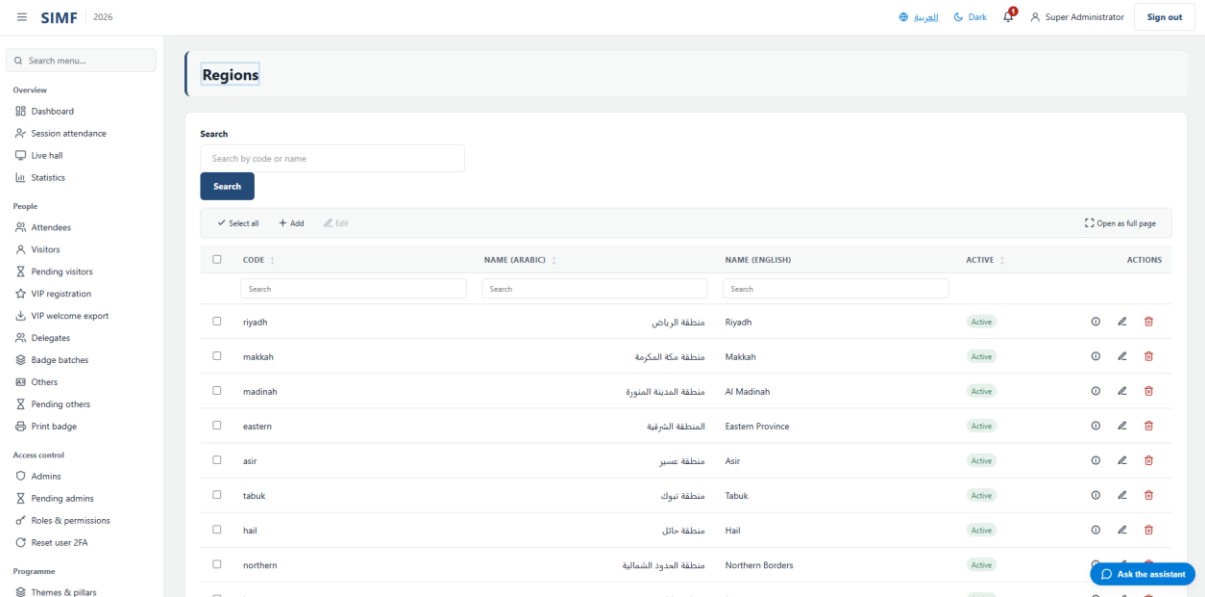


Figure 110 — Regions — /admin/regions

Visitor profile types (/admin/profile-types/visitor)

Property	Value
Address	/admin/profile-types/visitor
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/VisitorProfileTypesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/VisitorProfileTypesList.razor.cs
Page permission	ProfileTypes.View
Menu permission	ProfileTypes.View

What you can do here

Action	Permission it needs
Add profile type	ProfileTypes.Create
Edit profile type	ProfileTypes.Edit
Details	No permission of its own
Deactivate profile type	ProfileTypes.Delete

The list shows: Account type · Name · Name (Arabic) · Page colour · Active

It calls: /account/api/admin/profile-types/list /account/api/admin/profile-types/{_deleteTarget.Id}

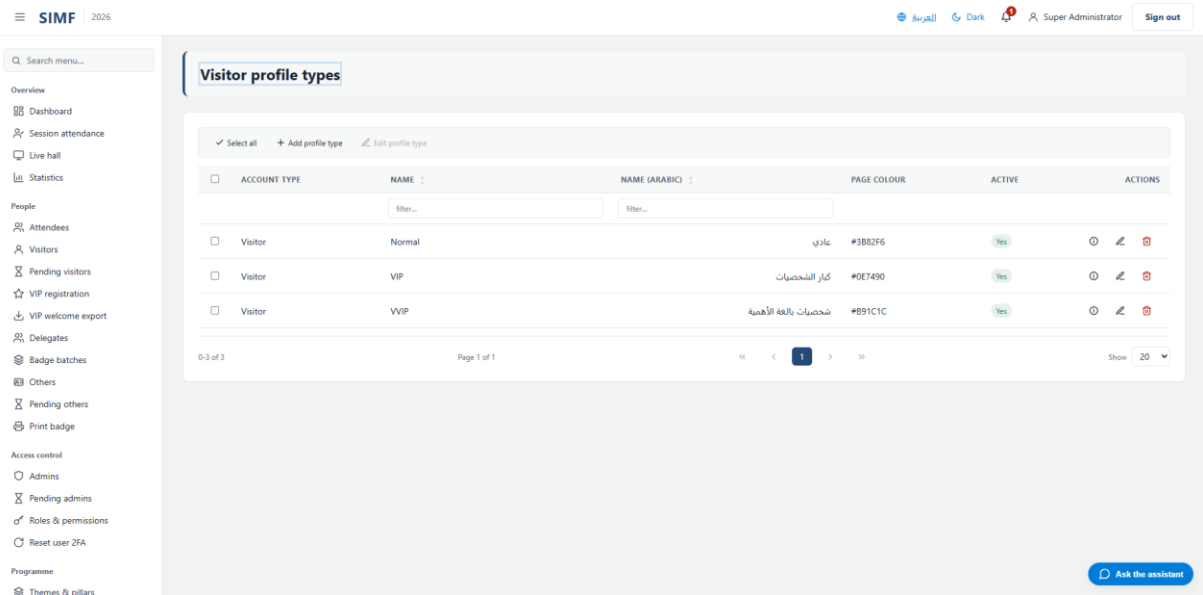


Figure 111 — Visitor profile types — /admin/profile-types/visitor

Other profile types (/admin/profile-types/other)

Property	Value
Address	/admin/profile-types/other
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/OtherProfileTypesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/OtherProfileTypesList.razor.cs
Page permission	ProfileTypes.View
Menu permission	ProfileTypes.View

What you can do here

Action	Permission it needs
Add profile type	ProfileTypes.Create
Edit profile type	ProfileTypes.Edit
Details	No permission of its own
Deactivate profile type	ProfileTypes.Delete

The list shows: Account type · Name · Name (Arabic) · Page colour · Mobile-app role · Active

It calls: /account/api/admin/profile-types/list /account/api/admin/profile-types/{_deleteTarget.Id}

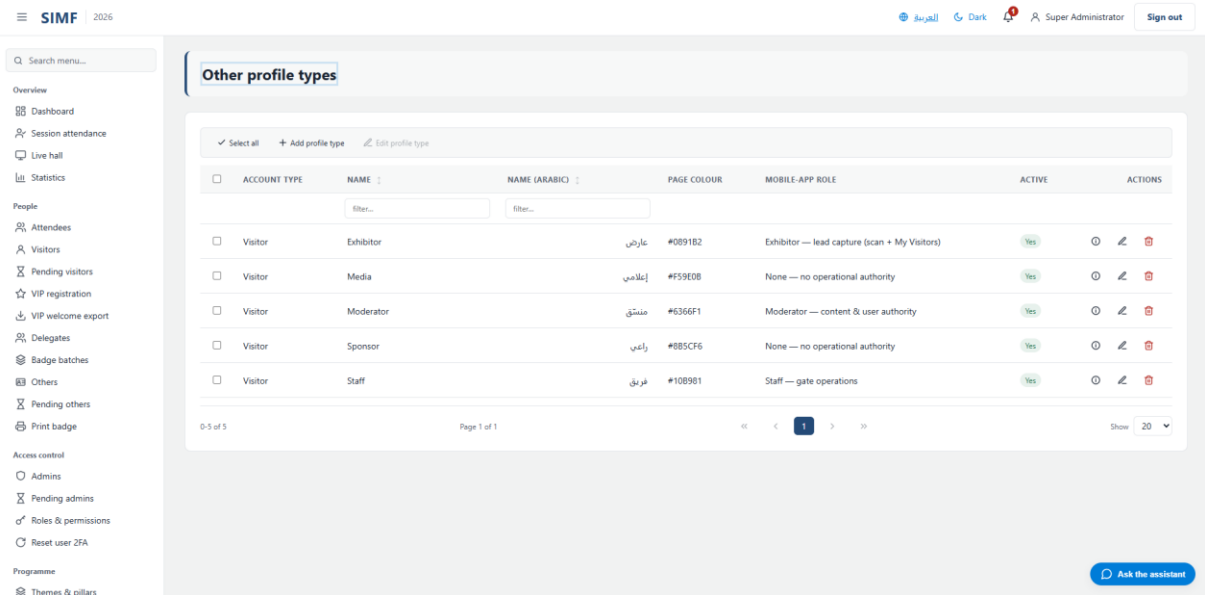


Figure 112 — Other profile types — /admin/profile-types/other

System

Configuration (/admin/configuration)

Property	Value
Address	/admin/configuration
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ConfigurationList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ConfigurationList.razor.cs
Page permission	Configuration.View
Menu permission	Configuration.View

What you can do here

Action	Permission it needs
Add	Configuration.Create
Edit	Configuration.Edit
Details	No permission of its own
Delete	Configuration.Delete
Import	Configuration.Import
Export	Configuration.Export

The list shows: Key · Value · Description · Active

It calls: /account/api/admin/system-settings/list /account/api/admin/system-settings/{id}

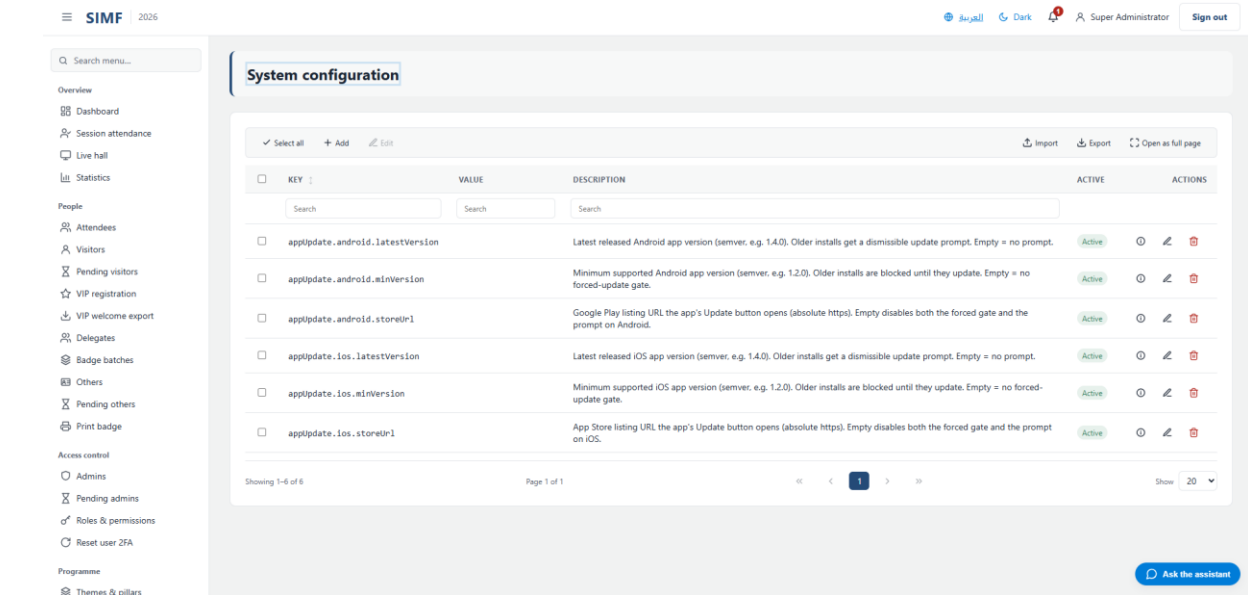


Figure 113 — Configuration — /admin/configuration

Site Settings (/admin/site-settings)

Property	Value
Address	/admin/site-settings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SiteSettingsPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SiteSettingsPage.razor.cs
Page permission	Configuration.Edit
Menu permission	Configuration.Edit

It calls: /account/api/admin/site-settings

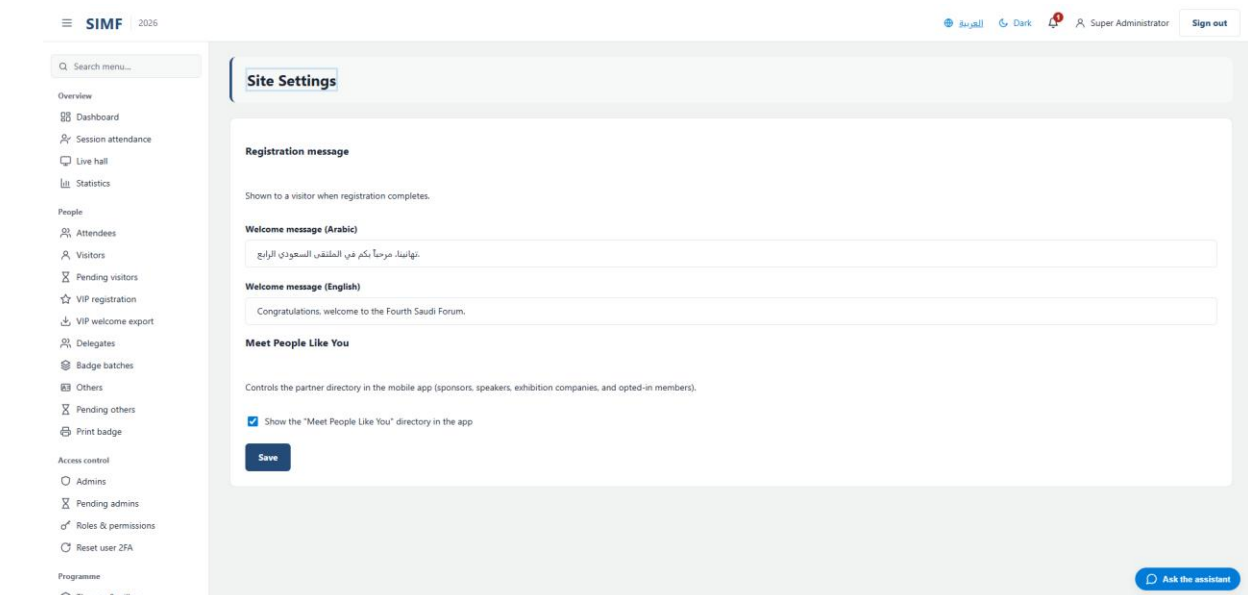


Figure 114 — Site Settings — /admin/site-settings

Walk-in Mode (/admin/walk-in-mode)

Property	Value
Address	/admin/walk-in-mode
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/WalkInModePage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/WalkInModePage.razor.cs
Page permission	WalkInMode.View
Menu permission	WalkInMode.View

It calls: /account/api/admin/walk-in-mode

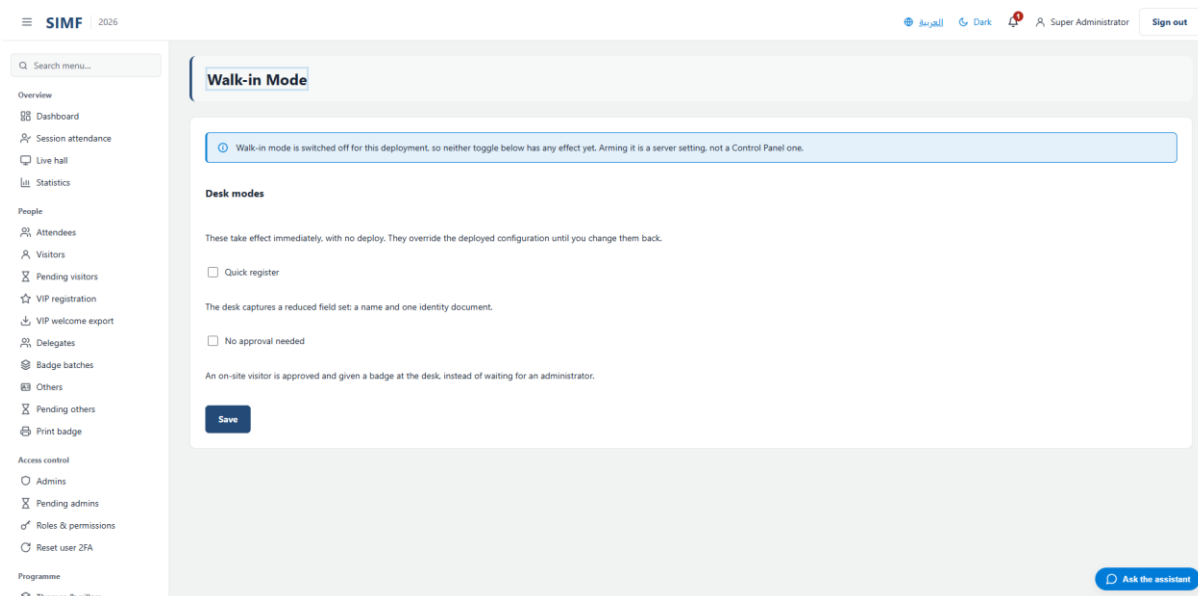


Figure 115 — Walk-in Mode — /admin/walk-in-mode

Email Templates (/admin/email/templates)

Property	Value
Address	/admin/email/templates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EmailTemplatesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EmailTemplatesList.razor.cs
Page permission	EmailTemplates.View
Menu permission	EmailTemplates.View

The list shows: Template · Subject · Customised · Version · Updated

It calls: /account/api/admin/email/templates/list /account/api/admin/email/templates/{row.Type}

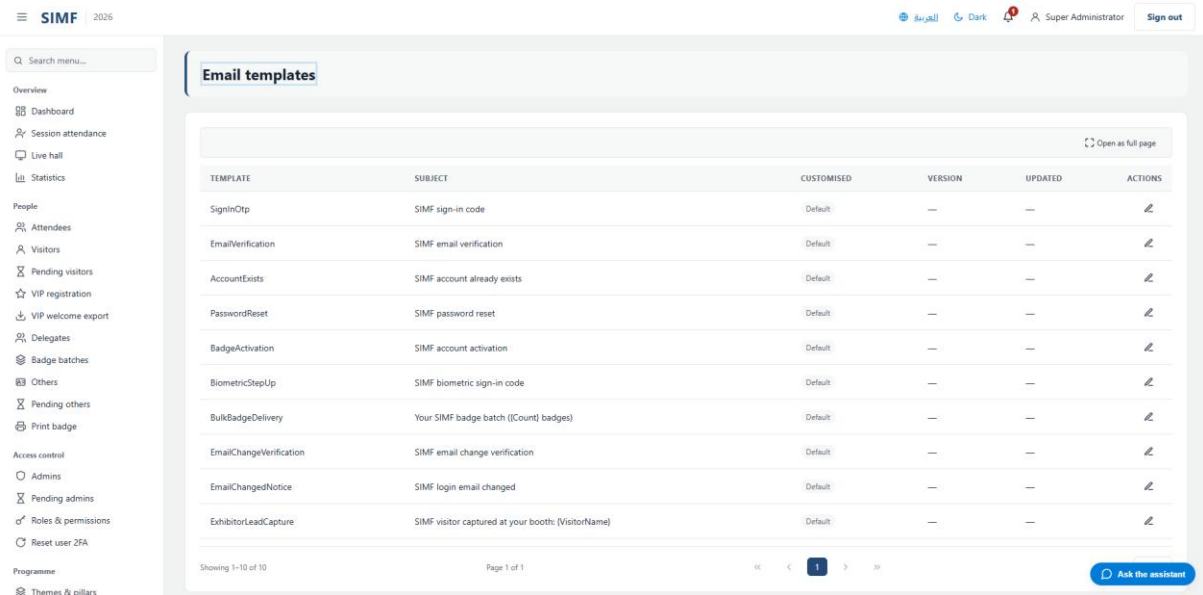


Figure 116 — Email Templates — /admin/email/templates

Organization Profile (/admin/organization-profile)

Property	Value
Address	/admin/organization-profile
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganizationProfilePage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganizationProfilePage.razor.cs
Page permission	OrganizationProfile.View
Menu permission	OrganizationProfile.View

What you can do here

Action	Permission it needs
+ Add about item	No permission of its own
A button the page gates itself	OrganizationProfile.Manage

It calls: /account/api/admin/organization-profile /account/api/admin/organization-profile/hero-video

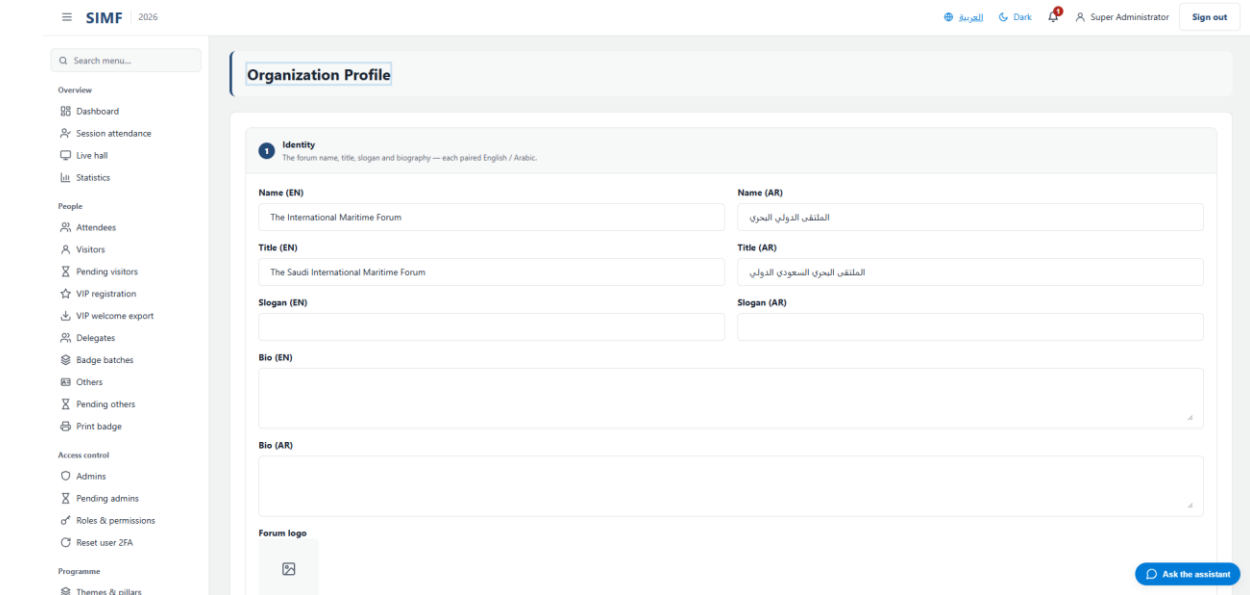


Figure 117 — Organization Profile — /admin/organization-profile

Logs (/admin/logs)

Property	Value
Address	/admin/logs
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/LogsViewer.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/LogsViewer.razor.cs
Page permission	Logs.View
Menu permission	Logs.View

It calls: /account/api/admin/logs/download /account/api/admin/logs/list /account/api/admin/logs/tail

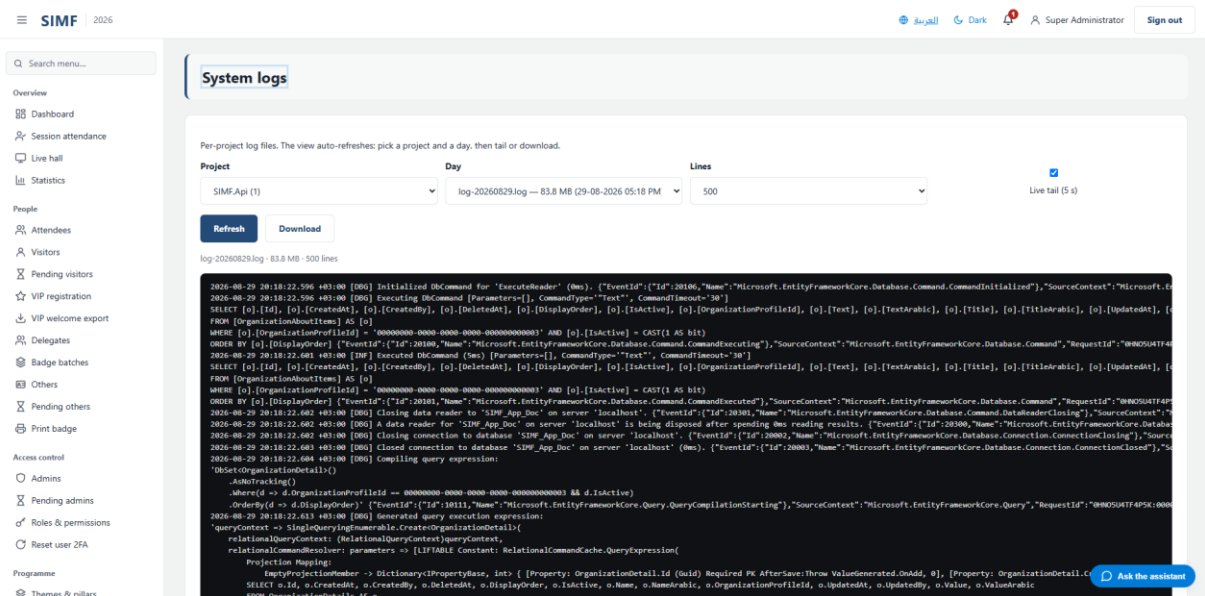


Figure 118 — Logs — /admin/logs

Background services (/admin/ops/services)

Property	Value
Address	/admin/ops/services
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ServicesMonitor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ServicesMonitor.razor.cs
Page permission	ServicesMonitor.View
Menu permission	ServicesMonitor.View

The list shows: Service · Status · Last run · Last success · Runs · Failures · Last error

It calls: /account/api/admin/ops/workers

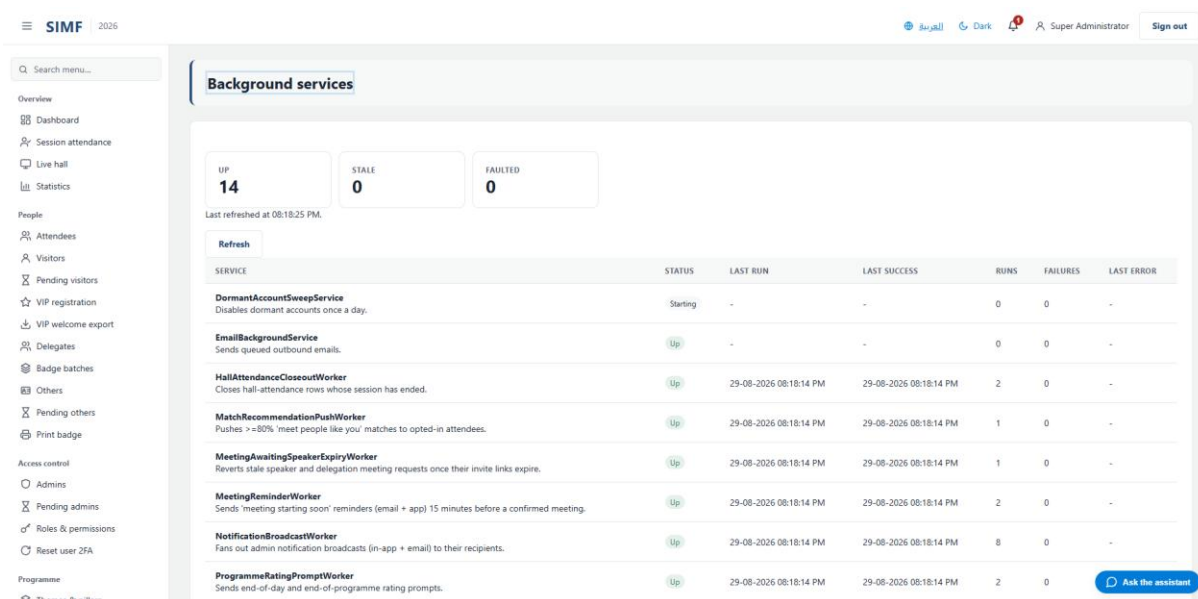


Figure 119 — Background services — /admin/ops/services

Operation log (/admin/operation-log)

Property	Value
Address	/admin/operation-log
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationLogViewer.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationLogViewer.razor.cs
Page permission	OperationLog.View
Menu permission	OperationLog.View

What you can do here

Action	Permission it needs
Details	No permission of its own
A button the page gates itself	OperationLog.Export

The list shows: When (local) · Event · Outcome · Subject email · Source IP

It calls: `/account/api/admin/operation-log/export` `/account/api/admin/operation-log/list`
`/account/api/admin/operation-log/{row.Id}`

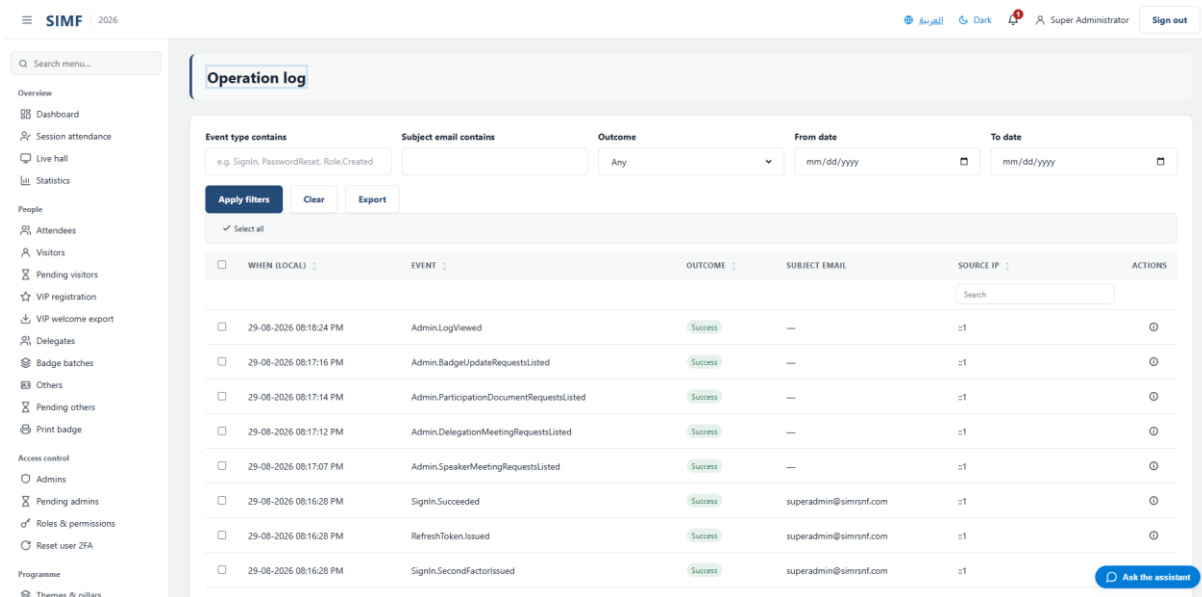


Figure 120 — Operation log — `/admin/operation-log`

Operations toggles (`/admin/operations`)

Property	Value
Address	<code>/admin/operations</code>
Implemented by	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationsToggles.razor</code>
Code-behind	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationsToggles.razor.cs</code>
Page permission	<code>Operations.View</code>
Menu permission	<code>Operations.View</code>

What you can do here

Action	Permission it needs
A button the page gates itself	<code>Operations.Edit</code>

It calls: `/account/api/admin/archive/visibility` `/account/api/admin/registration-gate`

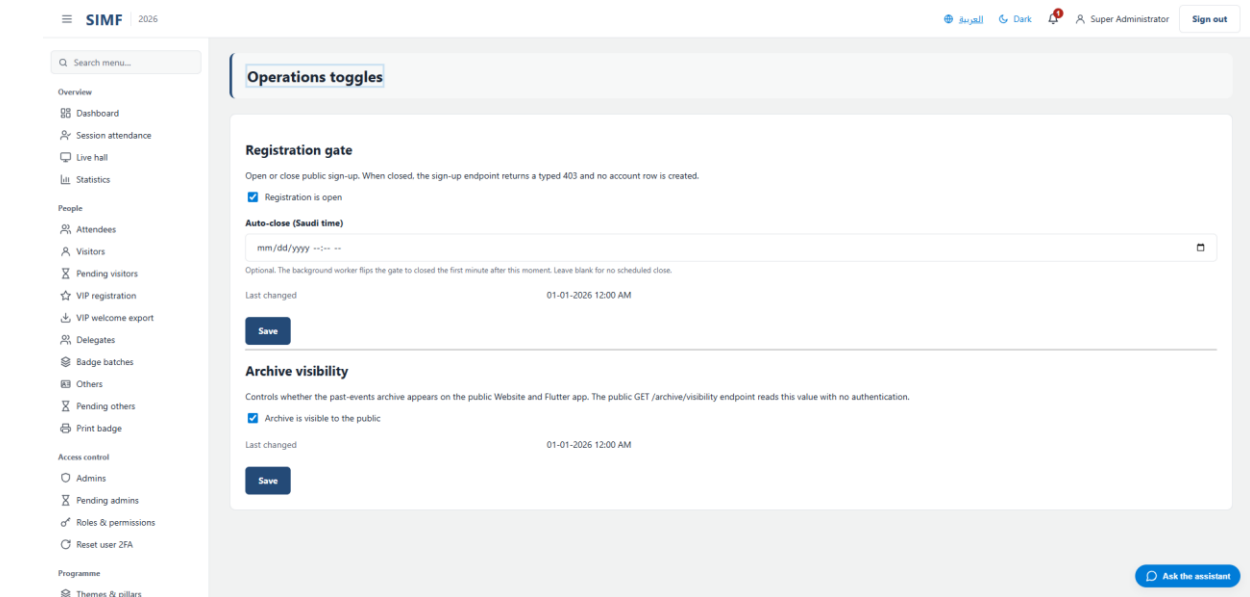


Figure 121 — Operations toggles — /admin/operations

Event edition (/admin/editions)

Property	Value
Address	/admin/editions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EventEdition.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EventEdition.razor.cs
Page permission	Editions.View
Menu permission	Editions.View

What you can do here

Action	Permission it needs
A button the page gates itself	Editions.Open

It calls: /account/api/admin/editions/current /account/api/admin/editions/open

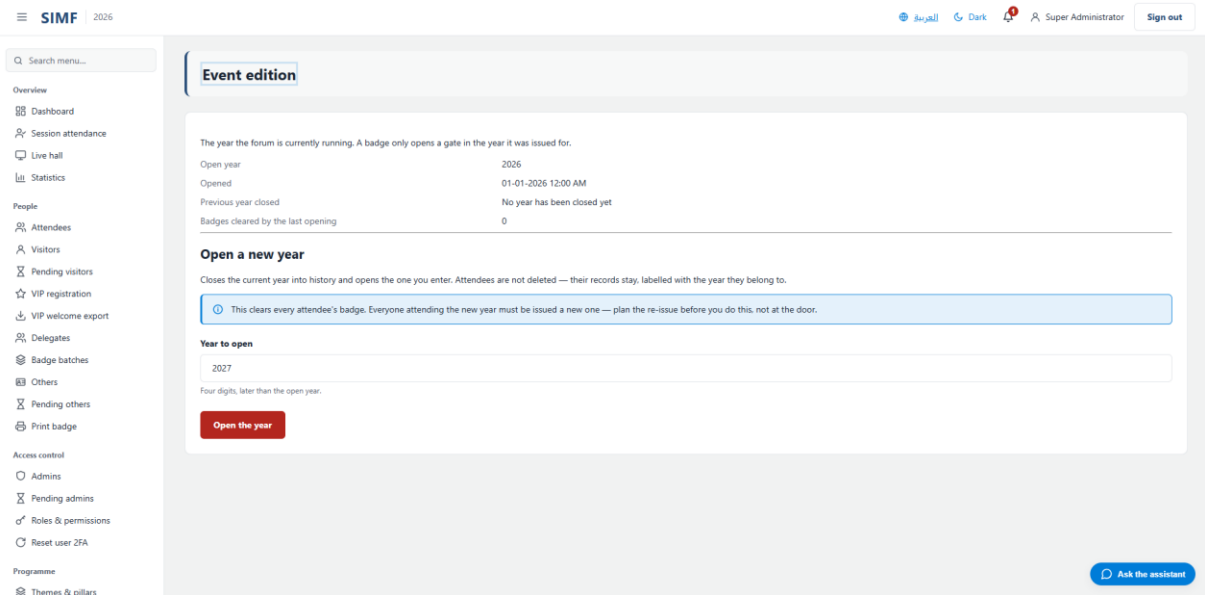


Figure 122 — Event edition — /admin/editions

Reports

All reports (/admin/reports)

Property	Value
Address	/admin/reports
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/ReportsHub.razor
Code-behind	-
Page permission	Reports.View
Menu permission	Reports.View

What you can do here

Action	Permission it needs
A button the page gates itself	Reports.Attendance
A button the page gates itself	Reports.Engagement
A button the page gates itself	Reports.Gates
A button the page gates itself	Reports.Meetings
A button the page gates itself	Reports.Partners
A button the page gates itself	Reports.Ratings
A button the page gates itself	Reports.Registrations
A button the page gates itself	Reports.Sessions

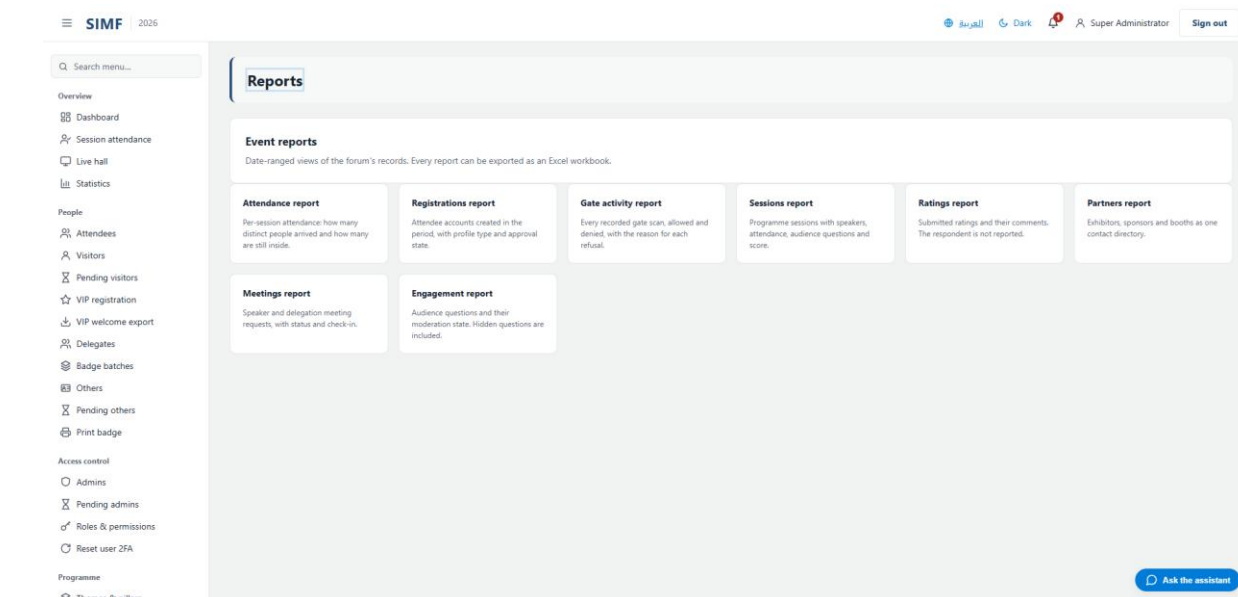


Figure 123 — All reports — /admin/reports

Attendance report (/admin/reports/attendance)

Property	Value
Address	/admin/reports/attendance
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/AttendanceReport.razor
Code-behind	-
Page permission	Reports.Attendance
Menu permission	Reports.Attendance

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Code · Session · Hall · Start · Attendees · Inside now

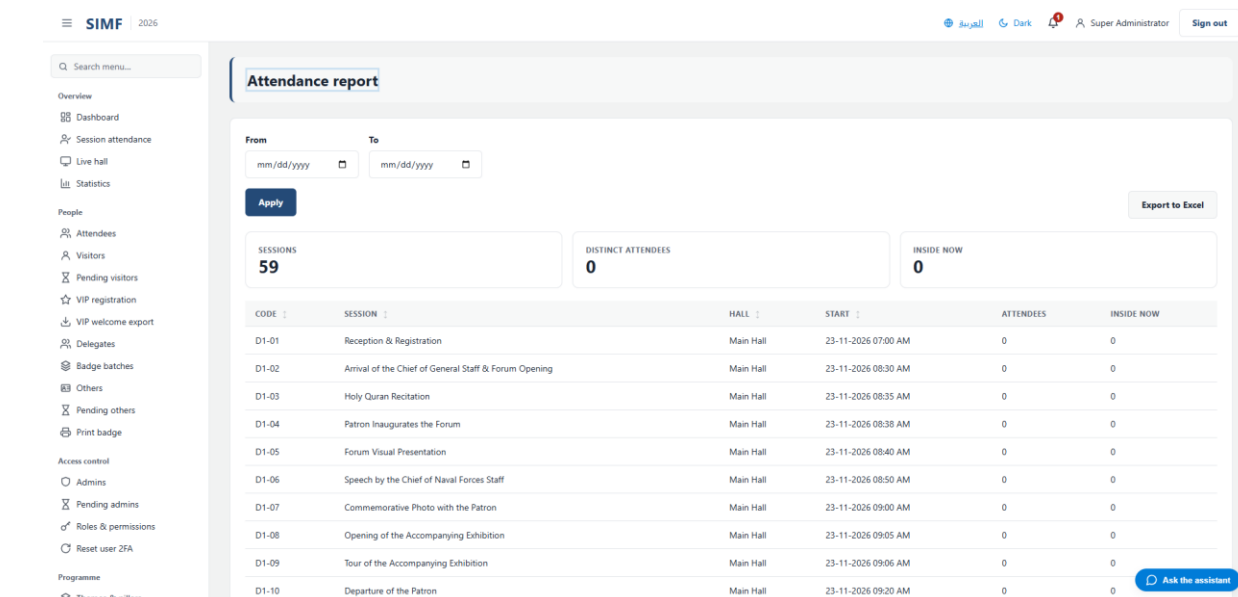


Figure 124 — Attendance report — /admin/reports/attendance

Registrations report (/admin/reports/registrations)

Property	Value
Address	/admin/reports/registrations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/RegistrationsReport.razor
Code-behind	-
Page permission	Reports.Registrations
Menu permission	Reports.Registrations

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Name · Email · Profile type · Account state · Registered

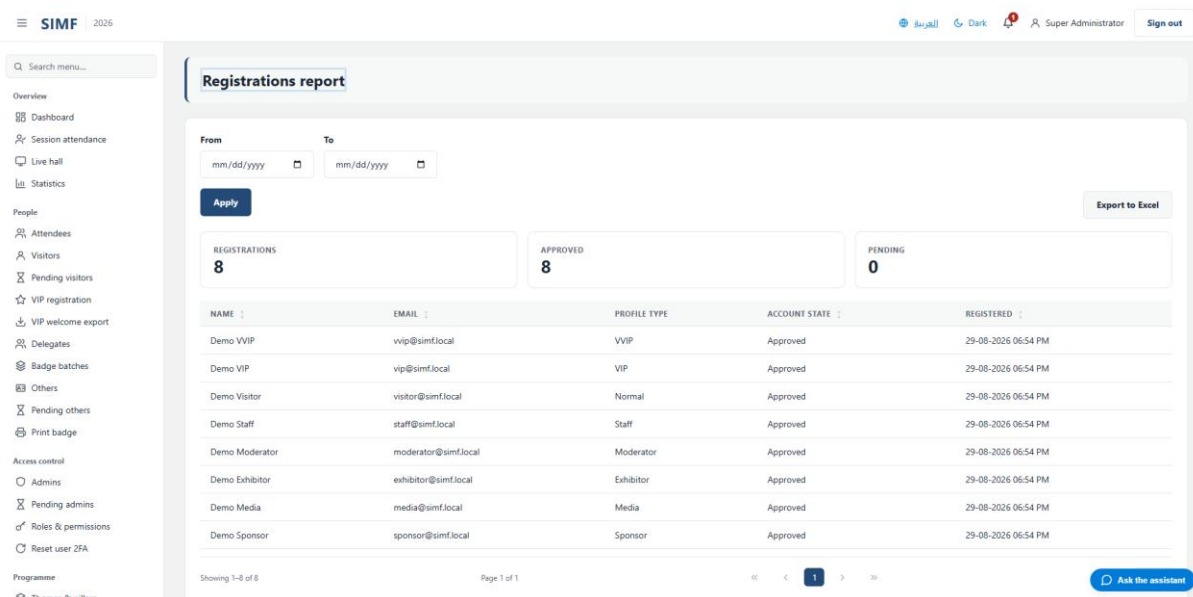


Figure 125 — Registrations report — /admin/reports/registrations

Gate activity report (/admin/reports/gates)

Property	Value
Address	/admin/reports/gates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/GateActivityReport.razor
Code-behind	-
Page permission	Reports.Gates
Menu permission	Reports.Gates

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Gate · Scanned · Visitor · Profile type · Direction · Outcome · Denial reason

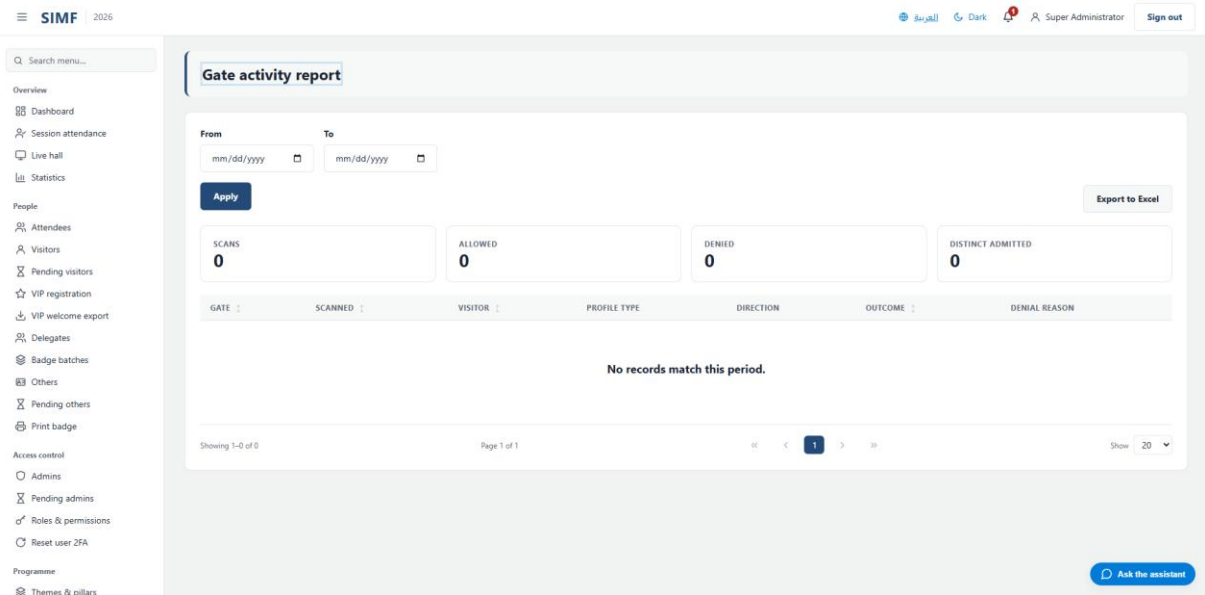


Figure 126 — Gate activity report — /admin/reports/gates

Sessions report (/admin/reports/sessions)

Property	Value
Address	/admin/reports/sessions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/SessionsReport.razor
Code-behind	-
Page permission	Reports.Sessions
Menu permission	Reports.Sessions

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Code · Session · Hall · Start · Speakers · Attendees · Questions · Average rating

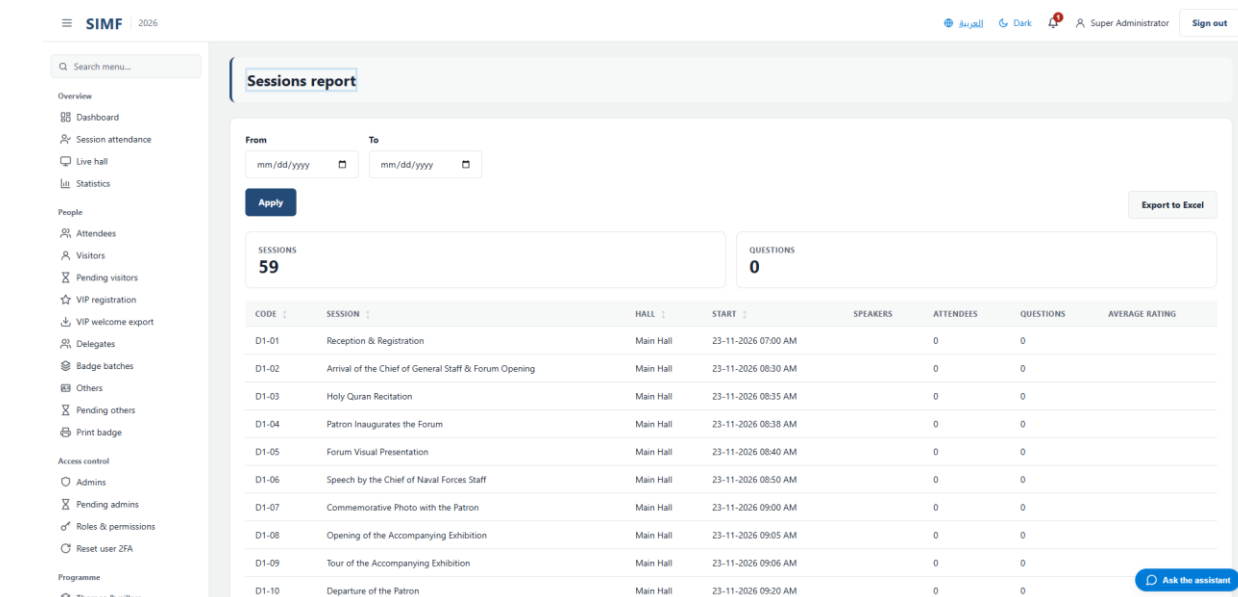


Figure 127 — Sessions report — /admin/reports/sessions

Ratings report (/admin/reports/ratings)

Property	Value
Address	/admin/reports/ratings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/RatingsReport.razor
Code-behind	-
Page permission	Reports.Ratings
Menu permission	Reports.Ratings

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Rating type · Scope · Stars · Comment · Submitted

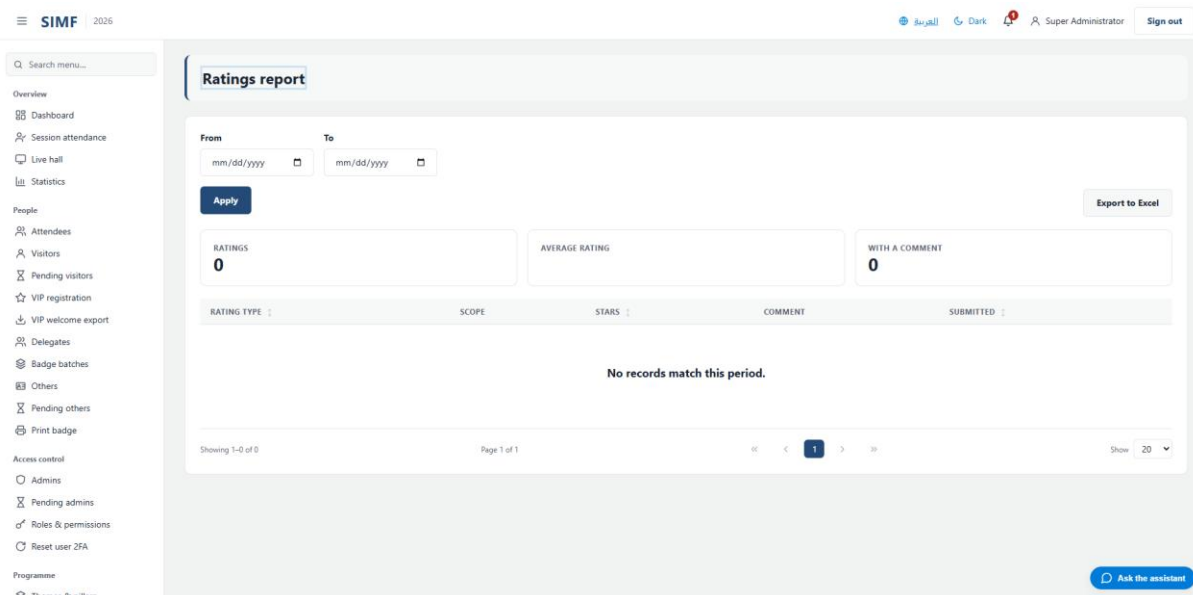


Figure 128 — Ratings report — /admin/reports/ratings

Partners report (/admin/reports/partners)

Property	Value
Address	/admin/reports/partners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/PartnersReport.razor
Code-behind	-
Page permission	Reports.Partners
Menu permission	Reports.Partners

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Kind · Name · Tier · Email · Phone · Website

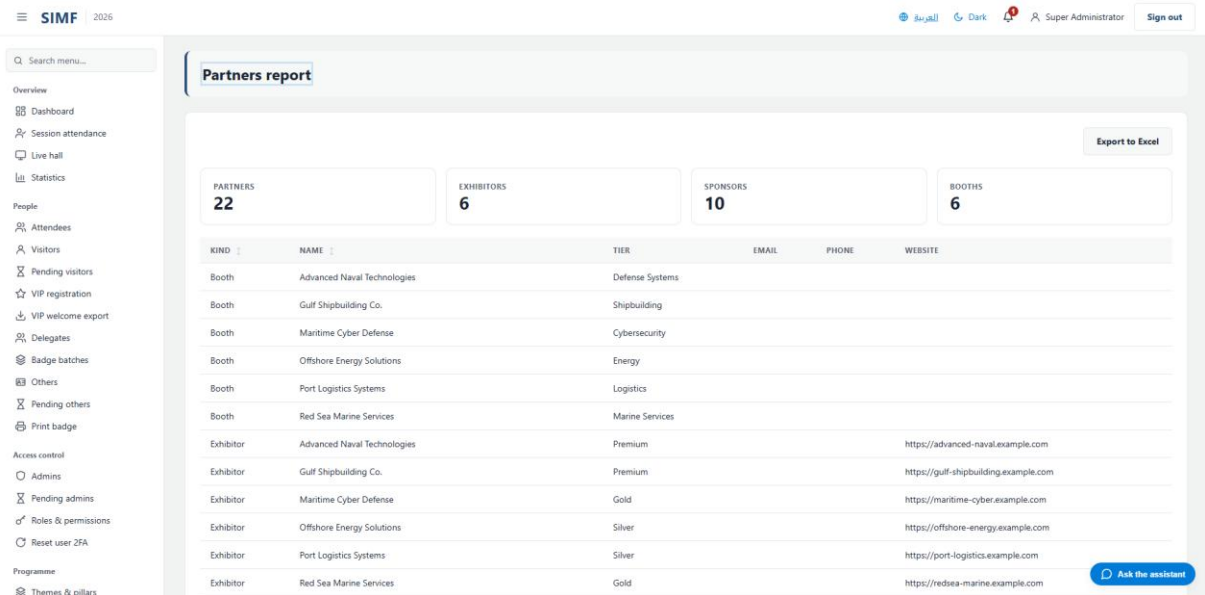


Figure 129 — Partners report — /admin/reports/partners

Meetings report (/admin/reports/meetings)

Property	Value
Address	/admin/reports/meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/MeetingsReport.razor
Code-behind	-
Page permission	Reports.Meetings
Menu permission	Reports.Meetings

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Kind · Requester · Target · Subject · Slot · Status · Requested

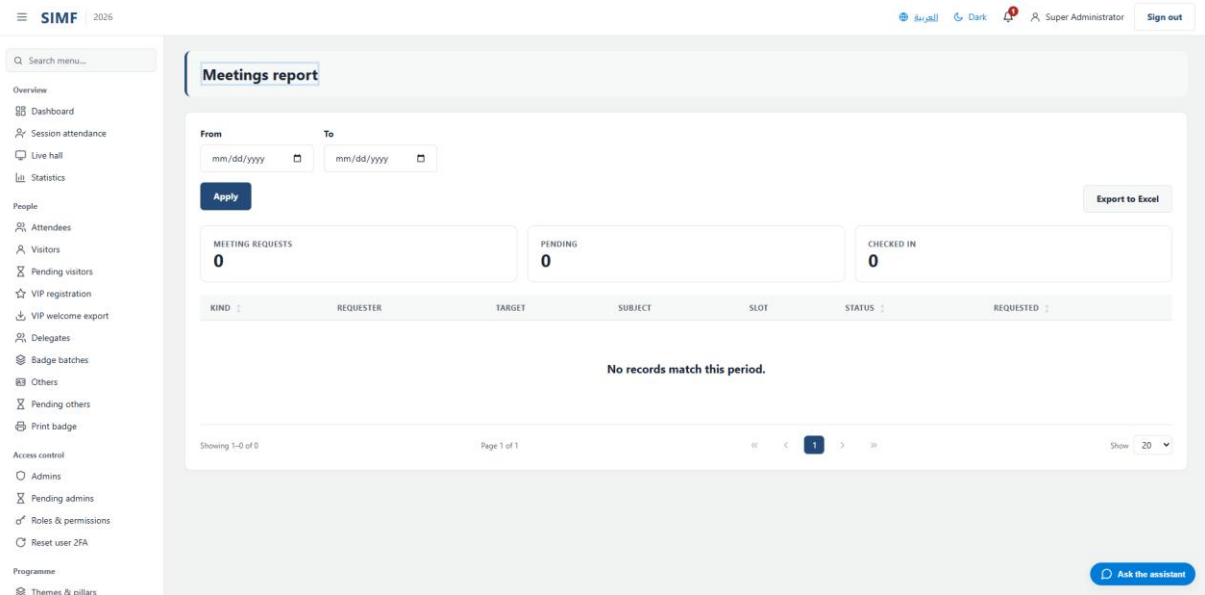


Figure 130 — Meetings report — /admin/reports/meetings

Engagement report (/admin/reports/engagement)

Property	Value
Address	/admin/reports/engagement
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/EngagementReport.razor
Code-behind	-
Page permission	Reports.Engagement
Menu permission	Reports.Engagement

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Code · Session · Question · Recipient · Status · Phase · Asked

SIMF

2026

المعرض

Dark

1

Super Administrator

Sign out

Q Search menu...

Overview

- Dashboard
- Session attendance
- Live hall
- Statistics

People

- Attendees
- Visitors
- Pending visitors
- VIP registration
- VIP welcome export
- Delegates
- Badge batches
- Others
- Pending others
- Print badge

Access control

- Admins
- Pending admins
- Roles & permissions
- Reset user 25A

Programme

- Themes & pillars

Engagement report

From

To

mm/dd/yyyy

mm/dd/yyyy

Apply

Export to Excel

QUESTIONS

HIDDEN

PUSHED TO SPEAKER

0

0

0

CODE	SESSION	QUESTION	RECIPIENT	STATUS	PHASE	ASKED
No records match this period.						

Showing 1-0 of 0

Page 1 of 1

<<

<

1

>

>>

Show 20

Ask the assistant

Figure 131 — Engagement report — /admin/reports/engagement

144

Pages reached from inside another page

These pages have an address but no menu entry. They open from a button or a row inside another page, or they belong to the sign-in flow.

Something went wrong (/Error)

Property	Value
Address	/Error
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Error.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Error.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

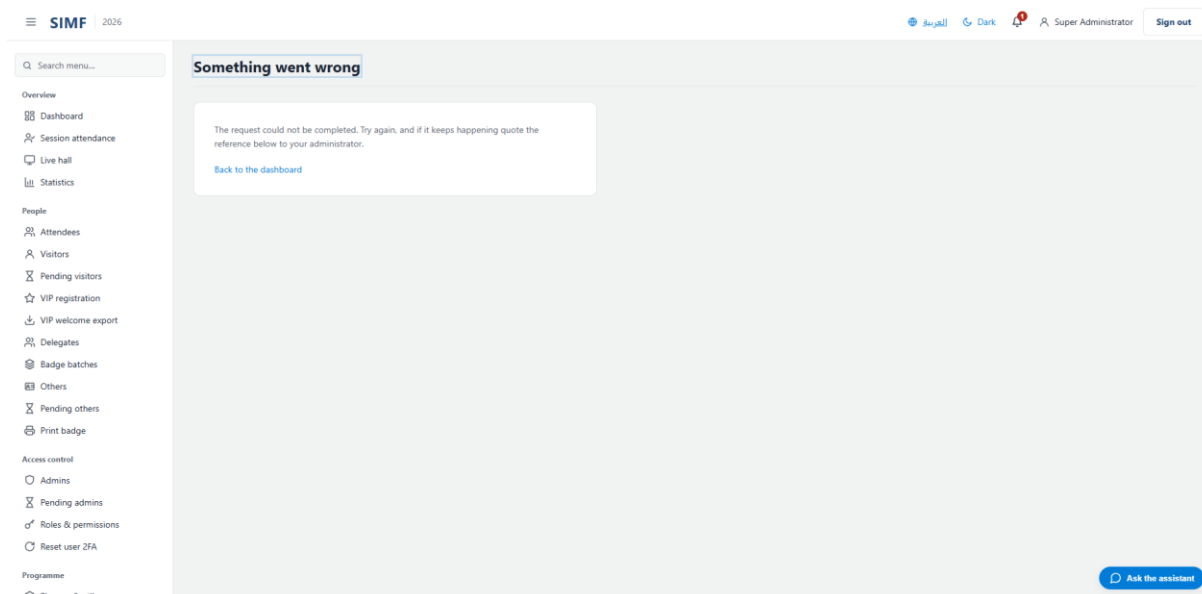


Figure 132 — /Error

Notifications (/account/notifications)

Property	Value
Address	/account/notifications
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Notifications.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Notifications.razor.cs
Page permission	Any signed-in user
Menu permission	-

What you can do here

Action	Permission it needs
Details	No permission of its own
Delete	No permission of its own
Delete (on the selected rows)	No permission of its own

The list shows: Title · Message · Type · Received

It calls: `/account/api/notifications/list` `/account/api/notifications/read-all`
`/account/api/notifications/{row.Id}` `/account/api/notifications/{row.Id}/read`

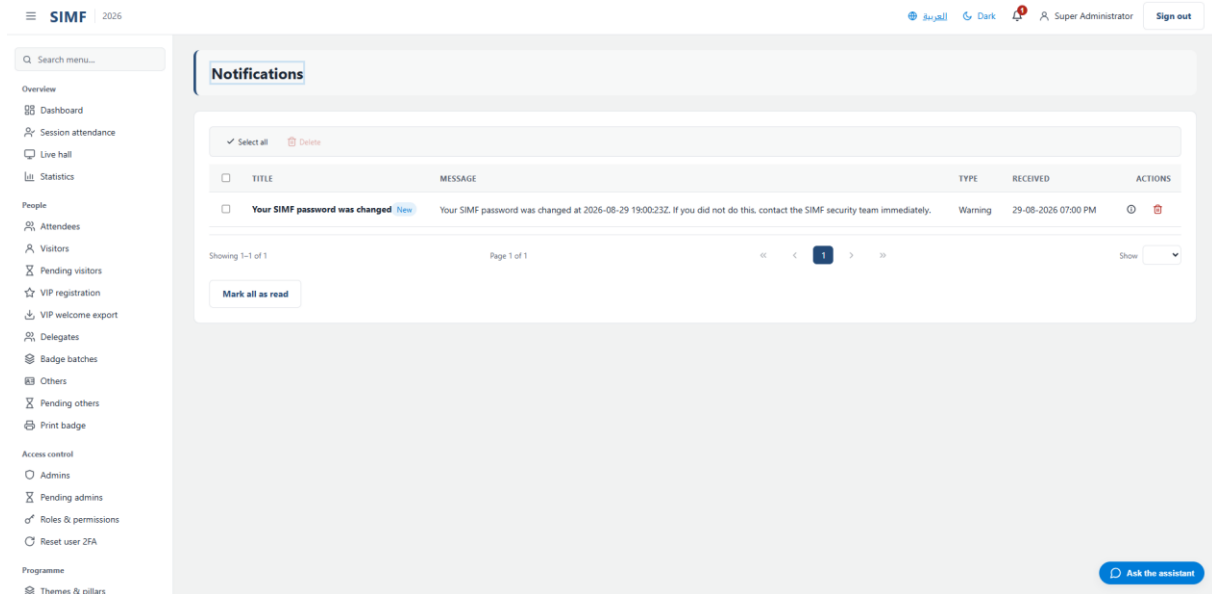


Figure 133 — `/account/notifications`

My profile (`/account/profile`)

Property	Value
Address	<code>/account/profile</code>
Implemented by	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Profile.razor</code>
Code-behind	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Profile.razor.cs</code>
Page permission	Any signed-in user
Menu permission	-

It calls: `/account/api/avatar` `/account/api/change-password` `/account/api/profile`
`/account/api/recovery-codes/regenerate` `/account/api/totp/confirm` `/account/api/totp/disable`
`/account/api/totp/setup`

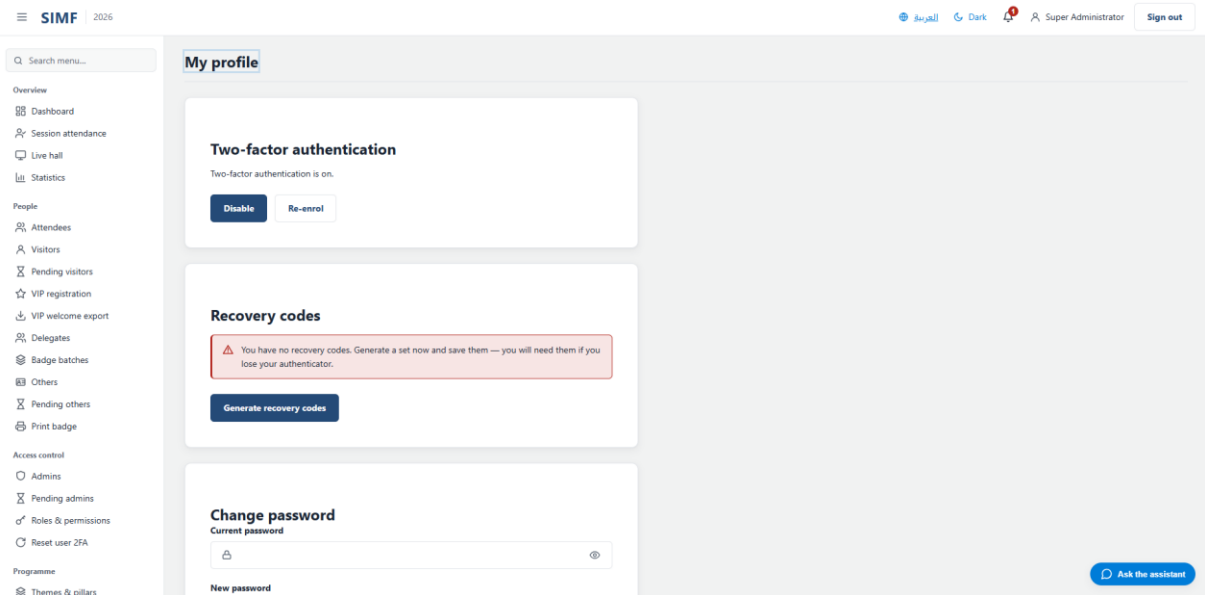


Figure 134 — /account/profile

Re-pair authenticator (/account/totp-pairing)

Property	Value
Address	/account/totp-pairing
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/TotpPairing.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/TotpPairing.razor.cs
Page permission	Any signed-in user
Menu permission	-

It calls: /account/api/totp/pairing /account/api/totp/pairing/verify

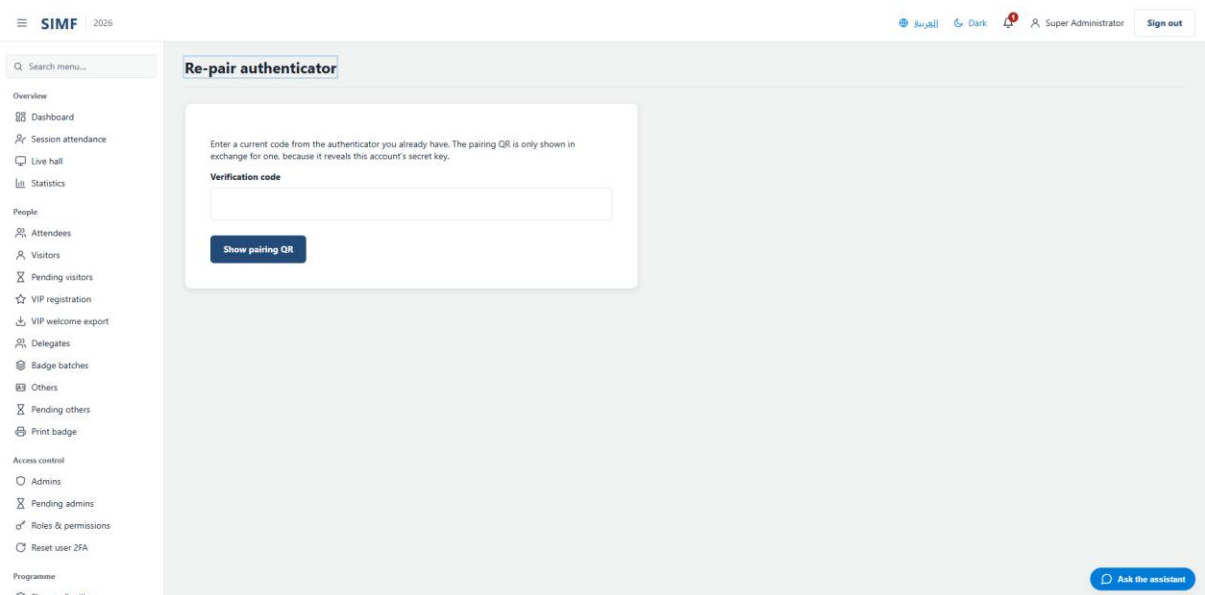


Figure 135 — /account/totp-pairing

Add a new user (/admin/admins/new)

Property	Value
Address	/admin/admins/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateUser.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateUser.razor.cs
Page permission	Admins.Create
Menu permission	-

Figure 136 — /admin/admins/new

AI service (/admin/ai/services/{Feature})

Property	Value
Address	/admin/ai/services/{Feature}
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AIServiceDetail.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AIServiceDetail.razor.cs
Page permission	AiPrompts.View
Menu permission	-

What you can do here

Action	Permission it needs
A button the page gates itself	AiPrompts.Edit

It calls: /account/api/admin/ai/dashboard /account/api/admin/ai/prompts/list

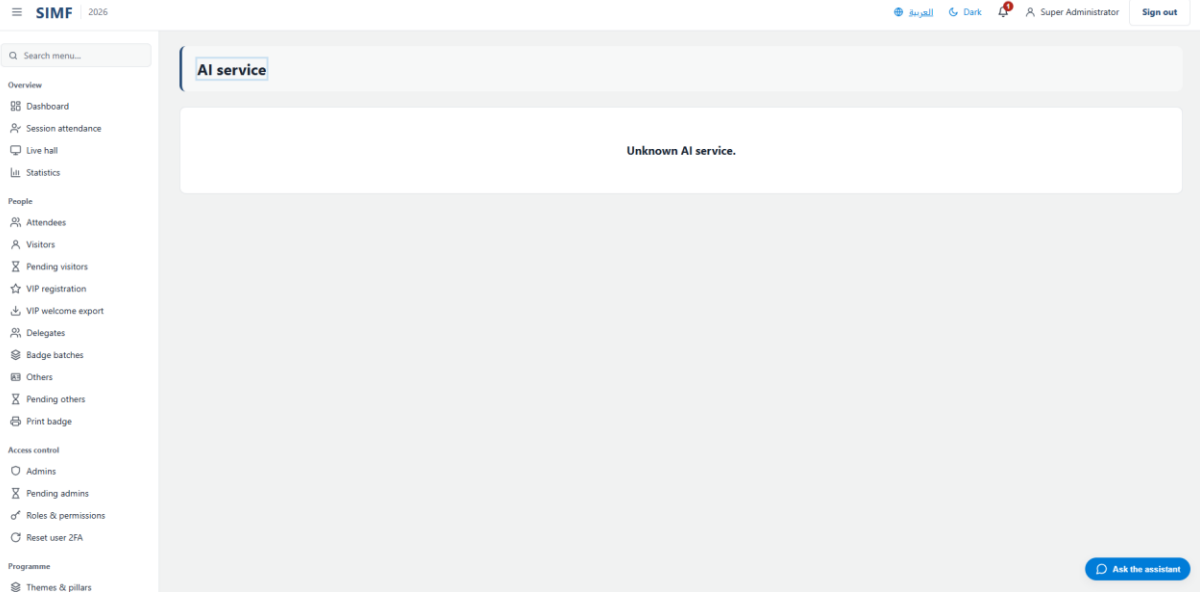


Figure 137 — /admin/ai/services/{Feature}

Add Other user (/admin/others/new)

Property	Value
Address	/admin/others/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateOther.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateOther.razor.cs
Page permission	Others.Create
Menu permission	-

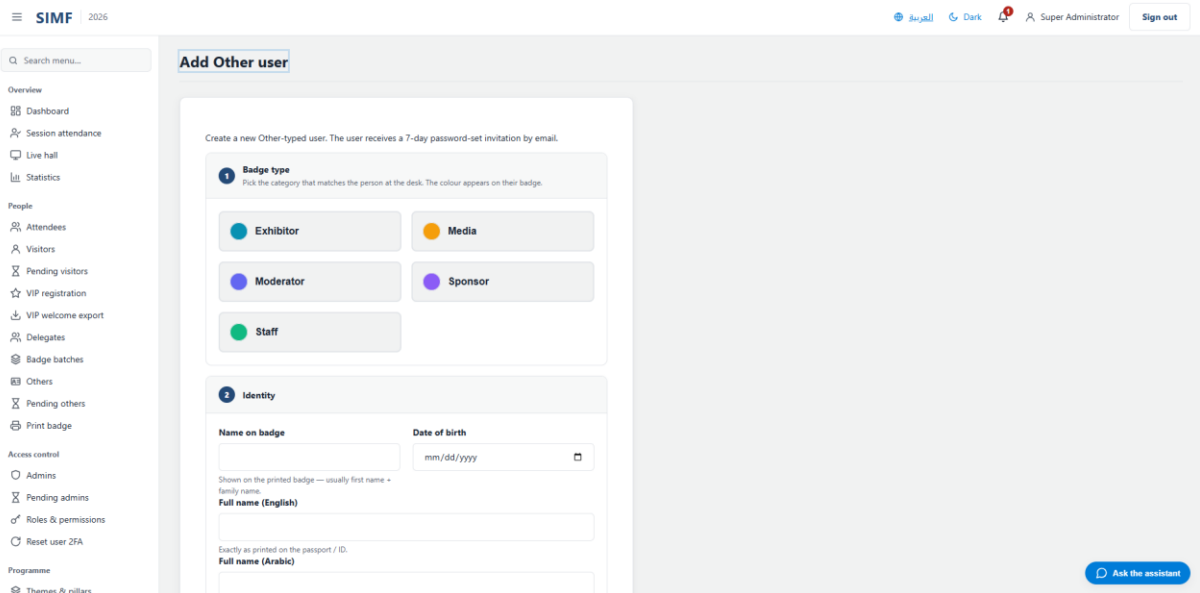


Figure 138 — /admin/others/new

/admin/roles/{RoleId:guid}/permissions (/admin/roles/{RoleId:guid}/permissions)

Property	Value
Address	/admin/roles/{RoleId:guid}/permissions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolePermissionsEditor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolePermissionsEditor.razor.cs
Page permission	Roles.AssignPermissions
Menu permission	-

It calls: /account/api/admin/roles/{RoleId}/permissions

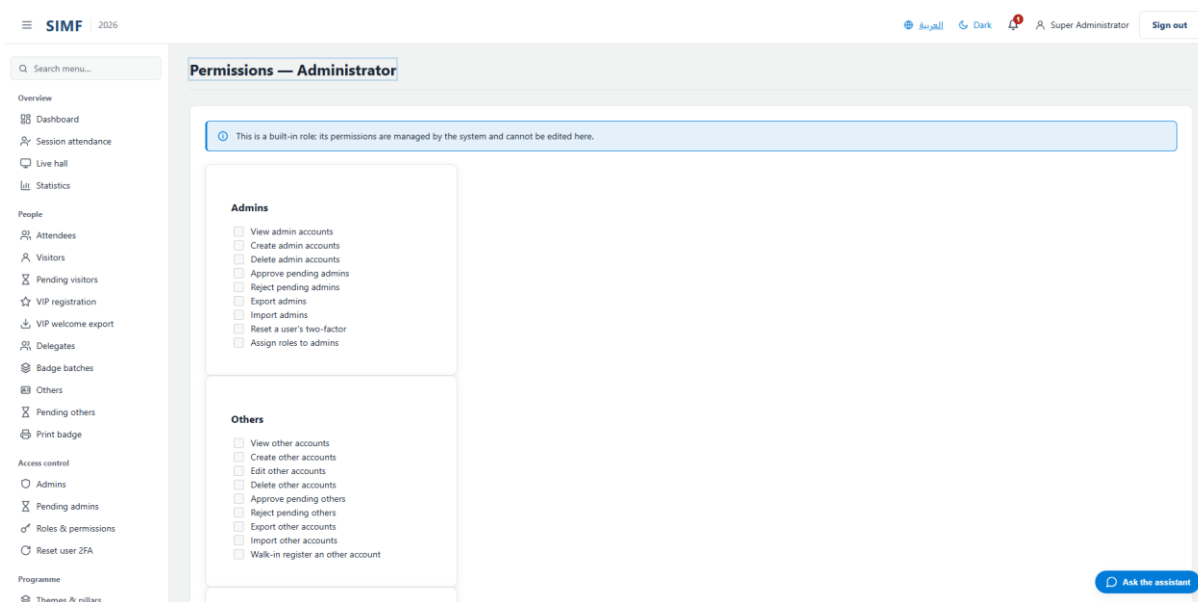


Figure 139 — /admin/roles/{RoleId:guid}/permissions

Add a new visitor (/admin/visitors/new)

Property	Value
Address	/admin/visitors/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateVisitor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateVisitor.razor.cs
Page permission	Visitors.Create
Menu permission	-

Figure 140 — /admin/visitors/new

Your account is waiting for approval (/auth/pending)

Property	Value
Address	/auth/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/PendingApproval.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/PendingApproval.razor.cs
Page permission	Any signed-in user
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Your account was not approved (/auth/rejected)

Property	Value
Address	/auth/rejected
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/Rejected.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/Rejected.razor.cs
Page permission	Any signed-in user
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Forgot password · SIMF Control Panel (/forgot-password)

Property	Value
----------	-------

Address	/forgot-password
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ForgotPassword.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ForgotPassword.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

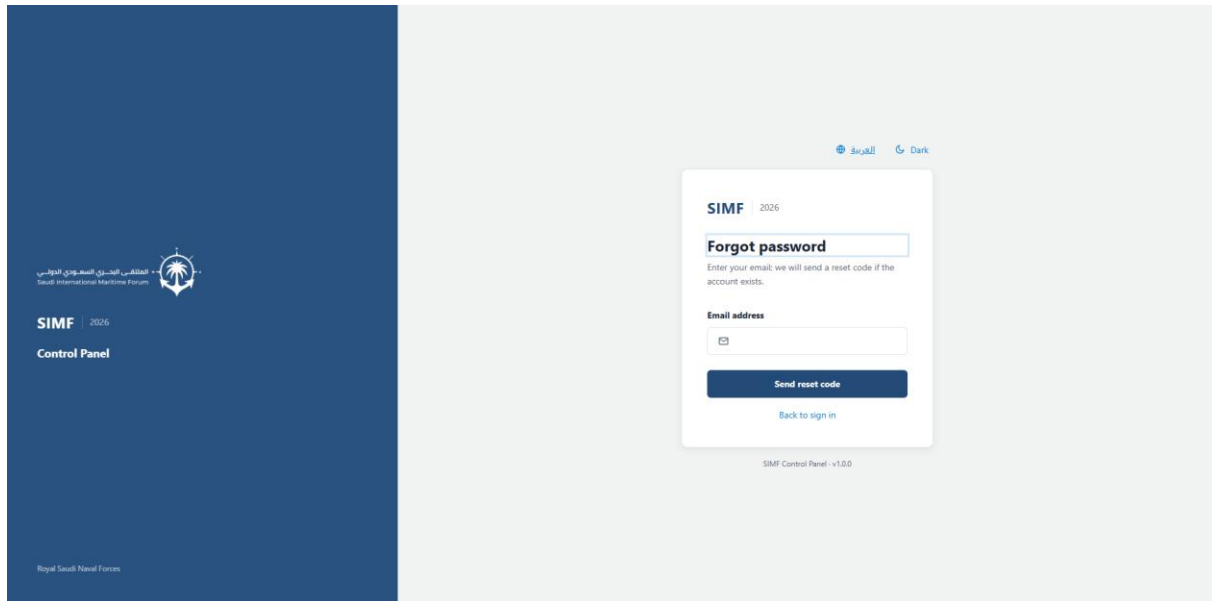


Figure 141 — /forgot-password

Sign in · SIMF Control Panel (/login)

Property	Value
Address	/login
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/SignIn.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/SignIn.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

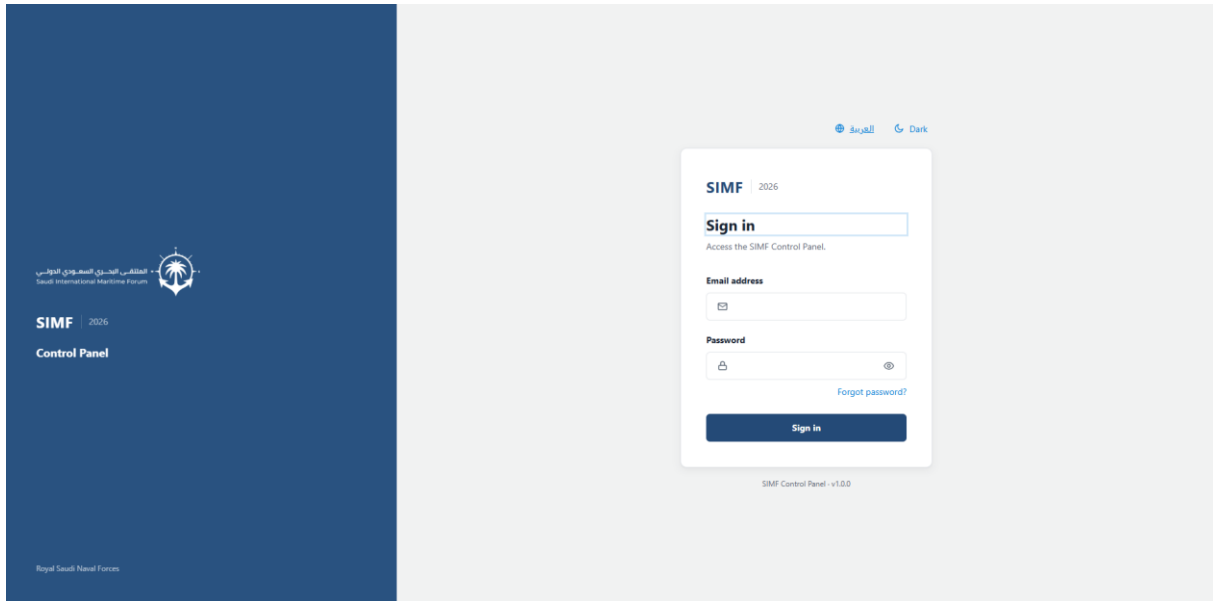


Figure 142 — /login

Set up two-factor authentication (/login/enrol-2fa)

Property	Value
Address	/login/enrol-2fa
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TwoFactorEnrolment.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TwoFactorEnrolment.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Recovery code · SIMF Control Panel (/login/recovery)

Property	Value
Address	/login/recovery
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/RecoveryCodeVerify.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/RecoveryCodeVerify.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Verify · SIMF Control Panel (/login/totp)

Property	Value
Address	/login/totp
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TotpVerify.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TotpVerify.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

/m/{Module} (/m/{Module})

Property	Value
Address	/m/{Module}
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/ModulePlaceholder.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/ModulePlaceholder.razor.cs
Page permission	Sessions.View
Menu permission	-

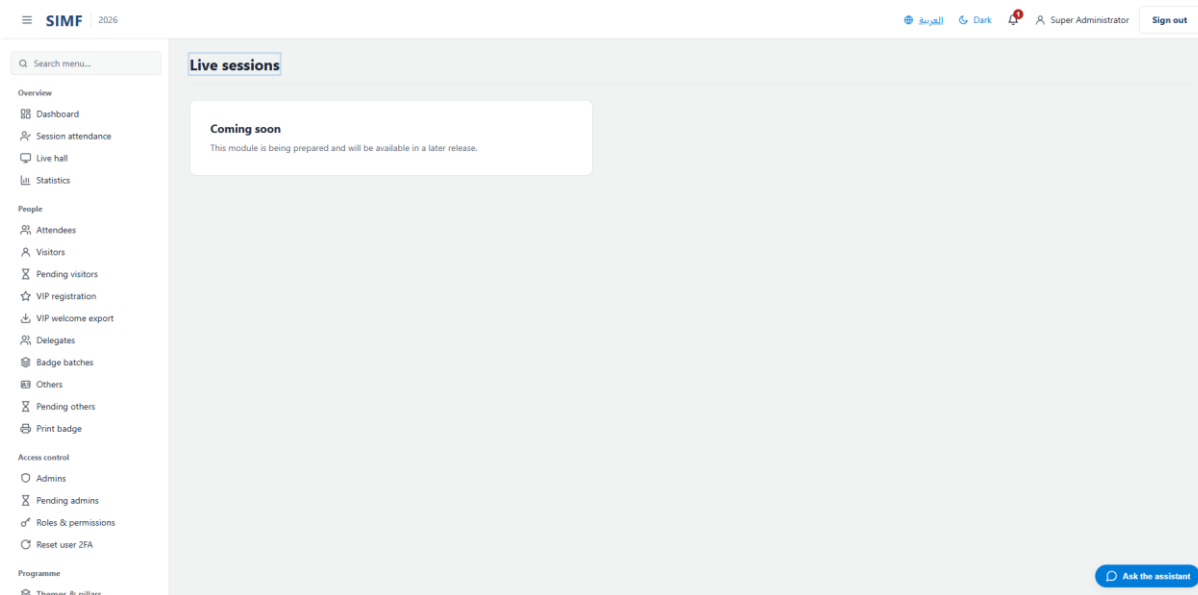


Figure 143 — /m/{Module}

Page not found (/not-found)

Property	Value
Address	/not-found
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/NotFound.razor
Code-behind	-
Page permission	Anyone, signed in or not

Menu permission	-
-----------------	---

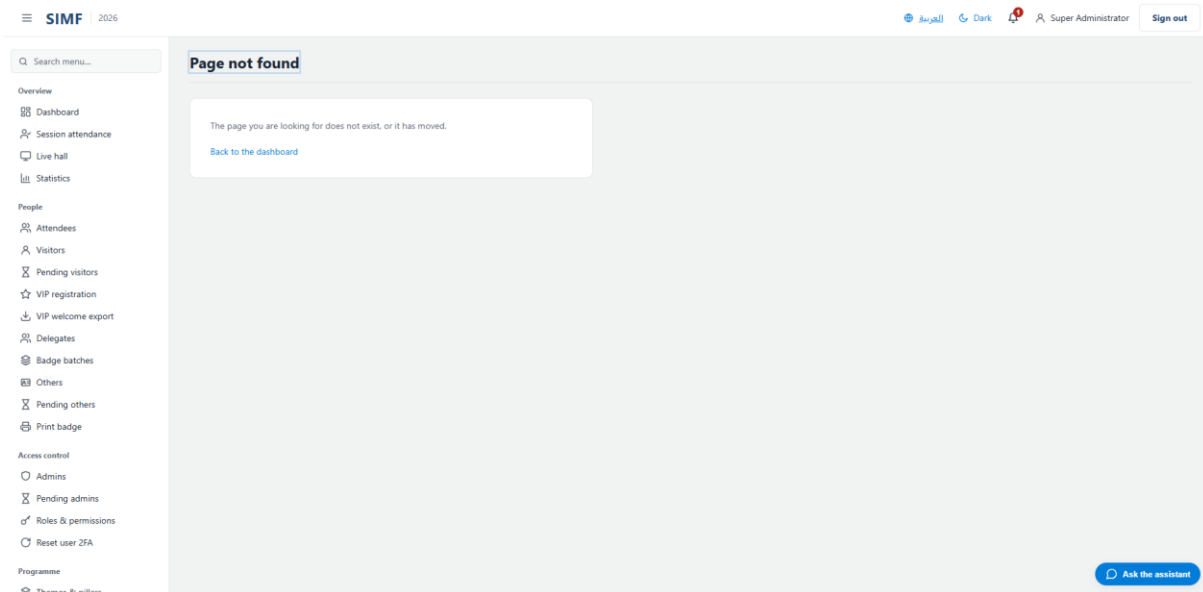


Figure 144 — /not-found

Not permitted (/not-permitted)

Property	Value
Address	/not-permitted
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/NotPermitted.razor
Code-behind	-
Page permission	Any signed-in user
Menu permission	-

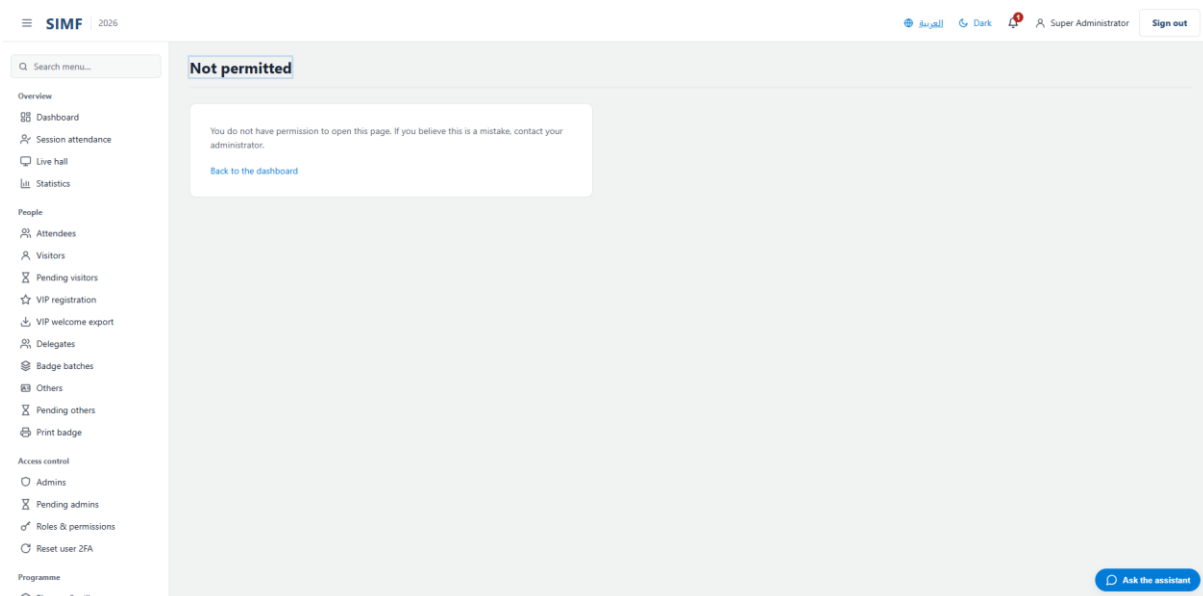


Figure 145 — /not-permitted

Reset password · SIMF Control Panel (/reset-password)

Property	Value
Address	/reset-password
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ResetPassword.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ResetPassword.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

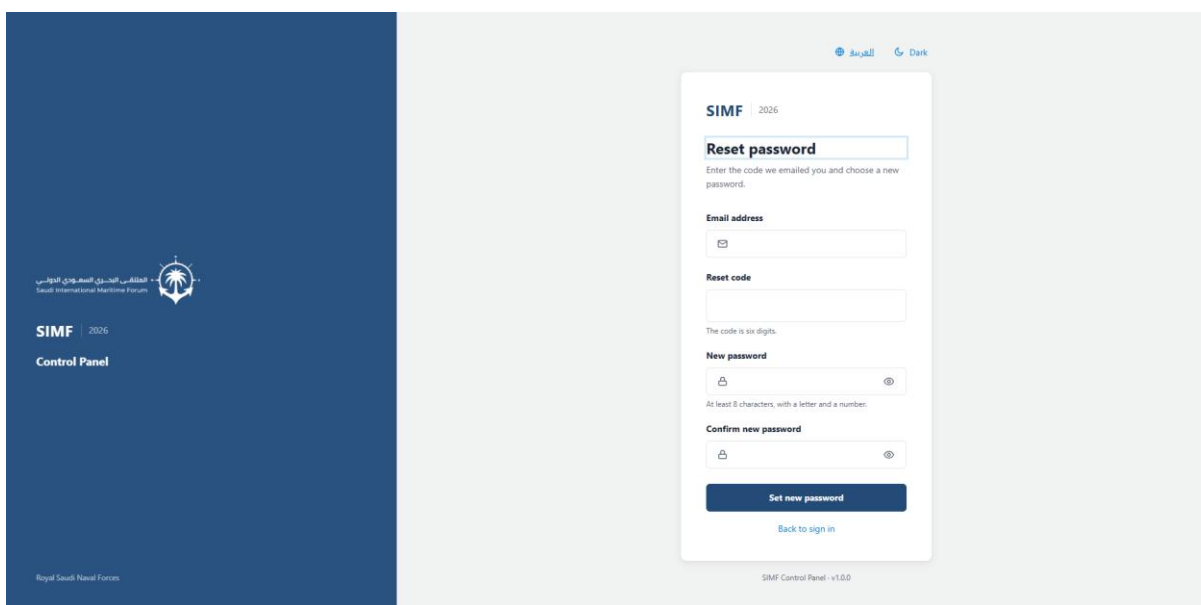


Figure 146 — /reset-password

Session Q&A moderation (/sessions/{SessionId:guid}/moderate)

Property	Value
Address	/sessions/{SessionId:guid}/moderate
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModerationDesk.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModerationDesk.razor.cs
Page permission	Questions.Moderate
Menu permission	-

What you can do here

Action	Permission it needs
A button the page gates itself	Questions.Moderate

It calls: /account/api/sessions/{SessionId}/questions/moderate
 /account/api/sessions/{SessionId}/questions/{row.Id}/hide
 /account/api/sessions/{SessionId}/questions/{row.Id}/push

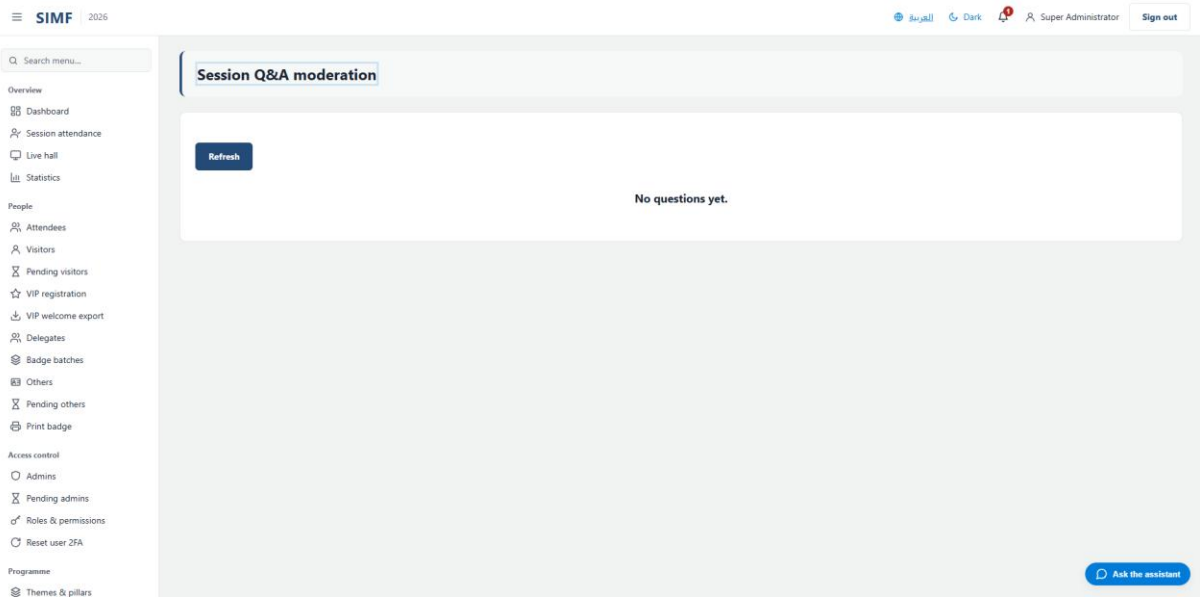


Figure 147 — /sessions/{SessionId:guid}/moderate