

SIMF Control Panel

Operations manual — creating users, configuring the system, and deploying it

Audience	Control Panel administrators and the team deploying the system
Covers	Every Control Panel page, account creation end to end, and the server deployment with its configuration
Screenshots	Captured from the running application, not drawn
Volumes	English and Arabic, published separately

Contents

Contents	2
Signing in for the first time	6
The sign-in screen	6
The forced password change	6
The second factor	7
Recovery codes.....	9
The dashboard.....	9
Creating a user by hand	11
Creating an administrator	12
Creating a visitor.....	15
Creating a partner or staff account.....	19
Registering a VIP.....	19
The profile picture.....	21
Where a picture is set	21
What the system accepts.....	22
Replacing and removing.....	23
Changing an account after it exists.....	24
The approval queues.....	24
Editing an account	24
Moving an account between types	25
Resetting a lost second factor	25
Withdrawing access.....	26
Roles and permissions.....	27
Permission names.....	27
Creating a role	27
Granting permissions to a role	28
Giving a person a role.....	28
The guards	29
Building the programme	30

What a session actually needs.....	30
Seating is two levels, and the top one is the hall	32
Four kinds of meeting, and only two have a queue.....	33
Running the event day	35
Gates.....	35
Halls and who is inside them	36
Questions, and who may touch them.....	38
Session summaries	38
Ratings	39
The numbers.....	39
The exhibition floor	41
Three entities and one optional link	41
The booth is the space, and it comes first	42
Giving somebody on a stand the ability to scan visitors.....	42
Sponsors and their tiers	44
The venue map.....	44
Publishing content, and where it shows up	46
Who reads what	46
Three shapes, not three lists of text	46
Media library and Media Center are different things	49
Previous editions are not the event edition	50
Reaching people: invitations, VIPs and announcements	52
Invitations	52
VIPs are a profile type, not a list you edit	53
Announcements.....	54
Contact inquiries.....	55
The FAQ and the AI features.....	57
The FAQ has two readers.....	57
What is running: services and prompts.....	58
Turning a feature off — and the way that does not work	59

Seeing what it did.....	60
How often you may test a prompt.....	61
System settings, the event year, and the logs.....	62
Four settings pages, four different mechanisms	62
Opening an event year	64
The two logs are for two different people	65
Background services.....	67
Email templates.....	68
Organisation profile.....	69
Reports.....	71
What each report answers	71
The toolbar every report shares.....	72
Exporting.....	73
The lists everything else chooses from.....	74
What each list feeds	74
Deleting is not deleting.....	74
Profile types are not just labels	75
Deploying to a server	76
The estate	76
The four applications	76
Before the first deployment.....	76
The order of a deployment.....	77
The databases	77
The first administrator	78
Every configuration value.....	79
How a variable name is built	80
How to set one	80
The values that stop a server starting.....	80
The API.....	82
The Control Panel	89

The Website	89
The mobile edge	89
The public web application	90
Every host	91
Appendix — what writing this manual found	92
Documents that disagreed with the code — corrected	92
Requirements documents that describe something the system does not do — recorded, not corrected	92
Wording in the product that no longer matched its behaviour — corrected	93
Behaviour worth knowing before it surprises somebody	93
Every page in the Control Panel	94
Overview	94
People	97
Access control	106
Programme	109
Scientific committee	128
Exhibition	131
Engagement	135
Knowledge & AI	137
Content	142
Public relations	149
Gates & arrivals	153
Reference data	157
System	163
Reports	171
Pages reached from inside another page	181

Signing in for the first time

The Control Panel is the operations console for the Saudi International Maritime Forum. Everything in this manual is done from it, so this chapter comes first: it covers the sign-in screen, the password change the system forces on a new account, the second factor, and the recovery codes you are shown exactly once.

The sign-in screen

Open the Control Panel address in a browser. The sign-in page asks for an email address and a password, and offers a language switch and a light/dark switch in the top corner. The language switch changes the whole application, not just this page.

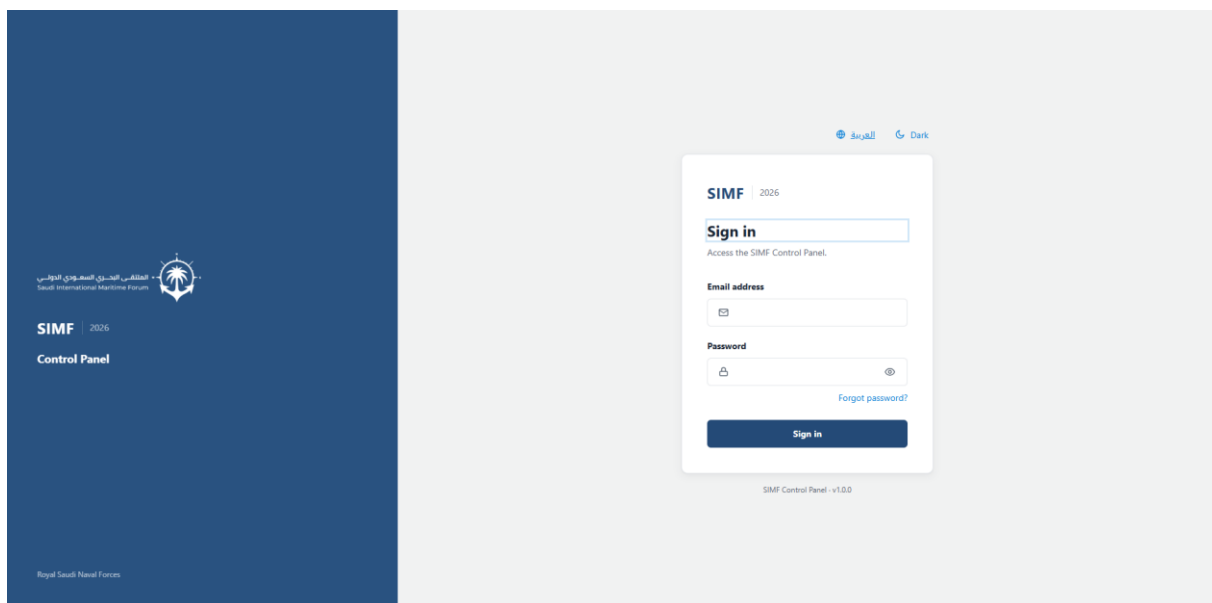


Figure 1 — The sign-in page as it opens.

The forced password change

The first account on a new installation — the super-administrator the system seeds for itself — is given a temporary password that it insists is replaced. So its first sign-in does not reach the dashboard: a dialog opens over the sign-in page asking for a new password twice, and until that is done the account cannot get in. An administrator created later from the Control Panel never sees this, because that account is issued no password at all: it sets its own from the invitation email, as the next chapter describes.

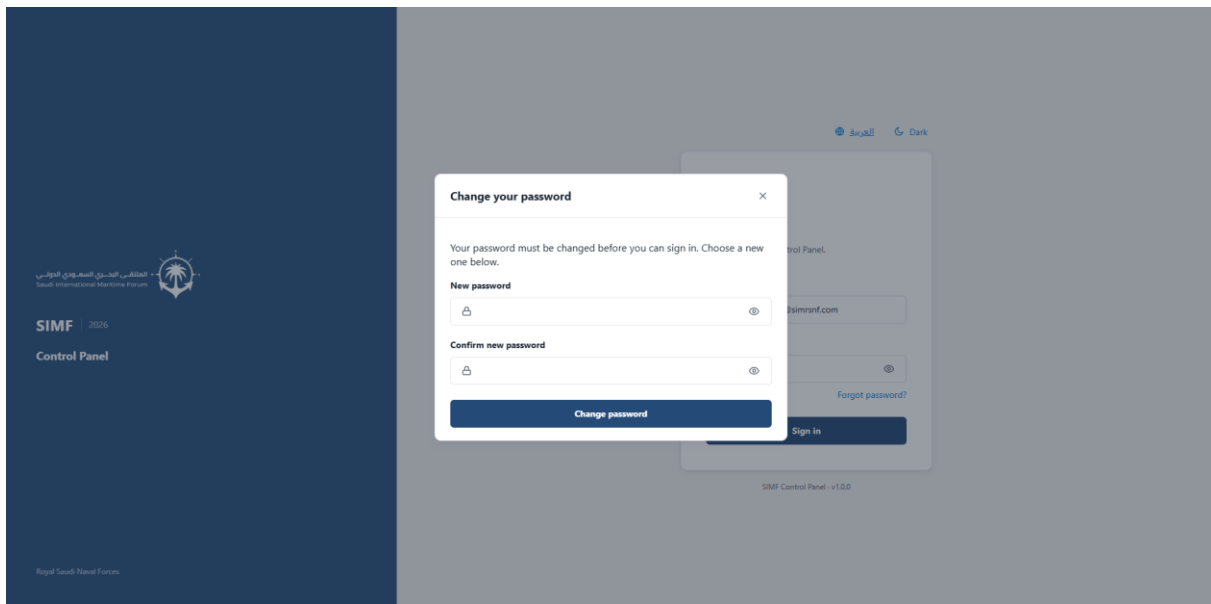


Figure 2 — The password change is a dialog over the sign-in page, not a separate address.

The new password must satisfy the rules the server applies to every password in the system. They are stricter than the length rule most people expect, and the two that surprise operators are the last two:

- Between 8 and 128 characters.
- At least one capital letter, one small letter, one digit and one symbol.
- No character repeated three times in a row — "aa" is allowed, "aaa" is not.
- No run of three characters in sequence within one class — "abc", "123", "cba" and "987" are all rejected.
- Not the account's own email address, and not a commonly used password (leet-speak spellings such as p@ssw0rd are folded back and rejected too).

These rules are enforced in PasswordPolicy.cs and applied by SimfPasswordValidator on every path that sets a password.

The second factor

The Control Panel requires two-factor authentication. After the password the system asks for the six-digit code from an authenticator application. If the account has never paired one, the system shows the pairing screen instead and will not let the account past it — enrolment is mandatory, not optional.

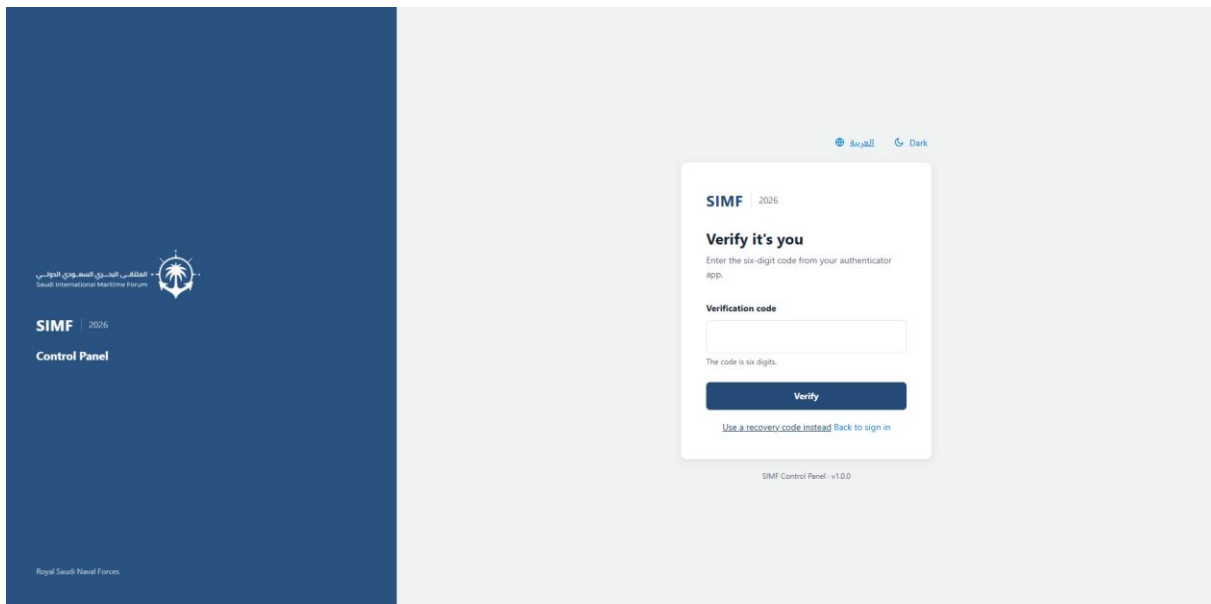


Figure 3 — The second-factor step, after the password has been accepted.

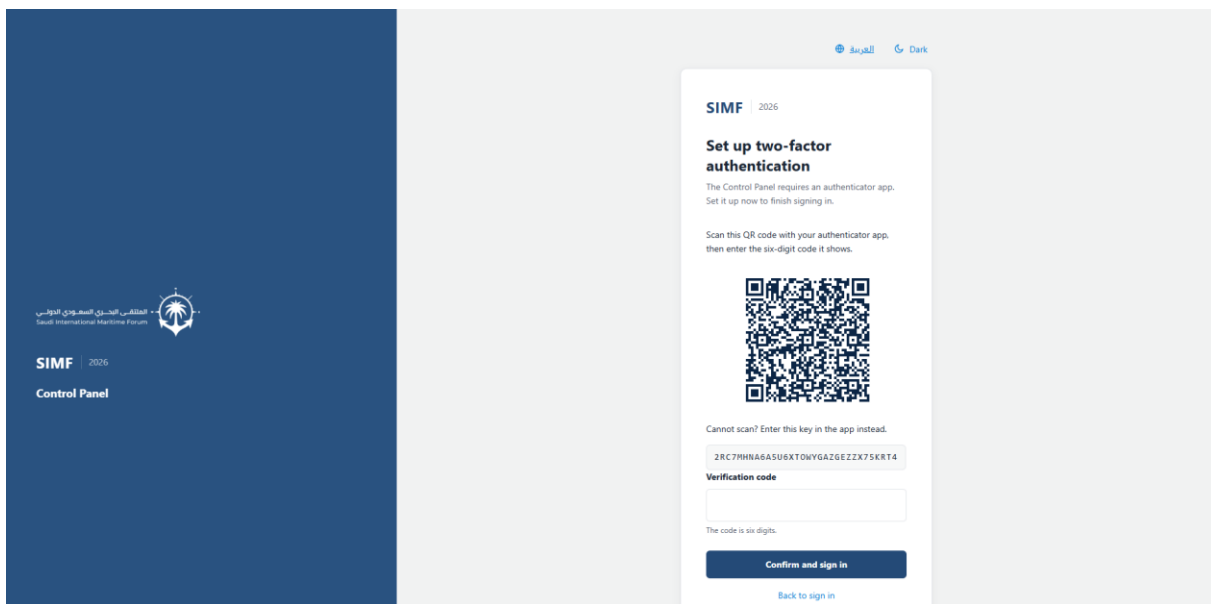


Figure 4 — The pairing screen an account meets when it has no authenticator yet. The QR code and the key beneath it are obscured here: they are a real credential, and a manual should never print one.

The requirement is controlled by `IdentityLifecycle:RequireControlPanelTwoFactorEnrolment`, which ships as `true`. It applies to the Control Panel only — the mobile application and the public website are not affected.

Recovery codes

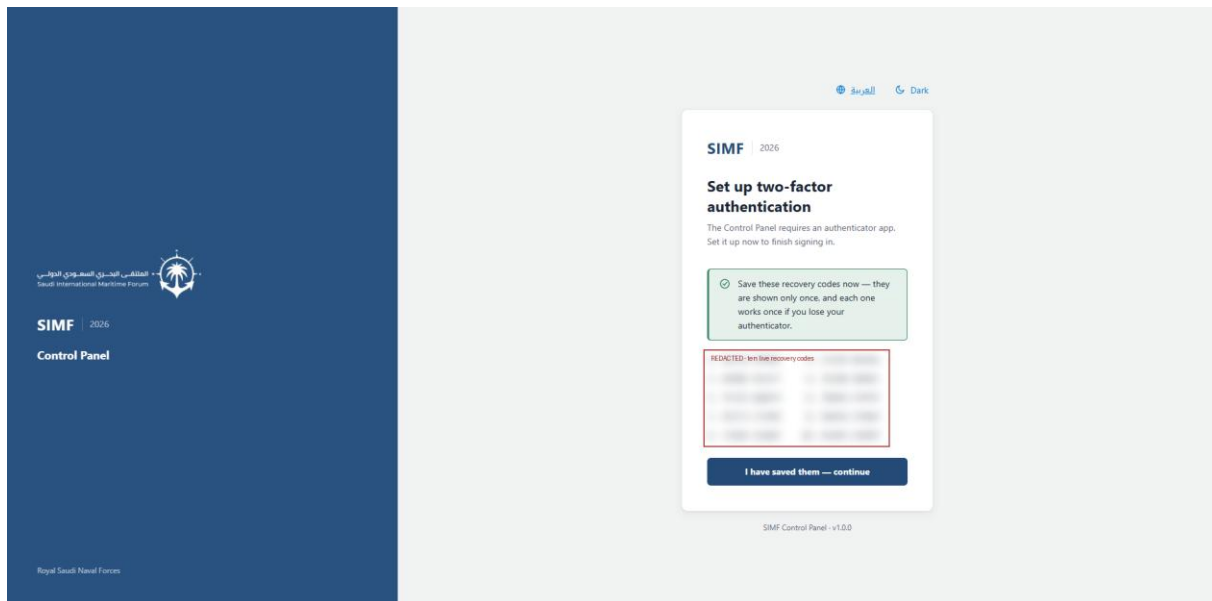


Figure 5 — The ten recovery codes, shown once and never again. They are obscured here because they were real when this was taken — a manual that printed a working set would be handing them out.

When an account pairs its authenticator the system displays ten single-use recovery codes. They are shown once and never again. Print them or store them somewhere safe: they are what gets the account back in when the phone is lost. If they are lost as well, another administrator resets the account's second factor from Reset user 2FA, which is covered later in this manual. That page cannot reset your own account, and it cannot reset an account holding the Administrator role — the super-administrator's authenticator is re-paired through configuration instead.

The dashboard

A completed sign-in lands on the dashboard: a summary of the event and, down the left, the menu that this manual follows chapter by chapter.

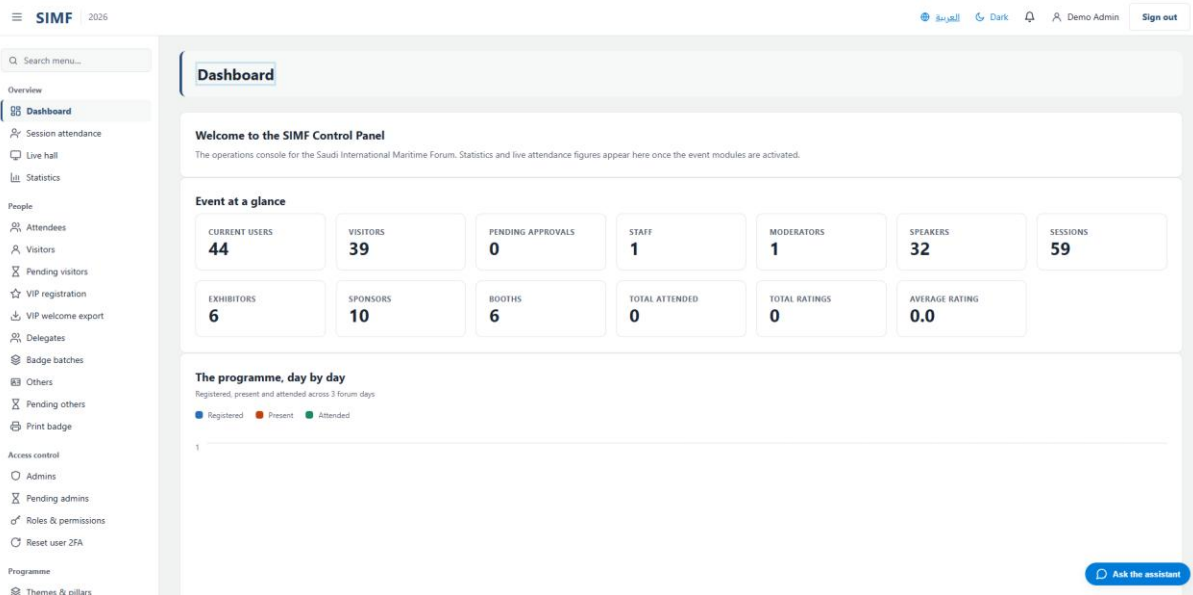


Figure 6 — The dashboard after signing in.

Creating a user by hand

The Control Panel creates three kinds of account, and they are not variations of one form — they are three separate pipelines with different screens, different fields, different rules and different outcomes. Choosing the wrong one is the most common mistake, so this chapter starts with how to choose.

To create	Use	Address	The account ends up
An operator of this Control Panel	Admins	/admin/admins	Awaiting approval, with a 7-day emailed invitation
A visitor or guest attending the forum	Visitors	/admin/visitors	Awaiting approval, with no password and no email
A partner, exhibitor, media or staff account	Others	/admin/others	Awaiting approval, always — never auto-approved
A VIP or VVIP guest	VIP registration	/admin/visitors/vip	As a visitor, plus the VIP protocol fields

The distinction that matters: an administrator receives an emailed invitation and sets a password. A visitor or partner receives neither — their credential is the QR badge, and the badge is only minted when the account is approved.

Creating an administrator

An administrator is somebody who signs in to this Control Panel. Open the menu group Access control, choose Admins, and use the Add button on the grid toolbar. The form is deliberately short — an administrator fills in no visitor profile and no identity documents. A bare profile and a badge are created when the account is approved, as they are for every account, but nothing on this form asks for them.

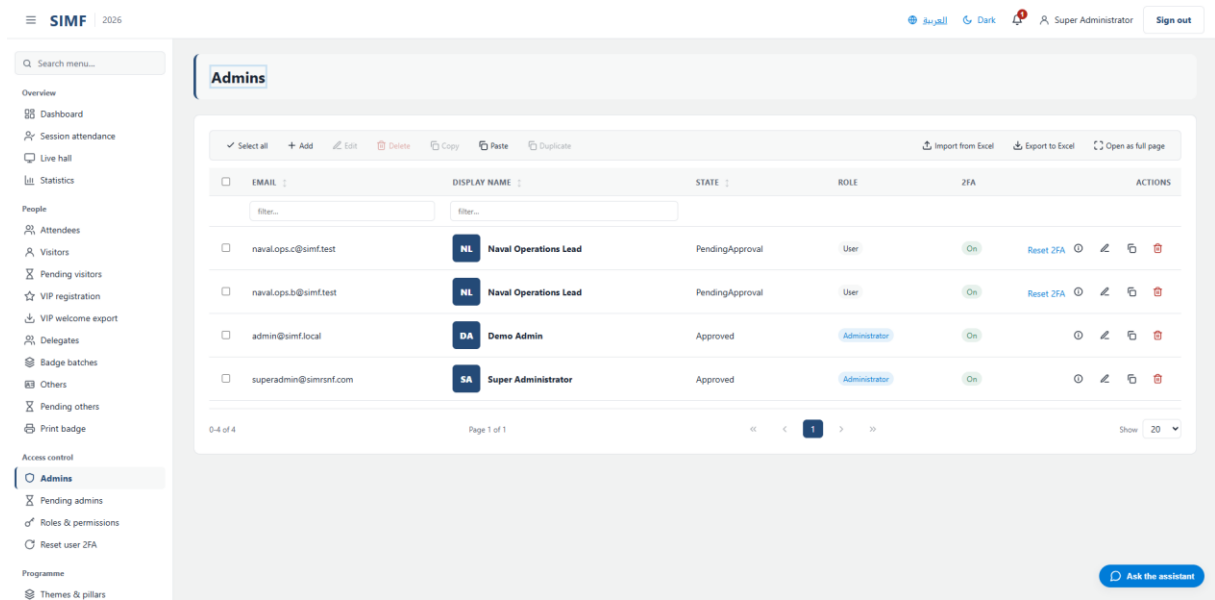


Figure 7 — The administrators list. The Add button opens the create form.

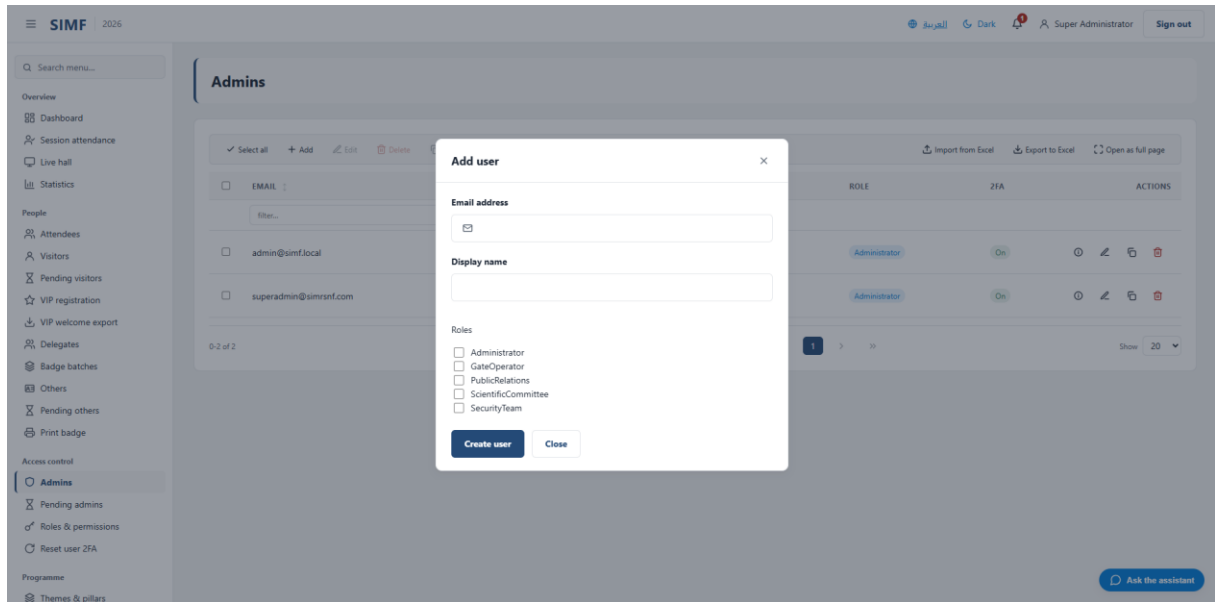


Figure 8 — The create form: an email address, a display name, and one tick box per role.

Field	Required	Limit	Rule the server enforces
Email address	Yes	256 characters	Must be a valid email address, and must not

			already belong to an account.
Display name	Yes	2 to 128 characters	The name shown throughout the Control Panel.
Roles	No	—	One tick box per role. Assigning a role here requires the role-assignment permission as well as the create permission.

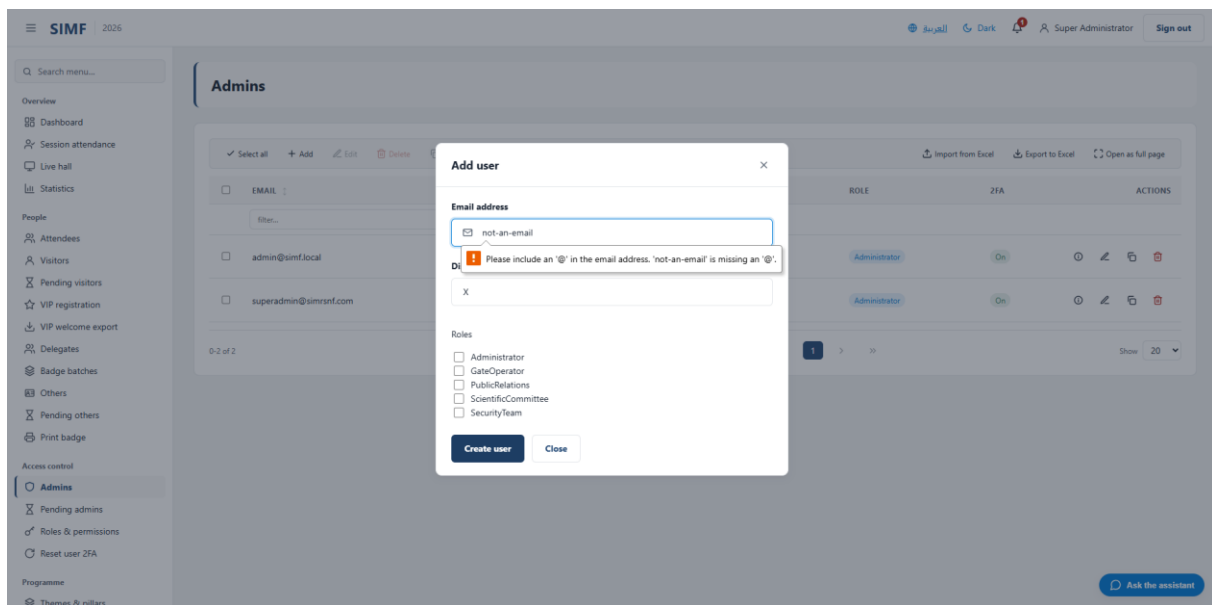


Figure 9 — A refused submission. The email box is a typed field, so the browser catches a malformed address before the form is sent at all; the form's own checks report a short display name and a missing address the same way, and nothing reaches the server until both are right.

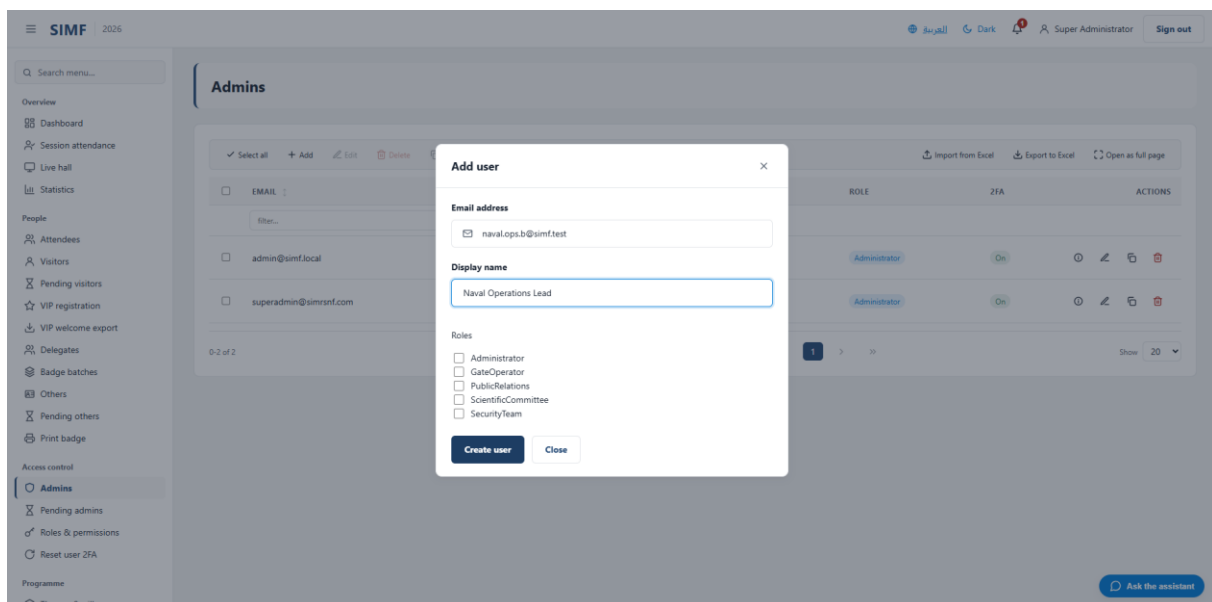


Figure 10 — The same form filled in and ready to submit.

On save the account is created in the awaiting-approval state, an invitation valid for seven days is emailed to the address, and every other approved administrator is notified that an account is waiting. Two-factor is armed on the account from the moment it is created, so the new administrator will be taken through the pairing screen on their first sign-in.

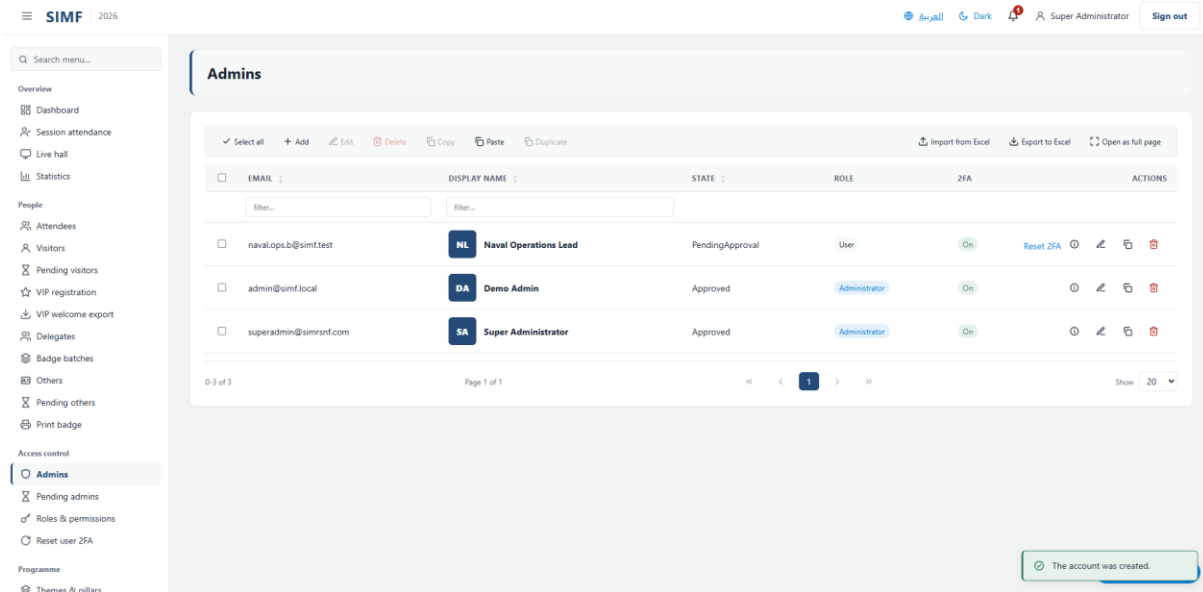


Figure 11 — The new account in the list, awaiting approval, with the confirmation message.

A duplicate email is refused with the error ADMIN_EMAIL_ALREADY_REGISTERED and the form stays open. If the mail server is not configured the account is still created — only the invitation fails to arrive, and it fails quietly, in the background.

Creating a visitor

A visitor is an attendee. The form is the on-site registration desk wizard, and it is long because it captures the identity the gate will check. It is organised into numbered sections. What changes which fields appear is whether the visitor is Saudi and, for a non-Saudi, whether an Iqama or a passport is being recorded. The profile type chosen first sets the tier and the badge colour, not the shape of the form.

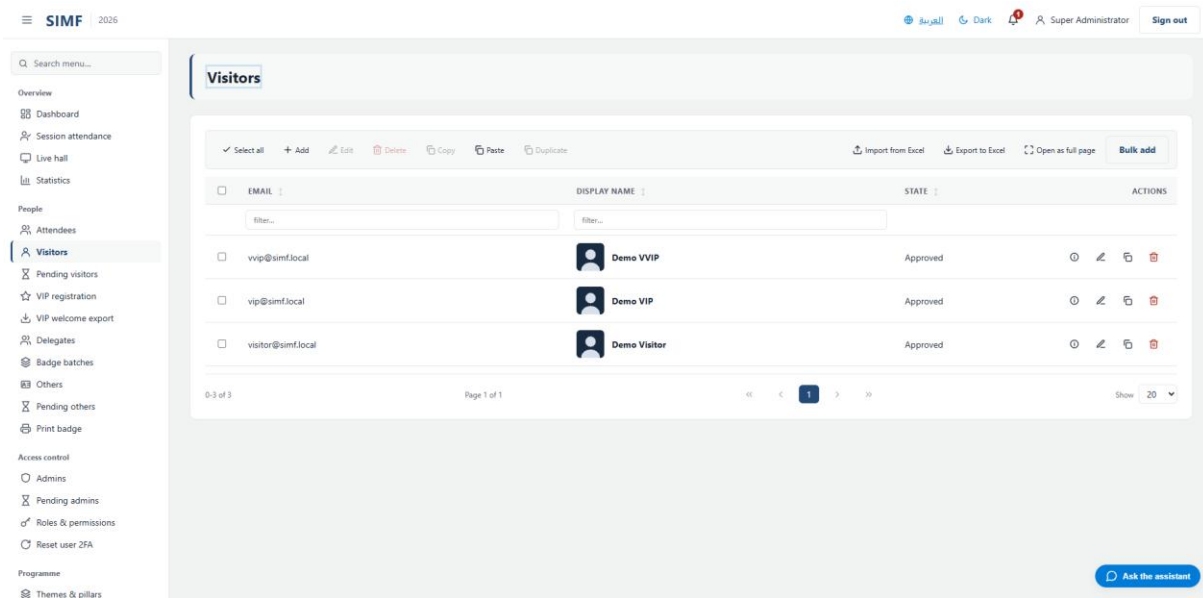


Figure 12 — The visitors list. Add opens the registration wizard.

1 Badge type
Pick the category that matches the person at the desk. The colour appears on their badge.

2 Identity

Name on badge
Shown on the printed badge — usually first name + family name.

Date of birth
mm/dd/yyyy

Full name (English)
Exactly as printed on the passport / ID.

Full name (Arabic)
الاسم الكامل بالعربية

Job title (optional)
Job title in Arabic (optional)

Place of birth
For example, "Captain" or "Director of Operations". Up to 128 characters.

Gender
Not specified

Plate number (optional)

Figure 13 — The wizard opens on the profile type, which sets the tier and the badge colour.

Figure 14 — The identity section.

Identity

Field	Required	Limit	Rule the server enforces
Name on badge	Yes	128 characters	—
Full name (Arabic)	Yes	50 characters	The form allows 128 characters; the server rejects anything over 50. Keep to 50.
Full name (English)	Yes	50 characters	Same 128-versus-50 mismatch as the Arabic name.
Job title (optional)	No	100 characters	—
Job title in Arabic (optional)	No	100 characters	—
Place of birth	No	128 characters	A region picker for a Saudi visitor; free text otherwise.

Nationality and identity document

Field	Required	Limit	Rule the server enforces
Saudi national ID	Yes, for a Saudi visitor	10 digits	Saudi visitors. Must start with 1 and pass the check-digit test; a number that fails it is refused.
Iqama number	One of the two, for a non-Saudi visitor	10 digits	Non-Saudi residents. Must start with 2 and pass the same check-digit test.
Passport number	One of the two, for a non-Saudi visitor	20 characters	Length only — the desk applies no format check, so a passport the mobile application would reject is accepted here.

One profile may hold one document of each kind. The same number may appear on more than one profile — the constraint that once made a number unique across all profiles was removed deliberately, because it blocked legitimate registrations.

Figure 15 — The nationality section, which decides whether a national ID, an Iqama or a passport is asked for.

Contact and organisation

Field	Required	Limit	Rule the server enforces
Saudi mobile	One of the two	32 characters	Must be 05XXXXXXX or +9665XXXXXXX.
International mobile	One of the two	32 characters	Must be the international format: a plus sign, the country code, then the number.
Email (optional)	No	256 characters	—
Organisation	Yes	150 characters	Chosen from the organisation list. If the employer is not listed, pick the "Other" entry — that is why it exists. The desk cannot type the real name; the visitor supplies it later on their own profile.

Those requirements are the desk in its normal mode. When quick registration is armed — see the walk-in mode page — the desk asks for less, and a visitor can be registered without the fields marked required above. It ships disarmed.

The screenshot shows the SIMF registration interface. On the left is a sidebar menu with categories: Overview (Dashboard, Session attendance, Live hall, Statistics), People (Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge), Access control (Admins, Pending admins, Roles & permissions, Reset user 2FA), and Programme (Themes & pillars). The main form area is titled 'Saudi mobile' and 'Email (optional)'. It includes a field for a Saudi mobile number (e.g., 966500000000) and a note to leave the email field blank if the visitor has no email. Below this is the 'ID document' section, which includes an optional scan of a national ID, Iqama, or passport (PNG/JPEG, up to 5 MB, stored encrypted at rest). It also has fields for an 'ID document image (optional)' and a 'Profile photo (optional)', both with 'Choose File' buttons and 'No file chosen' text. The 'Interests' section allows selecting up to 10 topics from a list: Naval Defence Technologies, Maritime Security, Shipbuilding & Marine Industries, Ports & Maritime Logistics, Hydrography & Marine Survey, Marine Environment & Sustainability, Autonomous & Unmanned Systems, Maritime Cybersecurity, Investment & Local Content, and Research & Innovation. At the bottom right are 'Register' and 'Cancel' buttons, and a blue 'Ask the assistant' button.

Figure 16 — The lower sections: contact, the identity document and the profile photo.

Interests are offered for visitors only, and at most ten may be chosen.

On save the visitor is created awaiting approval, with no password and no badge. The badge is minted when the account is approved from the pending queue. There is a configuration option that approves a walk-in visitor immediately and prints the badge at the desk, but it ships switched off, and it never applies to partner accounts.

Creating a partner or staff account

The Others page uses the same wizard as the visitor page, with two differences: there is no interests section, and the account is never approved automatically. Every account created here waits for a person to approve it.

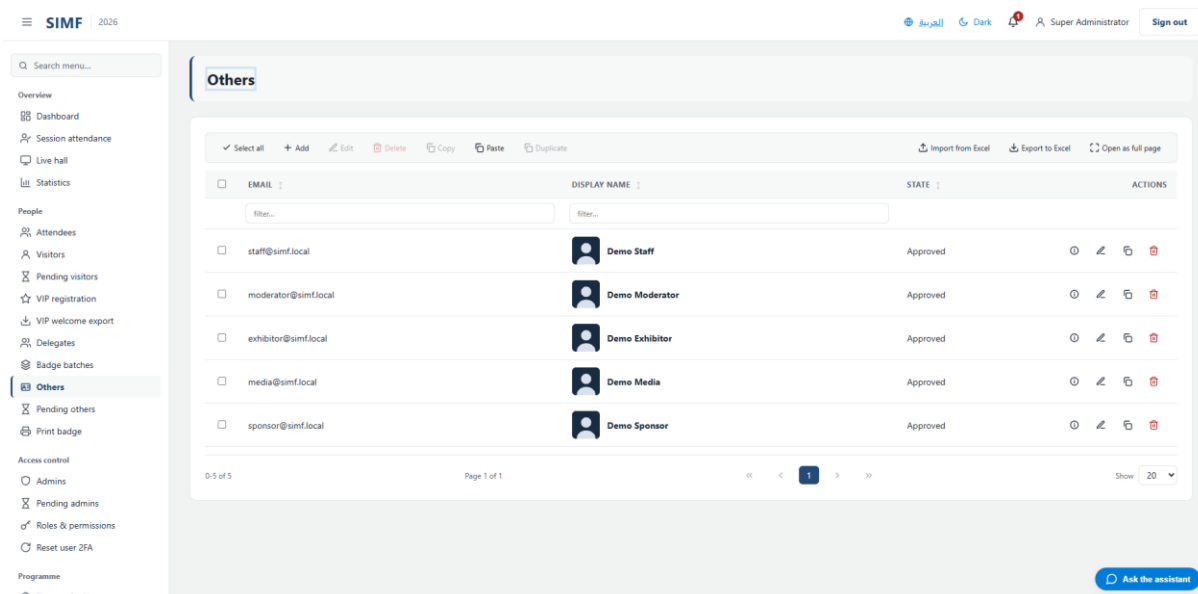


Figure 17 — The partner and staff accounts list.

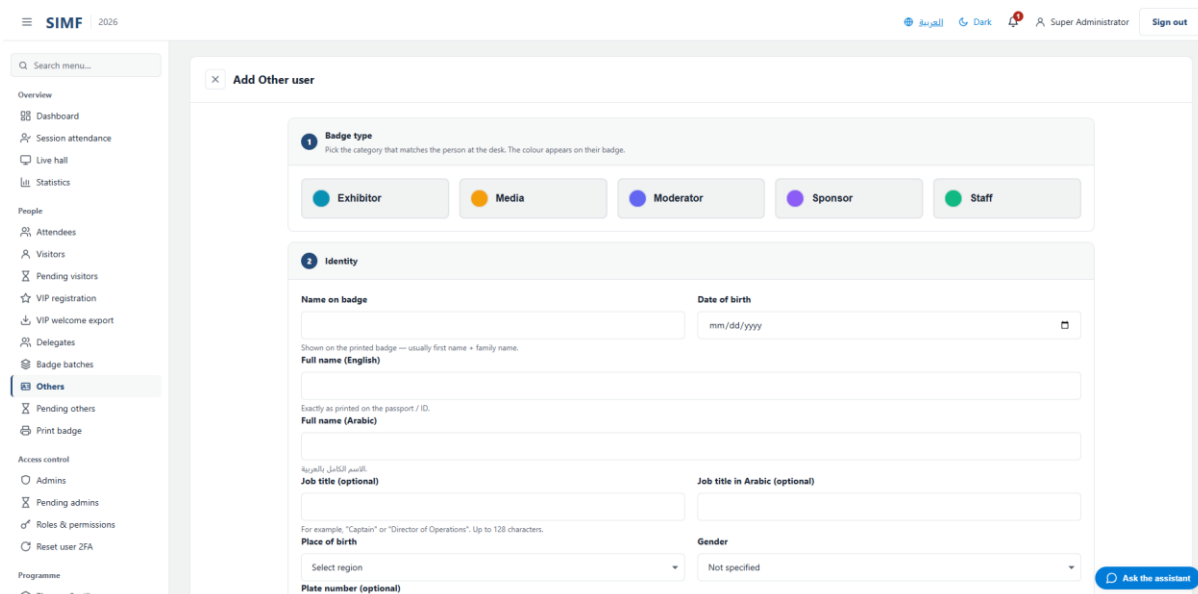


Figure 18 — The same wizard, without the interests section.

Registering a VIP

The VIP page is the visitor wizard with a protocol section added at the top, and a welcome photo alongside the profile photo.

Field	Required	Limit	Rule the server enforces
Mawj system ID (optional)	No	64 characters	—
Honorific / title (optional)	No	64 characters	—
Honorific / title in Arabic (optional)	No	64 characters	—
Preferred language (optional)	No	16 characters	Arabic or English.

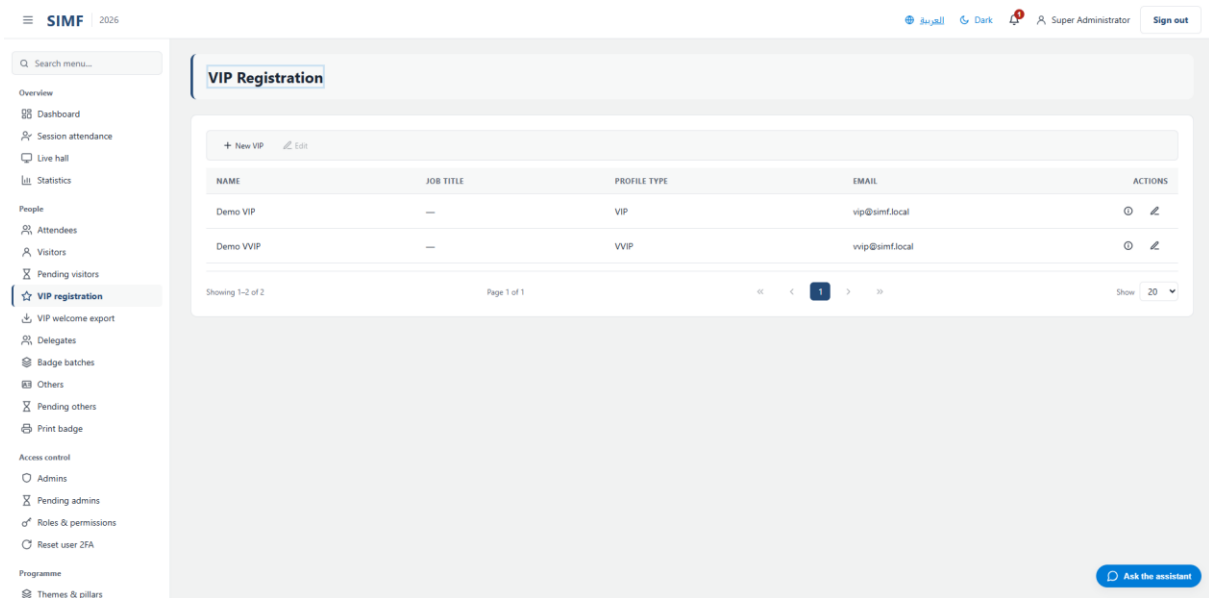


Figure 19 — The VIP registration page.

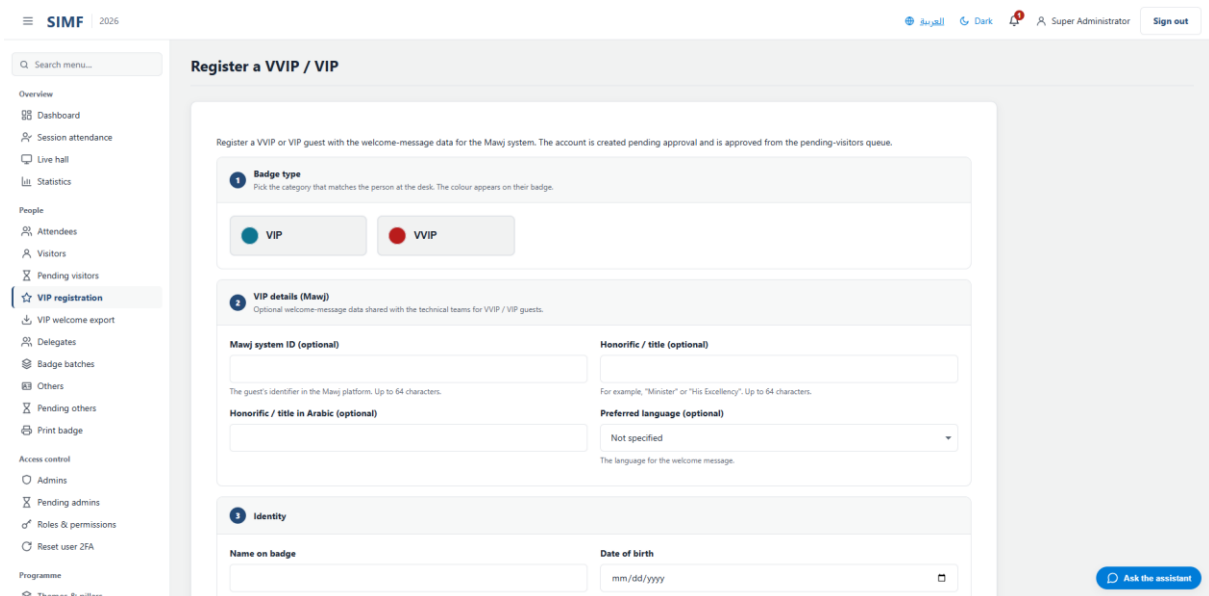


Figure 20 — The VIP wizard, with the protocol section above the identity section.

The profile picture

A profile picture is stored in the system's central file store, encrypted, and served back only to the account itself or to an administrator holding the right permission. It is not a file sitting in a public folder, and it cannot be reached by guessing an address.

Where a picture is set

- By the account owner, from My profile — this is the only place with a cropping tool.
- By an administrator, on the edit form of a visitor or partner account.
- By the registration desk, as part of the create wizard, alongside the identity document.

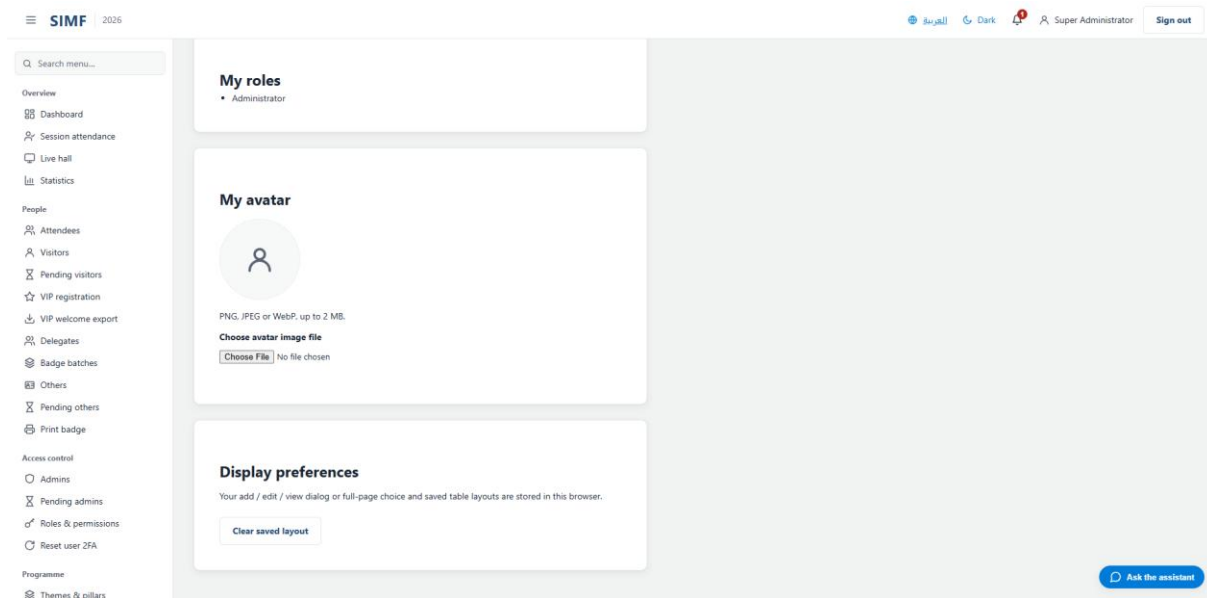


Figure 21 — The avatar card before a picture is set: a placeholder, the accepted formats and the size ceiling, and the file picker.

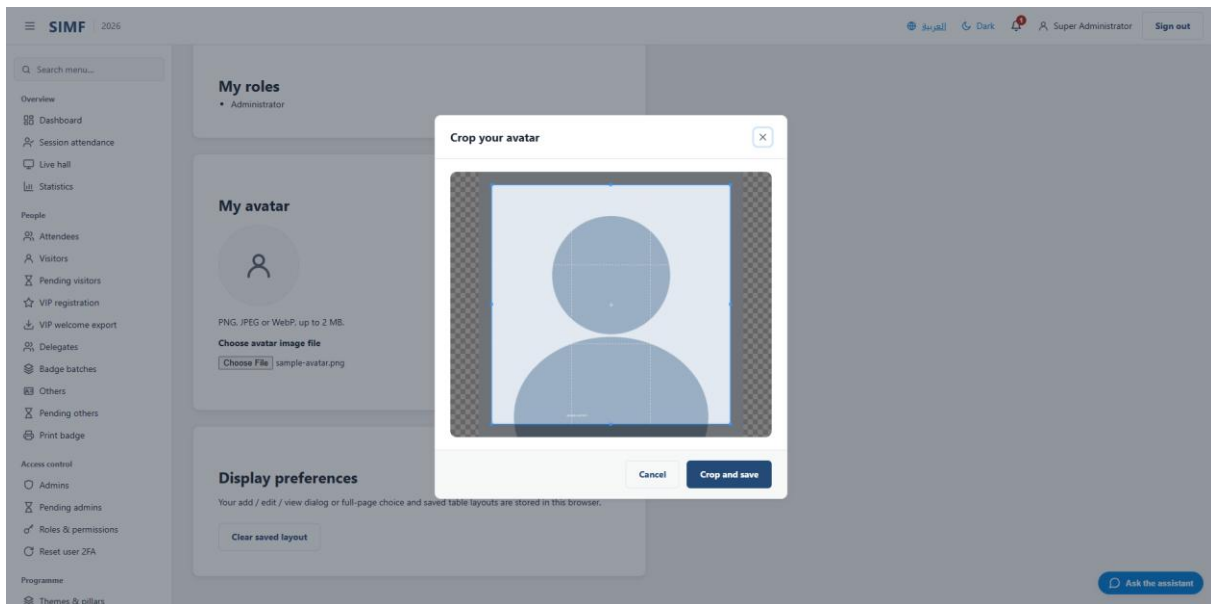


Figure 22 — Choosing a file opens the cropper straight away. The frame is square because the stored picture is square; there is no separate upload button, and nothing is sent until this is saved.

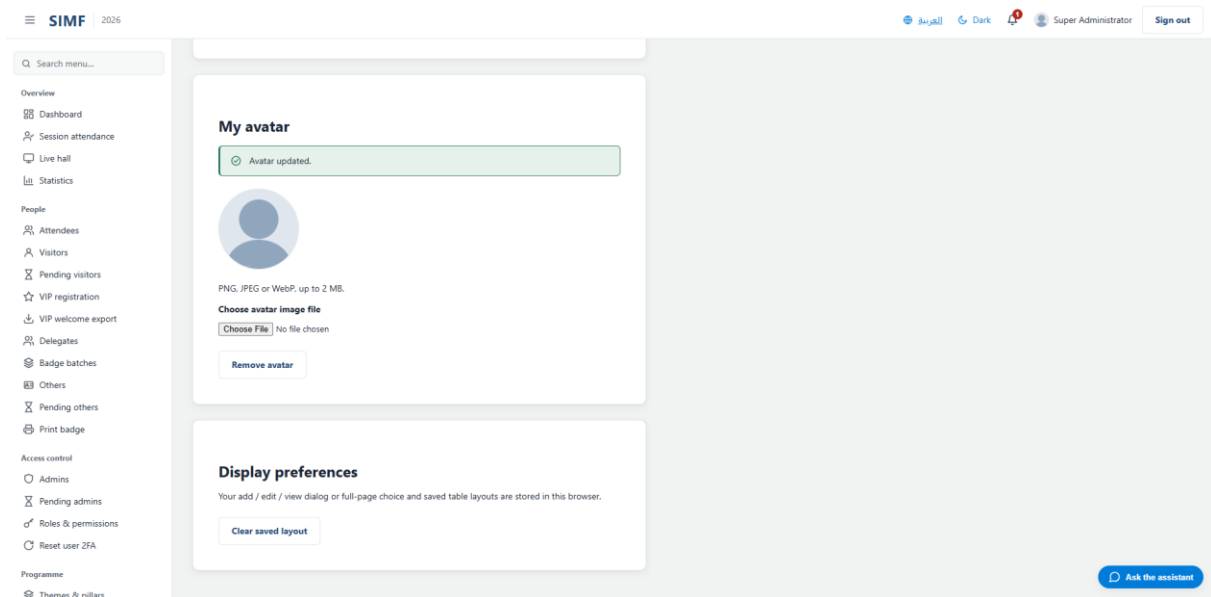


Figure 23 — The picture in place, with the option to remove it.

What the system accepts

Rule	Value
File types	PNG, JPEG or WebP — nothing else
Maximum size	2 MB for a profile picture; 5 MB for an identity document
Checked how	The file's declared type must match its actual content, so renaming a file to .png does not get it past the check
Cropping	Square, produced at 400 by 400 pixels
Stored	Encrypted, one active picture per account

There is no size check in the browser: an oversized file is uploaded and then refused by the server, so the failure appears after the wait rather than before it.

Replacing and removing

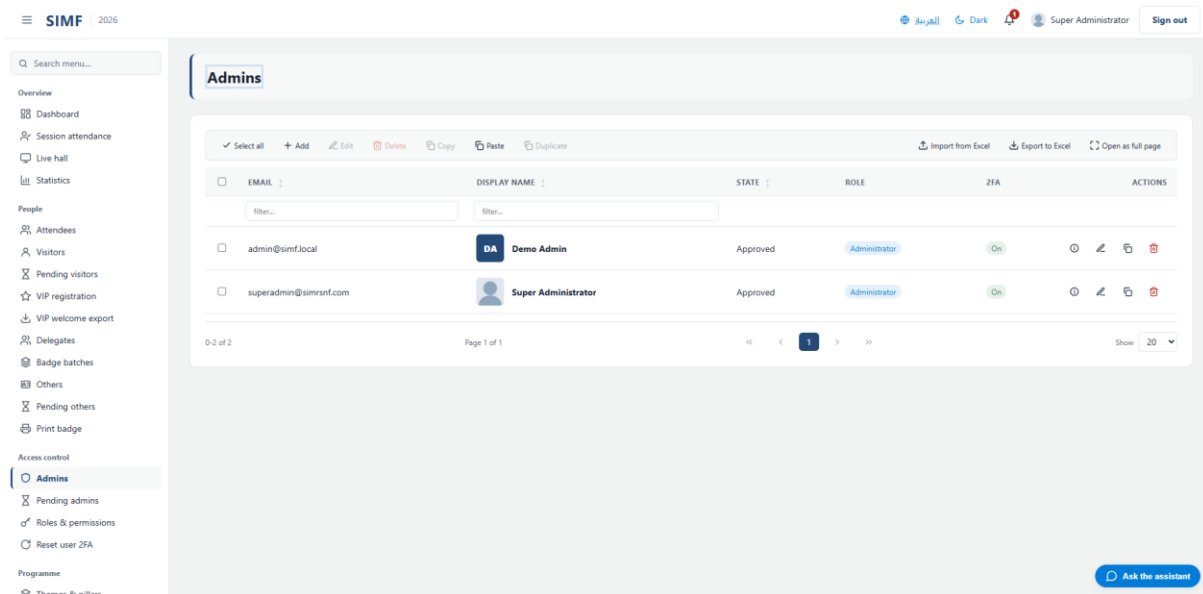


Figure 24 — The difference in a list: an account with a picture shows a thumbnail, one without shows a tile of its initials. An empty cell therefore means no picture was ever set, not a picture that failed to load.

Uploading a new picture retires the previous one in the same step; there is never more than one active picture on an account. Where an account has no picture the Control Panel shows a tile with the person's initials rather than a broken image, so an empty grid cell means no picture was ever set.

Changing an account after it exists

A new account is not usable yet. It waits in a queue until somebody approves it, and only then does it get its badge. This chapter covers the approval queues, editing an account, moving it between types, resetting a lost second factor, and withdrawing access.

The approval queues

There is one queue per kind of account, and each is a separate page with its own permissions. Approving is what mints the QR badge, so until it happens the person cannot pass a gate.

Queue	Address	Approve needs	Reject needs
Pending visitors	/admin/visitors/pending	Visitors.Approve	Visitors.Reject
Pending others	/admin/others/pending	Others.Approve	Others.Reject
Pending admins	/admin/admins/pending	Admins.Approve	Admins.Reject

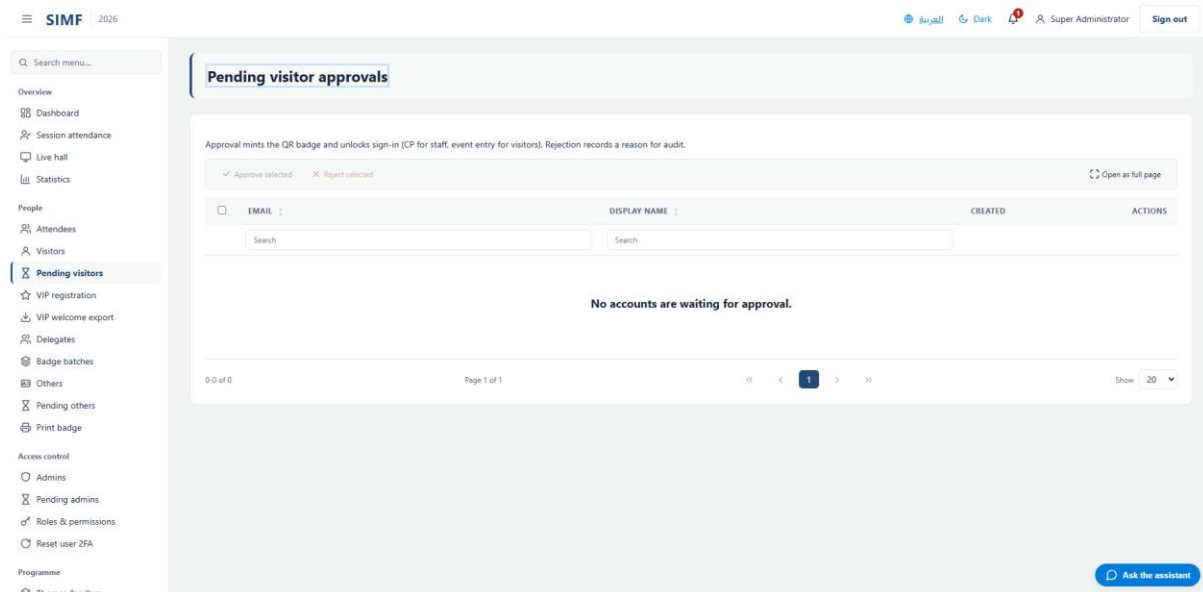


Figure 25 — The pending visitors queue.

Rows can be handled one at a time or in bulk. Rejecting requires a written reason of between 10 and 500 characters, and the button stays disabled until the reason is long enough. The reason is audited, so write something a colleague reading it in six months can act on.

When approving a visitor you may also set the tier at the same time, which saves editing the account afterwards.

Editing an account

The edit form is reached from the row actions on the visitor and partner account lists. It changes the email address, the display name, the profile type, the nationality, the two mobile numbers, the

meeting preferences and the pictures. It does not change the password — nobody can set another person's password; the account resets its own from the sign-in page. On the administrators list the Edit action manages that administrator's roles instead — an administrator's details cannot be edited from the account lists at all.

For a partner or staff account the profile type is required, and the form will not save without one. For a visitor it is optional.

Moving an account between types

An account created in the wrong pipeline does not have to be deleted and rebuilt. The account details view carries a change type control, gated by its own permission, which moves the account between the visitor and partner sides and asks for the profile type it should land on.

Resetting a lost second factor

When somebody loses the phone holding their authenticator, and has no recovery code left, an administrator clears the second factor from Reset user 2FA. A Control Panel account is then held at its next sign-in until it pairs a new authenticator. A visitor or partner signs in on their password alone, and pairs a new authenticator from their own profile page whenever they choose.

The screenshot shows the SIMF 2025 web application interface. On the left is a sidebar menu with categories: Overview (Dashboard, Session attendance, Live hall, Statistics), People (Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge), Access control (Admins, Pending admins, Roles & permissions, Reset user 2FA), and Programme (Themes & pillars). The 'Reset user 2FA' option is highlighted. The main content area is titled 'Reset another user's 2FA' and contains a form with the following fields: 'User email' (with an email icon), 'Reason (audited)' (with a text area), and a question 'How did you verify the user's identity? Who reported the loss?' followed by a text area. A 'Reset 2FA' button is at the bottom of the form. The top right of the page shows user information: 'Super Administrator' and a 'Sign out' button. A 'Ask the assistant' button is at the bottom right.

Figure 26 — Resetting a user's second factor.

- A reason is required, 10 to 500 characters, and it is audited.
- You cannot reset your own second factor here — use a recovery code, or ask another administrator.
- You cannot reset another administrator's second factor. The most privileged accounts are re-paired through configuration on the server, deliberately, so that no single administrator can take over another.

Withdrawing access

Delete on an account list is not a deletion. It disables the account, revokes its sessions and withdraws its admission. The row action and the bulk action open the same dialog, which asks for an audited reason of 10 to 500 characters. **The dialog says the people are notified by email; no such email is sent, so do not promise one.**

Your own row is skipped if you include it, and the result reports it as skipped rather than failing — so a bulk action that reports one fewer than you selected is usually this.

Roles and permissions

What an administrator can see and do is decided by permissions, and permissions are granted to roles, never to a person. To give somebody an ability you put them in a role that holds it. This is the whole model, and it has one deliberate exception: the Administrator role holds a wildcard that grants everything.

Permission names

A permission is written as the page it governs, a full stop, and the action — Visitors.Approve, Roles.AssignPermissions, Admins.ResetTwoFactor. Two permissions guard every page: one lets the page open at all, and one puts it in the menu. They are usually the same, and where they differ the manual's page reference lists both.

A button is gated by the permission of the endpoint it calls, which is not always the page's own. On a page holding two grids over two different things they differ, so read the permission off the action, not off the page.

Creating a role

Open Roles and permissions and use Add. A role needs only a name, between 1 and 64 characters, and the name must be unique. A new role starts with no permissions at all, so it grants nothing until permissions are assigned to it.

☐	NAME	TYPE	USERS	PERMISSIONS	ACTIONS
☐	Administrator	Built-in	2	0	Permissions ⓘ ⚙️ 🗑️
☐	GateOperator	Built-in	0	3	Permissions ⓘ ⚙️ 🗑️
☐	PublicRelations	Built-in	0	13	Permissions ⓘ ⚙️ 🗑️
☐	ScientificCommittee	Built-in	0	32	Permissions ⓘ ⚙️ 🗑️
☐	SecurityTeam	Built-in	0	9	Permissions ⓘ ⚙️ 🗑️

Figure 27 — The roles list.

Granting permissions to a role

The permissions editor lists every permission in the system, grouped by the page it governs, with the ones the role already holds ticked. Tick, untick, and save.

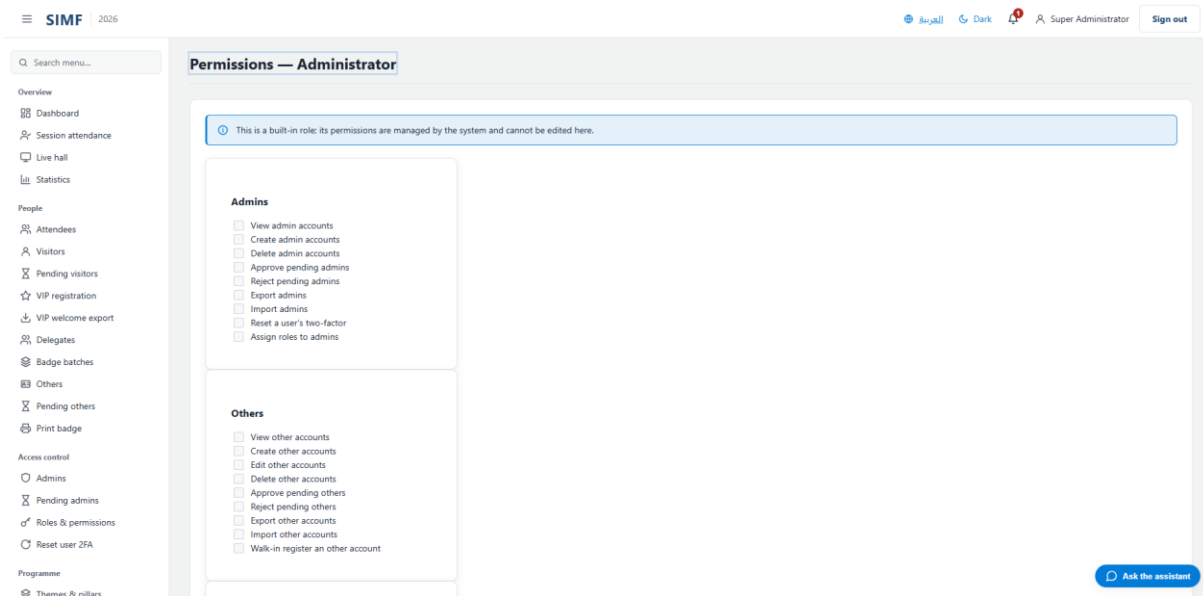


Figure 28 — The permissions editor for one role.

The baseline roles that ship with the system are read-only here. They cannot be edited, renamed or deleted, because the system's own behaviour depends on them.

Giving a person a role

Roles are assigned to administrators only — a visitor or partner account carries none, because it does not sign in to this Control Panel. Assign them either when creating the administrator, or afterwards from the Edit action on the administrators list.

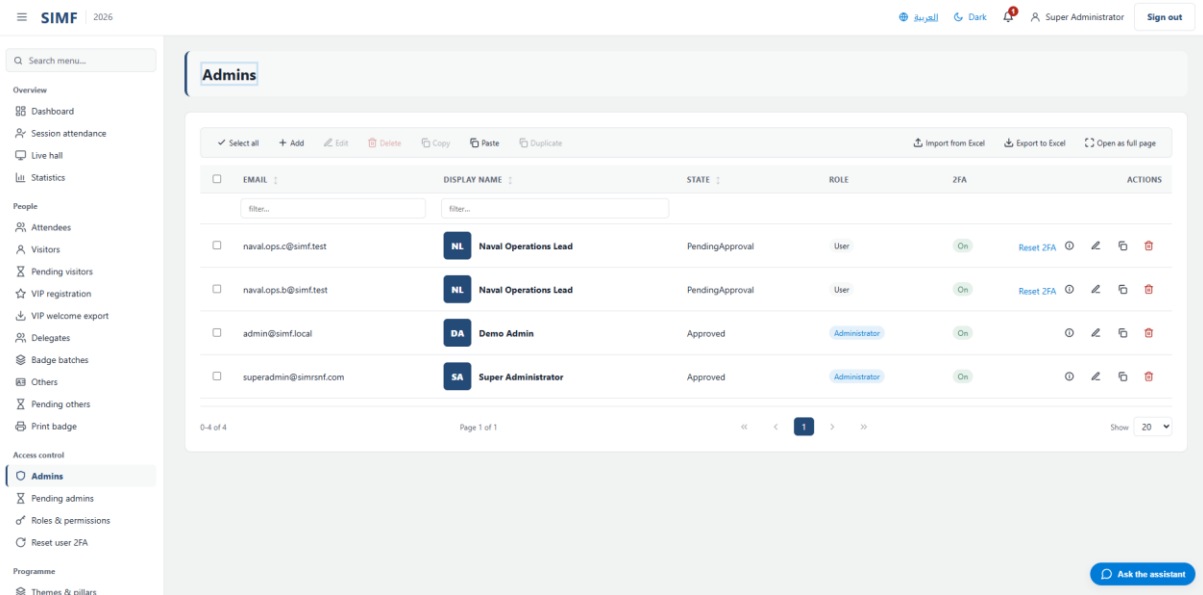


Figure 29 — The administrators list, where roles are assigned.

The guards

- The last administrator cannot have the Administrator role taken away. The system refuses, rather than leaving itself with nobody who can administer it.
- A role still held by somebody cannot be deleted; the error says how many people hold it.
- Assigning a role while creating an account needs the role-assignment permission on top of the create permission, so somebody who may add administrators cannot silently make one powerful.

Building the programme

The Programme menu lists twenty pages in a sensible reading order, and it is easy to take that order for a wizard. It is not. The actual dependencies are far sparser than the menu suggests, and knowing which is which saves an afternoon of filling in screens nothing was waiting for.

What a session actually needs

To create a session you need	Required?
A hall, and it must be active	Yes — the only hard link a session has
A type: Workshop, Session or Event	Yes
At least one speaker	Yes, unless the type is Event
A unique code	Yes — and it stays taken by a deleted session
One or more themes	No
A session category	No
A programme day covering its date	No — sessions are matched to a day by DATE, not by a link

Two rules catch people out. A session code stays reserved after the session is deleted, because deletion deactivates rather than removes — so reusing a code from a cancelled session is refused. And two active sessions cannot overlap in the same hall; the second one is rejected outright rather than flagged.

The requirements document says a session's theme, hall and category are all required. The code requires only the hall. Where the two disagree, the system does what the code says.

Themes and categories are not the same thing

A theme is one of the forum's pillars: a code, a bilingual name, an order and an accent colour, and a session may carry several. A category is a single, separate label, and its list ships EMPTY on purpose — the values are the client's to decide, which is why it is a table you fill rather than a fixed set in the code. Neither is required, so a session with no theme and no category is legal and will simply appear ungrouped wherever the programme is shown.

CODE	TITLE	TITLE (ARABIC)	HALL	START (SAUDI TIME)	END (SAUDI TIME)	CAPACITY	STATUS	LIFECYCLE	ACTIONS
D1-01	Reception & Registration	الاستقبال والتسجيل	Main Hall	23-11-2026 07:00 AM	23-11-2026 08:15 AM	500	Active	Scheduled	[Icons]
D1-02	Arrival of the Chief of General Staff & Forum Opening	وصول معالي رئيس هيئة الأركان العامة وبدء فعاليات افتتاح المنتدى	Main Hall	23-11-2026 08:30 AM	23-11-2026 08:35 AM	500	Active	Scheduled	[Icons]
D1-03	Holy Quran Recitation	تلوة آيات من القرآن الكريم	Main Hall	23-11-2026 08:35 AM	23-11-2026 08:38 AM	500	Active	Scheduled	[Icons]
D1-04	Patron Inaugurates the Forum	تدشين معالي راعي الأعمال للمنتدى	Main Hall	23-11-2026 08:38 AM	23-11-2026 08:40 AM	500	Active	Scheduled	[Icons]
D1-05	Forum Visual Presentation	العرض المرئي للمنتدى المرئي	Main Hall	23-11-2026 08:40 AM	23-11-2026 08:50 AM	500	Active	Scheduled	[Icons]
D1-06	Speech by the Chief of Naval Forces Staff	كلمة معالي رئيس أركان القوات البحرية	Main Hall	23-11-2026 08:50 AM	23-11-2026 09:00 AM	500	Active	Scheduled	[Icons]
D1-07	Commemorative Photo with the Patron	الصورة التذكارية مع راعي الحدث	Main Hall	23-11-2026 09:00 AM	23-11-2026 09:05 AM	500	Active	Scheduled	[Icons]
D1-08	Opening of the Accompanying Exhibition	افتتاح المعرض المصاحب	Main Hall	23-11-2026 09:05 AM	23-11-2026 09:06 AM	500	Active	Scheduled	[Icons]
D1-09	Tour of the Accompanying Exhibition	جولة على المعرض المصاحب	Main Hall	23-11-2026 09:06 AM	23-11-2026 09:20 AM	500	Active	Scheduled	[Icons]

Figure 30 — The sessions list, with the real programme in it.

Programme days matter — but not where you would expect

Because a session finds its day by date, a missing programme day does not stop anybody scheduling anything. What it does instead is quiet and worse. The forum's own date boundary is calculated as the earliest and latest ACTIVE programme day. Business meetings, hall allocations, and speaker and delegation availability windows must all fall inside it. Two things are not checked against it: a HALL availability window, and the slot a meeting is finally bound to — that slot comes out of a hall window, so it carries whatever dates the hall window carries. When there are no active days the boundary is nothing at all, and even the checks that do apply stop applying — so an administrator can set a speaker's availability in the wrong month and nothing objects.

The boundary is read from the programme days deliberately, and not from the event start and end dates on the organisation profile — those hold a placeholder range that has been stale for some time. If meetings are landing outside the forum, check the programme days are present AND active first, then look for a hall availability window authored outside them.

Run of Show is a read-only view. It groups the same sessions by day on one screen and authors nothing — there is no edit permission for it because there is nothing to edit.

Publishing a session needs a recording

A session moves Scheduled → Held → Recorded → Published, one step at a time; it cannot jump. It cannot be marked Held before its start time has passed, and it cannot reach Recorded or Published at all until a recording file has been uploaded. Un-publishing means stepping back to Recorded — that is the only retraction.

Seating is two levels, and the top one is the hall

The hall owns the seat map; the session only paints reservations on it. There is no per-session layout: the session seat plan draws the hall's rows and shows what is held on them for that session.

- Define the hall's rows once, on Hall seat layouts: row labels, seats per row, and a tier per row. The seats across all rows may not exceed the hall's capacity.
- Then, per session, use Session seat plans to block a whole row, hold a single seat for a VIP, or release something held.
- A hall with NO layout has no seat picker at all. The session silently becomes open seating and allocates against the hall's capacity number — it does not fail, it just stops being a seat map.

A newly added row starts as VVIP, deliberately: nobody may book it until an administrator downgrades it to VIP or Normal. That default has a history — a layout re-saved without its tiers once shifted every row's tier by one, and a row that had been bookable the day before began refusing every visitor with no explanation that the tiers had moved. When you edit a layout, check the tiers afterwards.

Three ways a seat can be unavailable

What it is	What it means
An admin-reserved row	A whole row painted off-limits for one session. It is written as one record per seat, and it holds nobody — it just blocks
A VIP tier row	A property of the HALL layout, not of a session. Only a visitor whose profile type is a VIP tier may pick it
A VVIP seat with a guest note	Nobody may self-pick it. There is no registration behind it, so the note you type IS the occupant record — "Reserved for the Minister" is what the app and the seating desk show

A booking IS a seat

There is no separate booking record. When a visitor books a session on a hall that has a layout, the booking is the seat; on an open-seating session it is the same record with no seat on it. A visitor cannot hold two bookings for sessions that overlap in time — the second is refused.

The Bookings page is a monitor, not a desk. Its approve and reject actions were removed when the approval queue was retired, so a booking is confirmed the moment it is made. Releasing a held seat is done on Session seat plans — the server's own error message says so, because people looked for it here first.

A held seat whose holder has not arrived is released automatically three minutes before the session starts. Blocked rows are exempt — they are not waiting for anybody.

Four kinds of meeting, and only two have a queue

Kind	Who asks	Who decides
Speaker meeting request	An attendee, from the app	An administrator accepts — then the SPEAKER confirms by email before it is really booked
Delegation meeting request	A delegate, for their country	The team accepts, then the target delegation confirms. Any eligible member's click confirms for all of them
Business meeting	Nobody — there is no request	An administrator creates it, already confirmed
Meeting table	Not a request at all — it is a resource	An administrator adds tables to a meeting hall

The state that causes the most confusion is the one between accept and confirm. Approve accepts a speaker request and binds it to a slot, but it does not book it: it waits for the speaker's own click on an emailed link, and while it waits the ATTENDEE'S APP STILL SHOWS IT AS PENDING. Telling them it is confirmed at that point is telling them something the app contradicts. Confirm is the other path, for when you already have the speaker's word: it books the slot at once, sends no link at all, and the app shows the meeting as accepted straight away. A third button, Accept without a hall, accepts the request but books no room. The slot is held on either binding path, so offering it to somebody else will fail.

The three availability pages — speaker, hall and delegation — exist to produce the bookable slots those requests choose from. Each window is a start and an end divided into fixed slots, half an hour by default. A speaker or delegation window must fall inside the forum days; a hall window is never checked against them, so it can be authored outside the event entirely — and because both meeting desks take their slots from the hall, such a window quietly produces bookable meetings outside the forum. Deleting a window does not cancel a meeting already booked in it; the meeting keeps its time.

Figure 31 — Business meetings — created here, never requested.

Running the event day

On the day, four groups of pages matter: the gates that let people in, the halls that record where they went, the question and summary desks the scientific committee works, and the numbers everybody asks for. This chapter is about those, in that order.

Gates

A gate is a physical way in. Each one carries a direction — in, out, or both — a list of profile types it admits, and the operators assigned to work it. A gate attached to a hall is a hall door, and an allowed scan there opens or closes the attendee's attendance for that hall; a gate with no hall is a perimeter gate.

The allow-list is the single most dangerous control on this page, because it is not read the way it looks. An EMPTY list admits everybody. A list with entries admits only those. And a list whose every entry has been DEACTIVATED admits nobody at all — it does not fall back to allow-all. That is deliberate: denying visibly was judged safer than silently turning a VIP gate into a public one. The consequence on the day is that the gate refuses everyone, one badge at a time, and it goes on doing so. Do not wait for it to stop itself: the gate's failure circuit counts backend faults, not refusals, so no number of refused badges will ever trip it. It has to be put right on the gate's own page.

☐	CODE	NAME	NAME (ARABIC)	DIRECTION	ALLOWED TYPES	OPERATORS	STATUS	ACTIONS
☐	MAIN-GATE	Main Venue Gate	البوابة الرئيسية	Both	All	1	Active	🔍 ✎ 🗑️
☐	VIP-GATE	VIP Gate	بوابة كبار الشخصيات	Both	2	1	Active	🔍 ✎ 🗑️

Figure 32 — The gates list. Each row is an entrance with its own direction and allow-list.

A refused scan is not an error

This is the distinction to hold on to. If the request itself failed — the operator is not assigned to this gate, or the gate's circuit has tripped — the console shows an error. If the badge was simply not admitted, the request SUCCEEDED and the refusal comes back as a reason on a normal response. So

"it worked" is never evidence that anybody got in, and the operator should be reading the reason, not the status.

The scan was refused because	What to do
The code matched no attendee	Wrong or damaged badge — re-issue from Print badge
The gate was deactivated between the scan and the check	Somebody edited the gate mid-shift; re-activate it
The holder is not approved	Approve them from the pending queue
The account is disabled, or locked out	An administrator disabled it, or it hit the sign-in lockout
The holder's profile type is inactive	Re-activate the type in Reference data
The badge belongs to a closed edition	A badge from last year. Deliberately not distinguished to the holder
The profile type is not on this gate's list	Either genuinely the wrong entrance, or the allow-list problem above
A hall door, and they are not registered for anything it admits for	They need a booking, or walk-in mode opened for the day

Two behaviours that look like faults and are not. The same badge scanned twice within five seconds replays the first result instead of recording a second movement — unless the operator deliberately flipped the direction on a both-way gate, which is a real movement and is recorded. And the badge is never told WHICH check it failed; a refusal is deliberately vague to the person holding it, and specific only on the operator's screen.

Halls and who is inside them

Hall attendance is a different record from a gate scan. A scan is the audit of an entrance; attendance is one row per attendee per session, opened when they arrive and closed when they leave. A row with no leaving time is somebody still in the room. Attendance is keyed to the PROFILE, not to an account, because a walk-in visitor may have no account at all.

- Hall arrivals is the door console for a hall.
- Live hall is the read-only monitor: the seat map and everyone currently in the room, refreshing itself every fifteen seconds. It writes nothing.
- The gates dashboard shows who is currently inside the venue, worked out from each visitor's most recent allowed scan.

"Currently inside" is derived, not stored, and it is bounded by a rolling window on purpose. An entrance that only ever records arrivals never records a departure, so without that bound a visitor who came in once would be counted as present forever.

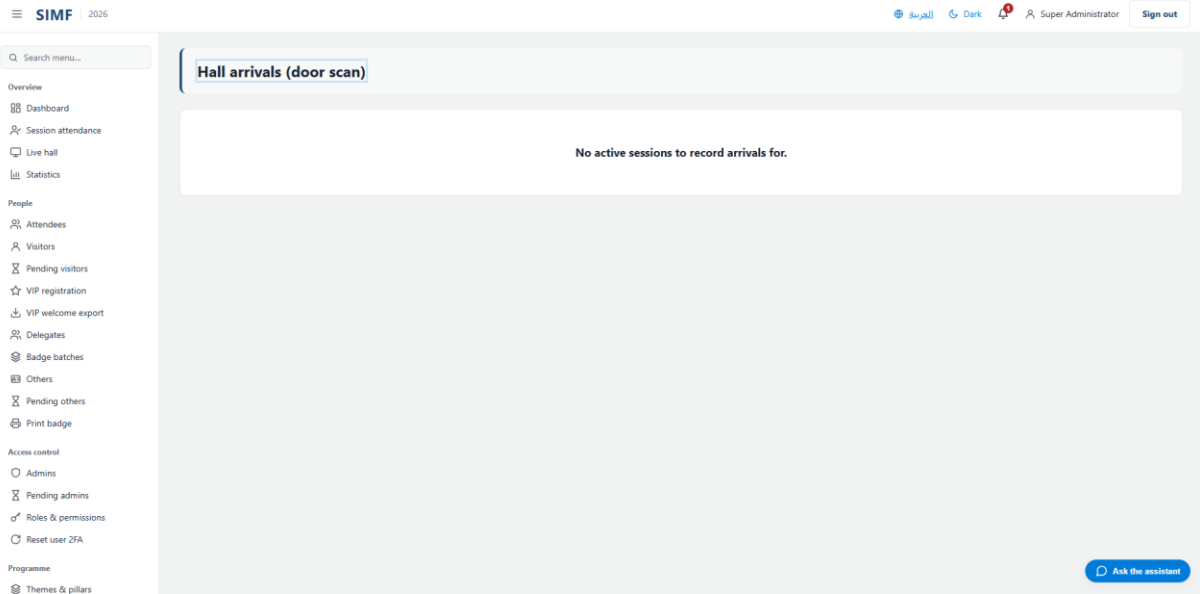


Figure 33 — The hall arrivals console.

Questions, and who may touch them

Attendees submit questions from the app. Where a question goes depends on when it was asked. One sent before the session starts travels through three hands: an AI screen, the scientific committee, and then the session's own moderator. One sent once the session is live skips the first two by design; it lands approved on the session moderator's desk, and the moderator is the only gate on it. Each of those is a different page and a different permission.

- The AI verdict is ADVISORY. It blocks nothing and hides nothing, and in the shipped configuration the filter is a stub until it is switched on.
- The committee works the central question queue: approve, hide, or escalate to a ROLE — never to a named person.
- The moderator works only their own session's approved set: reorder, hide, push to stage, mark answered. Questions still waiting for the committee are not readable from that desk, on purpose.
- Un-hiding restores a question to where it was, so a rejected question returns to pending rather than jumping to the stage.

Moderator authority is granted PER SESSION, on the Session moderators page. The mobile application's own Moderator role grants none of it. Somebody given the app role and no grant opens an empty desk and reports the system as broken; somebody given the grant moderates exactly the session it names.

An active session takes questions at any time up to the moment it ends — days ahead of the start is fine. Once the end time passes it takes none, with no grace at all; a session that has been deactivated takes none either way. The venue check applies only once the session is live: where the hall has a geofence the attendee must have a hall arrival on record for that session — they arrived at some point, whether or not they are still in the room — so somebody watching a live session remotely is refused, which is the intended behaviour, not a fault. Before the start, and in a hall with no geofence, there is no venue check at all.

Session summaries

The committee's minutes for a session are drafted by the AI service and then approved by a person. The draft the model produced is kept separately and never overwritten by an edit, so there is always a record of where the text started.

In the shipped configuration the AI provider is a stub that echoes the prompt back. It produces something that looks like minutes and is not, and the system refuses to publish it — which reads as a bug unless you know a real provider has not been configured yet. Configuring one is a change to the prompt's provider in the Control Panel, not a code change.

Approval is not permanent. Any edit to the content clears it, and the summary must be approved again — so a small correction after sign-off quietly returns it to the queue.

Ratings

Five rating forms ship with the system: one for the application, one for the event, one for the exhibition, one per day, and one per session. Their scope decides how often somebody may answer — once overall, once a day, or once per session — and the rule throughout is that you may only rate what you attended.

A rating is asked for automatically: at the end of a day to everybody who checked in that day, at the end of the programme, when a session's clock runs out, when somebody leaves a hall, and when they close the live stream. Leaving the venue through a gate is NOT one of the triggers, because a gate belongs to the venue and knows nothing about which session anybody was in.

The five built-in forms can be renamed and their questions changed, but they cannot be deleted and they cannot be deactivated — the switch is ignored on a built-in type. Only forms an administrator added can be turned off.

The numbers

The dashboard and the statistics page compute every figure the moment you open them. There is no snapshot, no overnight rollup and no "as at" time — two people opening the page seconds apart can legitimately see different numbers, and there is nothing to re-run when a figure looks stale.

- Attendees are counted from PROFILES, not from accounts, because a walk-in or a pre-printed badge may have no account behind it — and at a real event that is a large share of the room.
- "Total arrivals" counts distinct attendee-and-session pairs, not scans: somebody who steps out of a hall and comes back counts once. It will therefore never equal the gate scan count, and the two should not be reconciled.
- Exhibitors and sponsors are counted as organisations the team manages, not as accounts.

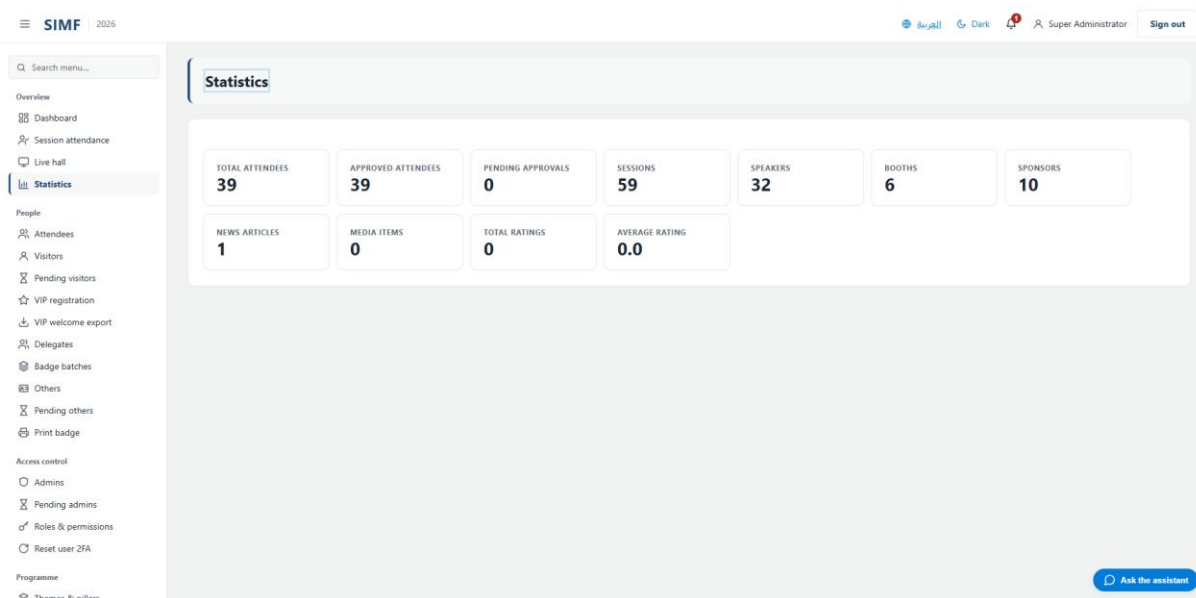


Figure 34 — The statistics page. Every figure on it was calculated when the page opened.

The exhibition floor

Four pages carry the exhibition, and the thing worth knowing before opening any of them is that they are not one hierarchy. An exhibitor is a company. A booth is a stand — a physical space on the floor, which is coded and numbered before anybody has signed for it. A sponsor is neither: it is a marketing row with a tier and a logo, attached to no booth and no exhibitor. The venue map is drawn from its own set of points and not from any of them.

Three entities and one optional link

Page	What the row is	What it links to
Exhibitors	An exhibiting company: bilingual name, contact email, phone and website, a tier, social links, city, a latitude and longitude — degrees on the globe, not the booth's venue-map coordinates — country and its own logo	Nothing above it. Booths point at it, not the reverse
Booths	The stand itself: a floor code such as A-12, a bilingual booth name, a hall, and a booth officer — the person standing on it, who is a different party from the company	Optionally a hall, and optionally one exhibitor. The hall may be left empty — the form carries a "no hall" choice — and the exhibitor for as long as the stand is unsold
Sponsors	A sponsorship: tier, tagline, about text, contact block and logo	Nothing. A sponsor is not a booth and not an exhibitor, and giving a company a booth does not make it a sponsor
Venue map	One labelled point: a hall, a zone, a booth or a point of interest, placed at an X and Y	Optionally a hall or a booth. Tapping any point opens its info card; only a booth point offers a way through to the booth's record

SIMF 2026

العربية

Dark

Super Administrator

Sign out

Search menu...

Overview

Dashboard

Session attendance

Live hall

Statistics

People

Attendees

Visitors

Pending visitors

VIP registration

VIP welcome export

Delegates

Badge batches

Others

Pending others

Print badge

Access control

Admins

Pending admins

Roles & permissions

Reset user 2FA

Programme

Themes & pillars

Exhibitors

✓ Select all

+ Add

Edit

Import

Export

Open as full page

	NAME (ENGLISH)	NAME (ARABIC)	ACCOUNTS	ACTIVE	ACTIONS
☐	PS Port Logistics Systems - أنظمة الخدمات اللوجستية للموانئ	أنظمة الخدمات اللوجستية للموانئ	0	Active	A O E D
☐	AT Advanced Naval Technologies - التقنيات البحرية المتقدمة	التقنيات البحرية المتقدمة	0	Active	A O E D
☐	MD Maritime Cyber Defense - الدفاع السيبراني البحري	الدفاع السيبراني البحري	0	Active	A O E D
☐	OS Offshore Energy Solutions - حلول الطاقة البحرية	حلول الطاقة البحرية	0	Active	A O E D
☐	RS Red Sea Marine Services - خدمات البحر الأحمر البحرية	خدمات البحر الأحمر البحرية	0	Active	A O E D
☐	GC Gulf Shipbuilding Co. - شركة الخليج لبناء السفن	شركة الخليج لبناء السفن	0	Active	A O E D

Showing 1-6 of 6

Page 1 of 1

1

Show 20

Ask the assistant

Figure 35 — The exhibitors list. Each row is a company, and the account count is the number of live memberships on it — it goes on counting after the company is deactivated, when nobody there can scan.

The booth is the space, and it comes first

A booth is created and coded before an exhibitor is signed, which is why every exhibitor-facing field on it can be left empty. The floor code is upper-cased when saved and must be unique across every booth including the deactivated ones — a code freed by retiring a stand is not free for re-use.

The officer fields belong to the person on the stand, not to the booth and not to the company. The booth's own name is the plain Name field; everything prefixed "officer" is that individual's name, phone, email, city and links. It is the single most-confused pair of fields on the page.

One consequence catches people out. When a booth is linked to an exhibitor, the public listing reads the company name off the exhibitor — and it hides the booth entirely if that exhibitor is inactive, even though the booth's own active switch was never touched. A stand that vanishes from the app while its own row still reads active is almost always an exhibitor that was deactivated.

CODE	NAME (ENGLISH)	NAME (ARABIC)	EXHIBITOR	SECTOR	HALL	ACTIVE	ACTIONS
A-01	AT Advanced Naval Technologies	التقنيات البحرية المتقدمة	Advanced Naval Technologies	Defense Systems	Main Hall	Active	[Icons]
A-02	RS Red Sea Marine Services	خدمات البحر الأحمر البحرية	Red Sea Marine Services	Marine Services	Main Hall	Active	[Icons]
B-01	GC Gulf Shipbuilding Co.	شركة الخليج لبناء السفن	Gulf Shipbuilding Co.	Shipbuilding	Main Hall	Active	[Icons]
B-02	MD Maritime Cyber Defense	الدفاع السيبراني البحري	Maritime Cyber Defense	Cybersecurity	Main Hall	Active	[Icons]
C-01	OS Offshore Energy Solutions	حلول الطاقة البحرية	Offshore Energy Solutions	Energy	Main Hall	Active	[Icons]
C-02	PS Port Logistics Systems	أنظمة الخدمات اللوجستية للموانئ	Port Logistics Systems	Logistics	Main Hall	Active	[Icons]

Figure 36 — The booths list. The code, the hall and the linked exhibitor are the three columns that decide what the app shows.

Giving somebody on a stand the ability to scan visitors

This is the part of the exhibition module that is genuinely a procedure, and it is the part that goes wrong. A person can sign up in the app as an exhibitor: the sign-up screen's registration-type tab has an Other side, and the exhibitor profile type is offered there. What that sign-up cannot create is the exhibitor company itself, or the membership tying the account to it — so a self-registered account arrives carrying the profile type, no membership and no way to scan. Both of those are made here, in the Control Panel. Open an exhibitor's row and use its Accounts button; there are two ways in and they are not interchangeable.

- **Create a new account.** The Control Panel provisions a fresh identity, sets the exhibitor profile type on it, and records the membership against this exhibitor in one step. Use this for somebody who has no account yet.
- **Link an account that already exists.** Matched on the email address, case-insensitively. Use this for somebody who was already created elsewhere — on the Others page, or at a desk.

Why Link refuses, and what to do about it

Linking checks three things before it agrees, and all three refusals are deliberate rather than defensive.

The refusal	What it means	What to do
The exhibitor is closed	Its own Active switch is off. This is checked before anything else, and a closed exhibitor takes on no new accounts. The Accounts button is still offered on a deactivated row, so this is the refusal you meet first	Reactivate the exhibitor, then link. It is the one place Link and Revoke differ: Revoke still works on a closed exhibitor
The account is not eligible	The account does not carry an active profile type whose app role is Exhibitor. The Control Panel will not quietly change the profile type here, because that would silently overwrite an app role another administrator assigned	Set an exhibitor profile type on the account first, on the Others page, then link
The account is already linked	That person already holds a live membership with another exhibitor. One account belongs to one exhibitor at a time, and the database enforces it	Revoke the earlier membership, then link — or use a different account

The most common failure in this whole chapter: an account carries an exhibitor profile type — set on the Others page, or picked by the person at sign-up — and everybody assumes it is ready. It is not. It has the profile type and no membership, so the app refuses its badge scans and its visitor list, and nothing on the Exhibitors page ties it to a stand. The instinct is to create the account again from the Accounts panel, which fails on the duplicate email address. The fix is Link, not Create.

What a live membership actually grants

Three things together authorise lead capture: an active account carrying the exhibitor profile type, a live membership against an exhibitor, and an exhibitor that is itself still active. With all three, that person's app can scan a visitor's entry badge and keep the resulting contact card, list the visitors they collected, delete one, and export a card as a vCard. They also become a recipient of the business-meeting notifications sent to the exhibitor. **Deactivating the exhibitor takes all of that away from every one of its officers at once**, without a single membership being touched.

Revoking access

Revoking deactivates the membership; it never deletes it. The row is the record of who captured which visitor's details and under whose consent, so it has to survive the person losing access. Three

things stop working immediately: the badge scan and the booth's collected contact cards, the business-meeting notifications, and the account count on the exhibitors grid. Revoking works on an inactive exhibitor too — withdrawing access has to remain possible after a stand closes.

Only live memberships are listed in the Accounts panel, which is why a revoked person simply disappears from it rather than appearing greyed out. Revoking one that is already revoked is refused rather than silently accepted.

Sponsors and their tiers

Sponsors carry four tiers — Platinum, Gold, Silver and Bronze — and the tier is always chosen, never inherited: a blank Add form opens on Platinum, the API refuses anything that is not one of the four, and an Excel import requires a Tier column and rejects any row that leaves it blank. The public surface groups them by tier with Platinum first, and within a tier orders by the display-order number and then by Arabic name.

FDS-006 describes the sponsor tiers as Strategic, Premium and Gold. The system does not use those; the four above are what it offers and what the public listing groups by. Separately, exhibitors have their own distinct tier list — Premium, Gold, Silver, Bronze — which is not the sponsor list even though two of the words are shared.

NAME (ENGLISH)	TIER	LINK	DISPLAY ORDER	ACTIVE	ACTIONS
S1 Saudi Arabian Military Industries - الشركة السعودية للصناعات العسكرية	Platinum	—	10	Active	ⓘ ✎ 🗑
G1 General Authority for Military Industries - الهيئة العامة للصناعات العسكرية	Gold	—	10	Active	ⓘ ✎ 🗑
R1 Royal Saudi Naval Forces - القوات البحرية الملكية السعودية	Gold	—	20	Active	ⓘ ✎ 🗑
G2 General Authority for Defense Development - الهيئة العامة للتطوير الدفاعي	Gold	—	30	Active	ⓘ ✎ 🗑
G1 Gold Sponsor 1 - 1 راعي ذهبي	Silver	—	10	Active	ⓘ ✎ 🗑
G2 Gold Sponsor 2 - 2 راعي ذهبي	Silver	—	20	Active	ⓘ ✎ 🗑
G3 Gold Sponsor 3 - 3 راعي ذهبي	Silver	—	30	Active	ⓘ ✎ 🗑
G4 Gold Sponsor 4 - 4 راعي ذهبي	Silver	—	40	Active	ⓘ ✎ 🗑
G5 Gold Sponsor 5 - 5 راعي ذهبي	Silver	—	50	Active	ⓘ ✎ 🗑

Figure 37 — The sponsors list. Tier and display order together decide the order the public surfaces show.

The venue map

The map is a set of labelled points, each one a hall, a zone, a booth or a point of interest, placed at an X and Y. Nought to a thousand is the convention the field documents, but nothing enforces it and the app never reads the absolute numbers: on each load it takes the smallest and largest X and Y among the points it received and stretches that spread across its canvas. Only the positions of the points relative to one another matter, **so moving one outlying point shifts where every other**

point lands. Every point is tappable and opens an info card, whatever it carries; only a booth point offers a way through to the booth's own record, and it needs the booth link to have anything to show there. A hall link reaches the app, but nothing there opens a hall. It is a two-dimensional map of points, not the three-dimensional isometric floor plan FDS-006 describes.

A booth also has its own map coordinates on the booths page. They are stored and published, and no map is drawn from them — the app's map is built from the venue-map points. Placing a booth by editing its coordinates therefore moves nothing on screen; add or move its point on the venue map instead.

One anonymous read serves the map, cached for forty-five seconds, and the mobile app is its only consumer. The public website does not use it: its exhibition page shows an exported floor-plan image instead, which is static and is not produced from these points. Moving a point therefore changes the app and leaves the website picture exactly as it was.

LABEL	KIND	POSITION (X, Y)	ACTIVE	ACTIONS
Advanced Naval Technologies	Booth	140, 460	Active	[Edit] [Delete] [Toggle]
Exhibition Zone	Zone	220, 300	Active	[Edit] [Delete] [Toggle]
Gulf Shipbuilding Co.	Booth	140, 300	Active	[Edit] [Delete] [Toggle]
Main Hall	Hall	500, 220	Active	[Edit] [Delete] [Toggle]
Maritime Cyber Defense	Booth	300, 300	Active	[Edit] [Delete] [Toggle]
Offshore Energy Solutions	Booth	140, 140	Active	[Edit] [Delete] [Toggle]
Port Logistics Systems	Booth	300, 140	Active	[Edit] [Delete] [Toggle]
Prayer Room	PointOfInterest	900, 80	Active	[Edit] [Delete] [Toggle]
Red Sea Marine Services	Booth	300, 460	Active	[Edit] [Delete] [Toggle]
Registration Desk	PointOfInterest	80, 80	Active	[Edit] [Delete] [Toggle]

Figure 38 — The venue map points. Each row is one point on the map the mobile app draws.

Publishing content, and where it shows up

Before the fields, the map. These pages do not all feed the same audience, and the difference is not visible from the Control Panel: the page looks identical whether a hundred thousand app users read it or nothing does. Publishing is only half the job — knowing where to go and look is the other half.

Who reads what

Page	Mobile app	Public website
Content blocks	Yes — the About and Terms screens read their text from here	No
Banners	Yes — the rotating hero on the app's home screen	No
Media Center	Yes — the gallery	No
News	Yes — the news list and each article	No — the website's news cards are fixed in the site itself
Media partners	Yes	No
Previous editions	Yes	Yes — the Archive page and the Archive menu
Sponsors	Yes	Yes — the logo strip on the landing page and the Partners page

This is the single most useful fact in the chapter. A news article, a banner, a gallery item, a media partner or a content block is published for the mobile app. Of the pages on this menu the website reads only sponsors and previous editions live; beyond the menu it also reads the programme sessions, the speakers, and the organisation profile — the landing hero's background video and the forum dates that the landing, Speakers and Venue pages show. Nothing else on this menu reaches it — the aggregating endpoint that once fed the rest of the landing page is still there and no shipped page calls it, and the landing's news cards are written into the site. Check the app, not the website, and the save you were about to repeat will turn out to have worked.

Three shapes, not three lists of text

Content blocks, banners and news look alike on the menu and behave nothing alike. Each has its own idea of what makes an item appear.


	Content block	Banner	News item
Addressed by	A key, such as home.welcome.title	Its display order	Its publish date and order
What makes it visible	Being active	Being active and the present moment falling inside its start and end	Being active and its publish date having passed
Ordering	None — clients ask for the key they want	Display order, zero first; ties break on the start date	Publish date and display order
Carries a picture	No	Yes	Yes

Content blocks: the key is the contract

A content block is a named slot. The app asks for a key and shows whatever text is in it, so the key is what the app was written against — renaming one does not move the text, it breaks the screen that asked for the old name. Add a block, edit a block, deactivate a block; do not rename its key unless the app is being changed with it.

The value is shown as plain text. Typing HTML into it puts the tags on the screen; it does not format anything.

The app re-reads a block every time the screen that uses it is opened, and again on pull-to-refresh, and keeps nothing between visits. So an edit shows up the next time a reader opens that screen, not on every phone the moment you save. There is no cache to wait out.

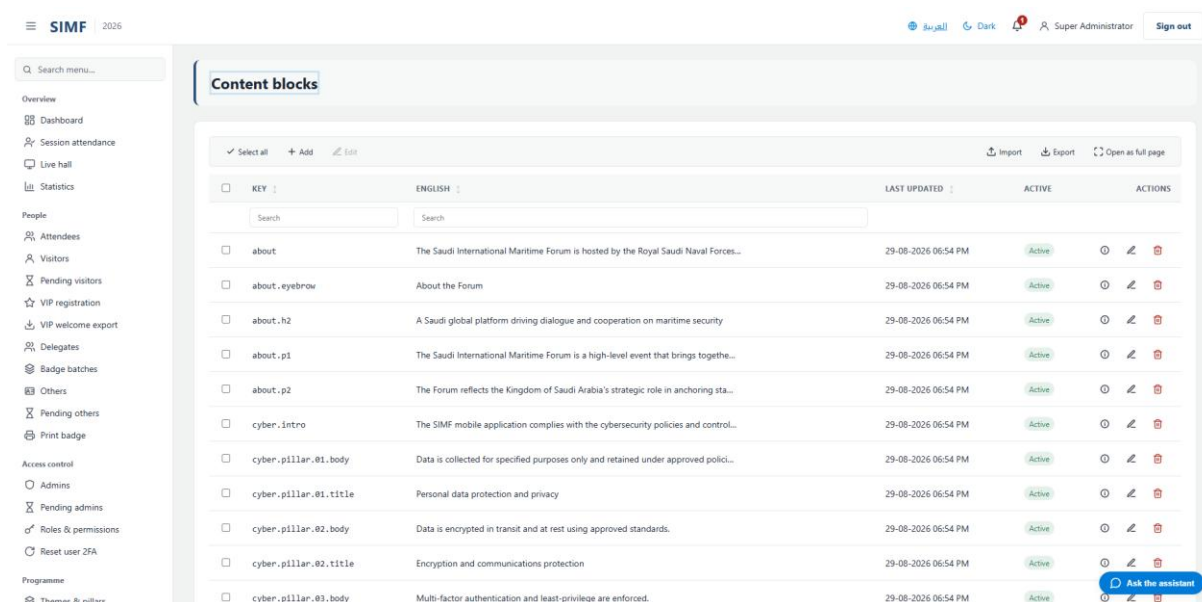

KEY	ENGLISH	LAST UPDATED	ACTIVE	ACTIONS
about	The Saudi International Maritime Forum is hosted by the Royal Saudi Naval Forces...	29-08-2026 06:54 PM	Active	Edit Delete
about.eyebrow	About the Forum	29-08-2026 06:54 PM	Active	Edit Delete
about.h2	A Saudi global platform driving dialogue and cooperation on maritime security	29-08-2026 06:54 PM	Active	Edit Delete
about.p1	The Saudi International Maritime Forum is a high-level event that brings together...	29-08-2026 06:54 PM	Active	Edit Delete
about.p2	The Forum reflects the Kingdom of Saudi Arabia's strategic role in anchoring sta...	29-08-2026 06:54 PM	Active	Edit Delete
cyber.intro	The SIMF mobile application complies with the cybersecurity policies and control...	29-08-2026 06:54 PM	Active	Edit Delete
cyber.pillar.01.body	Data is collected for specified purposes only and retained under approved polici...	29-08-2026 06:54 PM	Active	Edit Delete
cyber.pillar.01.title	Personal data protection and privacy	29-08-2026 06:54 PM	Active	Edit Delete
cyber.pillar.02.body	Data is encrypted in transit and at rest using approved standards.	29-08-2026 06:54 PM	Active	Edit Delete
cyber.pillar.02.title	Encryption and communications protection	29-08-2026 06:54 PM	Active	Edit Delete
cyber.pillar.03.body	Multi-factor authentication and least-privilege are enforced.	29-08-2026 06:54 PM	Active	Edit Delete

Figure 39 — The content blocks. The key column is what the app is coded against; the text beside it is what it shows.

Banners: a window, not a switch

A banner has a start and an end, and the public read returns only the active banners whose window contains right now. A banner that will not appear is far more often outside its dates than deactivated. Display order decides the sequence, with zero at the top, and two banners sharing an order are separated by their start date.

The link on a banner is stored as a plain address rather than an uploaded file, and it is optional. Nothing acts on it today: tapping the banner always opens the news list, whatever the link holds. Filling it in changes nothing on screen.

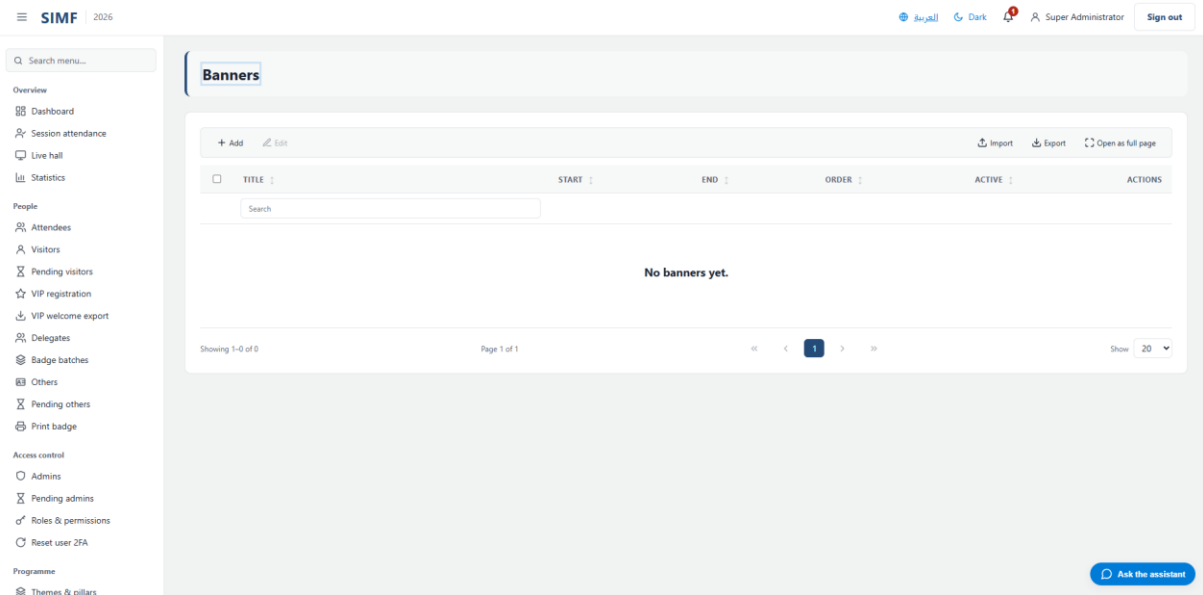


Figure 40 — The banners. Being active, and the present moment falling inside the start and end, are what decide whether one is on screen right now; display order decides the sequence.

News: the publish date is the gate

An article becomes public when it is active and its publish date has passed. Dating one ahead is how an article is written today and released on Sunday — and it is why an article can be plainly visible on this page and absent from the app. The admin grid shows every article regardless of its date, on purpose.

- The excerpt is optional, and nothing shows it today. Nothing is derived from the body; the app's news card carries only the picture, the date and the title, and the article screen has no excerpt at all. Leaving it empty changes nothing on screen.
- The category is the small kicker printed above the title. It is free text typed on the article, not a list to choose from, so spelling it differently on two articles produces two different kickers. FDS-010 describes it as a managed list; it is not one.
- Both title and body are bilingual, and both languages are wanted: the app shows the reader whichever matches their language.

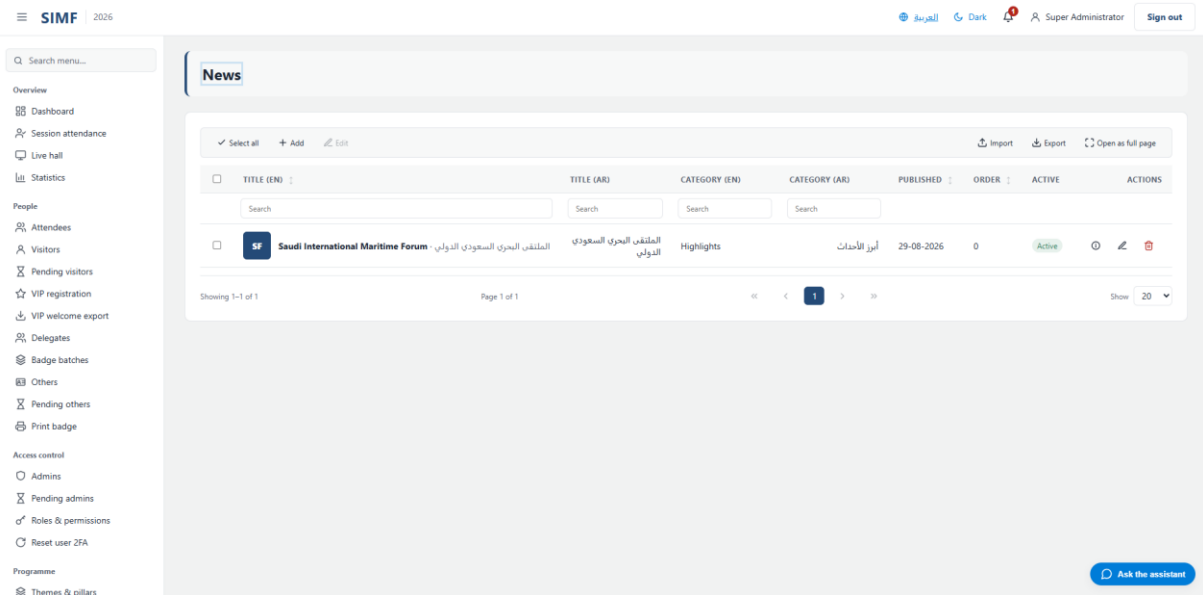


Figure 41 — The news list. Every article appears here, including the ones dated ahead that the app is not showing yet.

Media library and Media Center are different things

The Media Center is the public gallery: each item is either a picture uploaded to it or a video held as a link to where it plays, grouped into albums and ordered. That is content the audience browses.

The Media library is not content at all. It is a view across the images that belong to a page — speaker photographs, media-partner and sponsor and exhibitor and booth logos, archive covers, archive past-speaker and archive gallery photographs, news pictures, programme-day images, the organisation logo, banner images. It does not reach personal files — account photographs, identity documents, VIP photos — and it does not reach the Media Center's own gallery pictures, which are managed on their own page. It exists so somebody can find a file, look at it, and deactivate or restore it without hunting through the page that owns it. Deactivating a file here removes it from wherever it was being shown.

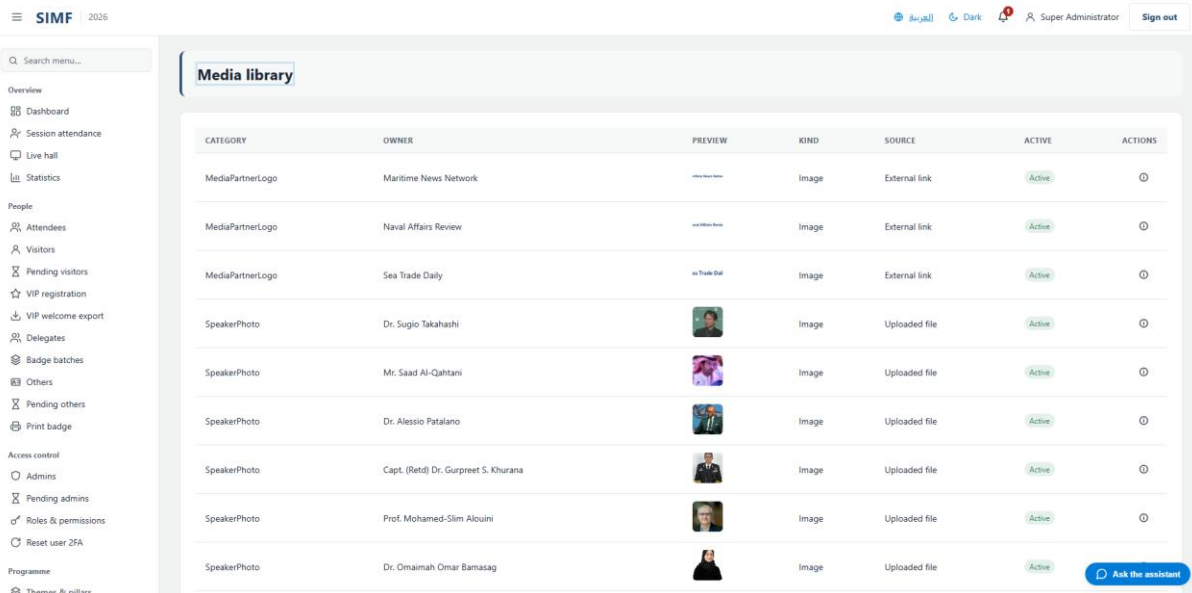


Figure 42 — The media library: every picture a page owns, whatever page that is — not personal files and not the Media Center's gallery.

Previous editions are not the event edition

Two pages carry a year and they have nothing to do with each other. Previous editions is hand-written history: a year, a bilingual title and summary, and reported totals for attendees, sessions and speakers that an administrator types in. They are not counted from anything. Alongside them sit that edition's gallery pictures, its session titles and its past speakers.

The event edition page, in the System menu, records which year the forum is currently running. Closing this year does not produce an archive card for it: somebody writes that card here, by hand, with the totals they want reported.

Whether the archive is publicly visible at all is not a setting on an edition. It is one switch for the whole archive, on the Operations page: turn it off and the public list comes back empty — the app's archive screen shows its empty state and each edition's page reports not found. The website does not go blank: its Archive page and Archive menu fall back to a fixed set of edition cards built into the site, with the site's own totals, so check the switch in the app rather than on the website. FDS-010 describes a visibility flag per edition; the system has a single global one.

Reaching people: invitations, VIPs and announcements

Four pages send things to people, and they are not variations on one another. Read this table before using the third one.

Page	Reaches	Ceiling	Channels
Invitations	One named person, one row per send	One at a time	In-app notification only — no email
VIPs — notify	The VIP profiles you tick	500 per send, refused above that	In-app notification and email
Announcements	One session's seat-holders, or a whole audience	None anywhere	In-app notification and email, one of each per recipient
Contact inquiries	Nobody — it is an inbox, not an outbox	—	Incoming from the app's contact form

Invitations

An invitation is a record of one send to one person. Inviting the same person again does not update the first invitation — it adds a second row, and the first one stays as the record that they were invited before. The row carries who sent it, who it was addressed to, its state, free-text notes, and when the recipient responded.

Issuing one sends an in-app notification and nothing else. There is no invitation email, so a recipient who does not open the app will not learn about it from the system.

- The invitation is addressed to the profile, not to a sign-in account. Somebody with no account can be invited; they simply have no inbox to receive the notification in, and the invitation still stands as a record.
- The notification is best-effort. If notifications are down the invitation is still created and still succeeds — it does not fail on the way out.
- A state can move from pending to a settled answer. It cannot be pushed back to pending afterwards, because the recipient has already answered and unsaying that is not something an administrator should be able to do.

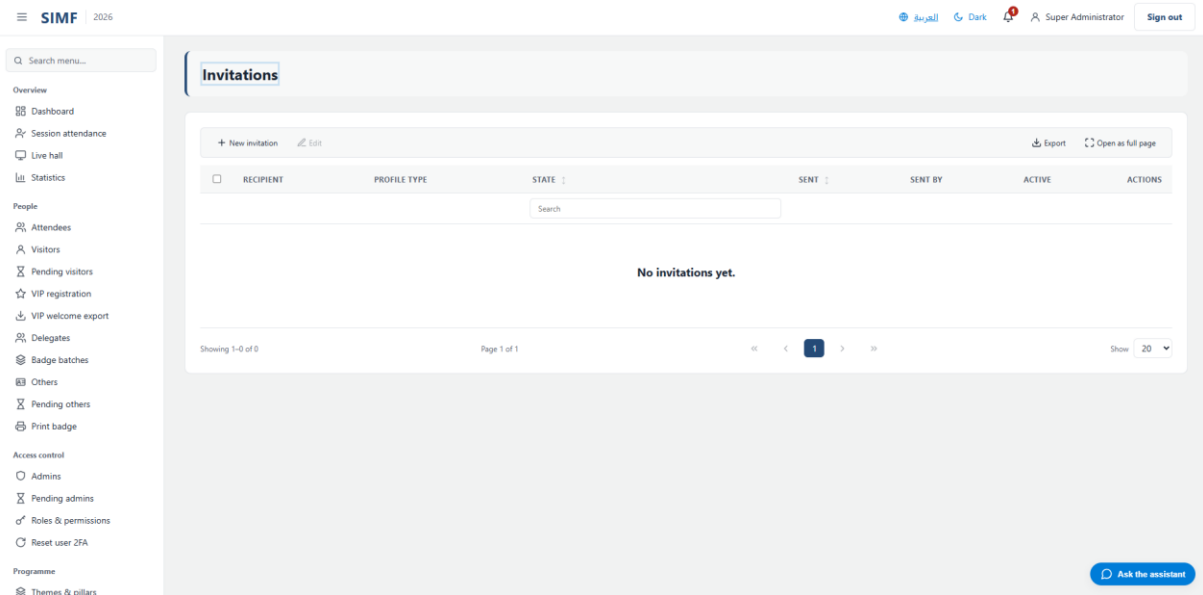


Figure 44 — The invitations list. One row per send, so a re-invitation appears alongside the earlier one rather than replacing it.

VIPs are a profile type, not a list you edit

There is no VIP table, and nothing on the VIPs page itself changes who is on it. The page shows every profile whose profile type is named VVIP, VIP or Gold — those three names, exactly. Somebody becomes a VIP by being given one of those profile types, and stops being one by being given a different type. The "VIP tier" checkbox on the visitor profile-type form is a different switch: it decides who may reserve a VIP-tier seat for themselves and whether the app shows the VIP marker, and it puts nobody on this page. The two do not line up out of the box — Gold is on this page, but only VVIP and VIP start out marked as the VIP tier, so a Gold guest is listed here and still cannot reserve a VIP seat for themselves.

Guests with no sign-in account are listed here without an email address rather than left out. They are real invitees and hiding them would make the list disagree with the guest list.

The notify action on this page sends to the profiles you have selected. It refuses more than five hundred in one send, and it quietly skips anybody in the selection who is not actually a VIP or who has no account to notify. The result tells you how many VIPs it reached and how many emails were queued, and nothing more: there is no skipped count on the screen, and the message stays a green success even when part of your selection was dropped. So compare the number it reports against the number you ticked — that is the difference between believing a hundred people were told and knowing that eighty-three were. How many it skipped goes to the audit log, not to you.

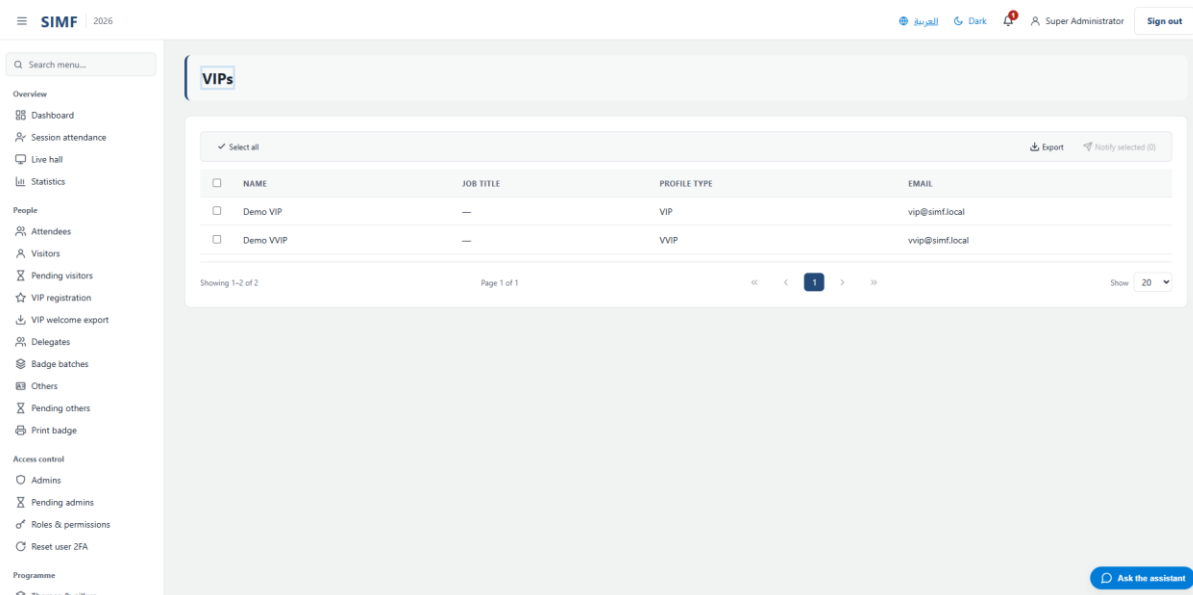


Figure 45 — The VIPs page. Everybody on it is here because of their profile type, and that is the only way on or off.

Announcements

An announcement is the broadcast desk. Write a bilingual title and message, choose an importance, choose who it goes to, and submit. Each recipient gets one notification inside the app and one queued email. There is no text-message or messaging-app channel — FDS-009 lists them; they were never built.

Choosing who it goes to

Target	Who that is
A session	Everybody with a sign-in account who holds a live seat reservation in that session. A seat-holder with no account — a walk-in, say — has no inbox, and drops out of both the send and the estimate
Approved app users	Every approved non-administrator account
Event attendees	Everybody with a sign-in account who holds a live seat reservation in at least one session, with the same exclusion
Everyone including pending	Every non-administrator account whatever its state — including sign-ups nobody has approved yet

Nothing anywhere limits how many people an announcement reaches. The composer accepts the target, checks the title and message lengths, and queues it. The VIP page's five-hundred ceiling does not exist here, and "everyone including pending" means exactly that. This is the one page in the Control Panel where a wrong click is measured in tens of thousands of messages.

What happens after you submit

Submitting does not send. It writes one pending job and hands back an estimate of how many people it will reach; a background worker picks the job up shortly afterwards and does the sending. Two consequences follow, and both surprise people.

- **The number you were shown is an estimate, computed when you submitted.** The recipients are worked out again at send time, so the count on the history is legitimately different from the one the composer promised — somebody signed up, or was approved, in between.
- **It cannot be recalled.** The worker claims the job before it starts dispatching, precisely so a restart mid-send never sends everything twice. The same claim means there is no way to stop it once it has started. A job left claimed for a quarter of an hour is marked failed rather than retried, for the same reason.

Sending is paced rather than instantaneous: recipients go out in batches of a hundred, and the worker waits when the email queue is already carrying seven hundred messages, half a second at a time. It will wait up to two minutes; beyond that it stops holding back and lets the queue drop what it cannot take, rather than stalling every later announcement behind this one. A very large announcement is therefore delivered over minutes, and its emails are the part that can be shed under load.

The screenshot displays the SIMF 2026 Announcements desk. The main area is titled 'Announcements' and contains a 'Compose a broadcast' form. The form has four sections: 1. Recipients (Choose who receives this announcement), 2. Session (Choose a session...), 3. Importance (Info), and 4. Message (Written in English and Arabic, sent in-app and by email). The Recipients section shows 'Send to' as 'A specific session' and 'Importance' as 'Info'. A status bar below the Recipients section indicates 'This will reach 0 recipient(s)'. The Message section has fields for 'Title (English)', 'Title (Arabic)', 'Message (English)', and 'Message (Arabic)'. A blue button labeled 'Ask the assistant' is located at the bottom right of the form. The left sidebar contains a search menu and various navigation links. The top right of the interface shows the user 'Super Administrator' and a 'Sign out' button.

Figure 46 — The announcements desk with its history. The recipient count on a past row is what was actually resolved at send time.

Contact inquiries

This is an inbox. The messages come from the contact form in the mobile app, which anybody may use — no sign-in is required — so a row may carry a name, an email address and a message with no account behind it at all. The public website has no form wired to this page.

Open inquiries are listed first, newest first. Marking one handled records who dealt with it and when; the same control reopens it if it was closed too early.

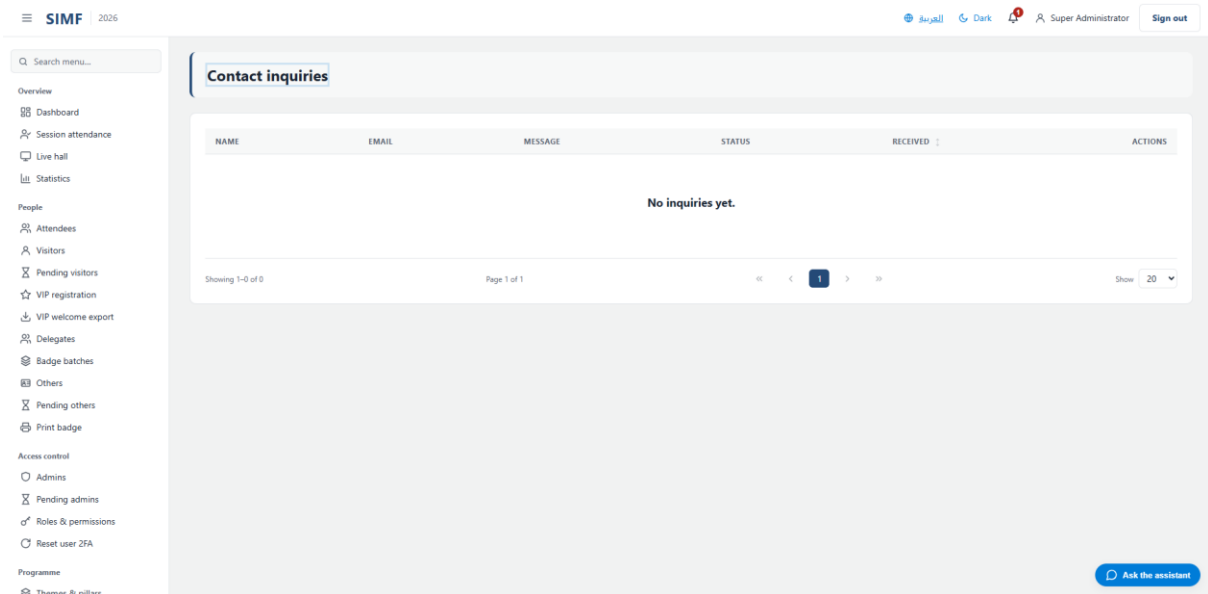


Figure 47 — The contact inquiries inbox. Open messages come first.

The FAQ and the AI features

The FAQ is ordinary content. The other four pages are the controls for a set of features that call a language model, and they are read-and-configure pages rather than pages you work on daily. The order to learn them in is: what the FAQ feeds, then what is running, then how to change it, then how to see what it did.

The FAQ has two readers

Entries are grouped, ordered inside their group, and only the active ones are published. What is worth knowing is who reads them.

- **The app's questions screen** reads them directly and shows them as they are.
- **The website's chat bubble** is not one of them: it sends the visitor's question to the AI with none of these entries attached, so the answer comes from the model's own knowledge and editing an entry does not change what the bubble says. A blank answer is reported as a failure instead of appearing as an empty bubble.
- **The in-app assistant** is given the programme sessions, the FAQ and the booth list as its grounding, so it can only talk about real, active data. The three share one budget of a few thousand characters and are assembled in that order, so a long programme or a few long answers can push the FAQ or the booths out of it entirely; an entry the assistant never mentions may simply not have fitted, and shortening the answers is what brings it back. That grounding is rebuilt about once a minute: a FAQ edit reaches the assistant when the old copy expires, not the instant it is saved.

FAQ management

FAQ groups

✓ Select all + Add Edit

☐	NAME (ENG)	NAME (AR)	ORDER	ENTRIES	ACTIVE	ACTIONS
☐	Registration	التسجيل	0	2	Active	ES ✎ 🗑
☐	Venue & Access	المكان والدخول	1	2	Active	ES ✎ 🗑
☐	Sessions & Program	الجلسات والبرامج	2	2	Active	ES ✎ 🗑

Showing 1-3 of 3 Page 1 of 1 < 1 > Show 20


Ask the assistant

Figure 48 — The FAQ. Groups and their entries, in the order the app shows them.

What is running: services and prompts

A service is one AI feature — the question filter, the FAQ answering, the assistant, translation, live translation, live sign language, session summaries and the Control Panel's own help assistant. The services page is almost entirely read-only: it collects, for every feature, which prompt is active on it, which provider and model that prompt uses, and whether that provider is hosted outside the organisation. It exists so the question "what runs the translation, and where?" has one place to be answered. The one thing it changes is routing: an administrator holding the prompt-edit permission gets an edit button on any row with an active prompt, and can set that prompt's provider, model, temperature and output ceiling from there. It saves through the same update the catalogue uses, so the version goes up and the change lands in the prompt's history and the audit trail. The wording of a prompt is still only editable in the catalogue.

The page warns when a sensitive feature is pinned to a provider that is definitely in the cloud. Sensitive here means the four that carry the audience's own words or a session's contents: session summaries, the assistant, live translation and live sign language. One provider is shown as depending on its endpoint rather than flagged, because it can be pointed at an internal address and the row alone cannot tell. **Read the badge and the warning as describing the pin, not the destination:** the page reads the provider stored on the prompt and does not follow the Echo redirect described below, so a prompt still on Echo shows as offline and raises no warning even while the estate's default provider is serving it from the cloud. Where a sensitive feature matters, pin its prompt to the provider you intend rather than leaving it on Echo.

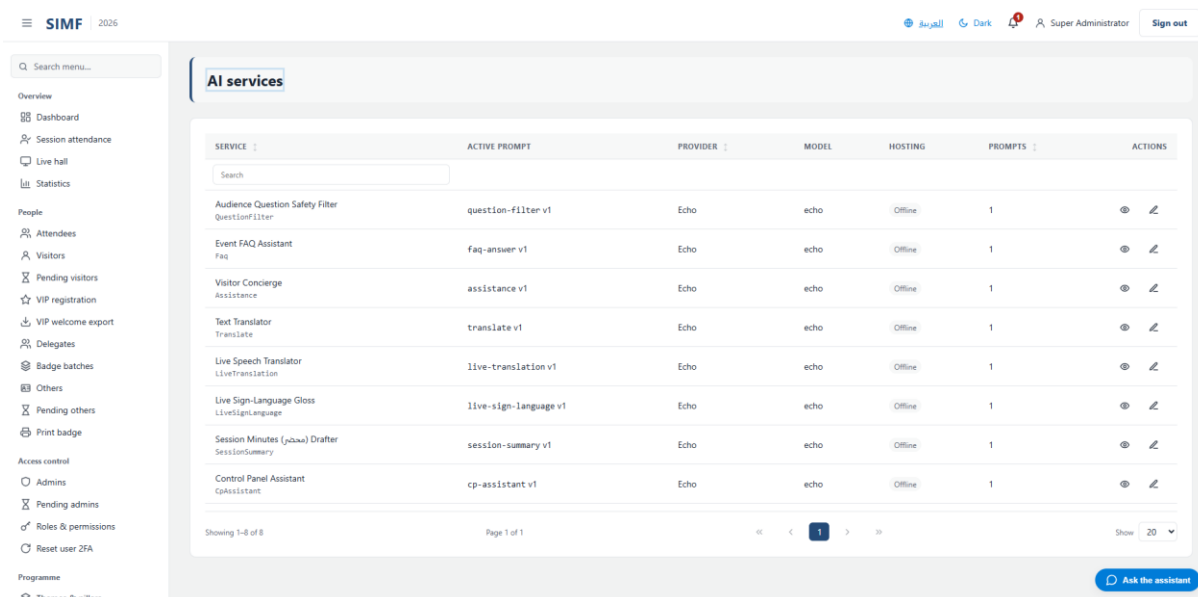

SERVICE	ACTIVE PROMPT	PROVIDER	MODEL	HOSTING	PROMPTS	ACTIONS
Audience Question Safety Filter QuestionFilter	question-filter v1	Echo	echo	Offline	1	 
Event FAQ Assistant Faq	faq-answer v1	Echo	echo	Offline	1	 
Visitor Concierge Assistance	assistance v1	Echo	echo	Offline	1	 
Text Translator Translate	translate v1	Echo	echo	Offline	1	 
Live Speech Translator LiveTranslation	live-translation v1	Echo	echo	Offline	1	 
Live Sign-Language Gloss LiveSignLanguage	live-sign-language v1	Echo	echo	Offline	1	 
Session Minutes (ملاحظات) Drafter SessionSummary	session-summary v1	Echo	echo	Offline	1	 
Control Panel Assistant cpassistant	cp-assistant v1	Echo	echo	Offline	1	 

Figure 49 — The services view: one row per AI feature, with the prompt, provider and model it is configured with.

A prompt is the whole unit of behaviour

Everything about how a feature behaves lives on its prompt: the key that callers reference, which feature it serves, its provider and model, the system prompt, the user template whose placeholders are filled from the request, the temperature, the output ceiling and whether it is active. Saving

increments its version. Editing a prompt changes what the system does immediately — there is no deployment and no restart.

More than one prompt may serve the same feature; the caller names the key it wants. That is how two wordings are compared against each other without either one being deleted.

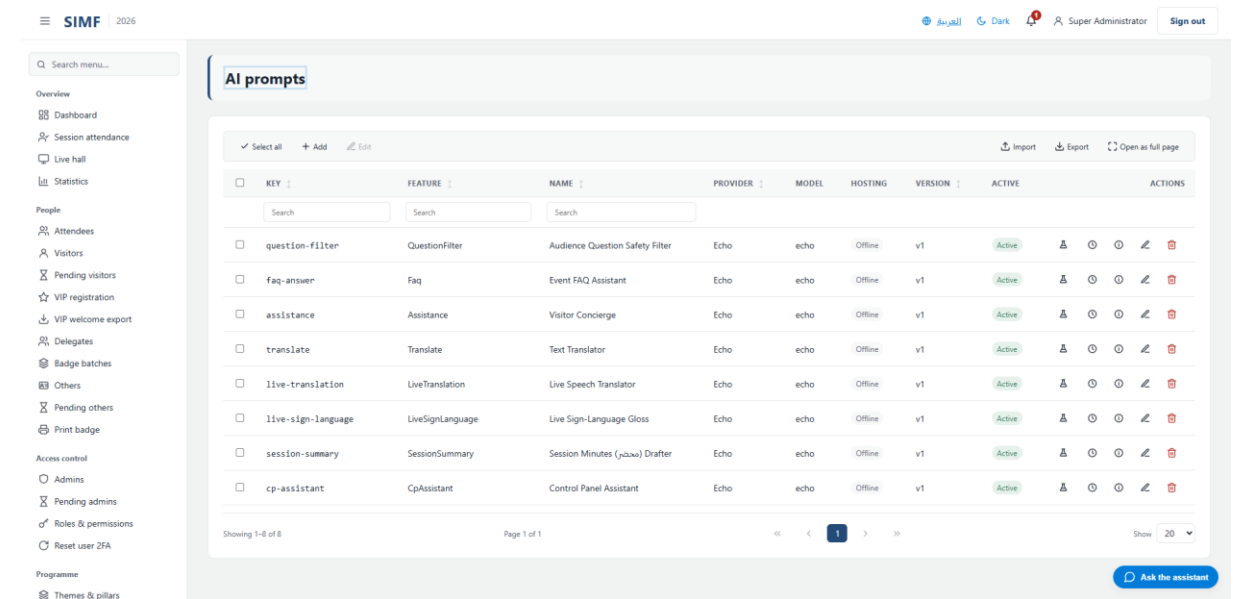


Figure 50 — The prompt catalogue. The key, the feature, the provider and the active flag are the four columns that decide behaviour.

Turning a feature off — and the way that does not work

Every prompt ships pinned to Echo, an offline provider that makes no outbound call at all: it returns the text it was given, behind a marker naming itself. That is what makes a fresh installation safe to run with no provider account of any kind.

Echo is not an off switch once a real provider is configured. Setting the estate's default provider redirects every prompt still pinned to Echo onto that provider — which is exactly what makes it the single setting that turns AI on, and exactly why it is not a mute. Only a prompt pinned to a named provider is left alone. To stop a feature, deactivate its prompt: it then answers with a plain "this feature is disabled" and calls nothing.

After a real provider is wired, the check that it took effect is that answers stop arriving with the Echo marker in front of them. A session summary drafted while Echo was serving carries a do-not-publish sentinel, and the publishing step looks for it again before approving — so a stub draft cannot reach an audience even if somebody forgets which provider produced it.

The two ways a call fails

What happened	What the caller sees	Where to look
The provider is chosen but has no key	The service is unavailable, refused before any call goes out; the failure is still recorded in the invocations log	The provider's key in the deployment configuration — see the configuration chapter

The provider is not wired up at all	The service is unavailable, and the failure is recorded in the invocations log	The provider chosen on the prompt
The prompt is deactivated	The feature reports itself disabled	The prompt catalogue

Both provider failures write their row under the same error code, so a row in the log tells you a provider problem happened, not which of the two it was. **Check the key first:** every provider but AzureOpenAi is wired up in every deployment, so a missing key is by far the commoner cause. A deactivated prompt is the one case that writes no row at all.

Seeing what it did

Every AI call writes one row, whether it succeeded or failed: which prompt and feature, which provider and model the prompt is configured with, the inputs after personal data and secrets have been stripped out, the output text, how many tokens went in and came out, how long it took, an error code when there was one, and who the caller was — anonymous, a visitor, staff, an administrator or a moderator. The dashboard is the same data summarised. Read the provider and model columns as the prompt's own settings rather than a record of where the text went: a prompt left on Echo and redirected by the estate's default provider still logs as Echo, with the model "echo", even though a real provider answered and chose its own model.

The prompt text itself is not on those rows. Prompt wording is kept separately: every edit is stored in full in the prompt's own history, which is never pruned, and the audit trail records a fingerprint of the wording before and after each save so a security reviewer can tell that a prompt changed without the text being copied into a second place.

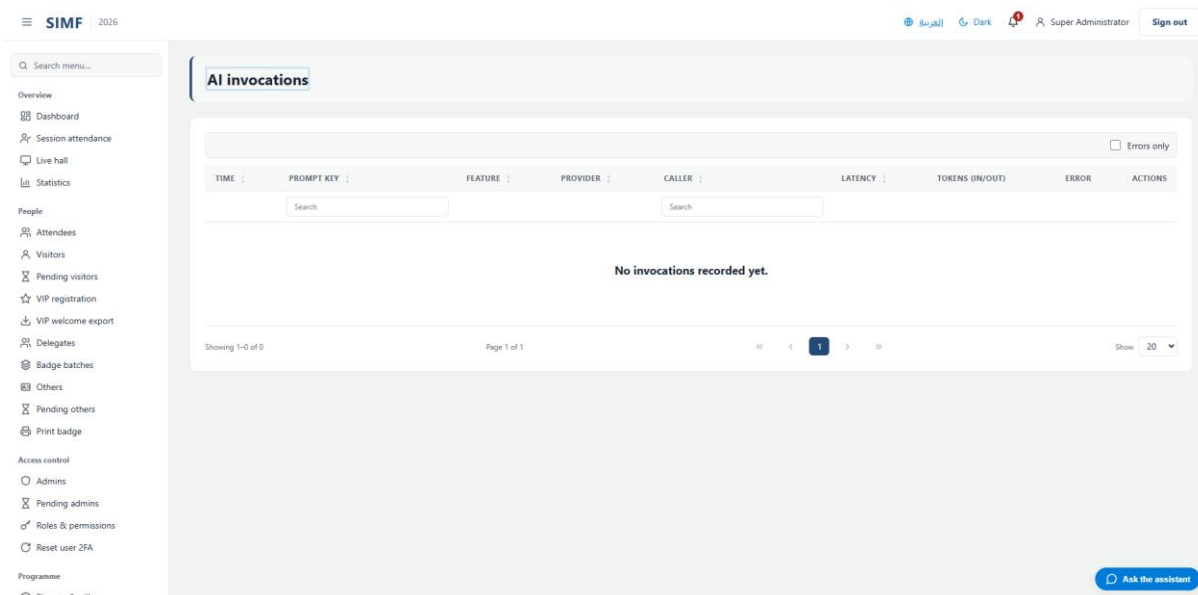


Figure 51 — The invocations log. Failures are here too — that is the point of it.

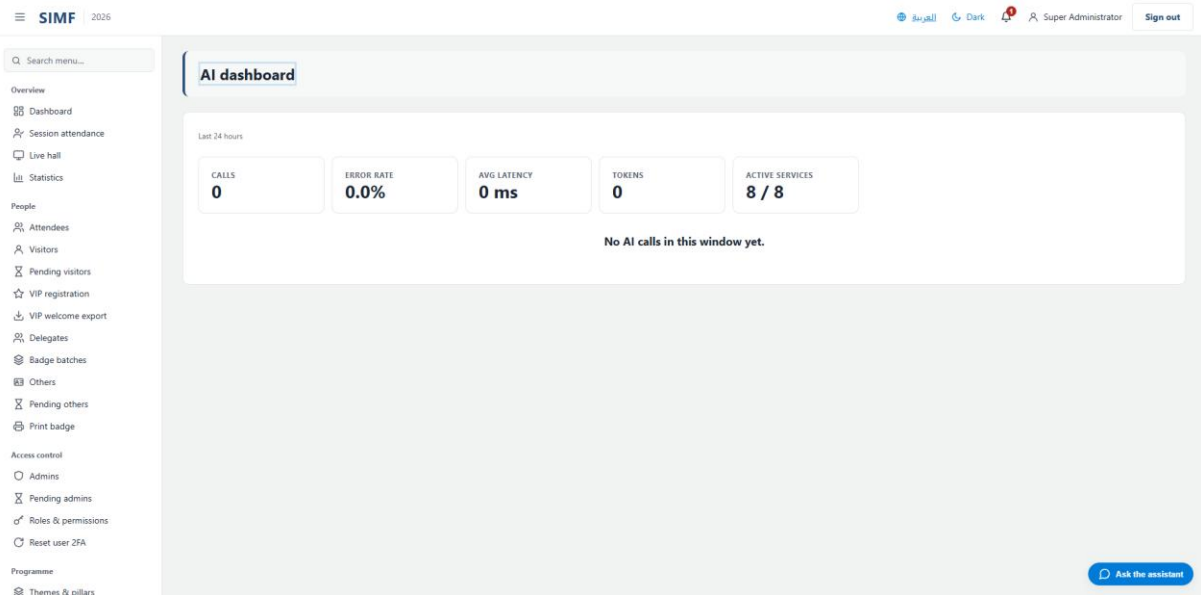


Figure 52 — The AI dashboard: the same calls, rolled up.

How often you may test a prompt

The Test button on a prompt draws on an allowance of twenty calls an hour, counted per administrator rather than per computer — so two administrators sharing an office each get their own twenty, and one administrator moving between machines does not get forty. The hour is a fixed window rather than a rolling one: the whole twenty comes back at once when the window turns over, instead of each call freeing up on its own. That same twenty also covers opening an invocation's full detail from the log, so twenty drill-downs will refuse a test with nothing on screen to explain why; the log list itself, and the error-code column on it, cost nothing. The Control Panel's own help assistant has a separate, larger allowance of forty an hour.

System settings, the event year, and the logs

Two warnings before the detail. First, the page called Configuration on this menu is not the deployment configuration described later in this manual: that one is environment variables on a server, and this one is a small table inside the application. Second, opening a new event year cancels every badge in the system. Both are covered below.

Four settings pages, four different mechanisms

Page	What it holds	What it is for
Configuration	Free key/value rows: a machine key, a value, and a description for whoever edits it next	Whatever the organisation decides to keep there, on top of the six app-update rows it ships with: the minimum and latest app version and the store link, for Android and for iOS. They arrive empty, and an empty value leaves that rule off
Site settings	A typed form: the bilingual registration welcome message and the partner-directory switch	The handful of settings the app and the website read through a public endpoint
Operations	Two switches: whether registration is open, with an optional automatic closing time, and whether the archive is publicly visible	The two things most likely to be turned on and off during an event
Walk-in mode	Two overrides on top of what the servers were deployed with, plus a read-only master state	Relaxing or tightening the on-site desk mid-event without a deployment

Site settings no longer live where their name suggests

The registration welcome message and the social links used to be rows in the Configuration table. They are not any more: they were moved onto the organisation profile so there is one copy of each fact, and the social links are now edited on the Organisation profile page rather than here. The public reading of them is unchanged, so nothing downstream noticed the move — which is exactly why an operator can still type a registration-message key into the Configuration table and watch it change nothing.

A social link is only published if it is a complete web address. Anything else is dropped rather than shown as a broken link.

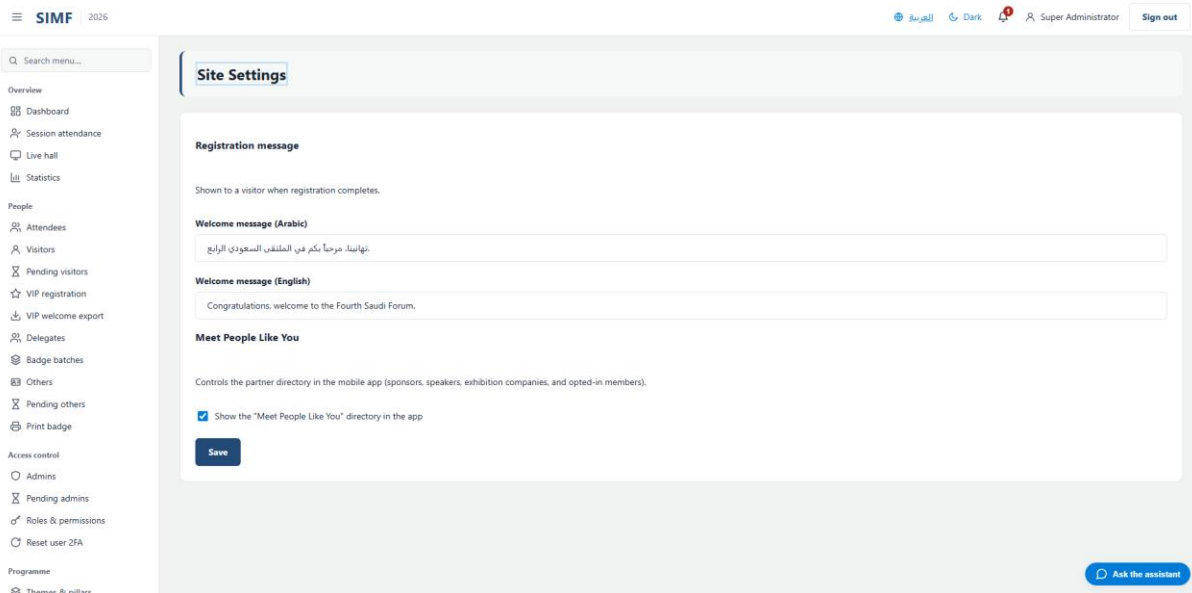


Figure 53 — Site settings. The social links moved to the organisation profile; what remains here is the registration message and the partner-directory switch.

Walk-in mode overrides configuration; it does not replace it

The two switches here sit on top of what the servers were deployed with. Until this page is saved the deployed setting applies to both. Saving writes an override for both — not only the switch you moved — and from then on your setting wins. Nothing on the page says where a value came from: a switch that agrees with the deployment looks exactly like one overriding it. To see the difference, or to hand a mode back to the deployment, go to the Configuration page and find the `walkInMode.quickRegister` and `walkInMode.autoApprove` rows. An active row holding true or false is an override; untick Active on it, or use Delete there — which deactivates the row rather than removing it — and the deployed setting applies again. The value itself cannot be blanked: that form refuses an empty value.

The master switch — whether walk-in mode is armed at all, and the window it is armed in — is deliberately not editable here. An administrator may turn automatic approval off in the middle of a rush, but cannot arm walk-in registration on an estate that never enabled it; that still costs server access. When the mode is not armed the page says so, rather than showing a switch that would do nothing.

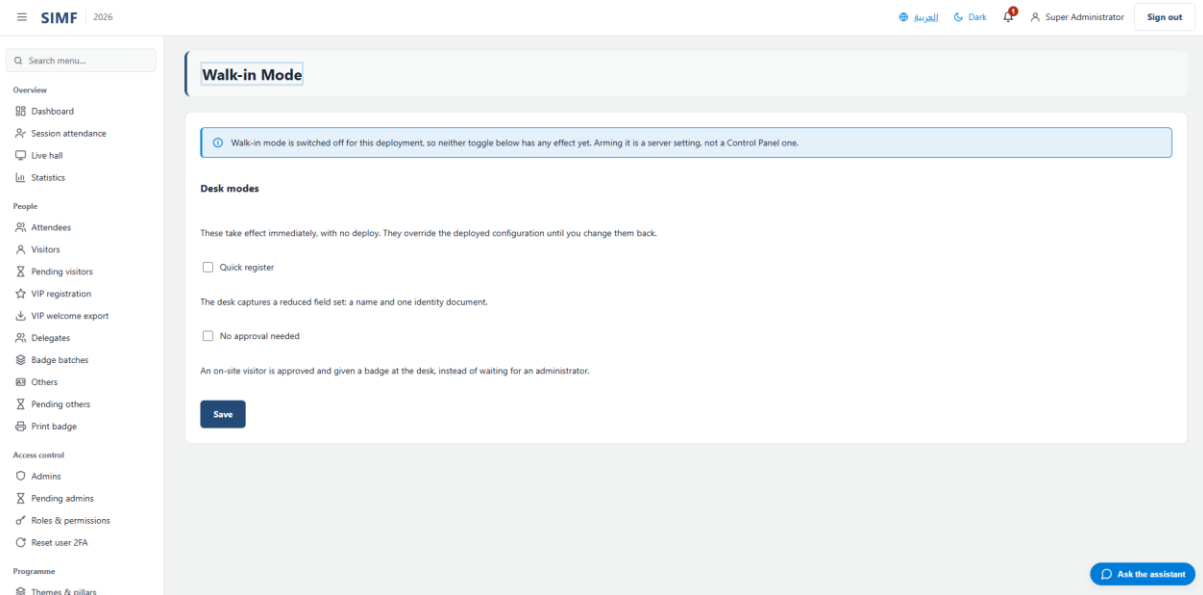


Figure 54 — Walk-in mode. The armed state at the top is read-only; the two switches below it are the overrides.

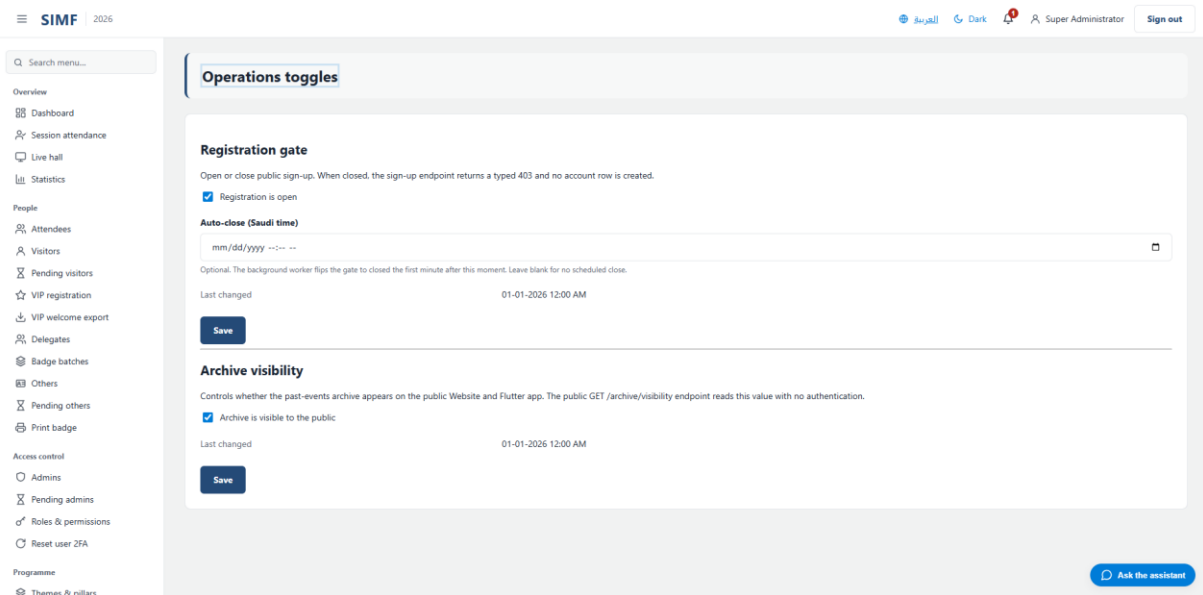


Figure 55 — The operations toggles: the registration gate and the archive's public visibility.

Opening an event year

The forum recurs. A year is opened, registrations and content accumulate against it, and then the next year is opened and that one becomes history. The page holds the open year, when it was opened, when a year was last closed, and how many badges the last opening re-issued.

Opening a year cancels every badge that exists. Every attendee's badge is cleared and a fresh one is issued in its place, in one operation. Printed badges, emailed badges and badges on a phone all stop opening gates the moment it completes, and every attendee carried forward needs their new one sent or printed. This is not a side effect: the gate refuses a badge that does not carry the open year, so the re-issue is what keeps returning attendees able to get in at all. The confirmation states the consequence

before you agree, and says plainly that it cannot be undone. It carries no number: the count is not known until the server has done the work, and it is reported the moment the operation finishes.

- The year must be four digits between 2000 and 2999. A typed "202" or "20265" is refused, because the year is printed into the badge and read by a scanner that has no other way to ask.
- The year already open is refused.
- A year earlier than the open one is refused, permanently. Re-opening a closed year would make every badge issued since valid again, which is the opposite of what closing it meant.
- The re-issue count is written down afterwards. It is the only evidence that the re-issue actually ran, and it is the first thing you will be asked for when a returning attendee finds their badge dead.

The year an attendee belongs to is stamped on their record the moment it is created, whichever way it was created — a sign-up, a desk, a bulk order, an approval. Opening a year moves that stamp forward only for the attendees who actually held a badge; somebody who never held one keeps the year they registered for, which is what makes the year worth reporting on.

Event edition

The year the forum is currently running. A badge only opens a gate in the year it was issued for.

Open year	2026
Opened	01-01-2026 12:00 AM
Previous year closed	No year has been closed yet
Badges cleared by the last opening	0

Open a new year

Closes the current year into history and opens the one you enter. Attendees are not deleted — their records stay, labelled with the year they belong to.

ⓘ This clears every attendee's badge. Everyone attending the new year must be issued a new one — plan the re-issue before you do this, not at the door.

Year to open

2027

Four digits, later than the open year.

Open the year

[Ask the assistant](#)

Figure 56 — The event edition page. Almost all of it exists to state the consequence before the button is pressed.

The two logs are for two different people

	Operation log	Logs
Answers	Who did what, to whom, and did it succeed	What the software did, technically, at 14:32
Holds	One row per business or security event: the time in local Saudi time, the event, the outcome, the subject, the administrator who acted, the address they acted from, and an error code when it failed	The applications' own log files, one per project per day
Can be edited	No. Nobody, including an administrator, can change or remove	Not applicable — they are files, and can be downloaded

an entry through the application

The operation log stores the subject's name as it was at the time, so an entry still reads correctly after somebody is renamed. Its detail line never carries a secret.

The Logs page lists the log files it can find, tails the one you pick every few seconds, and offers each as a download. It distinguishes between failing to reach the log service and finding no files, which are opposite facts when something is wrong.

Operation log

Event type contains: e.g. SignIn.PasswordReset, Role.Created

Subject email contains: [input]

Outcome: Any

From date: mm/dd/yyyy

To date: mm/dd/yyyy

Apply filters Clear Export

Select all

Event type	Subject email	Outcome	From date	To date	Actions
WHEN (LOCAL)	EVENT	OUTCOME	SUBJECT EMAIL	SOURCE IP	
29-08-2025 08:18:24 PM	Admin.LogViewed	Success	—	1	
29-08-2025 08:17:16 PM	Admin.BadgeUpdateRequestsListed	Success	—	1	
29-08-2025 08:17:14 PM	Admin.ParticipationDocumentRequestsListed	Success	—	1	
29-08-2025 08:17:12 PM	Admin.DelegationMeetingRequestsListed	Success	—	1	
29-08-2025 08:17:07 PM	Admin.SpeakerMeetingRequestsListed	Success	—	1	
29-08-2025 08:16:28 PM	SignIn.Succeeded	Success	superadmin@simrsnf.com	1	
29-08-2025 08:16:28 PM	RefreshToken.Issued	Success	superadmin@simrsnf.com	1	
29-08-2025 08:16:28 PM	SignIn.SecondFactorIssued	Success	superadmin@simrsnf.com	1	

Ask the assistant

Figure 57 — The operation log: the business and security audit trail.

System logs

Per-project log files. The view auto-refreshes: pick a project and a day, then tail or download.

Project: SIMF.Api (1)

Day: log-20260829.log — 83.8 MB (29-08-2026 05:18 PM)

Lines: 500

Refresh Download

log-20260829.log — 83.8 MB - 500 lines

```
2026-08-29 20:18:22.596 +03:00 [00] Initialized DbCommand for 'ExecuteNonQuery' (DbCommand), ["EventId":("Id":20100,"Name":"Microsoft.EntityFrameworkCore.Database.Command.CommandInitialized"),"SourceContext":"Microsoft...
2026-08-29 20:18:22.596 +03:00 [00] Executing DbCommand [Parameters=[], CommandType='Text', CommandTimeout='30']
SELECT [o].[Id], [o].[CreatedAt], [o].[CreatedBy], [o].[DeletedAt], [o].[DisplayOrder], [o].[IsActive], [o].[OrganizationProfileId], [o].[Text], [o].[TitleArabic], [o].[Title], [o].[TitleArabic], [o].[UpdatedAt], [o]
FROM [OrganizationDetails] AS [o]
WHERE [o].[OrganizationProfileId] = '00000000-0000-0000-0000-000000000000' AND [o].[IsActive] = CAST(1 AS bit)
ORDER BY [o].[DisplayOrder] ["EventId":("Id":20100,"Name":"Microsoft.EntityFrameworkCore.Database.Command.CommandExecuting"),"SourceContext":"Microsoft.EntityFrameworkCore.Database.Command", "RequestId":"00000000-0000-0000-0000-000000000000"]
2026-08-29 20:18:22.601 +03:00 [00] Executed DbCommand (0ms) [Parameters=[], CommandType='Text', CommandTimeout='30']
SELECT [o].[Id], [o].[CreatedAt], [o].[CreatedBy], [o].[DeletedAt], [o].[DisplayOrder], [o].[IsActive], [o].[OrganizationProfileId], [o].[Text], [o].[TitleArabic], [o].[Title], [o].[TitleArabic], [o].[UpdatedAt], [o]
FROM [OrganizationDetails] AS [o]
WHERE [o].[OrganizationProfileId] = '00000000-0000-0000-0000-000000000000' AND [o].[IsActive] = CAST(1 AS bit)
ORDER BY [o].[DisplayOrder] ["EventId":("Id":20101,"Name":"Microsoft.EntityFrameworkCore.Database.Command.CommandExecuted"),"SourceContext":"Microsoft.EntityFrameworkCore.Database.Command", "RequestId":"00000000-0000-0000-0000-000000000000"]
2026-08-29 20:18:22.602 +03:00 [00] Closing data reader for 'SIMF.App.Doc' on server 'localhost'. ["EventId":("Id":20301,"Name":"Microsoft.EntityFrameworkCore.Database.Command.DataReaderClosing"),"SourceContext":"Microsoft.EntityFrameworkCore.Database.Command", "RequestId":"00000000-0000-0000-0000-000000000000"]
2026-08-29 20:18:22.602 +03:00 [00] A data reader for 'SIMF.App.Doc' on server 'localhost' is being disposed after spending 0ms reading results. ["EventId":("Id":20300,"Name":"Microsoft.EntityFrameworkCore.Database.Command.DataReaderClosed"),"SourceContext":"Microsoft.EntityFrameworkCore.Database.Command", "RequestId":"00000000-0000-0000-0000-000000000000"]
2026-08-29 20:18:22.603 +03:00 [00] Closing connection to database 'SIMF.App.Doc' on server 'localhost'. ["EventId":("Id":20002,"Name":"Microsoft.EntityFrameworkCore.Database.Connection.ConnectionClosing"),"SourceContext":"Microsoft.EntityFrameworkCore.Database.Connection", "RequestId":"00000000-0000-0000-0000-000000000000"]
2026-08-29 20:18:22.604 +03:00 [00] Compiling query expression:
'DbSet<OrganizationDetail>()
.OrderBy(o => o.OrganizationProfileId)
.Where(d => d.OrganizationProfileId == 00000000-0000-0000-0000-000000000000) && d.IsActive)
.OrderBy(d => d.DisplayOrder) ["EventId":("Id":10111,"Name":"Microsoft.EntityFrameworkCore.Query.QueryCompilationStarting"),"SourceContext":"Microsoft.EntityFrameworkCore.Query", "RequestId":"00000000-0000-0000-0000-000000000000"]
2026-08-29 20:18:22.613 +03:00 [00] Generated query execution expression:
'queryContext => SingleQueryingEnumerable.Create<OrganizationDetail>(
    relationalQueryContext: (RelationalQueryContext)queryContext,
    relationalCommandResolver: parameters => [LIFTABLE Constant: RelationalCommandCache.QueryExpression(
        Projection Mapping:
            ExpressionMember -> Dictionary<PropertyBase, int> { [Property: OrganizationDetail.Id (Guid) Required PK AfterSave: Throw ValueGenerated.OnAdd, 0], [Property: OrganizationDetail.C
FROM [OrganizationDetails] AS o
```

Ask the assistant

Figure 58 — The logs viewer: the applications' own files, per project and per day.

Background services

Thirteen background workers do the things nobody presses a button for. Fourteen services report their health to this page: those thirteen, plus the email sender. It shows whether each is running, when it last ran, how many times it has run and failed, and its last error. It refreshes itself and has no actions — it is a health display, not a control panel.

Worker	What it does
Registration gate auto-close	Closes registration the first time the automatic closing time passes
Session reminder	"Your session starts soon" to everybody holding a seat
Meeting reminder	The same, a quarter of an hour before a confirmed meeting, by app and email
Awaiting-speaker expiry	Returns a meeting request to the queue when the speaker's links expire, freeing the held slot
No-show seat release	Releases seats a few minutes before a session starts when the holder never arrived
Not-attended reminder	"The session started and you are not here", after a grace period
Match recommendation push	"You match this attendee" for strong matches, in batches
Session rating prompt	Asks for a rating — of the people who checked into the hall, not everybody who booked
Programme rating prompt	The end-of-day and end-of-programme rating prompts
Hall attendance close-out	Closes attendance records left open when a session ends
Announcement queue	Sends the queued announcements
Dormant account sweep	Disables accounts unused for the configured number of days; does nothing until that number is set
Retention sweep	The daily purge of expired security artefacts

Each of these runs on exactly one server, whatever the size of the estate, because two copies would send everything twice. The email sender is the exception and runs everywhere on purpose: its queue lives inside each server, so a server that is not sending is a server whose emails never leave. It hands a message to the mail relay three times at most — one send and two retries — and only while the failure looks temporary; a relay that refuses the message outright, for an unknown recipient or bad credentials, ends it on the first failure. It can also be configured to email an operations address when a send fails.

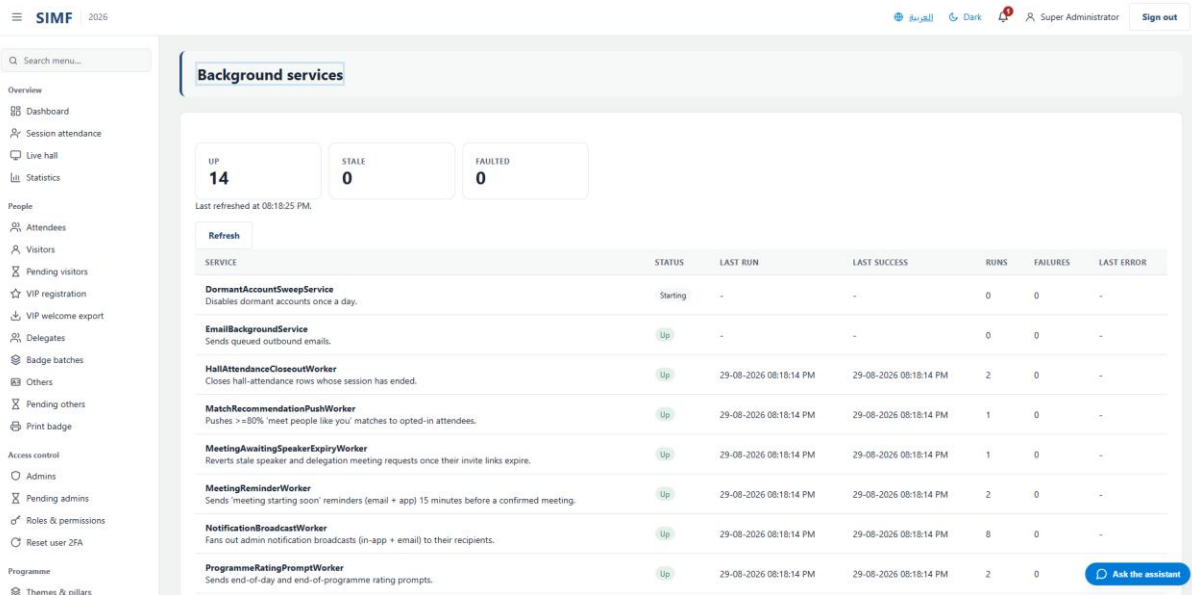


Figure 59 — The background services monitor. No actions — the value is in the last-run and failure columns.

Email templates

Ten emails can be reworded here: the sign-in code, email verification, the account-already-exists notice, password reset, badge activation, the biometric step-up code, the bulk-badge cover note, email-change verification, the email-changed alert, and the exhibitor lead-capture message. There is no Add and no Delete, because the set is fixed by the code that sends them; the only action is Edit, and every template can be reset to the wording it shipped with.

- The database holds only your changes. A template you never touched is sent from the wording built into the application, so a fresh installation sends correct emails with an empty table.
- The tokens are per template and are offered as chips beside the editor — the code and its expiry for the code emails, the count and generation time for the bulk-badge note, the new address for the change-of-email alert. A token that does not belong to the template is rejected on save.
- **The notification emails are not here.** Registration approved or rejected and badge ready are written in the code and cannot be reworded from the Control Panel. Two messages are yours to write per send instead: the announcement composer, and the notify-VIPs message on the VIPs page — each takes a bilingual title and body and sends exactly what you type. Two others reach nobody by email at all: the session reminder is sent with email switched off, so it arrives only as a message inside the app, and a booking confirmation goes out on no channel — the kind exists in the app's notification list, and nothing in the system sends it.

TEMPLATE	SUBJECT	CUSTOMISED	VERSION	UPDATED	ACTIONS
SignInOtp	SIMF sign-in code	Default	—	—	
EmailVerification	SIMF email verification	Default	—	—	
AccountExists	SIMF account already exists	Default	—	—	
PasswordReset	SIMF password reset	Default	—	—	
BadgeActivation	SIMF account activation	Default	—	—	
BiometricStepUp	SIMF biometric sign-in code	Default	—	—	
BulkBadgeDelivery	Your SIMF badge batch (Count) badges	Default	—	—	
EmailChangeVerification	SIMF email change verification	Default	—	—	
EmailChangedNotice	SIMF login email changed	Default	—	—	
ExhibitorLeadCapture	SIMF visitor captured at your booth (VisitorName)	Default	—	—	

Figure 60 — The email templates. Edit is the only row action; the set itself is fixed.

Organisation profile

This is the forum's own record, and it is edition-generic: the name, title, slogan and biography, the version and its dates, the status and year, the location and its coordinates, the contact details, the live-stream address, the social links, and the repeating lists of about-items and details. Opening it needs the view permission; saving it needs the manage permission, so a reader can be given the page without being able to change the forum's public identity.

Figure 61 — The organisation profile: the forum's own details, and the home of the social links.

Reports

The reports hub is a grid of cards, and you see only the cards you hold the permission for — the hub does not advertise a report it would then refuse to open. Each report is also gated at the server, on its own permission, so somebody can be given the gate log without being given the attendee roster.

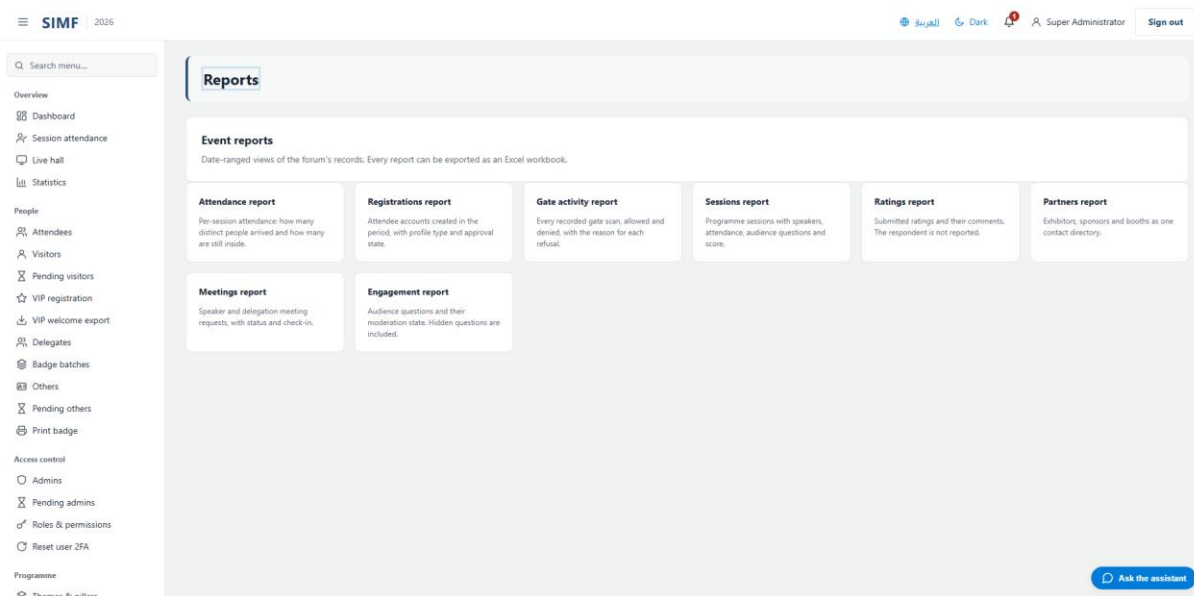


Figure 63 — The reports hub. A card you cannot see is a report you do not have permission for.

Every figure in every report is calculated when you open it, from the live records. Nothing is stored, summarised nightly or cached, so two people running the same report a minute apart can legitimately see different numbers. FDS-011 describes stored statistics snapshots; they were never built, and the document records that correction itself.

What each report answers

Report	The question it answers	Worth knowing
Attendance	Was this session attended? One row per session, with how many people arrived and how many are still inside	The attendee number counts people, not scans: somebody who left and came back counts once
Registrations	Who registered, and in what state? One row per attendee account	The date range filters when the account was created
Gate activity	What happened at the doors? One row per scan, admitted or refused, with the reason	The visitor's name and type are the ones recorded on the scan itself, so a historic row still reads correctly after somebody is renamed
Sessions	How did this session do? Programme, speakers, attendance, questions and average score on one row	An unrated session shows an empty score, not zero — a zero would read as unanimously terrible
Ratings	What was scored, and where? One row per rating submitted	The respondent is deliberately not shown: a rating carries a free-text comment, and naming the author would turn an anonymous channel into an attributed one

Partners	Who is participating? Exhibitors, sponsors and booths flattened into one contact directory	This one ignores the date range, and the control is hidden on it — a directory is who is here, not events in a period
Meetings	What was requested, of whom, and was it answered? Speaker and delegation requests together	The date range filters when the request was made, not when the meeting was scheduled
Engagement	What did the audience ask, and what was suppressed? Session questions with their moderation state	Hidden questions are included — that is the point of a moderation report. The asker is not shown

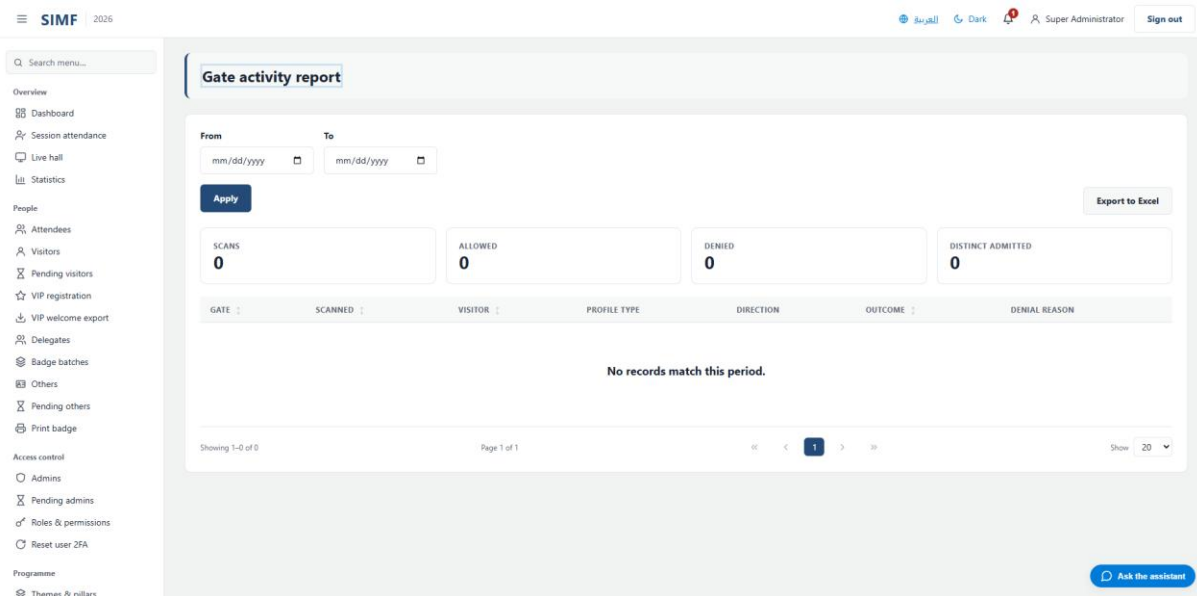


Figure 64 — The gate activity report. Refusals are rows here too, with the reason each one was refused.

The toolbar every report shares

- **The date range is in Saudi calendar dates and includes both ends.** A range of the 1st to the 3rd includes everything on the 3rd, up to midnight.
- **The totals describe the whole filtered set, not the page you are looking at.** They will not add up to the rows on screen, and that is correct.
- **Changing the range takes you back to the first page.** Staying on page seven of a different period would show an empty grid for no visible reason.
- **There is no filter for the event year.** A report has no edition dimension; use the date range.

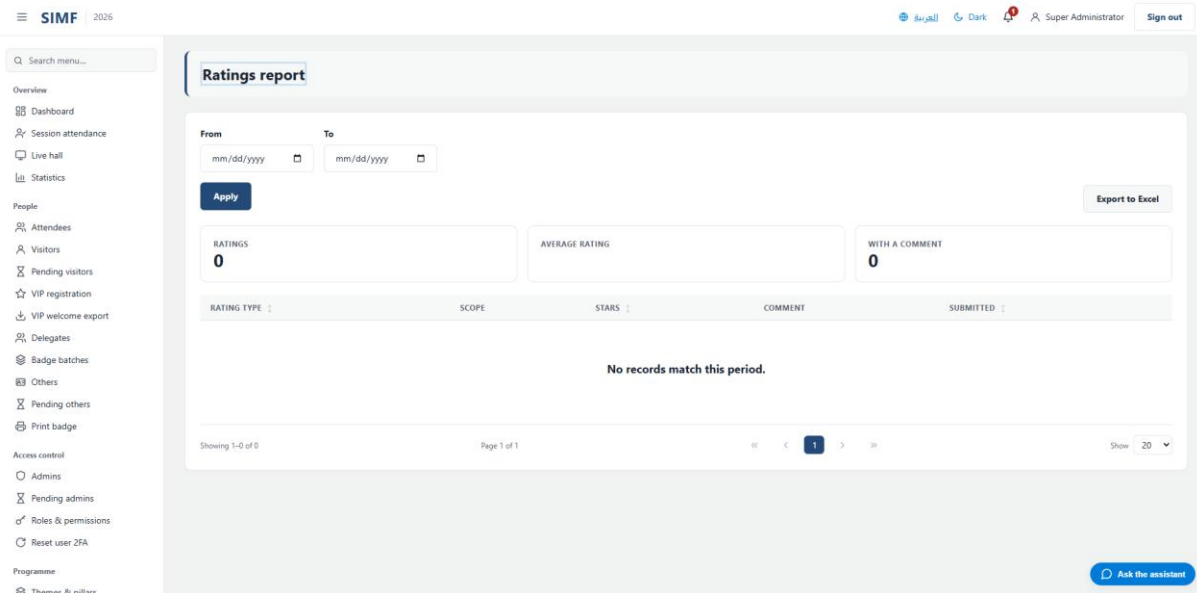


Figure 65 — A report page: the range and the totals strip above the grid, and the export beside them.

Exporting

Export produces an Excel workbook, downloaded as an attachment and named for the report and the moment you asked for it in Saudi local time. It carries the whole filtered report, not just the page on screen. It is gated by its own permission, separate from the permission to read the report: taking the data off the premises as a file is a bigger act than reading a page of it.

An export stops at twenty thousand rows, and says nothing. Beyond that it returns the first twenty thousand in the report's own order rather than failing, and nothing on screen tells you it happened. On an event-scale gate log that is easy to reach. Narrow the date range and export in pieces when the report is large.

The workbook also does not read like the screen. Where the page shows a translated label, the file carries the underlying code — so a gate export says HolderNotApproved and CheckIn where the Arabic page said them in Arabic. That is deliberate: an export is a file people sort, filter and pivot on, and a stable identifier is worth more there than a sentence.

The lists everything else chooses from

Six pages hold lists that nothing else works without. They look like the least interesting screens in the Control Panel and they are the ones that stop a registration dead when they are empty: a visitor cannot finish signing up without an organisation to belong to, and cannot be registered at the walk-in desk — nor given a bulk-minted badge — without a profile type. Approving a visitor still issues the badge whether or not a tier is picked. Fill these before an event opens, not during it.

What each list feeds

List	Read by	What an empty list does
Interests	The mobile app's interests step, and the "meet people like you" matching	The picker offers nothing; a visitor cannot pick the one to ten interests the app asks for
Organisations	The organisation picker on every registration, in the app and at the desk	Registration cannot be completed — an organisation is required. This is not hypothetical: it happened on the first production install
Countries	Nationality on every profile, and the calling-code picker	No visitor can state a nationality — Saudi Arabia is a row in this list like any other. App sign-up and the desk's full registration are both refused, for Saudis as much as foreigners; only a quick walk-in taken with no nationality at all still completes
Regions	Place of birth for a Saudi visitor	Nothing — the picker falls back to the thirteen official Saudi regions built into both the app and the desk. Place of birth itself is required on every app sign-up, though the desk may leave it blank
Visitor profile types	Which tier a visitor is approved into, and what the badge says	The account is still approved and still gets a working badge, but in no tier — the badge shows no tier line and falls back to the default gold strip, and any gate with an allow-list refuses it
Other profile types	The same, for partner, exhibitor, media and staff accounts	A partner account cannot be saved — its profile type is required

The organisation list is a curated government import matched on commercial registration, which is why the Control Panel is the only place it is edited and why the app cannot add to it. When somebody's employer is genuinely absent they pick the "Other" entry and type the name; that text is read later by a person, not merged automatically.

Deleting is not deleting

Removing an entry from any of these lists deactivates it. It stops being offered to anybody choosing from now on, and every profile that already points at it keeps pointing at it — a visitor who chose an interest does not lose it because the interest was retired. Re-activating puts it back in the picker. This

is why four of these lists — interests, organisations, countries and regions — can be tidied during an event without breaking the people already registered. A profile type is stricter: it refuses to be removed at all while any account is still assigned to it, and the Control Panel shows you that refusal, so retiring one means re-assigning its holders first.

Profile types are not just labels

A profile type decides more than a word on a badge: whether the holder counts as a visitor, whether they appear in the app's meet-people list, whether they are a VIP tier, and — through the gate's allow-list — which entrances they may use. Creating one is quick; deciding what it means is the part worth doing carefully, because gates and badges are configured against it afterwards.

Search menu...

Overview

- Dashboard
- Session attendance
- Live hall
- Statistics

People

- Attendees
- Visitors
- Pending visitors
- VIP registration
- VIP welcome export
- Delegates
- Badge batches
- Others
- Pending others
- Print badge

Access control

- Admins
- Pending admins
- Roles & permissions
- Reset user ZFA

Programme

- Themes & pillars

Visitor profile types

Select all + Add profile type Edit profile type

ACCOUNT TYPE	NAME	NAME (ARABIC)	PAGE COLOUR	ACTIVE	ACTIONS
Visitor	Normal	عادي	#3882F6	Yes	
Visitor	VIP	كبار الشخصيات	#0E7490	Yes	
Visitor	VVIP	شخصيات بالغة الأهمية	#B91C1C	Yes	

0-3 of 3 Page 1 of 1

Show 20

Ask the assistant

Figure 66 — The visitor profile types. Each one is a tier an account can be approved into.

Deploying to a server

SIMF is installed on premises, on Windows Server with IIS and SQL Server. A deployment is three separate things, done in this order: the pipeline copies the built files onto the server, an operator sets that server's configuration, and the application creates or updates its own database the first time it starts. Nothing else creates the database, and nothing in the pipeline sets a single configuration value.

The estate

There are two servers, and each runs all four applications. The single most important thing to know before running a deployment is that the environment names are misleading:

Environment name	What it actually is	Address
SIMF-Prod	PRE-PRODUCTION	simf.zagali-ict.com
SIM-RNSF	PRODUCTION	web / cp / api.simrsnf.com

This is not a typo to be corrected. Those are the names as registered, and the one that reads like production is not. Anyone who "fixes" the mapping on sight deploys straight to production while believing they are rehearsing. Trust the job names in the pipeline, never the environment string.

The four applications

Application	IIS site	Folder on the server	Public address
API	SIMF.API	D:\System\v1.0.1\api	api.simrsnf.com (internal)
Control Panel	SIMF.CP	D:\System\v1.0.1\cp	cp.simrsnf.com
Website	SIMF.WEB	D:\System\v1.0.1\web	web.simrsnf.com
Mobile edge	SIMF.EDGE	D:\System\v1.0.1\edge	edge.simrsnf.com

The IIS sites and application pools must already exist. The deployment copies files into them; it does not create them. Create them by hand in IIS Manager before the first deployment, with the .NET CLR version set to No Managed Code.

Before the first deployment

- Windows Server with IIS and the ASP.NET Core hosting bundle installed — without the bundle the application pool starts and immediately stops.
- SQL Server, reachable from the application server on port 1433.
- A TLS certificate for each public host name. The one for the API is the one that gets forgotten, because it is internal.
- The host time zone set to Arab Standard Time.
- Write access, for each application pool identity, to the log directory and to the file-store directory.

- For the Flutter web bundle only: the IIS URL Rewrite and Application Request Routing modules, with proxying enabled.

The order of a deployment

- The pipeline builds all four applications and publishes them as one artefact.
- It checks the target machine against two names: the one that job expects, and the machine pinned to the other environment, which is forbidden.
- For each application in turn — API first, edge last — it stops the site and its pool, mirrors the files into place, and starts them again, proving both reached the started state.
- The operator then runs that server's configuration scripts as an administrator.
- The operator restarts IIS. Recycling the pool is not enough: the worker process inherits its environment from the service that launched it, so a recycled pool keeps the old values.
- The API is started; it creates or migrates both databases and seeds the first administrator.

The forbidden name is the only half of that check armed on production today. The production machine's name has never been read, so the name production expects is blank — and a job whose expected name is blank warns and carries on rather than refusing. Pre-production is the mirror: the name forbidden to it is production's, which is that same blank, so what stops a pre-production run reaching production is its expected name, not the forbidden one. Filling in the production machine name closes both halves.

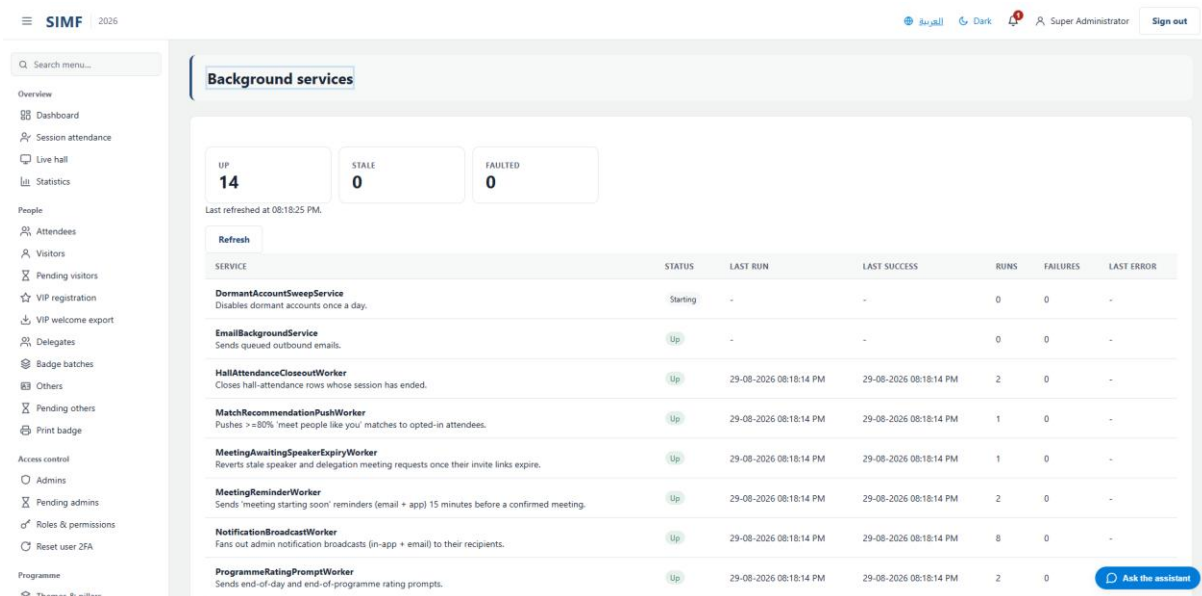


Figure 67 — After a deployment, this is where you confirm the background workers came up. They run inside the API process, so a healthy site with a dead worker looks fine from the outside.

The databases

There are two, deliberately kept apart: one holds accounts, roles and permissions, the other holds everything else. There is no manual migration step — the API applies its own migrations at startup, and it applies them to the second database before the first. That order is required, not incidental.

Booting the API against an empty database creates it. Content — the programme, the speakers, the news, the sponsors and the archive — is applied separately, by hand, from the seed scripts. One step in that process is copying the speaker photographs into the file store; without it every photograph returns not-found while the database rows look perfectly healthy.

The first administrator

The system creates exactly one administrator on first boot, from configuration. Its email, its starting password and its authenticator secret are all configuration values. Once it has signed in, change the password, pair a fresh authenticator, and then change those configuration values to new throwaway ones. That last step is the line between deployed and secure.

Two traps, and they fail differently. If the configured email or password is blank the seeder writes no administrator, logs the reason, and the system starts up perfectly healthy — every sign-in then fails with nothing visibly wrong. But a password the rules reject — one containing a run such as 12345 — fails the boot outright in production, and the error names the rule that broke. Outside production that second case is logged and skipped like the first.

Every configuration value

Configuration reaches the applications as machine-wide environment variables set on the server. The files shipped inside each application carry only non-secret defaults, and they are overwritten by every deployment, so nothing that matters may be edited there.

Not everything is an environment variable. Some settings are edited in the Control Panel itself and stored in the database, which is the right place for anything an administrator should be able to change without a deployment.

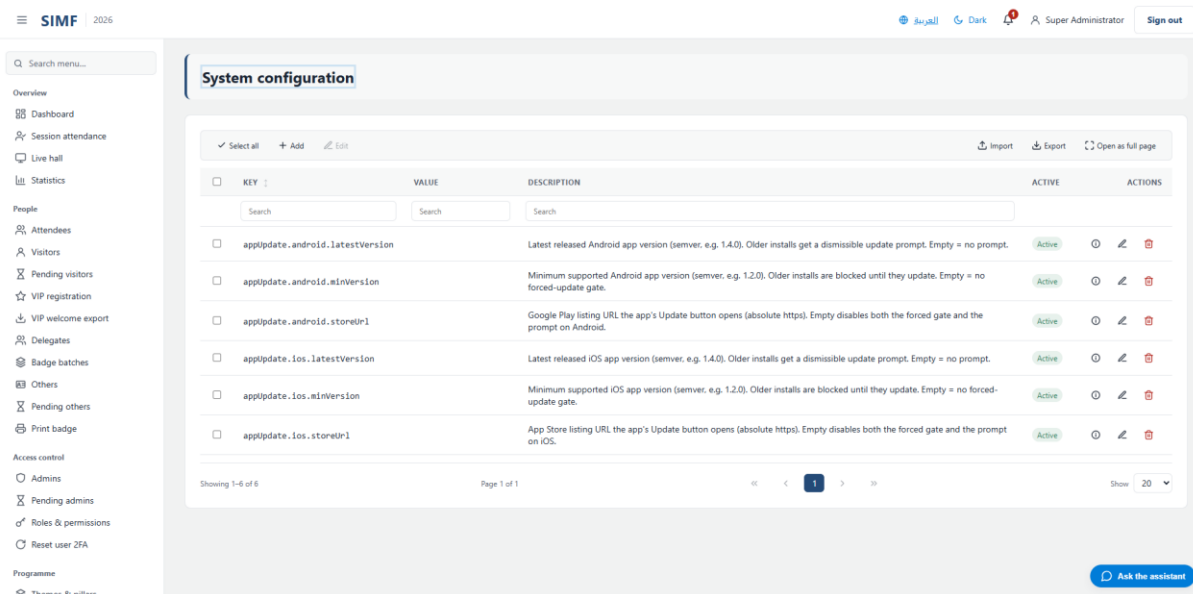


Figure 68 — The configuration list — key and value pairs the system reads at run time.

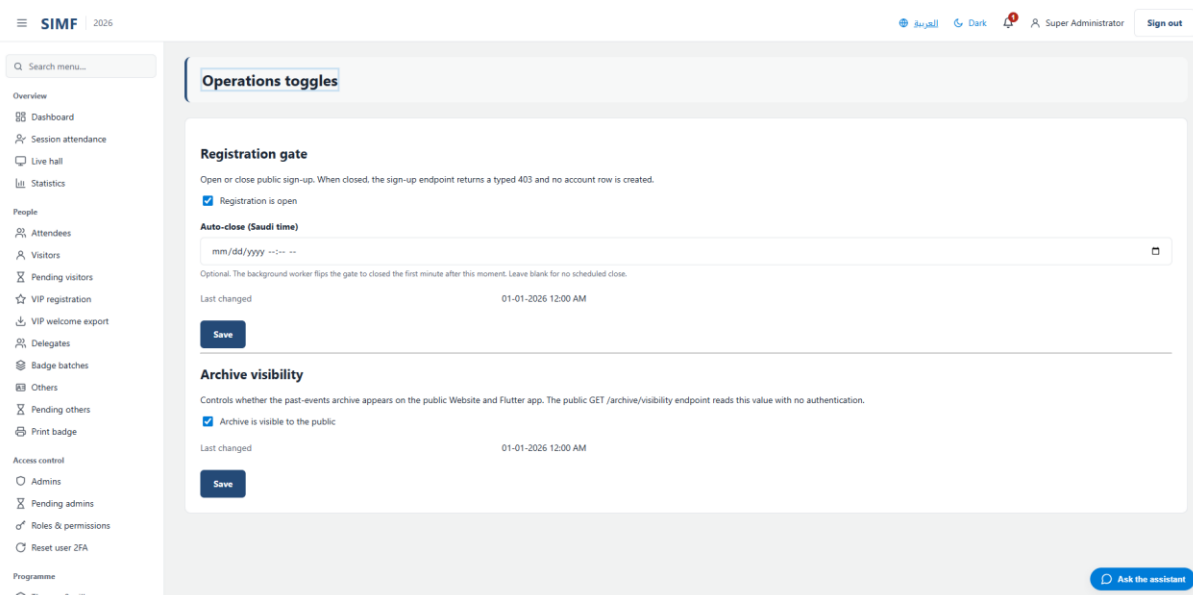


Figure 69 — The operations switches, which turn features on and off for an event day without touching the server.

How a variable name is built

Each application reads its own prefix, and a colon in the setting name becomes a double underscore in the variable name.

Application	Prefix	Example
API	SIMF_API_	SIMF_API_ConnectionStrings__SimfAppDb
Control Panel	SIMF_CP_	SIMF_CP_Api__BaseUrl
Website	SIMF_WEB_	SIMF_WEB_Api__BaseUrl
Mobile edge	SIMF_EDGE_	SIMF_EDGE_ReverseProxy__KnownProxies__0

A bare SIMF_ prefix binds to nothing. Worse, each application refuses to start if it finds variables using that retired prefix, naming them in the error — so an upgraded server must have the new variables written first and the old ones cleared afterwards, never the other way round. The one exception is ASPNETCORE_ENVIRONMENT, which is read before any prefix applies and stays unprefixed on every host.

How to set one

From an elevated PowerShell prompt on the server, machine scope, then restart IIS so the worker process picks up the new environment block:

```
[Environment]::SetEnvironmentVariable(
    'SIMF_API_ConnectionStrings__SimfAppDb',
    'Server=...;Database=SIMF_App;...',
    [EnvironmentVariableTarget]::Machine)
```

iisreset

Recycling the application pool is not enough, and this is the most common reason a correctly set value appears to have no effect.

The values that stop a server starting

Ten values are boot gates: leave one empty and the application refuses to start. They do not all hold in the same places, and where a gate holds matters as much as its name. This is deliberate — each one protects something that would otherwise fail silently and much later.

Variable	Application	Where it holds
SIMF_API_Jwt__SigningKey	API	Every environment
SIMF_API_ReverseProxy__KnownProxies__0	API	Outside development
SIMF_CP_DataProtection__KeyRingPath	Control Panel	Outside development
SIMF_WEB_DataProtection__KeyRingPath	Website	Outside development
SIMF_EDGE_ReverseProxy__Clusters__api__Destinations__primary__Address	Mobile edge	Outside development
SIMF_EDGE_ReverseProxy__KnownProxies__0	Mobile edge	Outside development

SIMF_API_FileStorage__EncryptionKey	API	Production only
SIMF_API_Storage__UserIdDocumentEncryptionKey	API	Production only
SIMF_API_Ai__PromptHash__Secret	API	Production only
SIMF_API_SuperAdmin__TotpSecret	API	Production only

One more value stops a boot without being empty. The Control Panel and the Website refuse to start unless their API address is https outside development, and both ship `http://localhost:5175/` — so the shipped default is itself a refused boot on any server that is not a development box.

Two of the API's gates are encryption keys, and they behave differently under change. The file-store key wraps a per-file key, so it has a rotation path in principle — but the job that finishes a rotation has never been built, so treat it as set once. The identity-document key has no such path at all: changing it strands every encrypted column permanently, with no way back. Escrow both, with the version number stamped alongside the file-store key, before the system carries any real data.

```
# Generate a 32-byte key, base64-encoded:
openssl rand -base64 32
```

```
# The JWT signing key wants more:
openssl rand -base64 48
```

The API

The API reads by far the most configuration — the connection strings, every key, the mail server, the bootstrap administrator and the AI provider. Its script on a provisioned server carries 82 variables.

Databases

Variable	What it controls	Ships as	Set it to
SIMF_API_ConnectionStrings__SimfIdentityDb	The accounts, roles and permissions database.	empty	Required
SIMF_API_ConnectionStrings__SimfAppDb	Everything else — profiles, programme, gates, meetings.	empty	Required

Both are required. The application throws on the first database access if either is missing — it does not start and then misbehave.

Keys and tokens

Variable	What it controls	Ships as	Set it to
SIMF_API_Jwt__SigningKey	Signs every access token. Also derives the one-time-code and meeting-link hashes, so changing it invalidates those too.	empty	At least 32 bytes; 48 recommended
SIMF_API_Jwt__Issuer	The token issuer name.	SIMF	SIMF
SIMF_API_Jwt__Audience	The token audience name.	SIMF	SIMF
SIMF_API_Jwt__AccessTokenMinutes	How long an access token stays valid.	5	5
SIMF_API_Jwt__SessionLifetimeHours	How long a signed-in session may be refreshed for.	24	24
SIMF_API_Storage__UserIdDocumentEncryptionKey	Encrypts the national ID, Iqama, passport and mobile columns. Cannot be changed once data exists.	empty	A secret — generate one per environment (32 bytes, base64)
SIMF_API_FileStorage__EncryptionKey	Wraps the key of every encrypted stored file.	empty	A secret — generate one per environment (32 bytes, base64)
SIMF_API_FileStorage__KekVersion	The version stamp written into every encrypted file. On a restore the right key under the wrong version fails every read.	1	1

SIMF_API_FileStorage__PreviousEncryptionKey	The superseded key, during a rotation only.	empty	Leave empty
SIMF_API_Ai__PromptHash__Secret	Signs the AI prompt fingerprints. Without it the application falls back to a publicly derivable key.	empty	A secret — generate one per environment

The first administrator

Variable	What it controls	Ships as	Set it to
SIMF_API_SuperAdmin__Email	The bootstrap administrator's address.	superadmin@simrsnf.com	The real address
SIMF_API_SuperAdmin__TempPassword	Its starting password. Must satisfy the password rules, including the no-sequential-run rule.	empty	A secret — generate one per environment
SIMF_API_SuperAdmin__TotpSecret	Its authenticator secret, and a boot gate: in production the API refuses to start without it. Outside production there is no gate, and the most privileged account in the system is then protected by a password alone.	empty	A secret — generate one per environment (base32)
SIMF_API_SuperAdmin__PasswordChangeRequired	Force a password change at the first sign-in.	true	true
SIMF_API_Seed__DemoPassword	The shared password of the sample accounts.	empty	Leave empty in production
SIMF_API_Seed__EnableDemoAccounts	Create the sample accounts outside development.	false	false

The sample accounts must not exist on a production system. They are created only in development, or when the switch above is turned on deliberately.

Mail

Variable	What it controls	Ships as	Set it to
SIMF_API_Email__Host	The mail server.	empty	Required
SIMF_API_Email__Port	Its port.	587	587
SIMF_API_Email__User	The mail account.	empty	Required
SIMF_API_Email__Password	Its password.	empty	A secret — generate one per environment
SIMF_API_Email__FromAddress	The address mail is sent from.	no-reply@ammn.com.sa	The verified sender
SIMF_API_Email__FromName	The display name on sent mail.	SIMF	SIMF
SIMF_API_Email__FailureAlertRecipients	Who is told when mail delivery starts failing.	empty	An operations address

Mail failure is invisible from the interface. Sending is queued in the background, so a wrong password does not throw, does not appear on screen, and does not stop an account being created — the messages simply never arrive. Set the alert recipients, and test delivery after every change.

An EMPTY mail host is worse than a wrong one, and this was observed rather than reasoned about. With no host configured every message fails in a way the retry logic treats as permanent, so each one is dropped on its first attempt rather than retried. The sender itself does not stop — it keeps draining the queue — but nothing is delivered, and the health check reports the API as unhealthy from that first failure until a send finally succeeds, while the site keeps serving pages normally. If a load balancer is watching that endpoint it will take a working server out of rotation because nobody filled in an SMTP host, and restarting the API will not clear it.

Network and limits

Variable	What it controls	Ships as	Set it to
SIMF_API_ReverseProxy__KnownProxies__0	The trusted proxy, so a visitor's real address is recovered.	empty	The proxy's IP ADDRESS
SIMF_API_Cors__WebAppOrigins__0	A browser origin allowed to call the API. Numbered from zero.	empty	Each public site address
SIMF_API_RateLimit__PermitLimit	Requests allowed per address in the window.	20	20
SIMF_API_RateLimit__WindowSeconds	The window, in seconds.	60	60
SIMF_API_Swagger__AllowSwagger	Publish the interactive API documentation in production.	false	false
SIMF_API_FileStorage__RootPath	Where uploaded files are written.	empty	An explicit path that is backed up
SIMF_API_Storage__LogDirectory	Where the log files are written.	logs	An explicit path

The trusted-proxy entry must be an IP address. A host name is read, fails to parse, and is dropped without a word — the setting then looks configured while every visitor shares one rate-limit bucket. If the file-store path is left empty the files land in a default location under ProgramData that nobody chose and that a backup may not cover.

Walk-in desk and offline badges

These govern the on-site registration desk. Every switch ships off, so the desk behaves conservatively until somebody deliberately opens it up for an event day.

Variable	What it controls	Ships as	Set it to
SIMF_API_WalkInMode__Enabled	The desk features as a whole.	false	true on event days
SIMF_API_WalkInMode__ExpiresAt	When the desk switches itself off again.	empty	Blank means never
SIMF_API_WalkInMode__QuickRegister	The shortened desk form.	false	false
SIMF_API_WalkInMode__QuickRegisterRequiresIdentityDocument	Whether the short form still demands an identity document.	true	true
SIMF_API_WalkInMode__AutoApprove	Approve a desk visitor immediately and print the badge. Never applies to partner accounts.	false	Only on an event day
SIMF_API_WalkInMode__SessionWalkIn	Admission to a session at the door.	false	false
SIMF_API_WalkInMode__ArrivalGraceMinutes	How late an arrival still counts. Capped at 240.	15	15
SIMF_API_WalkInMode__AcceptOfflineBadges	Honour badges issued by a desk with no network.	false	false
SIMF_API_WalkInMode__OfflineUpload	Accept a batch uploaded from an offline desk.	false	false
SIMF_API_WalkInMode__AllowBadgeActivation	Let a badge be activated at the desk.	false	false
SIMF_API_WalkInMode__BadgeKey	Signs offline badges. Only meaningful when offline	empty	A secret — generate one per environment

	badges are accepted.		
SIMF_API_WalkInMode__BadgeKeyVersion	Its version stamp.	0	0
SIMF_API_WalkInMode__PreviousBadgeKey	The superseded badge key, during a rotation only.	empty	Leave empty
SIMF_API_WalkInMode__PreviousBadgeKeyVersion	Its version stamp.	0	0

The offline badge desk carries its own copy of the badge key and its version. The two must match the API values exactly, or every badge the desk issues is refused at the gate.

Account lifecycle and devices

Variable	What it controls	Ships as	Set it to
SIMF_API_IdentityLifecycle__RequireControlPanelTwoFactorEnrolment	Force every Control Panel account through authenticator enrolment.	true	true
SIMF_API_IdentityLifecycle__PasswordMaxAgeDays	Expire a password after this many days. Zero means never.	0	0
SIMF_API_IdentityLifecycle__PasswordHistoryCount	How many previous passwords may not be reused. Zero disables it.	0	0
SIMF_API_IdentityLifecycle__DormantAccountDisableDays	Disable an account unused for this long. Zero means never.	0	0
SIMF_API_DeviceKey__RequireStepUpForEnrol	Demand a second factor before a device key is enrolled.	true	true
SIMF_API_DeviceKey__MaxActiveKeysPerUser	How many devices one account may keep enrolled.	5	5
SIMF_API_Jwt__StreamAudience	The audience of the short-lived token that authorises a video stream.	simf-stream	simf-stream
SIMF_API_Jwt__StreamTokenMinutes	How long that	180	180

	token lasts.		
--	--------------	--	--

Artificial intelligence

The AI features answer with a harmless echo until a provider is configured, so an unconfigured deployment degrades quietly rather than failing.

Variable	What it controls	Ships as	Set it to
SIMF_API_Ai__DefaultProvider	Which provider answers: Echo, Anthropic, Gemini or OpenAi.	Echo	Anthropic
SIMF_API_Ai__Anthropic__ApiKey	The Anthropic key.	empty	A secret — generate one per environment
SIMF_API_Ai__Anthropic__DefaultModel	The model used by default.	claude-haiku-4-5-20251001	claude-haiku-4-5-20251001
SIMF_API_Ai__Anthropic__BaseUrl	The provider address.	https://api.anthropic.com	https://api.anthropic.com
SIMF_API_Ai__Anthropic__DefaultMaxTokens	The reply length ceiling.	2048	2048
SIMF_API_Ai__Gemini__ApiKey	The Gemini key, if used.	empty	Leave empty unless used
SIMF_API_Ai__OpenAi__ApiKey	The OpenAI key, if used.	empty	Leave empty unless used

Uploads, media and links

Variable	What it controls	Ships as	Set it to
SIMF_API_UploadScanning__Enabled	Scan every upload before it is stored.	true	true
SIMF_API_FaceDetection__Enabled	Check that an identity photograph contains a face.	true	true
SIMF_API_FaceDetection__MinConfidence	How sure that	0.5	0.5

	check must be.		
SIMF_API_SessionRecordingStorage__MaxUploadBytes	The largest session recording accepted (1 GB).	1073741824	1073741824
SIMF_API_OrganizationHeroVideo__MaxUploadBytes	The largest banner video accepted (200 MB).	209715200	209715200
SIMF_API_OrganizationHeroVideo__PublicApiBaseUrl	The address that video is served from publicly.	empty	The edge address
SIMF_API_MeetingLinks__PublicWebBaseUrl	The site a meeting confirmation link points at. Without it the Control Panel refuses the speaker approve and resend actions and names this setting in the error — no link is minted and no email is sent.	empty	https://web.simrsnf.com
SIMF_API_MeetingLinks__TokenTtlHours	How long such a link stays valid.	72	72
SIMF_API_Swagger__Username	Guards the interactive documentation when it is published.	empty	Required only if the documentation is published
SIMF_API_Swagger__Password	Its password.	empty	A secret — generate one per environment
SIMF_API_Serilog__MinimumLevel__Default	How much is logged.	Information	Information
SIMF_API_AllowedHosts	The host names the API answers for.	*	api.simrsnf.com

The Control Panel

The Control Panel holds no database of its own. It talks to the API, and it needs somewhere shared to keep the keys that protect its session cookies.

Variable	What it controls	Ships as	Set it to
SIMF_CP_Api__BaseUrl	The API address, with a trailing slash.	http://localhost:5175/	https://api.simrsnf.com/
SIMF_CP_DataProtection__KeyRingPath	Where the cookie-protection keys live.	empty	A shared, backed-up path
SIMF_CP_Session__LifetimeHours	How long a session lasts.	8	8
SIMF_CP_Storage__LogDirectory	Where its logs are written.	logs	An explicit path
SIMF_CP_AllowedHosts	The host names it will answer for.	*	cp.simrsnf.com

The Control Panel and the Website must be given the SAME API address and the SAME key-ring path. A build-time test fails if the two disagree.

The Website

Variable	What it controls	Ships as	Set it to
SIMF_WEB_Api__BaseUrl	The API address; must match the Control Panel's.	http://localhost:5175/	https://api.simrsnf.com/
SIMF_WEB_DataProtection__KeyRingPath	Its key ring; must match the Control Panel's path.	empty	The same shared path
SIMF_WEB_AllowedHosts	The host names it will answer for.	*	web.simrsnf.com

The mobile edge

The edge is the only application the mobile app talks to. It is a reverse proxy in front of the API, and it exists so the API itself never has to be published to the internet.

Variable	What it controls	Ships as	Set it to
----------	------------------	----------	-----------

	Is		
SIMF_EDGE_ReverseProxy__Clusters__api__Destinations__primary__Address	Where the edge forwards to.	empty	https://api.simrsnf.com/
SIMF_EDGE_ReverseProxy__KnownProxies__0	The trusted hop in front of the edge.	empty	The load balancer's IP ADDRESS
SIMF_EDGE_AllowedHosts	The host names it will answer for.	*	edge.simrsnf.com

The public web application

The Flutter web bundle is different in kind: its settings are COMPILED INTO the build rather than read from the server, so changing one means rebuilding and redeploying the bundle, not setting a variable and restarting.

Variable	What it controls	Ships as	Set it to
ApiBase	The address the application calls. Must be https and must end in the API version path; the build refuses otherwise. A bundle built without it falls back to a localhost address baked into the app.	https://edge.simrsnf.com/api/v1	https://edge.simrsnf.com/api/v1
OutDir	Where the built bundle is written. The script DELETES this folder and recreates it on every run, so check the path before the first build.	D:\System\v1.0.1\appweb	The site folder
AppKey	The application key, if the gate is in use.	empty	A secret — generate one per environment

SupportPhone	The support number shown in the application.	empty	The real number
SupportEmail	The support address.	empty	The real address
SocialX, SocialInstagram, SocialLinkedIn, SocialYouTube, SocialTikTok	The social links in the footer. Any left empty is hidden.	empty	The real profiles
VisitSaudiUrl	The tourism link.	https://www.visitsaudi.com	https://www.visitsaudi.com

Every host

Variable	What it controls	Ships as	Set it to
ASPNETCORE_ENVIRONMENT	Which environment the application believes it is in. Unprefixed, and identical on every server.	not set	Production

Setting this to anything other than Production disables the four Production-only boot gates — the two encryption keys, the AI prompt-hash secret and the super-admin authenticator seed — and publishes the interactive API documentation. The other gates key off Development rather than Production, so they still hold on a Staging server, and nothing anywhere disables the JWT signing-key check. Sample-data seeding is a separate rule again: Development turns it on, or the Seed switch set deliberately. It is still the single most consequential value on the server.

Appendix — what writing this manual found

This appendix records what was found while every page was opened and every constraint checked against the code. Four groups. The first and the third were CORRECTED in the same change that produced this manual, and are kept here because the pattern matters more than any single line: a document and the code drift apart silently, and the drift is only visible to somebody reading both. The second group is differences with the requirements documents, which are recorded here and left for their owners to amend. The fourth is behaviour, not error - nothing to fix, but worth knowing before it surprises somebody.

Documents that disagreed with the code — corrected

What a document says	What the code does
Thirteen page references described the page guard as a role check on Administrator — because the TEMPLATE they were copied from did, which is why one error appeared thirteen times	Pages are guarded by a named permission, not by a role. The template now says so, and says why
The administrator manual says the Edit action on the administrators list is an unbuilt placeholder	Edit opens a working role editor and saves through a live endpoint
The administrator manual gives the Control Panel address as cp.simf.local	The repository's own index gives localhost:5158 for a local run
The operations document describes one shared configuration prefix	There have been four, one per application, since August 2026
The operations document lists two storage paths as required	Both were removed; setting them does nothing
The operations document gives the access-token lifetime as 30 minutes	It is 5
The deployment guide says the API configuration script carries 62 values	It declares 82
The recovery procedure says the seeder re-applies the configured authenticator secret on every start	It re-applies it only while two-factor is still switched on for that account

Requirements documents that describe something the system does not do — recorded, not corrected

These came out of writing the module chapters. They are differences between a controlled requirements document and the built system, and unlike the group above they were NOT changed here: a requirements document is amended by the person who owns it, through the process that governs it, not by the writer of a manual. Each is stated in the chapter it belongs to as well, so a reader of that chapter is not misled by the document.

What the document says	What the system does
FDS-006: sponsor tiers are Strategic, Premium and Gold	They are Platinum, Gold, Silver and Bronze, and the Add form opens a new sponsor on Platinum. Exhibitors carry a separate tier list of their own
FDS-006: the venue map is a three-dimensional isometric	It is a two-dimensional set of labelled points, and the public website shows a static exported image rather than

floor plan	drawing it
FDS-009: notifications go out over text message and messaging applications as well	There are two channels: a notification inside the app and an email. The others were never built
FDS-010: a news article's category is a managed list	It is free text typed on the article, so two articles can carry two spellings of one category
FDS-010: each previous edition carries its own visibility flag	There is one switch for the whole archive, on the Operations page
FDS-012: a content-block edit shows on the website and the app without a release	The app reads content blocks. No shipped website page does
FDS-012: registration is opened and closed from the System Configuration page	It is on the Operations page. The Configuration table ships with the six app-update keys the seeder creates, their values empty, and holds no registration control

Wording in the product that no longer matched its behaviour — corrected

- Saving a new visitor said an invitation had been sent. None is sent on that path — the wording predated the registration wizard that replaced it. It now says the visitor was registered.
- Saving a partner account showed the ADMINISTRATORS' message, which promises an invitation email that this path never queues. Partner accounts now have their own message, and it says the account is waiting for approval.
- The partner page's supporting line described a seven-day password invitation, which belongs to a create endpoint no page calls. It now describes what the page actually does.

Behaviour worth knowing before it surprises somebody

- With no mail host configured, every send fails and each message is dropped on its first attempt, so no backlog is waiting to go out later — but the sender itself does not stop, it keeps draining the queue. The health check reports the whole API as unhealthy from that first failure until a send finally succeeds, while every page keeps working. Seen during the writing of this manual, after creating an account triggered its first notification.
- On a fresh installation the organisation logo is absent, so its page requests an image that is not there. The page is unharmed; the logo simply has not been uploaded yet.
- The registration desk accepts a passport format that the mobile application would reject, because only the desk skips the format check.
- The Arabic and English name fields accept 128 characters in the browser and are refused above 50 by the server.
- Walking quickly from page to page exhausts the per-address request allowance, because the whole Control Panel reaches the API from one address and many of its admin calls share the same twenty-a-minute window. Nothing breaks; the refused call fails until the window rolls over.

Every page in the Control Panel

This section lists every page the Control Panel serves, in the order the menu presents them. For each: the address, the file that implements it, the permission that gates the page, the permission that puts it in the menu, and a picture of the page as it renders. It is generated from the source code on every build, so it describes the system as it is rather than as it once was.

Overview

Dashboard (/)

Property	Value
Address	/
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Home.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Home.razor.cs
Page permission	Any signed-in user
Menu permission	-

It calls: `/account/api/admin/statistics` `/account/api/admin/statistics/programme`

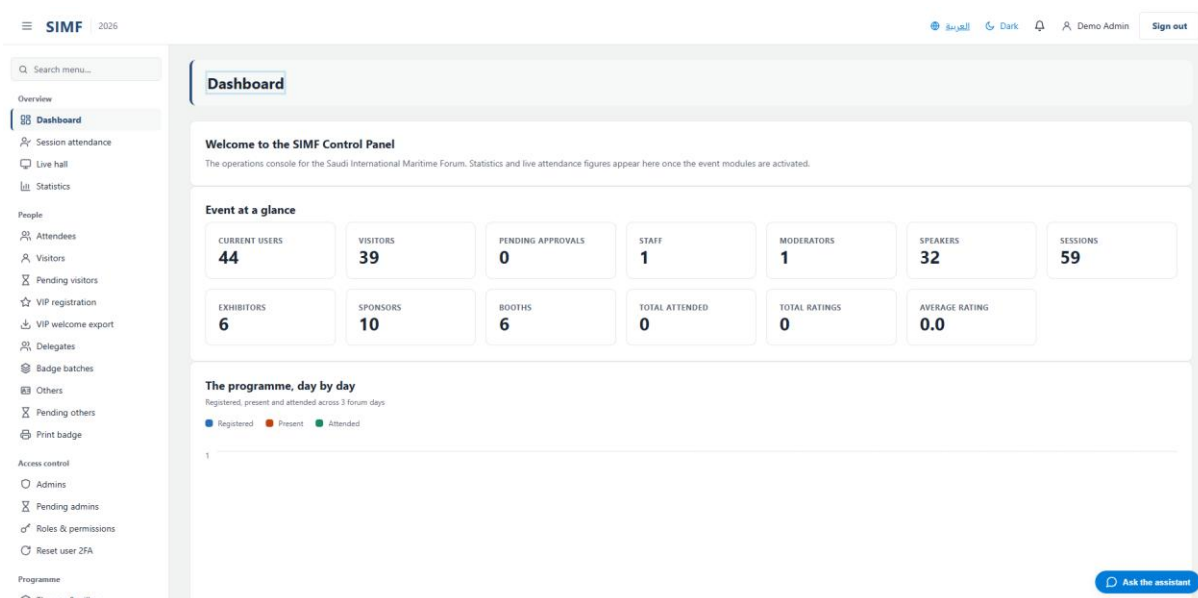


Figure 70 — Dashboard — /

Session attendance (/admin/attendance)

Property	Value
Address	/admin/attendance
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendanceDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendanceDashboard.razor.cs
Page permission	Attendance.View

Menu permission	Attendance.View
-----------------	-----------------

The list shows: Code · Session · Hall · Start (Saudi time) · Total attendees · Live now

It calls: /account/api/admin/attendance/sessions/list /account/api/admin/attendance/summary

Figure 71 — Session attendance — /admin/attendance

Live hall (/admin/sessions/live-hall)

Property	Value
Address	/admin/sessions/live-hall
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionLiveHall.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionLiveHall.razor.cs
Page permission	Attendance.View
Menu permission	Attendance.View

It calls: /account/api/admin/attendance/sessions/list
/account/api/admin/sessions/{session.SessionId}/present/list
/account/api/admin/sessions/{session.SessionId}/seat-map

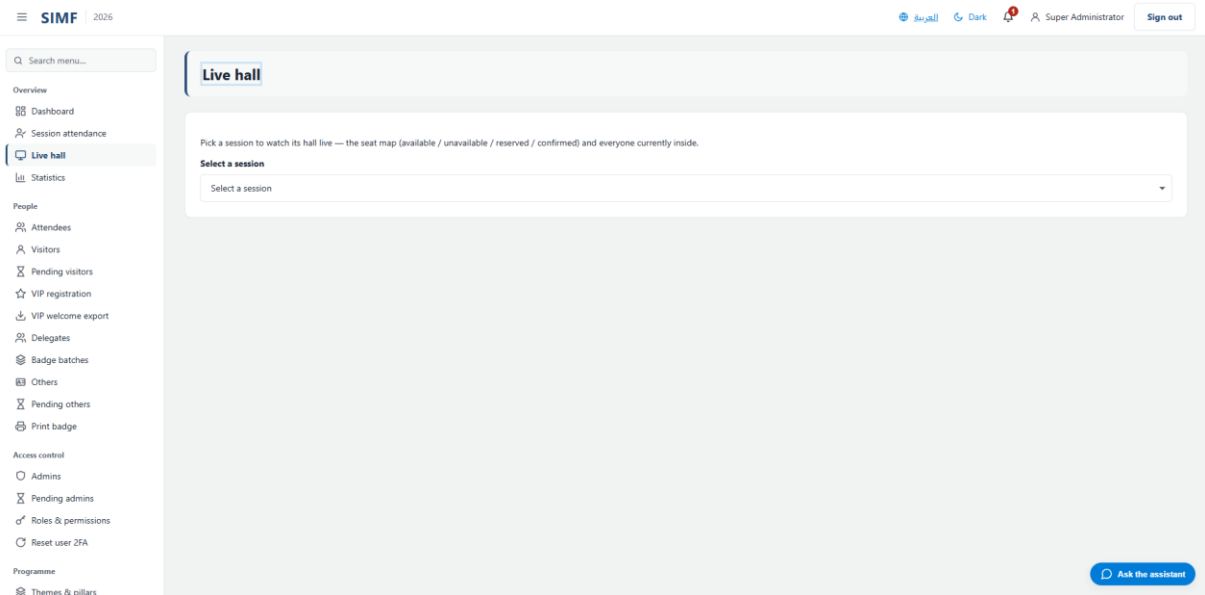


Figure 72 — Live hall — /admin/sessions/live-hall

Statistics (/admin/statistics)

Property	Value
Address	/admin/statistics
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/StatisticsDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/StatisticsDashboard.razor.cs
Page permission	Statistics.View
Menu permission	Statistics.View

It calls: /account/api/admin/statistics

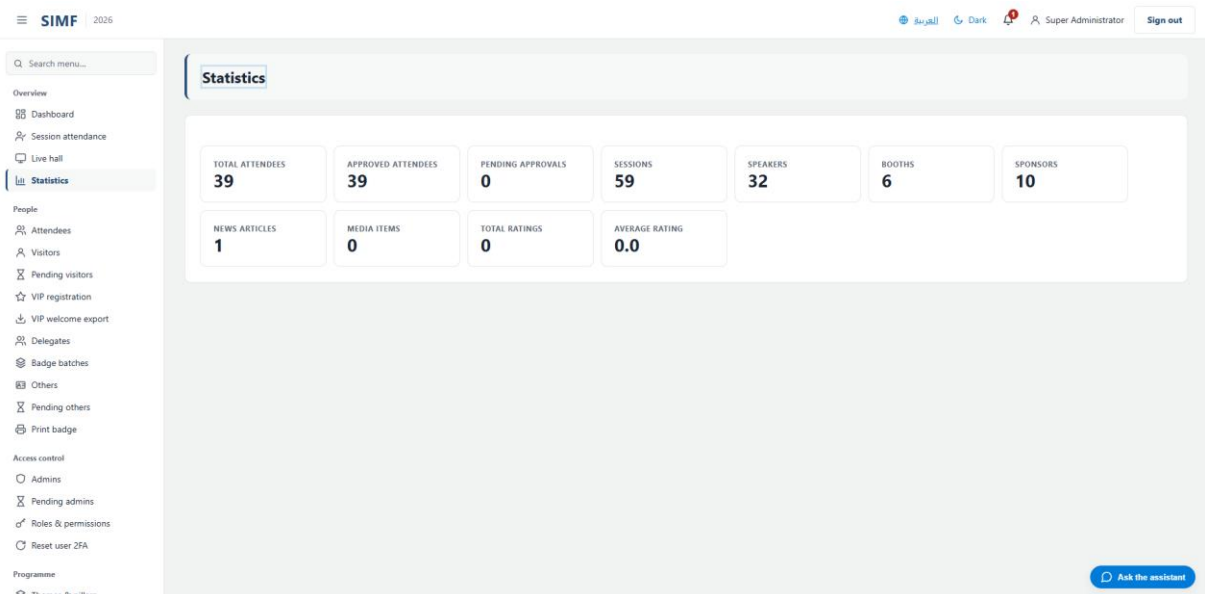


Figure 73 — Statistics — /admin/statistics

People

Attendees (/admin/attendees)

Property	Value
Address	/admin/attendees
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendeesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendeesList.razor.cs
Page permission	Attendees.View
Menu permission	Attendees.View

What you can do here

Action	Permission it needs
A button the page gates itself	Attendees.Export

The list shows: Email · Display name · Kind · Profile type · State · QR id · Registered

It calls: /account/api/admin/attendees/export /account/api/admin/attendees/list

The screenshot displays the 'Attendees' management page. At the top, there's a header with the SIMF 2026 logo and user information. A sidebar on the left contains navigation links. The main content area features a filter section with dropdowns for 'Kind' (All) and 'State' (Any), a text input for 'Email or display name contains' (e.g., ahmed or @example.com), and date pickers for 'From date' and 'To date'. Below the filters are 'Apply filters', 'Clear', and 'Export' buttons. A table lists attendees with columns: EMAIL, DISPLAY NAME, KIND, PROFILE TYPE, STATE, QR ID, and REGISTERED. The table shows 8 entries, all marked as 'Approved'. At the bottom, there's a pagination bar indicating 'Showing 1-8 of 8' and 'Page 1 of 1'.

Figure 74 — Attendees — /admin/attendees

Visitors (/admin/visitors)

Property	Value
Address	/admin/visitors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VisitorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VisitorsList.razor.cs
Page permission	Visitors.View
Menu permission	Visitors.View

What you can do here

Action	Permission it needs
Add	Visitors.Create
Edit	Visitors.Edit
Details	No permission of its own
Duplicate	Visitors.Create
Copy	No permission of its own
Copy (on the selected rows)	No permission of its own
Paste	Visitors.Create
Delete	Visitors.Delete
Delete (on the selected rows)	Visitors.Delete
Import from Excel	Visitors.Import
Export to Excel	Visitors.Export
A button the page gates itself	Visitors.BulkGenerate

The list shows: Email · Display name · State

It calls: /account/api/admin/visitors/bulk-delete /account/api/admin/visitors/duplicate
 /account/api/admin/visitors/export /account/api/admin/visitors/import
 /account/api/admin/visitors/list /account/api/admin/visitors/{row.Id}/avatar

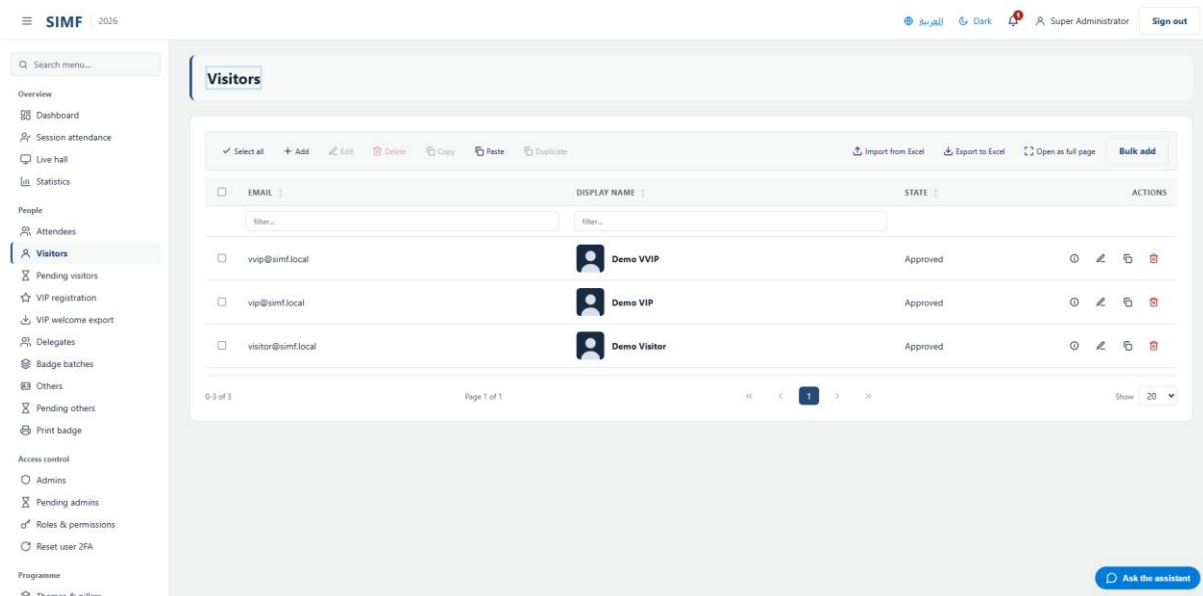


Figure 75 — Visitors — /admin/visitors

Pending visitors (/admin/visitors/pending)

Property	Value
Address	/admin/visitors/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingVisitors.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingVisitors.razor.cs
Page permission	Visitors.View
Menu permission	Visitors.View

What you can do here

Action	Permission it needs
Approve selected	Visitors.Approve
Reject selected	Visitors.Reject

The list shows: Email · Display name · Created

It calls: `/account/api/admin/visitors/{row.Id}/avatar` `/account/api/admin/visitors/{user.Id}/profile-for-approval`

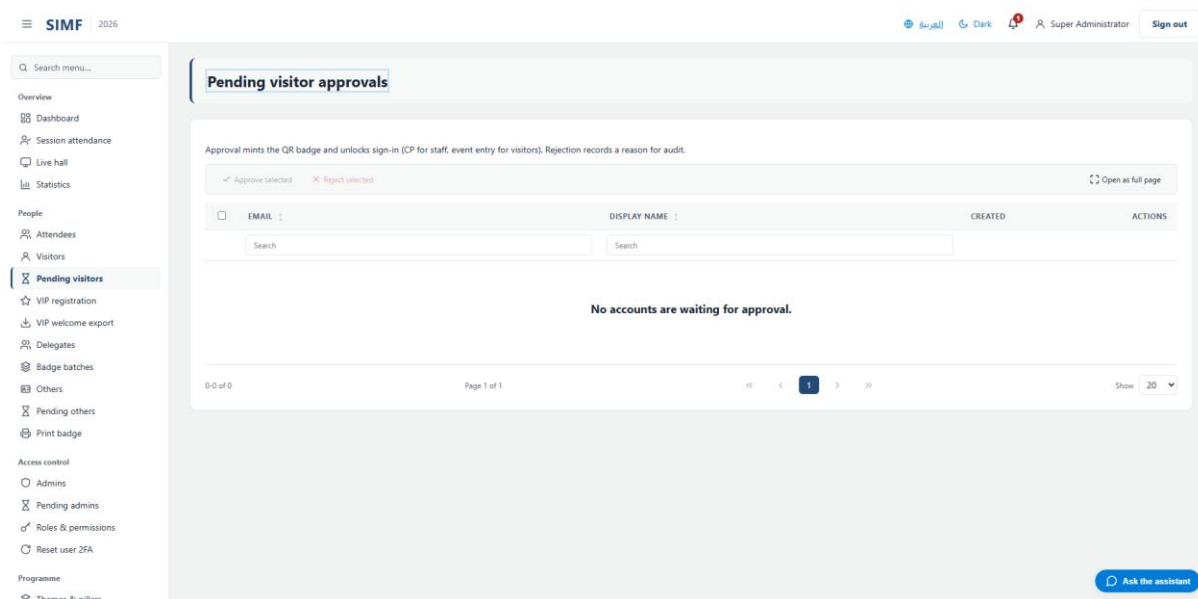


Figure 76 — Pending visitors — `/admin/visitors/pending`

VIP registration (`/admin/visitors/vip`)

Property	Value
Address	<code>/admin/visitors/vip</code>
Implemented by	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipRegistration.razor</code>
Code-behind	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipRegistration.razor.cs</code>
Page permission	<code>Visitors.RegisterOnsite</code>
Menu permission	<code>Visitors.RegisterOnsite</code>

What you can do here

Action	Permission it needs
New VIP	No permission of its own
Edit	No permission of its own
Details	No permission of its own

The list shows: Name · Job title · Profile type · Email

It calls: `/account/api/admin/vips/list`

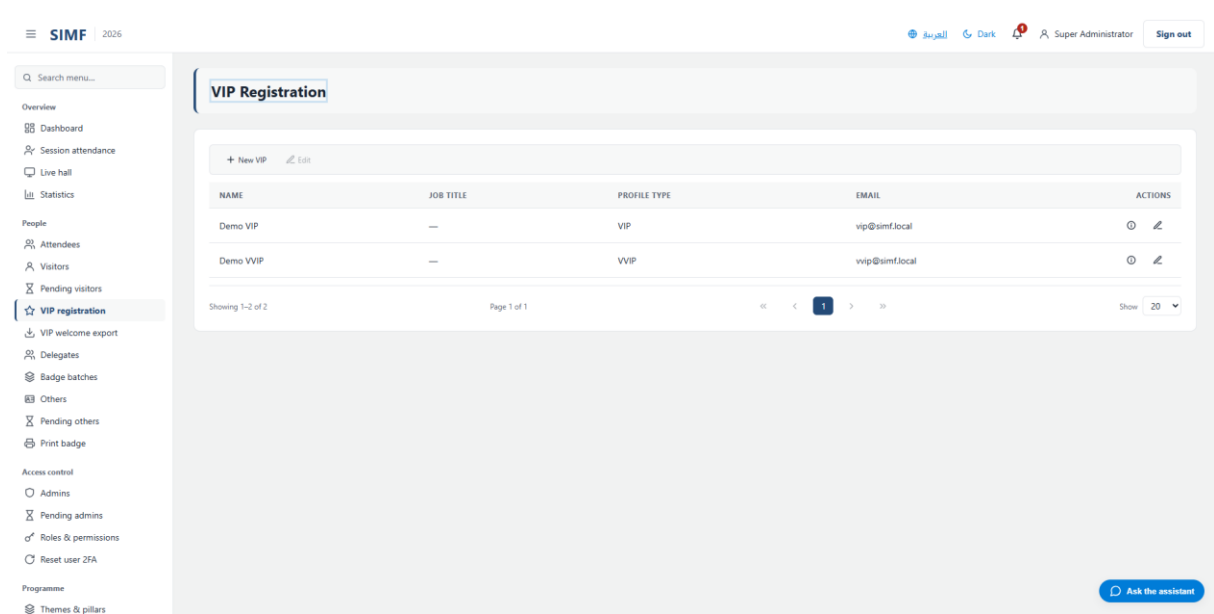


Figure 77 — VIP registration — /admin/visitors/vip

VIP welcome export (/admin/visitors/vip/export)

Property	Value
Address	/admin/visitors/vip/export
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipExport.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipExport.razor.cs
Page permission	Visitors.ExportVip
Menu permission	Visitors.ExportVip

The list shows: Photo · VIP welcome export (Mawj) · Full name (English) · Honorific / title (optional) · Job title (optional) · Mawj system ID (optional) · Preferred language (optional) · Email (optional) · Saudi mobile · Reference number

It calls: /account/api/admin/visitors/vip/roster /account/api/admin/visitors/vip/roster/list
/account/api/admin/visitors/{userId}/vip-photo

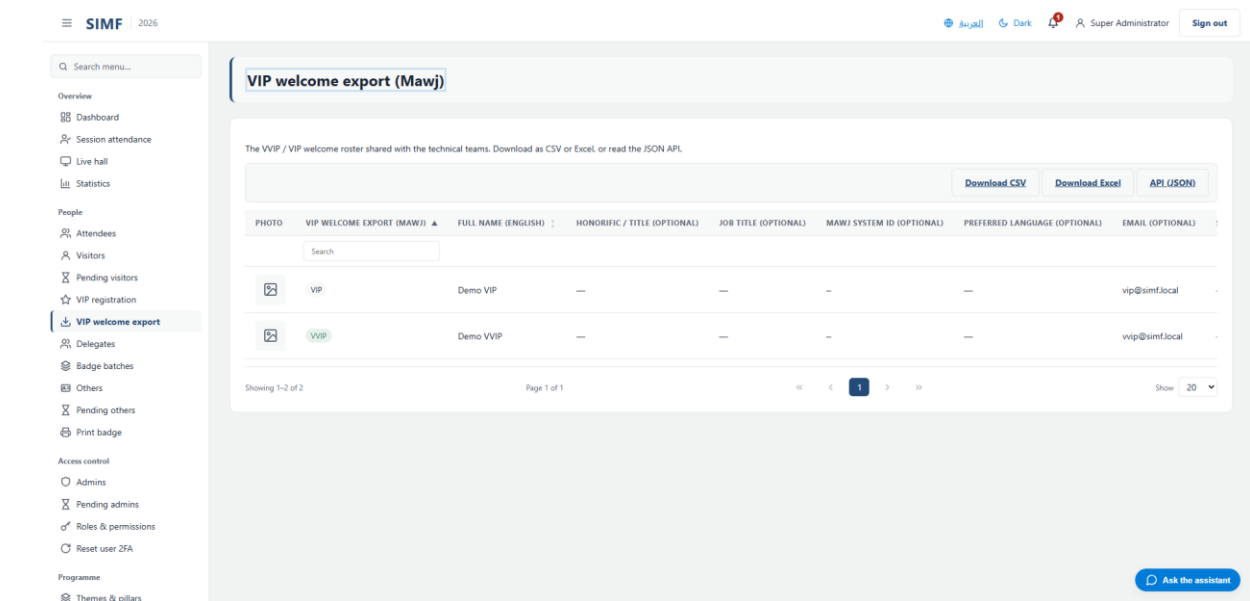


Figure 78 — VIP welcome export — /admin/visitors/vip/export

Delegates (/admin/delegates)

Property	Value
Address	/admin/delegates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegatesPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegatesPage.razor.cs
Page permission	Visitors.RegisterOnsite
Menu permission	Visitors.RegisterOnsite

What you can do here

Action	Permission it needs
A button the page gates itself	Visitors.BulkGenerate

Figure 79 — Delegates — /admin/delegates

Badge batches (/admin/visitors/badge-batches)

Property	Value
Address	/admin/visitors/badge-batches
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeBatchesPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeBatchesPage.razor.cs
Page permission	Visitors.ViewBatches
Menu permission	Visitors.ViewBatches

What you can do here

Action	Permission it needs
A button the page gates itself	Visitors.BulkGenerate
A button the page gates itself	Visitors.ManageBatches

The list shows: Order · Contents · Total · Delegation · Emailed to · Generated · Status

It calls: /account/api/admin/visitors/badge-batches/list /account/api/admin/visitors/badge-batches/re-email /account/api/admin/visitors/badge-batches/revoke /account/api/admin/visitors/badge-batches/top-up

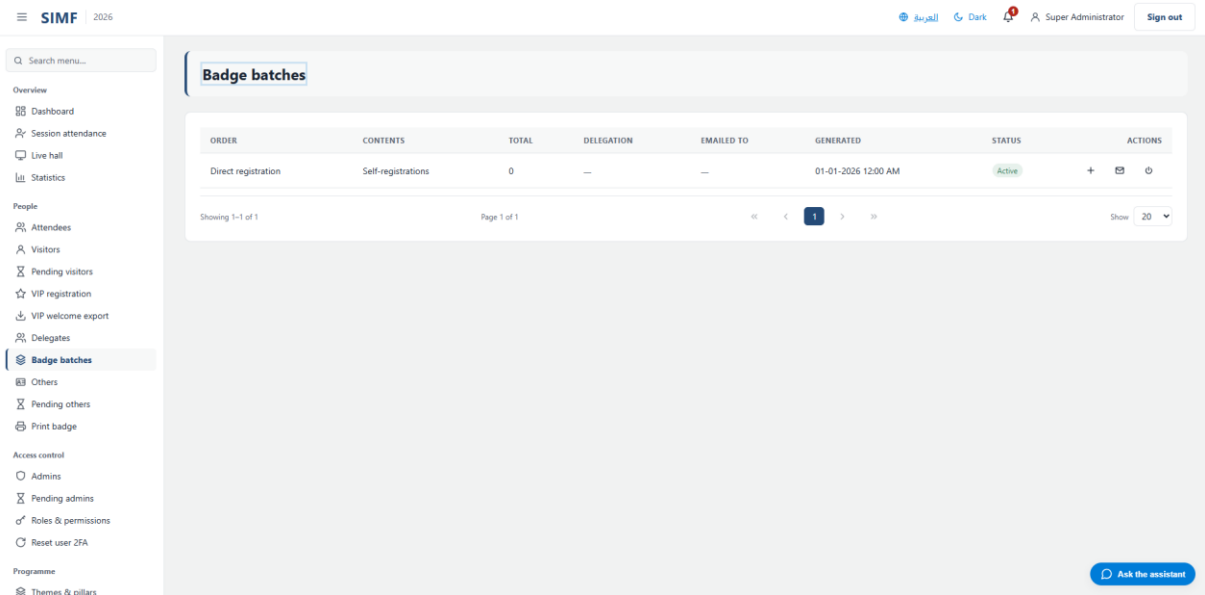


Figure 80 — Badge batches — /admin/visitors/badge-batches

Others (/admin/others)

Property	Value
Address	/admin/others
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OthersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OthersList.razor.cs
Page permission	Others.View
Menu permission	Others.View

What you can do here

Action	Permission it needs
Add	Others.Create
Edit	Others.Edit
Details	No permission of its own
Duplicate	Others.Create
Copy	No permission of its own
Copy (on the selected rows)	No permission of its own
Paste	Others.Create
Delete	Others.Delete
Delete (on the selected rows)	Others.Delete
Import from Excel	Others.Import
Export to Excel	Others.Export

The list shows: Email · Display name · State

It calls: /account/api/admin/others/bulk-delete /account/api/admin/others/duplicate
 /account/api/admin/others/export /account/api/admin/others/import /account/api/admin/others/list
 /account/api/admin/others/{id}/profile /account/api/admin/others/{row.Id}/avatar

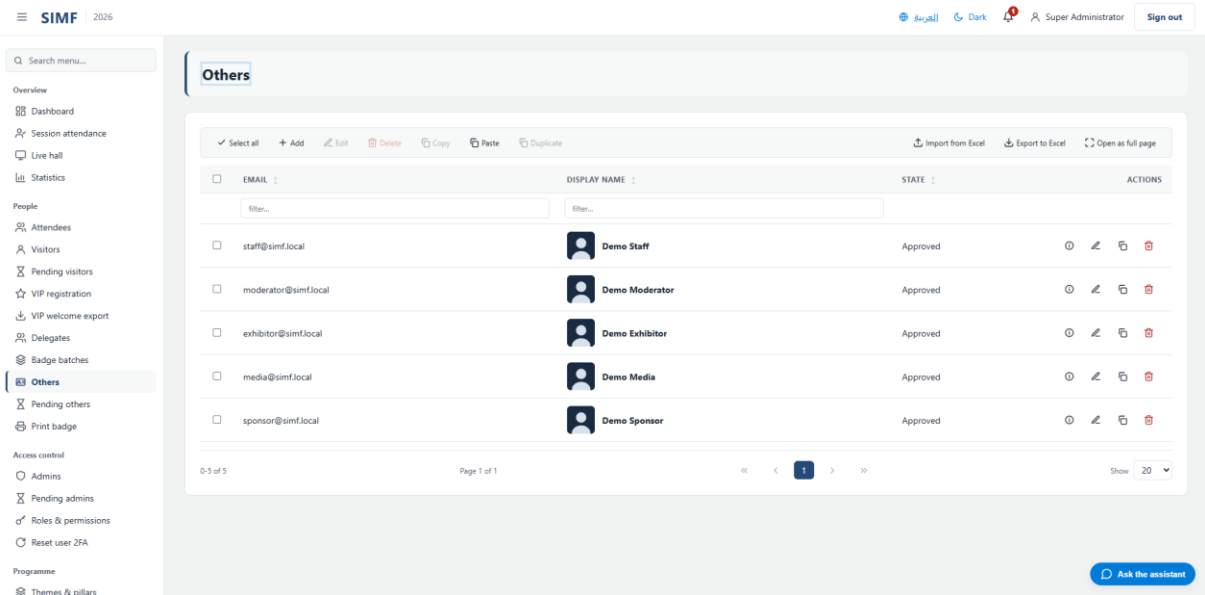


Figure 81 — Others — /admin/others

Pending others (/admin/others/pending)

Property	Value
Address	/admin/others/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingOthers.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingOthers.razor.cs
Page permission	Others.View
Menu permission	Others.View

What you can do here

Action	Permission it needs
Approve selected	Others.Approve
Reject selected	Others.Reject

The list shows: Email · Display name · Created

It calls: /account/api/admin/others/{row.Id}/avatar /account/api/admin/others/{user.Id}/profile-for-approval

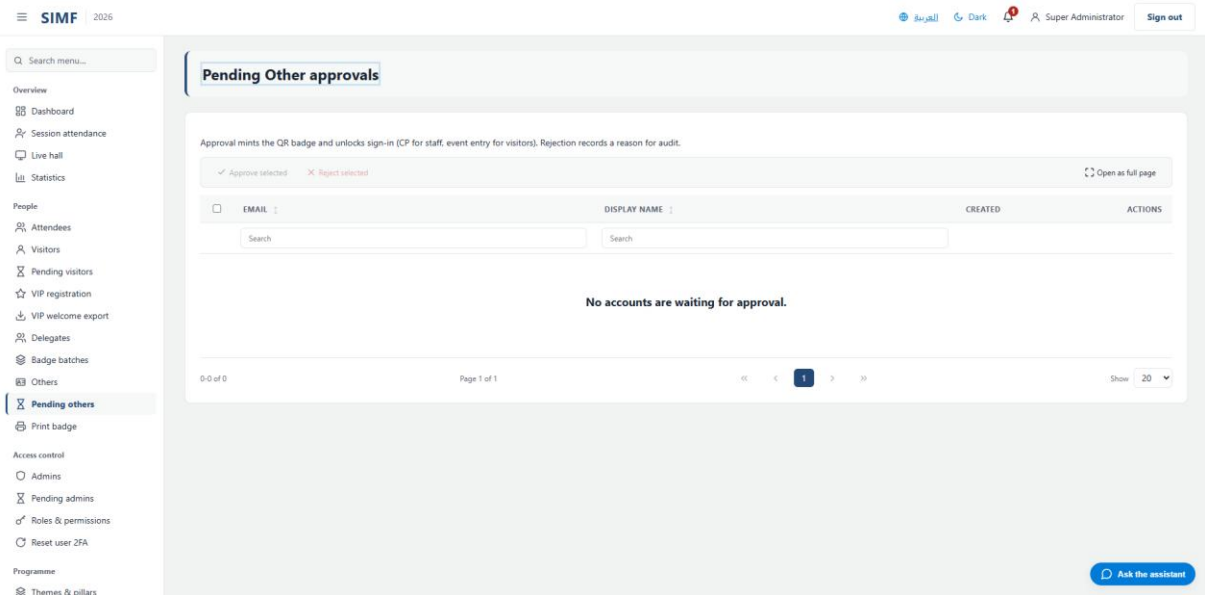


Figure 82 — Pending others — /admin/others/pending

Print badge (/admin/print-bag)

Property	Value
Address	/admin/print-bag
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PrintBag.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PrintBag.razor.cs
Page permission	Attendees.PrintBag
Menu permission	Attendees.PrintBag

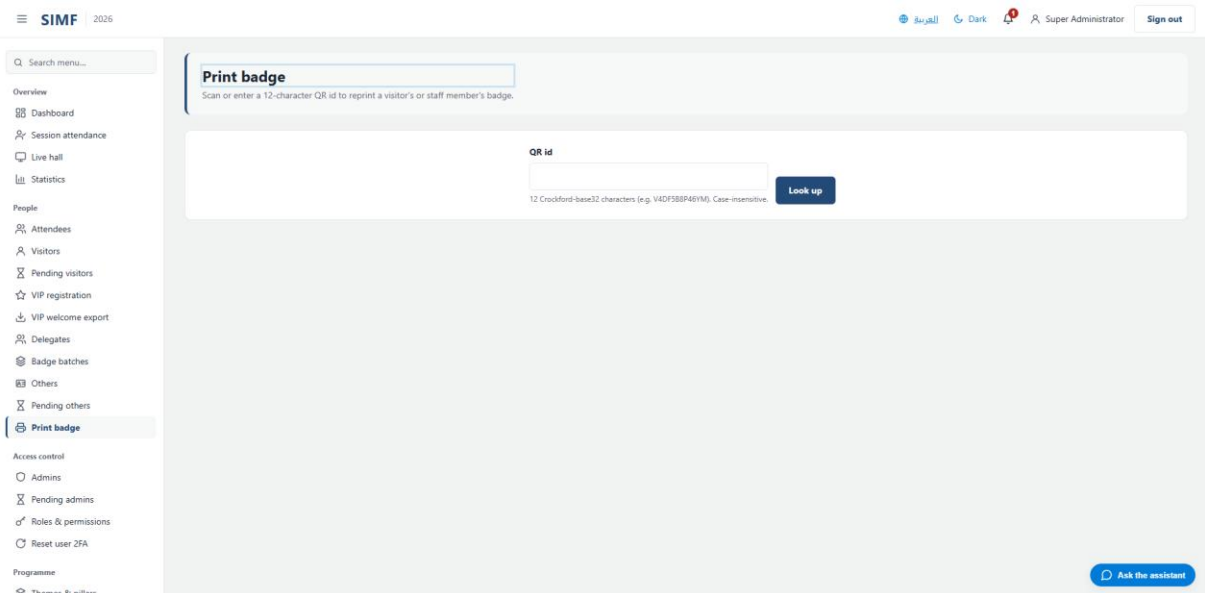


Figure 83 — Print badge — /admin/print-bag

Access control

Admins (/admin/admins)

Property	Value
Address	/admin/admins
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/UsersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/UsersList.razor.cs
Page permission	Admins.View
Menu permission	Admins.View

What you can do here

Action	Permission it needs
Add	Admins.Create
Edit	Admins.AssignRoles
Details	No permission of its own
Duplicate	Admins.Create
Copy	No permission of its own
Copy (on the selected rows)	No permission of its own
Paste	Admins.Create
Delete	Admins.Delete
Delete (on the selected rows)	Admins.Delete
Import from Excel	Admins.Import
Export to Excel	Admins.Export

The list shows: Email · Display name · State · Role · 2FA

It calls: /account/api/admin/admins/bulk-delete /account/api/admin/admins/duplicate
/account/api/admin/admins/export /account/api/admin/admins/import /account/api/admin/admins/list
/account/api/admin/admins/{row.Id}/avatar

The screenshot displays the SIMF Admins management interface. The top navigation bar includes the SIMF logo, the year 2026, and user information (Super Administrator) with a Sign out button. The sidebar on the left lists various navigation options under categories like Overview, People, Access control, and Programme. The main content area is titled 'Admins' and features a table with columns: EMAIL, DISPLAY NAME, STATE, ROLE, 2FA, and ACTIONS. The table contains four rows of user data. The first two rows are for 'Naval Operations Lead' (User) with state 'PendingApproval'. The next two rows are for 'Demo Admin' (Administrator) with state 'Approved'. The 'Demo Admin' row is highlighted. The ACTIONS column includes icons for selecting, adding, editing, deleting, copying, pasting, and duplicating, as well as a 'Reset 2FA' button. The bottom of the interface shows pagination (Page 1 of 1) and a 'Show 20' dropdown.

Figure 84 — Admins — /admin/admins

Pending admins (/admin/admins/pending)

Property	Value
Address	/admin/admins/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingStaff.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingStaff.razor.cs
Page permission	Admins.View
Menu permission	Admins.View

What you can do here

Action	Permission it needs
Approve selected	Admins.Approve
Reject selected	Admins.Reject

The list shows: Email · Display name · Created

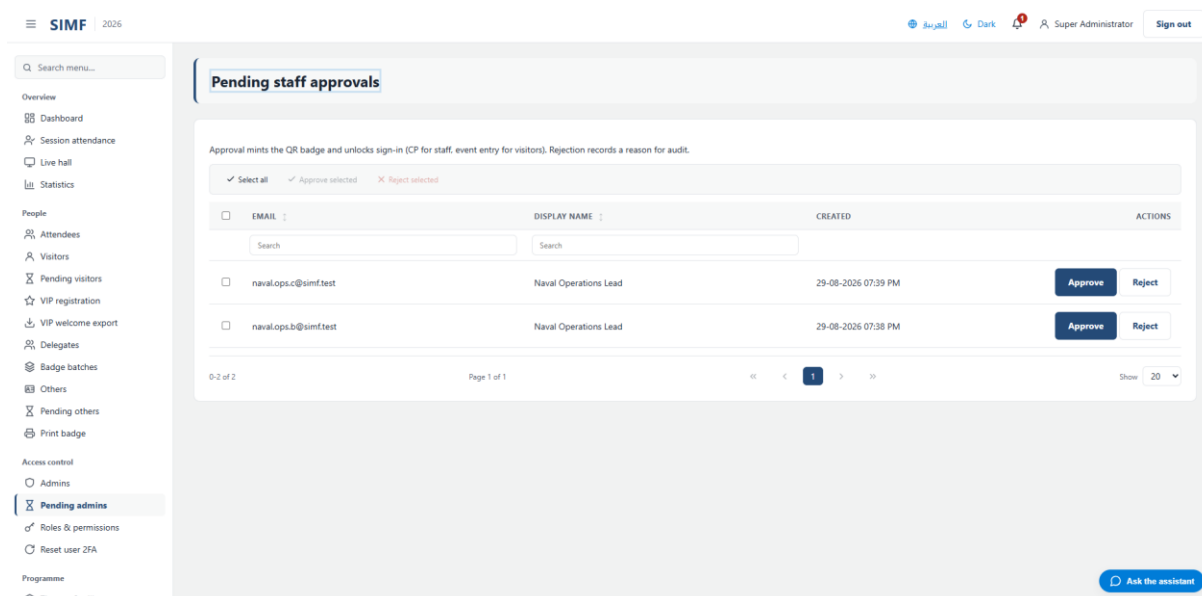


Figure 85 — Pending admins — /admin/admins/pending

Roles & permissions (/admin/roles)

Property	Value
Address	/admin/roles
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolesList.razor.cs
Page permission	Roles.View
Menu permission	Roles.View

What you can do here

Action	Permission it needs
Add role	Roles.Create
Edit	Roles.Edit

Details	No permission of its own
Delete	Roles.Delete
Import	Roles.Import
Export	Roles.Export
A button the page gates itself	Roles.AssignPermissions

The list shows: Name · Type · Users · Permissions

It calls: /account/api/admin/roles/list

Figure 86 — Roles & permissions — /admin/roles

Reset user 2FA (/admin/reset-2fa)

Property	Value
Address	/admin/reset-2fa
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ResetTwoFactor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ResetTwoFactor.razor.cs
Page permission	Admins.ResetTwoFactor
Menu permission	Admins.ResetTwoFactor

It calls: /account/api/admin/reset-2fa

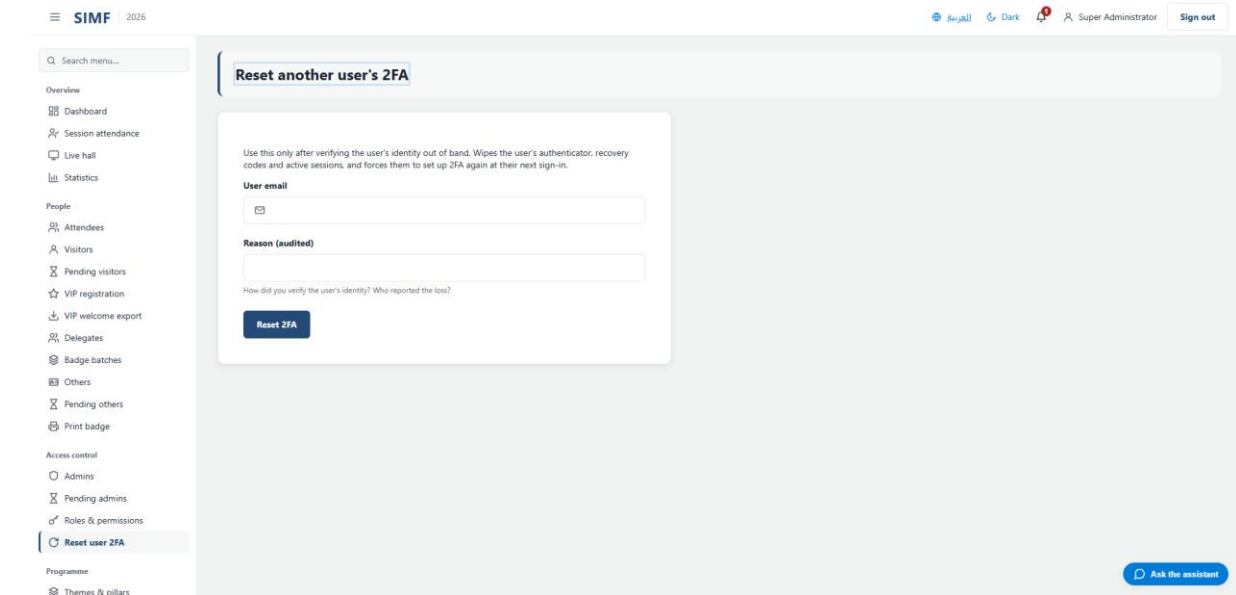


Figure 87 — Reset user 2FA — /admin/reset-2fa

Programme

Themes & pillars (/admin/themes)

Property	Value
Address	/admin/themes
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ThemesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ThemesList.razor.cs
Page permission	Themes.View
Menu permission	Themes.View

What you can do here

Action	Permission it needs
Add theme	Themes.Create
Edit	Themes.Edit
Details	No permission of its own
Deactivate	Themes.Delete
Import	Themes.Import
Export	Themes.Export

The list shows: Code · Name · Name (Arabic) · Order · Color · Status

It calls: /account/api/admin/themes/list /account/api/admin/themes/{id}

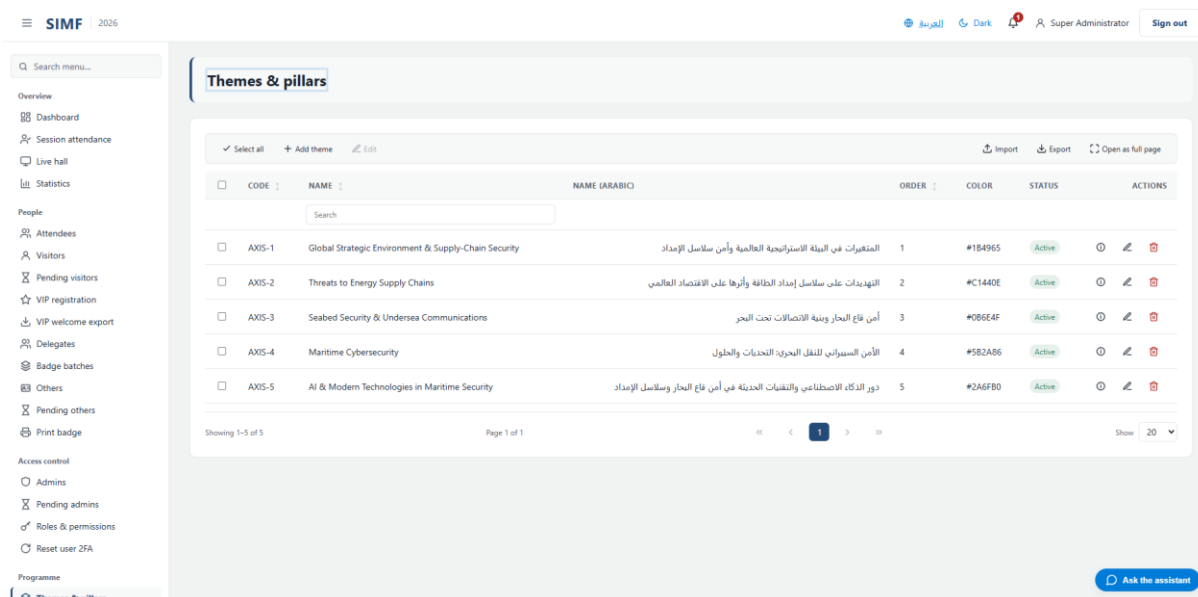


Figure 88 — Themes & pillars — /admin/themes

Sessions (/admin/sessions)

Property	Value
Address	/admin/sessions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionsList.razor.cs
Page permission	Sessions.View
Menu permission	Sessions.View

What you can do here

Action	Permission it needs
Add session	Sessions.Create
Edit	Sessions.Edit
Details	No permission of its own
Deactivate	Sessions.Delete
Import	Sessions.Import
Export	Sessions.Export
A button the page gates itself	Questions.Moderate

The list shows: Code · Title · Title (Arabic) · Hall · Start (Saudi time) · End (Saudi time) · Capacity · Status · Lifecycle

It calls: /account/api/admin/sessions/list /account/api/admin/sessions/{id}

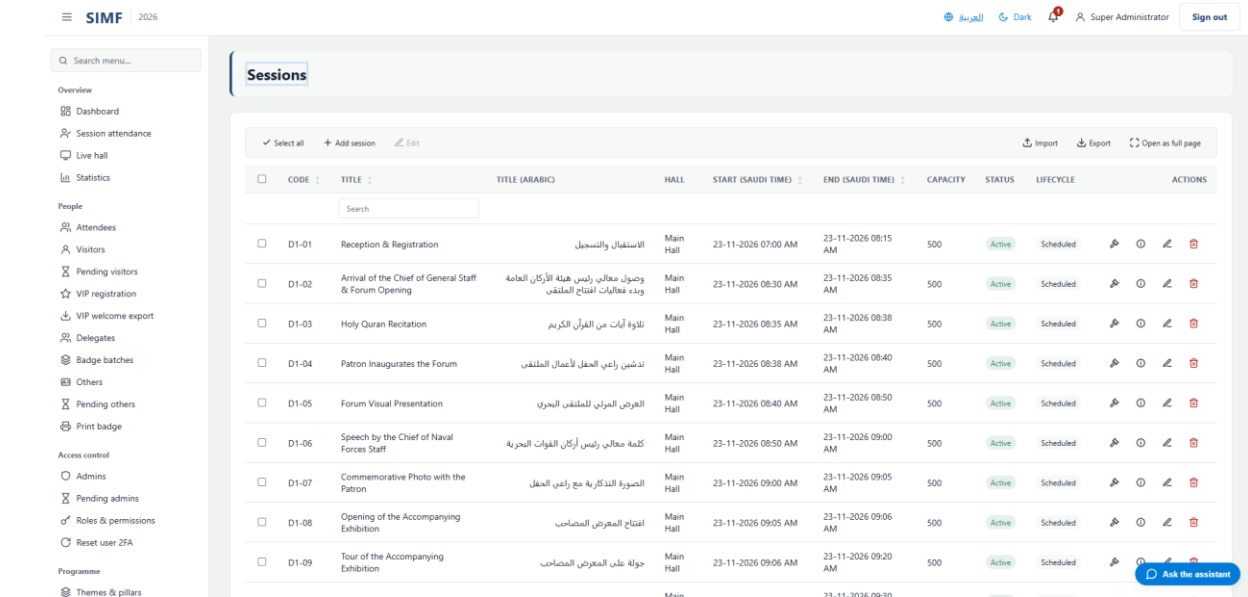


Figure 89 — Sessions — /admin/sessions

Session categories (/admin/session-categories)

Property	Value
Address	/admin/session-categories
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionCategoriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionCategoriesList.razor.cs
Page permission	SessionCategories.View
Menu permission	SessionCategories.View

What you can do here

Action	Permission it needs
Add	SessionCategories.Create
Edit	SessionCategories.Edit
Details	No permission of its own
Delete	SessionCategories.Delete
Import	SessionCategories.Import
Export	SessionCategories.Export

The list shows: Name (English) · Name (Arabic) · Order · Active

It calls: /account/api/admin/session-categories/list /account/api/admin/session-categories/{id}

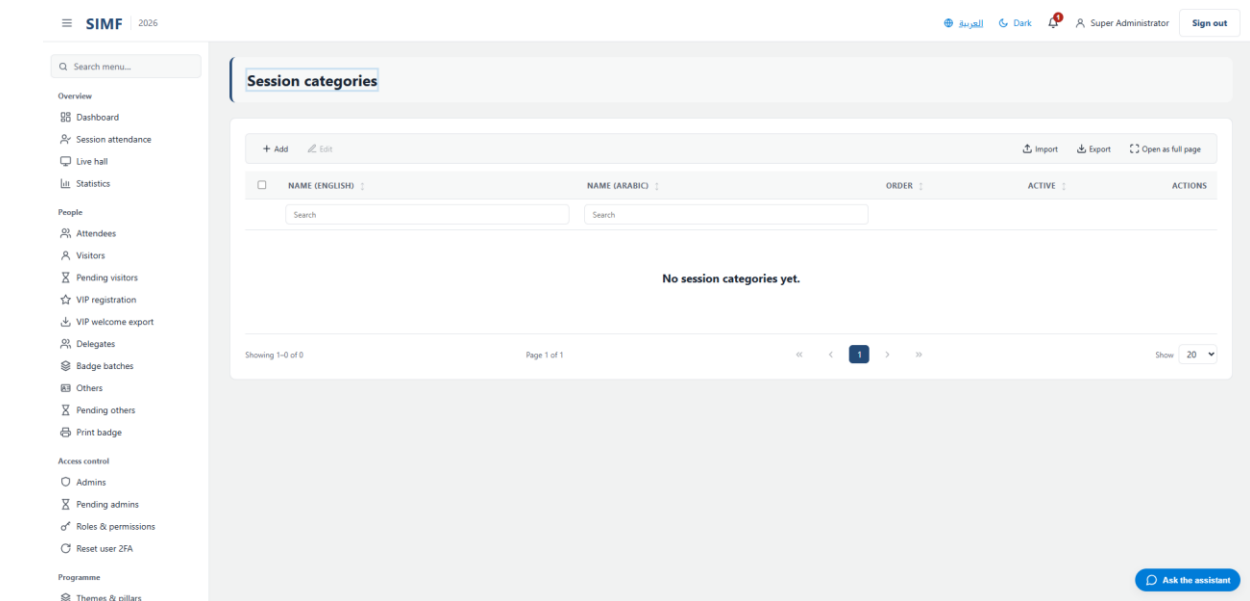


Figure 90 — Session categories — /admin/session-categories

Programme days (/admin/programme-days)

Property	Value
Address	/admin/programme-days
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeDaysList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeDaysList.razor.cs
Page permission	ProgrammeDays.View
Menu permission	ProgrammeDays.View

What you can do here

Action	Permission it needs
Add	ProgrammeDays.Create
Edit	ProgrammeDays.Edit
Details	No permission of its own
Delete	ProgrammeDays.Delete

The list shows: Date · Title (EN) · Title (AR) · Order · Logo · Active

It calls: /account/api/admin/programme-days/list /account/api/admin/programme-days/{id}

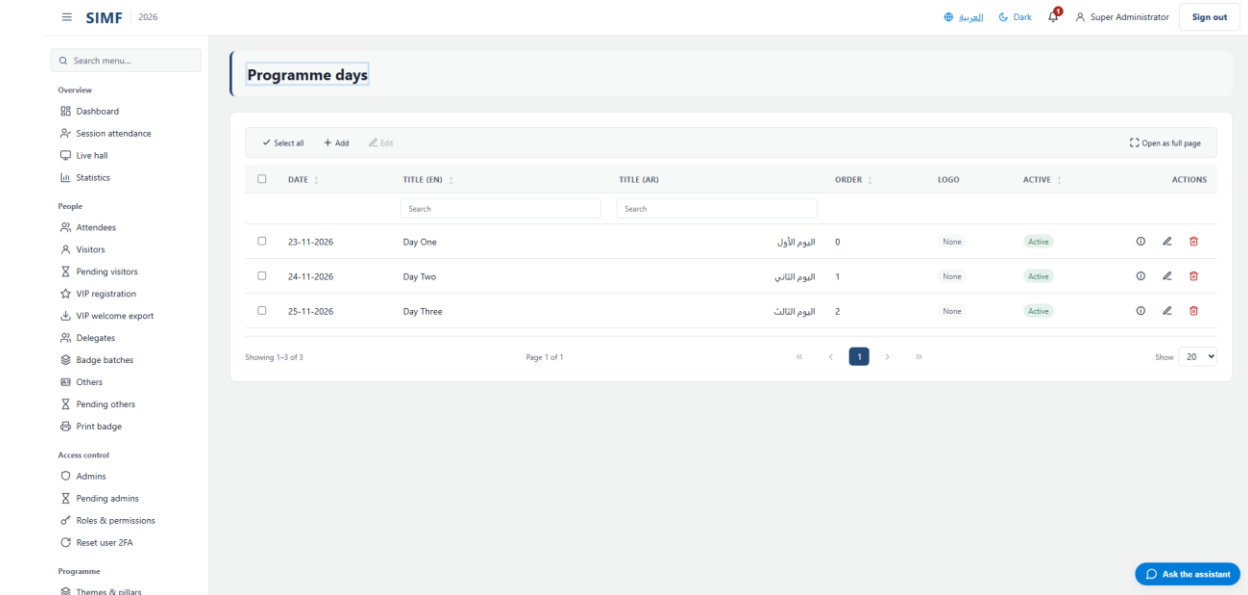


Figure 91 — Programme days — /admin/programme-days

Run of Show (/admin/programme/timeline)

Property	Value
Address	/admin/programme/timeline
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeTimeline.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeTimeline.razor.cs
Page permission	ProgrammeTimeline.View
Menu permission	ProgrammeTimeline.View

It calls: /account/api/admin/sessions/list

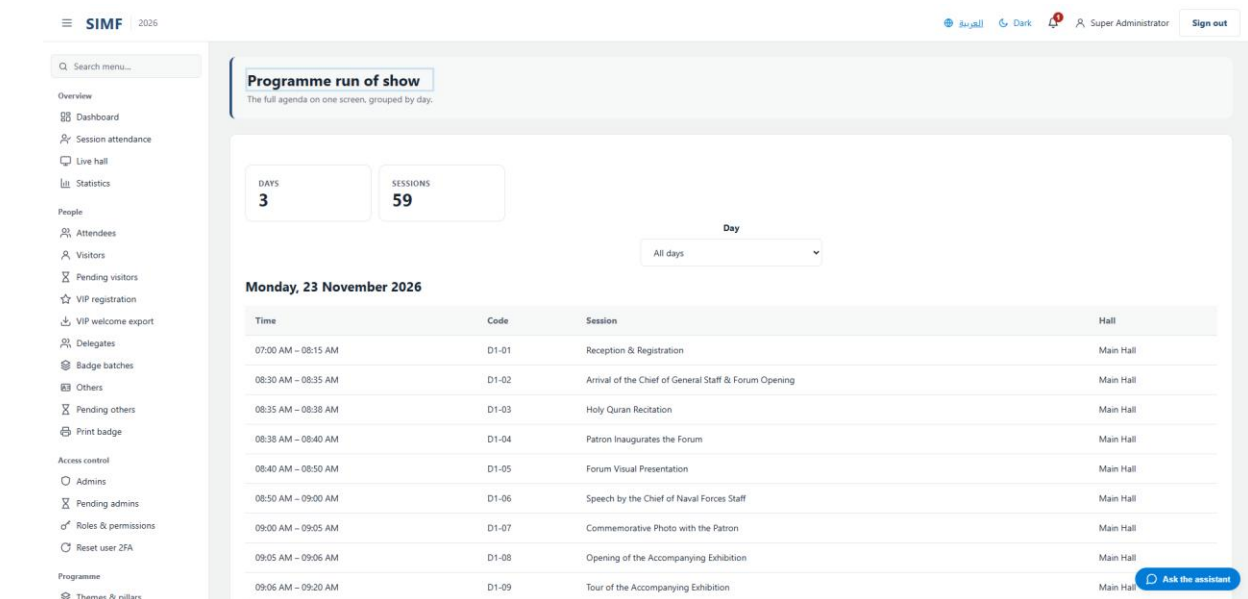


Figure 92 — Run of Show — /admin/programme/timeline

Halls & seating (/admin/halls)

Property	Value
Address	/admin/halls
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallsList.razor.cs
Page permission	Halls.View
Menu permission	Halls.View

What you can do here

Action	Permission it needs
Add hall	Halls.Create
Edit	Halls.Edit
Details	No permission of its own
Deactivate	Halls.Delete
Import	Halls.Import
Export	Halls.Export
A button the page gates itself	SeatLayouts.View

The list shows: Code · Name · Name (Arabic) · Capacity · Floor · Status

It calls: /account/api/admin/halls/list /account/api/admin/halls/{id}

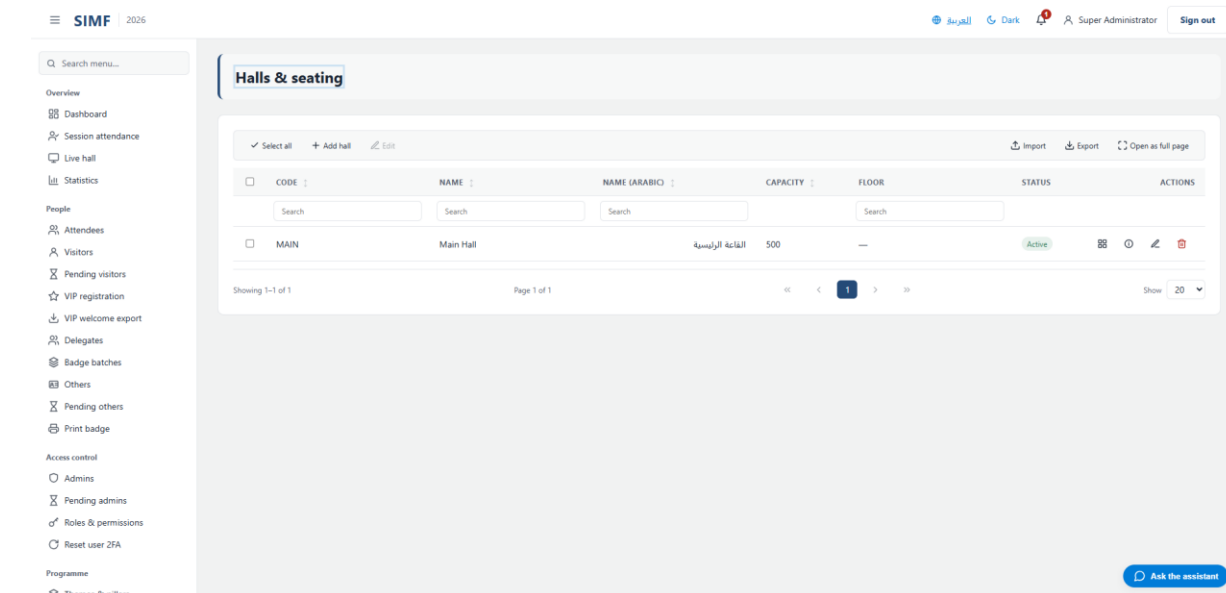


Figure 93 — Halls & seating — /admin/halls

Hall seat layouts (/admin/halls/seat-layouts)

Property	Value
Address	/admin/halls/seat-layouts
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallSeatLayoutEditor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallSeatLayoutEditor.razor.cs

Page permission	SeatLayouts.View
Menu permission	SeatLayouts.View

What you can do here

Action	Permission it needs
A button the page gates itself	SeatLayouts.Delete
A button the page gates itself	SeatLayouts.Edit

It calls: `/account/api/admin/halls/list` `/account/api/admin/halls/{_selectedHallId}/seat-layout`

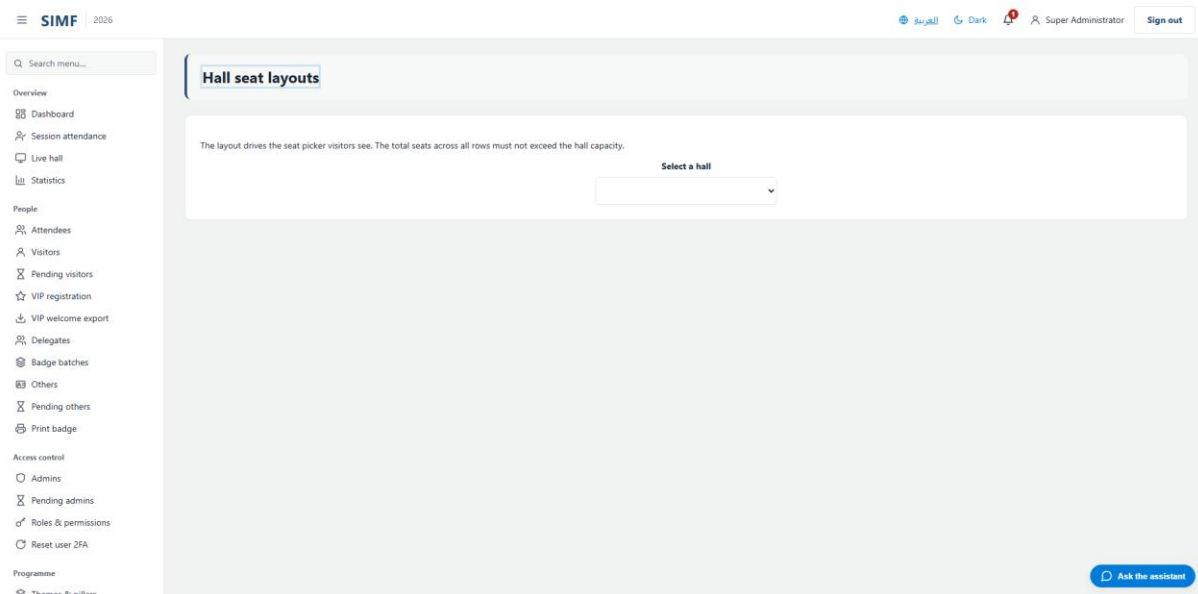


Figure 94 — Hall seat layouts — `/admin/halls/seat-layouts`

Session seat plans (`/admin/sessions/seat-plans`)

Property	Value
Address	<code>/admin/sessions/seat-plans</code>
Implemented by	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSeatPlan.razor</code>
Code-behind	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSeatPlan.razor.cs</code>
Page permission	SeatPlans.View
Menu permission	SeatPlans.View

What you can do here

Action	Permission it needs
A button the page gates itself	SeatPlans.Edit

It calls: `/account/api/admin/halls/{session.HallId}/seat-layout` `/account/api/admin/sessions/list`
`/account/api/admin/sessions/{_selectedSessionId}/seats/list`
`/account/api/admin/sessions/{_selectedSessionId}/seats/reserve-row`

/account/api/admin/sessions/{_selectedSessionId}/seats/reserve-seat
 /account/api/admin/sessions/{_selectedSessionId}/seats/{row.ReservationId}

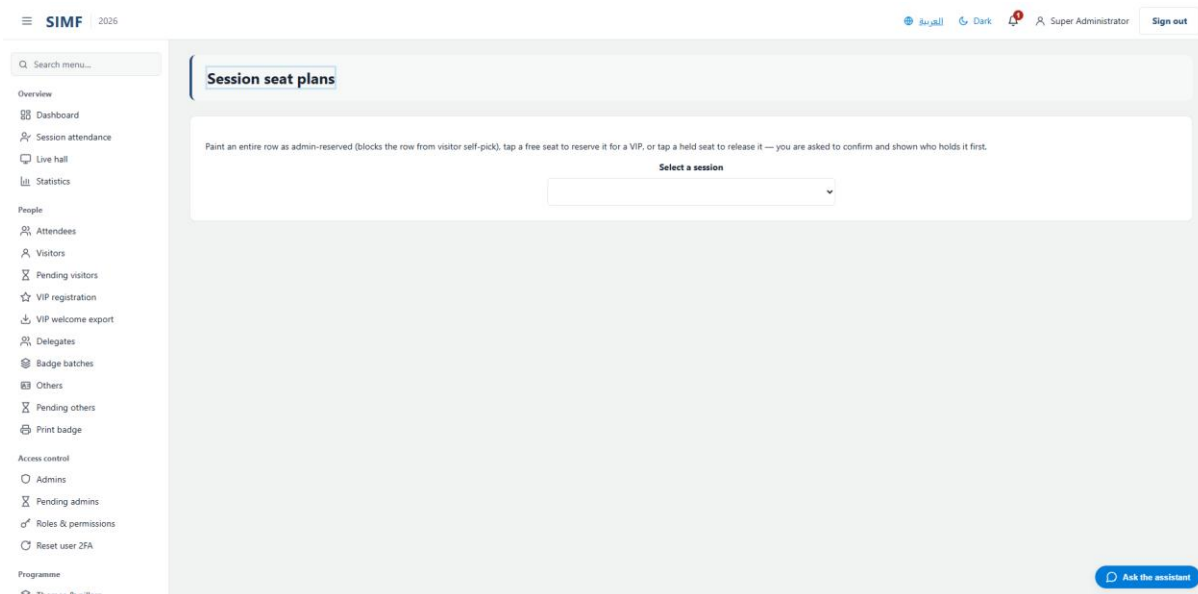


Figure 95 — Session seat plans — /admin/sessions/seat-plans

Speaker meeting requests (/admin/speaker-meeting-requests)

Property	Value
Address	/admin/speaker-meeting-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerMeetingRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerMeetingRequestsList.razor.cs
Page permission	SpeakerMeetingRequests.View
Menu permission	SpeakerMeetingRequests.View

What you can do here

Action	Permission it needs
Export	SpeakerMeetingRequests.Export
A button the page gates itself	SpeakerMeetingRequests.Manage

The list shows: Speaker · Requester · Subject · Status · Submitted · Responded

It calls: /account/api/admin/halls/list /account/api/admin/halls/{hallId}/available-slots
 /account/api/admin/halls/{hallId}/meeting-tables/list /account/api/admin/speaker-meeting-requests/export /account/api/admin/speaker-meeting-requests/list /account/api/admin/speaker-meeting-requests/{_respondTarget.Id}/respond /account/api/admin/speaker-meeting-requests/{row.Id}/check-in /account/api/admin/speaker-meeting-requests/{row.Id}/reopen /account/api/admin/speaker-meeting-requests/{row.Id}/resend-confirmation

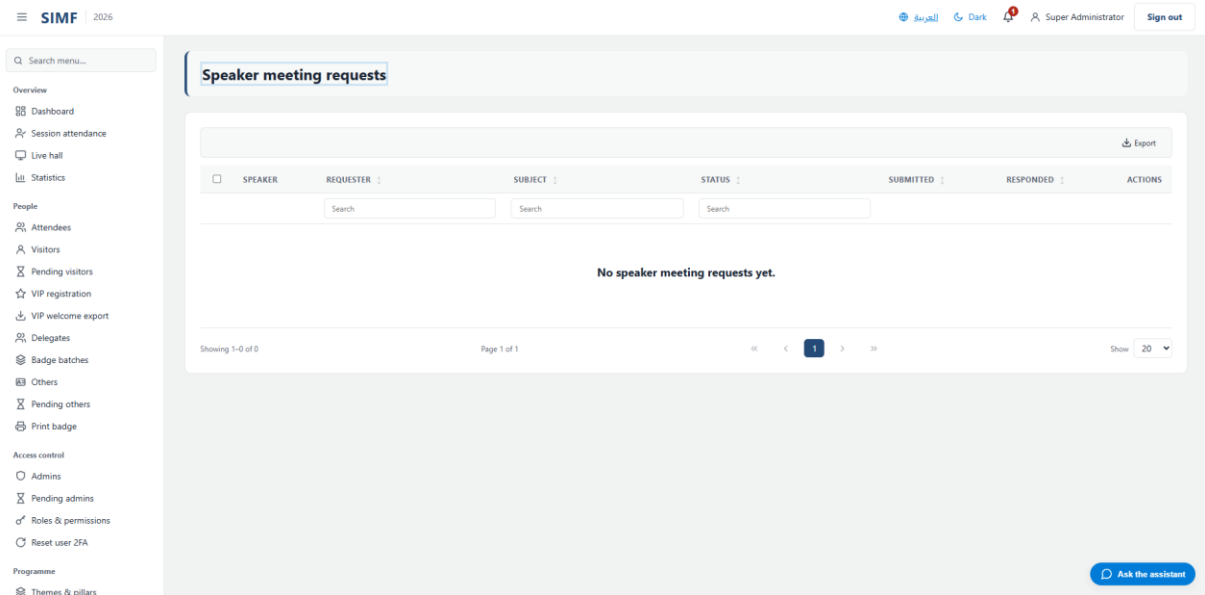


Figure 96 — Speaker meeting requests — /admin/speaker-meeting-requests

Speaker availability (/admin/speaker-availability)

Property	Value
Address	/admin/speaker-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerAvailabilityPage.razor.cs
Page permission	SpeakerMeetingRequests.Manage
Menu permission	SpeakerMeetingRequests.Manage

What you can do here

Action	Permission it needs
A button the page gates itself	SpeakerMeetingRequests.Manage

It calls: /account/api/admin/programme/forum-window /account/api/admin/speaker-availability-windows/{windowId} /account/api/admin/speakers/list /account/api/admin/speakers/{id}/availability-windows

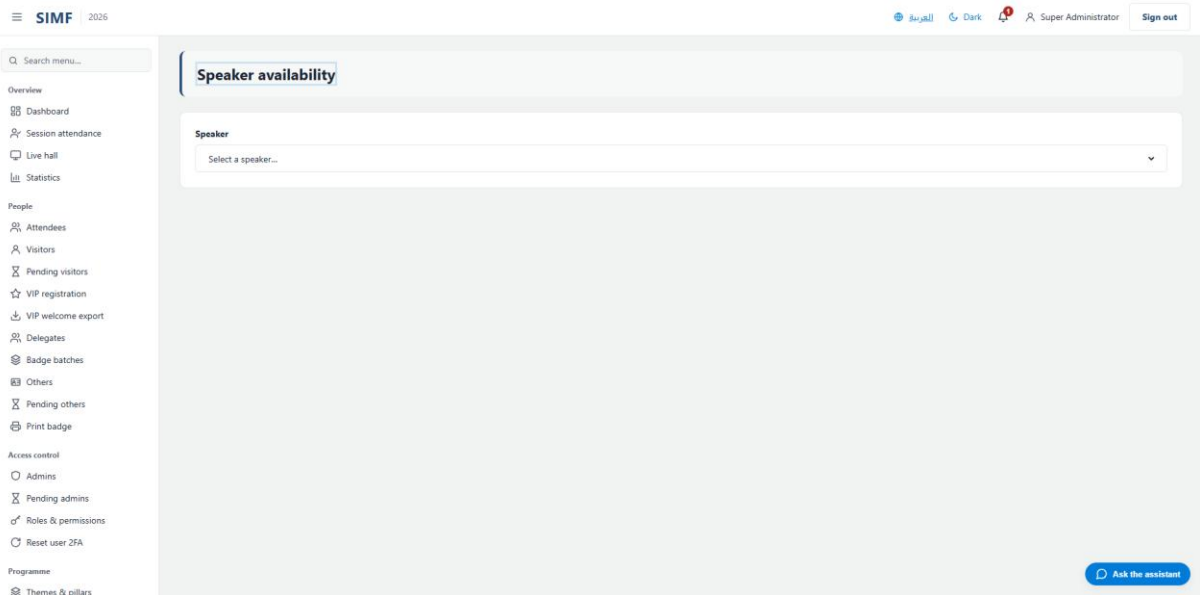


Figure 97 — Speaker availability — /admin/speaker-availability

Hall availability (/admin/hall-availability)

Property	Value
Address	/admin/hall-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallAvailabilityPage.razor.cs
Page permission	HallAvailability.Manage
Menu permission	HallAvailability.Manage

What you can do here

Action	Permission it needs
A button the page gates itself	HallAvailability.Manage

It calls: /account/api/admin/hall-availability-windows/{windowId} /account/api/admin/halls/list
/account/api/admin/halls/{id}/availability-windows

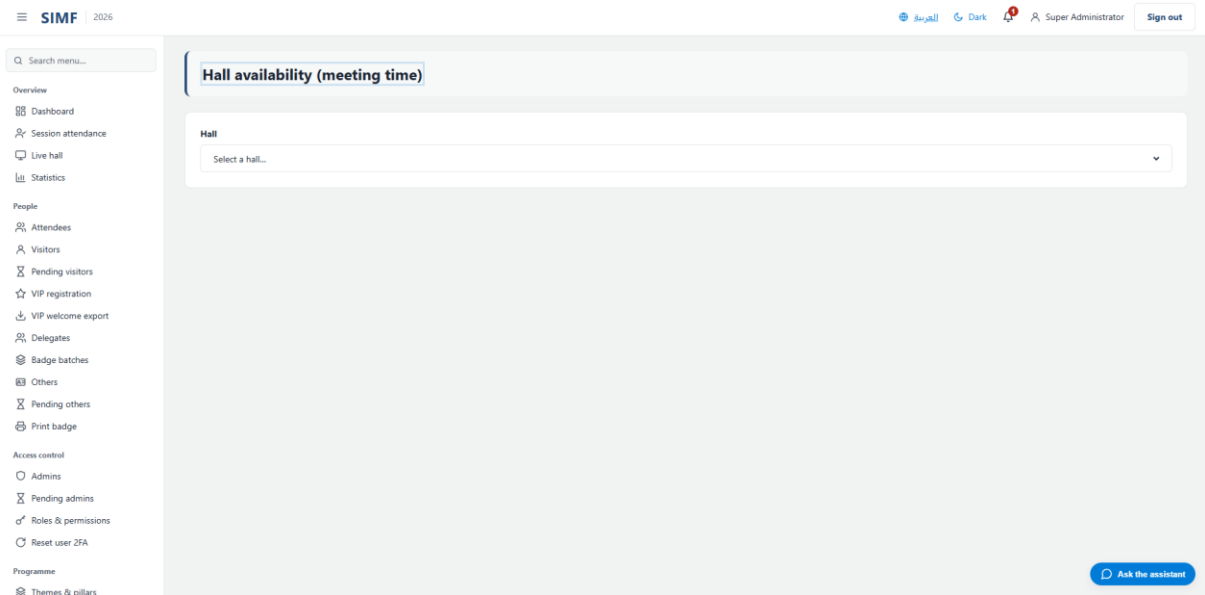


Figure 98 — Hall availability — /admin/hall-availability

Delegation meetings (/admin/delegation-meetings)

Property	Value
Address	/admin/delegation-meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationMeetingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationMeetingsList.razor.cs
Page permission	DelegationMeetings.View
Menu permission	DelegationMeetings.View

What you can do here

Action	Permission it needs
A button the page gates itself	DelegationMeetings.Manage

The list shows: From delegation · To delegation · Attendees · Subject · Status · Submitted

It calls: /account/api/admin/delegation-meeting-requests/list /account/api/admin/delegation-meeting-requests/{_respondTarget.Id}/respond /account/api/admin/delegation-meeting-requests/{row.Id} /account/api/admin/delegation-meeting-requests/{row.Id}/check-in /account/api/admin/halls/list /account/api/admin/halls/{hallId}/available-slots /account/api/admin/halls/{hallId}/meeting-tables/list

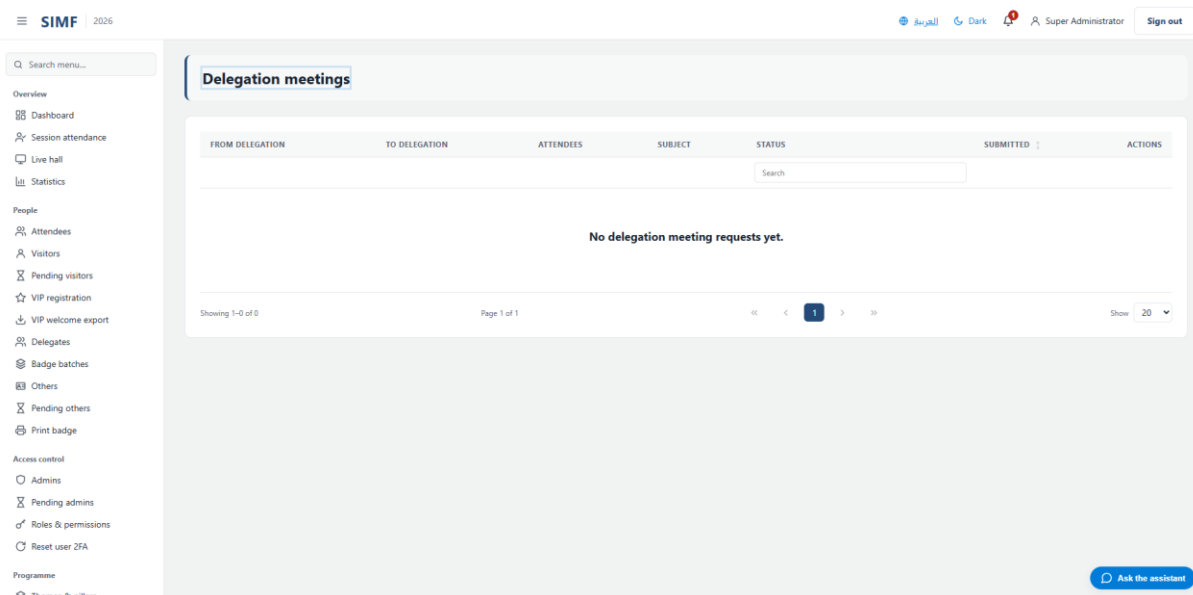


Figure 99 — Delegation meetings — /admin/delegation-meetings

Delegation availability (/admin/delegation-availability)

Property	Value
Address	/admin/delegation-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationAvailabilityPage.razor.cs
Page permission	DelegationMeetings.Manage
Menu permission	DelegationMeetings.Manage

What you can do here

Action	Permission it needs
A button the page gates itself	DelegationMeetings.Manage

It calls: /account/api/admin/countries/list /account/api/admin/countries/{id}/availability-windows
 /account/api/admin/delegation-availability-windows/{windowId} /account/api/admin/programme/forum-window

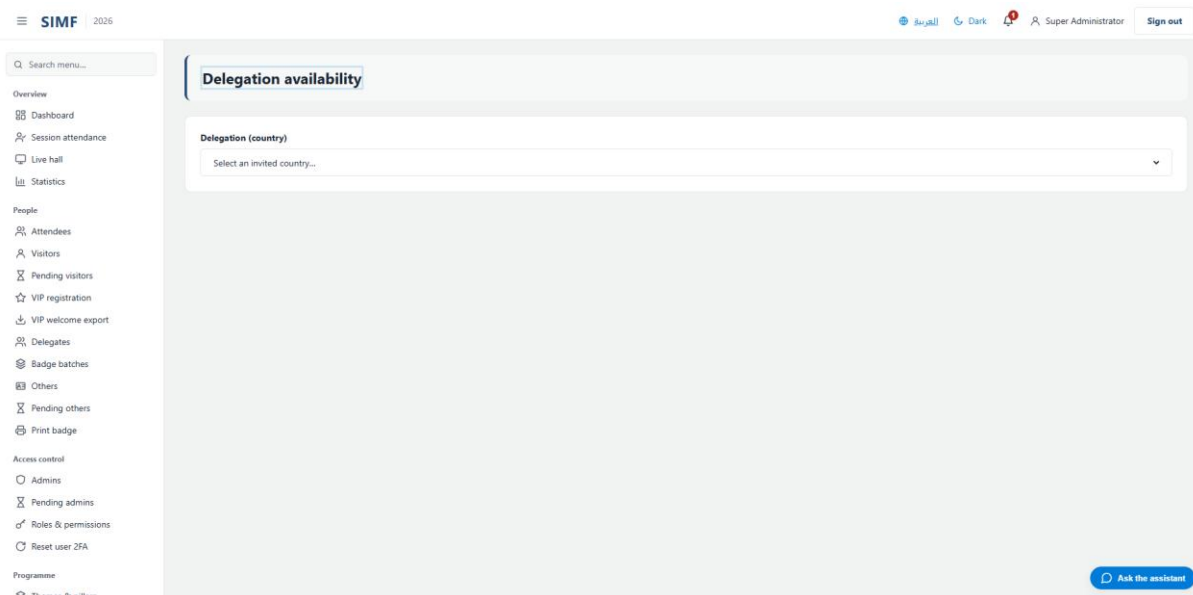


Figure 100 — Delegation availability — /admin/delegation-availability

Document requests (/admin/document-requests)

Property	Value
Address	/admin/document-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DocumentRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DocumentRequestsList.razor.cs
Page permission	ParticipationDocumentRequests.View
Menu permission	ParticipationDocumentRequests.View

What you can do here

Action	Permission it needs
A button the page gates itself	ParticipationDocumentRequests.Manage

The list shows: Requester · Document · Note · Status · Submitted · Responded

It calls: /account/api/admin/document-requests/list /account/api/admin/document-requests/{_respondTarget.Id}/respond /account/api/admin/document-requests/{row.Id}

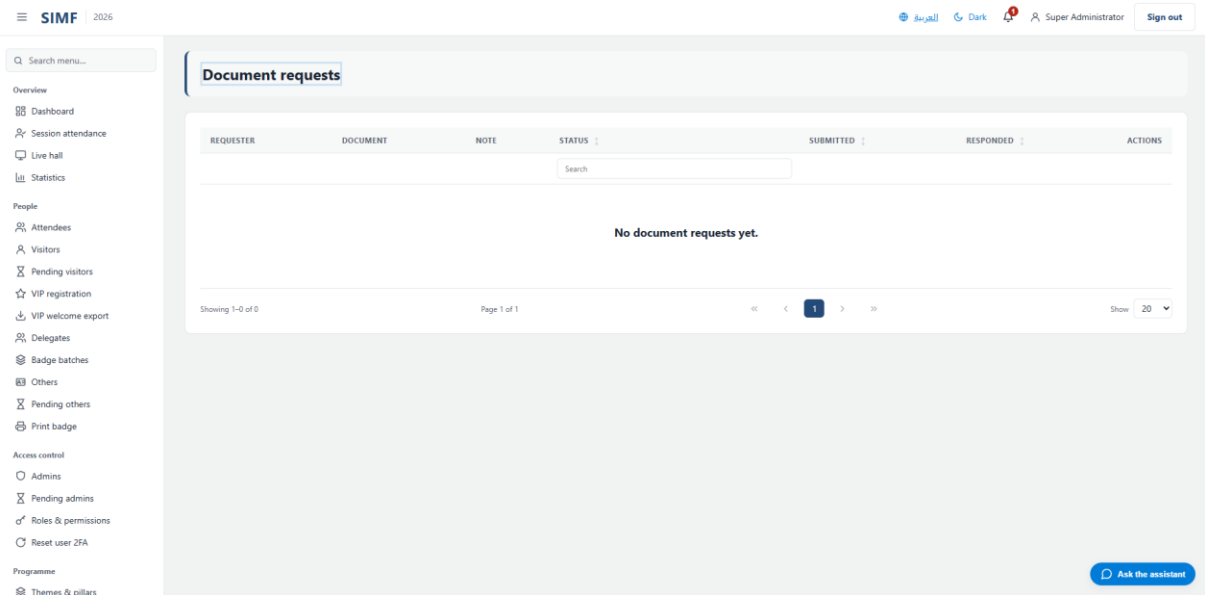


Figure 101 — Document requests — /admin/document-requests

Badge requests (/admin/badge-requests)

Property	Value
Address	/admin/badge-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeRequestsList.razor.cs
Page permission	BadgeUpdateRequests.View
Menu permission	BadgeUpdateRequests.View

What you can do here

Action	Permission it needs
A button the page gates itself	BadgeUpdateRequests.Manage

The list shows: Requester · Requested title · Current title · Status · Submitted · Responded

It calls: /account/api/admin/badge-requests/list /account/api/admin/badge-requests/{_respondTarget.Id}/respond /account/api/admin/badge-requests/{row.Id}

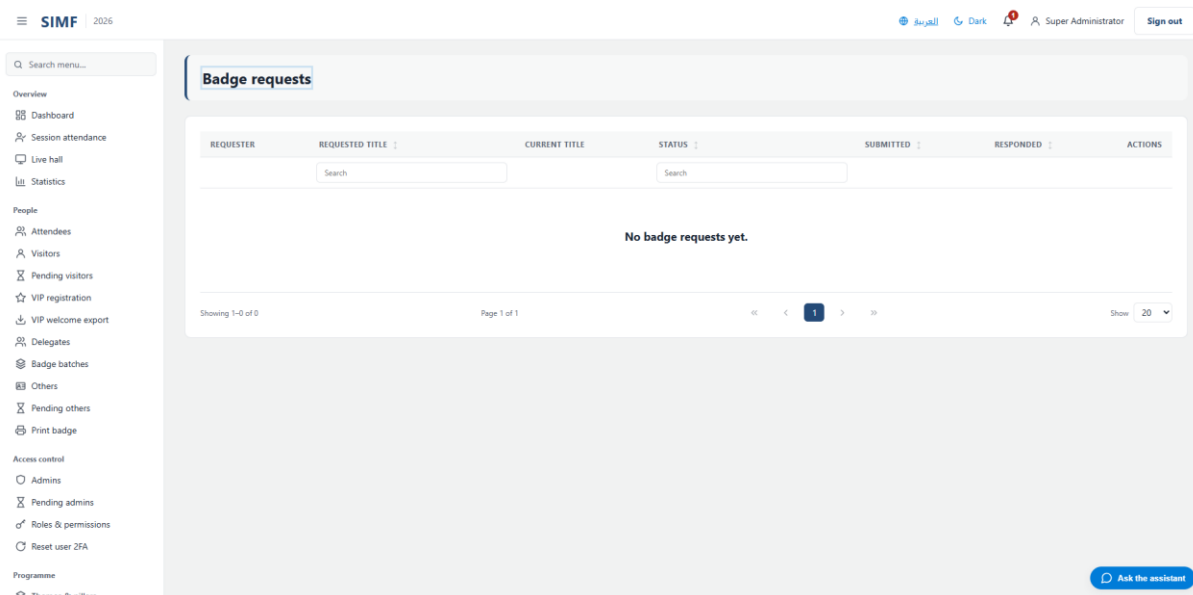


Figure 102 — Badge requests — /admin/badge-requests

Speakers (/admin/speakers)

Property	Value
Address	/admin/speakers
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakersList.razor.cs
Page permission	Speakers.View
Menu permission	Speakers.View

What you can do here

Action	Permission it needs
Add speaker	Speakers.Create
Edit	Speakers.Edit
Details	No permission of its own
Deactivate	Speakers.Delete
Import	Speakers.Import
Export	Speakers.Export

The list shows: Speaker · Country · Code · Order · Status

It calls: /account/api/admin/speakers/list /account/api/admin/speakers/{id}

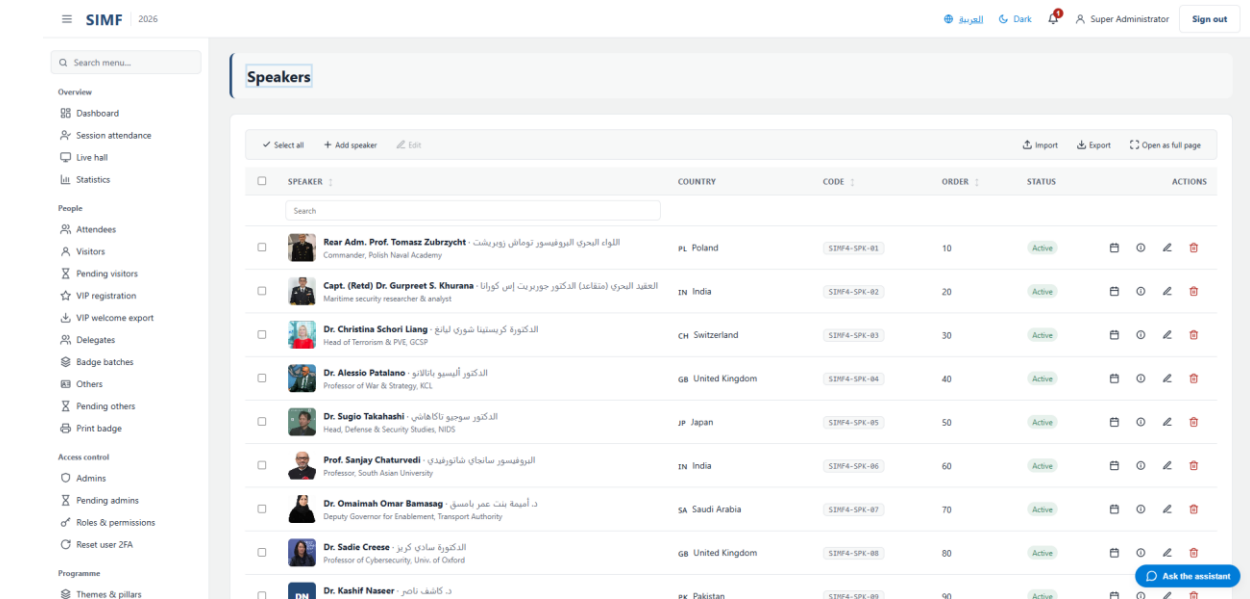


Figure 103 — Speakers — /admin/speakers

Speaker presentations (/admin/speaker-presentations)

Property	Value
Address	/admin/speaker-presentations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerPresentationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerPresentationsList.razor.cs
Page permission	Speakers.View
Menu permission	Speakers.View

What you can do here

Action	Permission it needs
Export	Speakers.Export
A button the page gates itself	Speakers.Edit
A button the page gates itself	Speakers.View

The list shows: File · Session · Size

It calls: /account/api/admin/sessions/list /account/api/admin/speaker-presentations/export
/account/api/admin/speaker-presentations/{row.Id} /account/api/admin/speaker-presentations/{row.Id}/file /account/api/admin/speakers/list
/account/api/admin/speakers/{_speakerId}/presentations

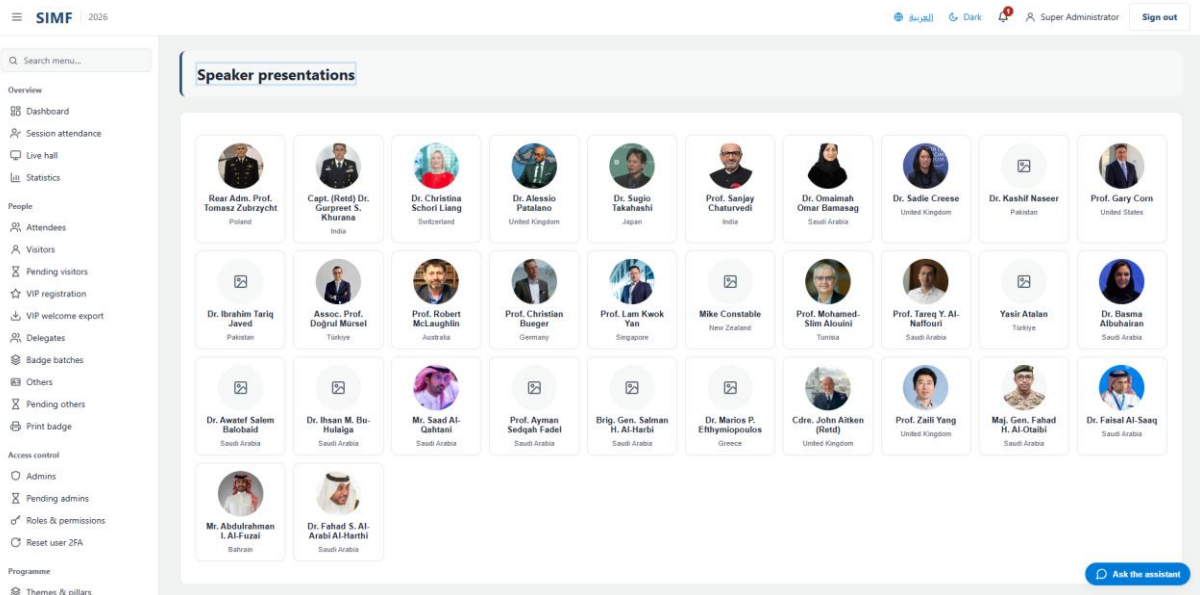


Figure 104 — Speaker presentations — /admin/speaker-presentations

Bookings (/admin/bookings)

Property	Value
Address	/admin/bookings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BookingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BookingsList.razor.cs
Page permission	Bookings.View
Menu permission	Bookings.View

What you can do here

Action	Permission it needs
Export	Bookings.Export

The list shows: Session · Starts (Saudi time) · Seat · Attendee · Booked (Saudi time)

It calls: /account/api/admin/bookings/export /account/api/admin/bookings/list

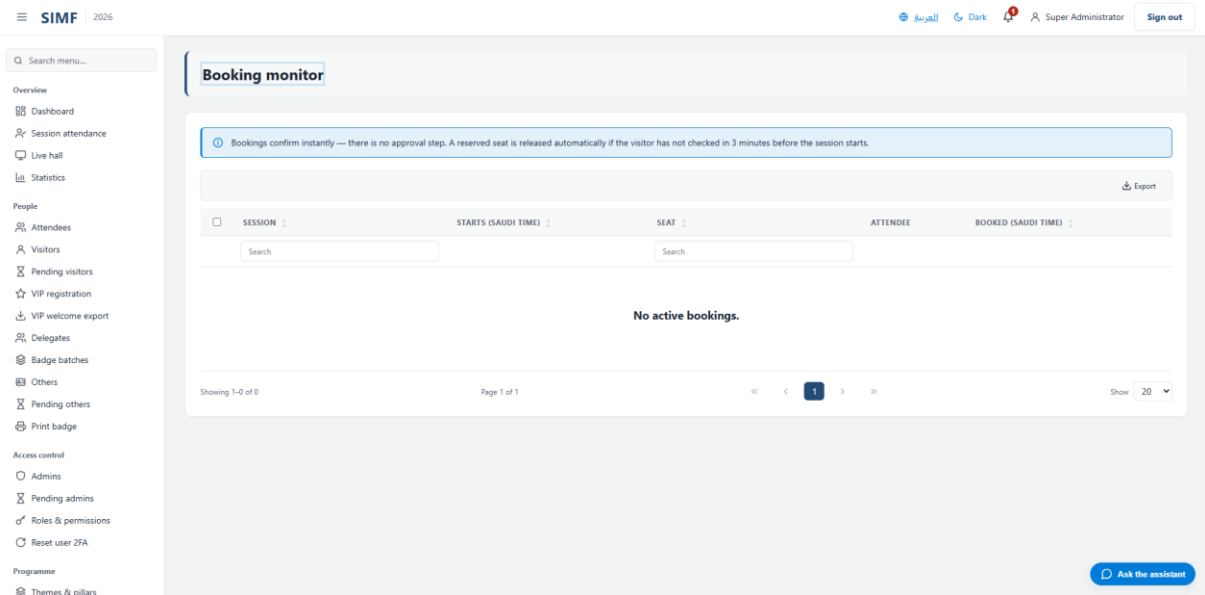


Figure 105 — Bookings — /admin/bookings

Meeting Tables (/admin/meeting-tables)

Property	Value
Address	/admin/meeting-tables
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MeetingTablesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MeetingTablesList.razor.cs
Page permission	MeetingTables.View
Menu permission	MeetingTables.View

What you can do here

Action	Permission it needs
Add table	MeetingTables.Edit
Edit	MeetingTables.Edit
Details	No permission of its own
Delete	MeetingTables.Edit
Export	MeetingTables.Export
A button the page gates itself	HallAllocations.Edit
A button the page gates itself	Halls.Edit

The list shows: Code · Row · Column · Capacity · Purpose · Mode · Start · End

It calls: /account/api/admin/hall-allocations/{row.Id} /account/api/admin/halls/list
 /account/api/admin/halls/{hid}/hall-allocations /account/api/admin/halls/{hid}/hall-allocations/list /account/api/admin/halls/{hid}/meeting-tables
 /account/api/admin/halls/{hid}/meeting-tables/generate /account/api/admin/halls/{hid}/meeting-tables/list /account/api/admin/halls/{hid}/purpose /account/api/admin/meeting-tables/export
 /account/api/admin/meeting-tables/{_editingTableId} /account/api/admin/meeting-tables/{row.Id}

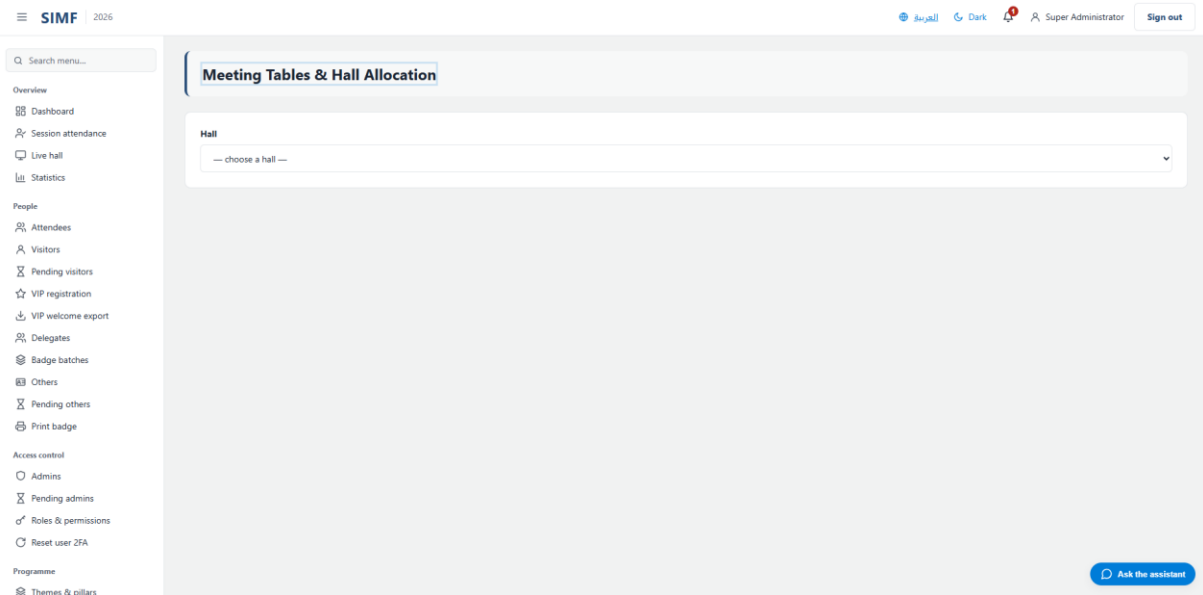


Figure 106 — Meeting Tables — /admin/meeting-tables

Business Meetings (/admin/business-meetings)

Property	Value
Address	/admin/business-meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BusinessMeetingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BusinessMeetingsList.razor.cs
Page permission	BusinessMeetings.View
Menu permission	BusinessMeetings.View

What you can do here

Action	Permission it needs
Schedule meeting	BusinessMeetings.Schedule
View	No permission of its own
Export	BusinessMeetings.Export
A button the page gates itself	BusinessMeetings.Cancel

The list shows: Hall · Table · Type · Start · End · Participants · Status

It calls: /account/api/admin/attendees/list /account/api/admin/business-meetings
 /account/api/admin/business-meetings/export /account/api/admin/business-meetings/list
 /account/api/admin/business-meetings/{_cancelTarget.Id}/cancel /account/api/admin/business-meetings/{row.Id}
 /account/api/admin/exhibitors/list /account/api/admin/halls/list
 /account/api/admin/halls/{hid}/meeting-tables/list /account/api/admin/programme/forum-window

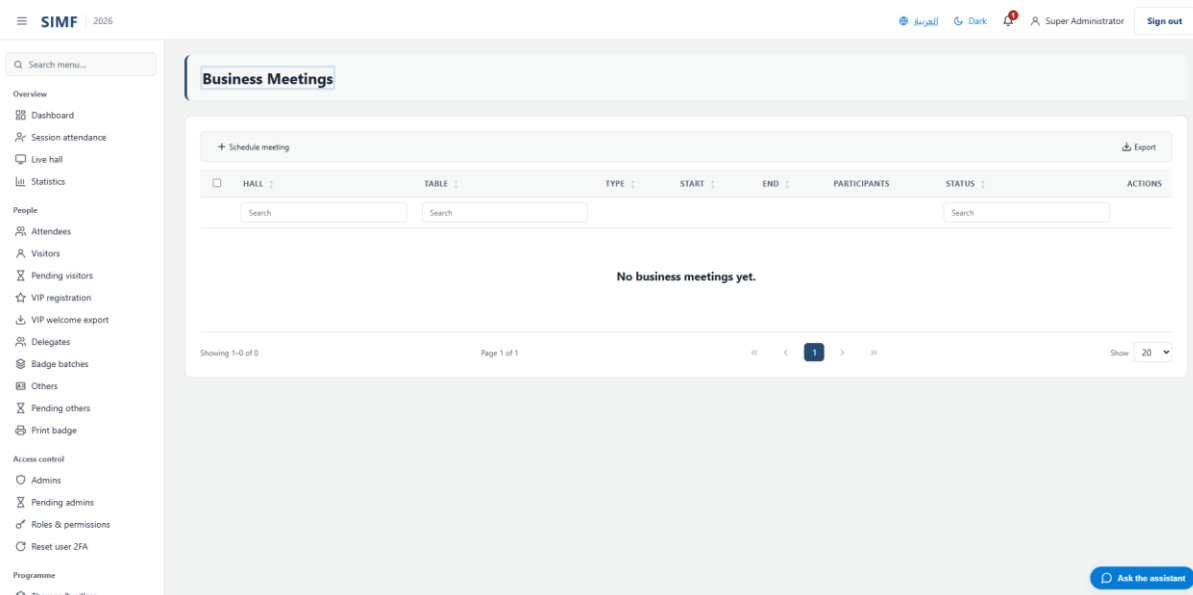


Figure 107 — Business Meetings — /admin/business-meetings

Scientific committee

Session moderators (/admin/session-moderators)

Property	Value
Address	/admin/session-moderators
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModeratorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModeratorsList.razor.cs
Page permission	SessionModerators.View
Menu permission	SessionModerators.View

What you can do here

Action	Permission it needs
Add	SessionModerators.Assign
Export	SessionModerators.Export
A button the page gates itself	SessionModerators.Revoke

The list shows: Session · Moderator · Assigned by · Assigned

It calls: /account/api/admin/session-moderators /account/api/admin/session-moderators/assign-options
 /account/api/admin/session-moderators/export /account/api/admin/session-moderators/list
 /account/api/admin/session-moderators/{row.SessionId}/{row.UserId}

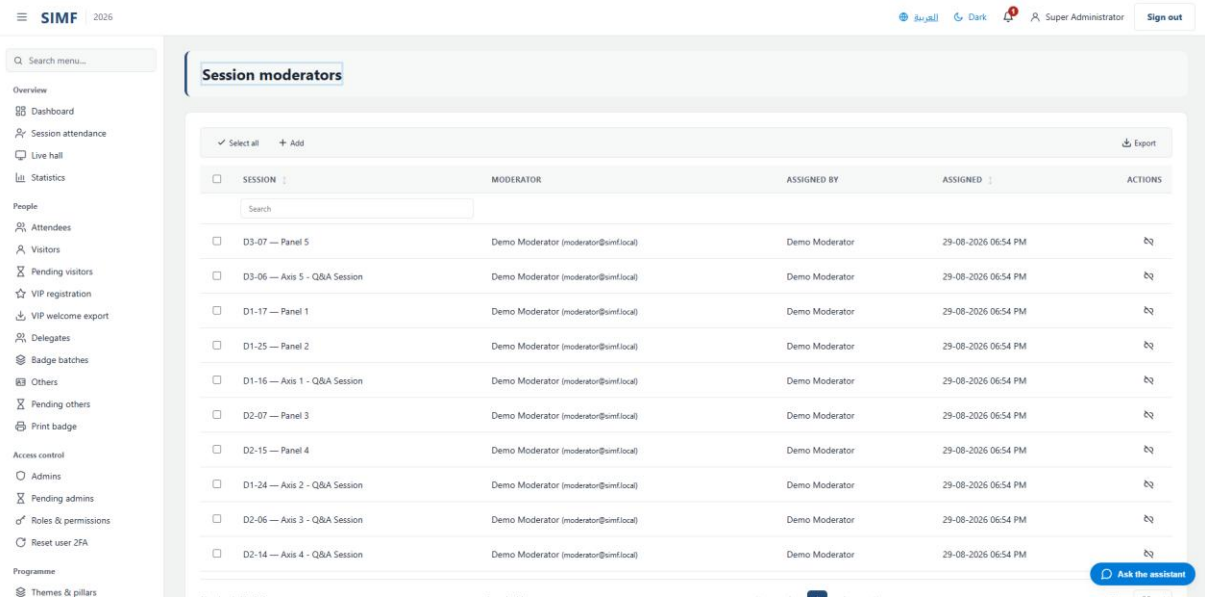


Figure 108 — Session moderators — /admin/session-moderators

Question queue (/admin/question-queue)

Property	Value
Address	/admin/question-queue
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/QuestionQueueList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/QuestionQueueList.razor.cs
Page permission	Questions.View
Menu permission	Questions.View

What you can do here

Action	Permission it needs
Export	Questions.Export
A button the page gates itself	Questions.Escalate
A button the page gates itself	Questions.Moderate

The list shows: Session · Question · Submitter · Phase · AI verdict

It calls: /account/api/admin/questions/export /account/api/admin/questions/list
 /account/api/admin/questions/{id}/approve /account/api/admin/questions/{id}/escalate
 /account/api/admin/questions/{id}/hide

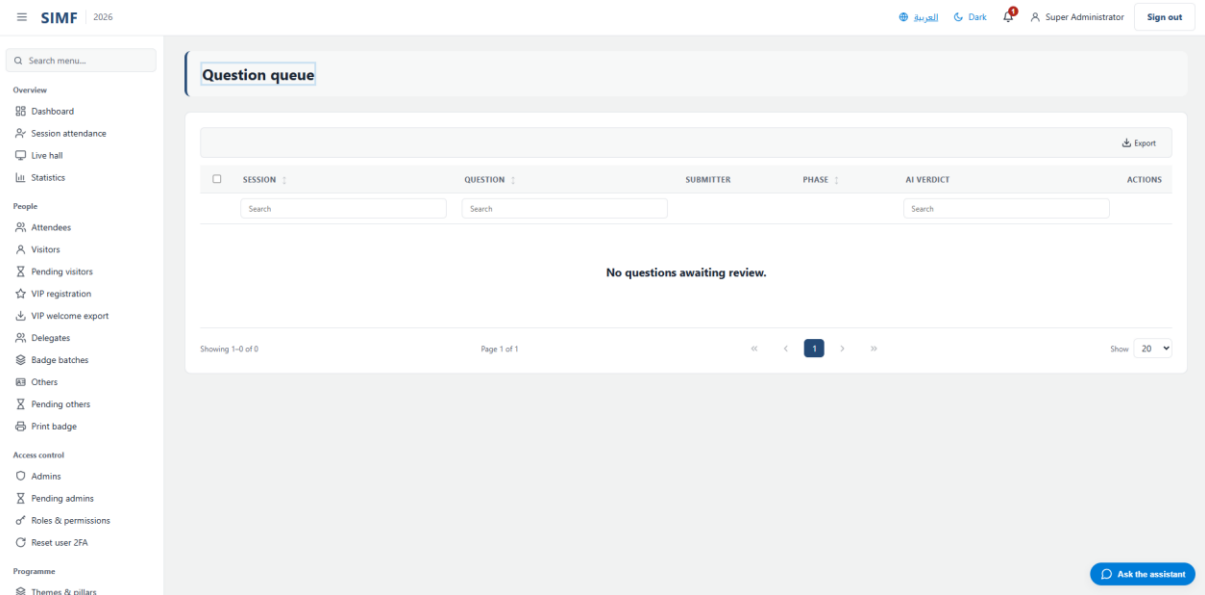


Figure 109 — Question queue — /admin/question-queue

Session summaries (/admin/session-summaries)

Property	Value
Address	/admin/session-summaries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSummariesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSummariesList.razor.cs
Page permission	SessionSummaries.View
Menu permission	SessionSummaries.View

What you can do here

Action	Permission it needs
Export	SessionSummaries.Export
A button the page gates itself	SessionSummaries.Approve
A button the page gates itself	SessionSummaries.Edit
A button the page gates itself	SessionSummaries.Publish

The list shows: Session · Status · Source

It calls: /account/api/admin/session-summaries/export /account/api/admin/session-summaries/list /account/api/admin/session-summaries/{_editSessionId} /account/api/admin/session-summaries/{sessionId} /account/api/admin/session-summaries/{sessionId}/generate /account/api/admin/session-summaries/{sessionId}/publish /account/api/admin/session-summaries/{sessionId}/unpublish /account/api/admin/session-summaries/{sessionId}/{action}

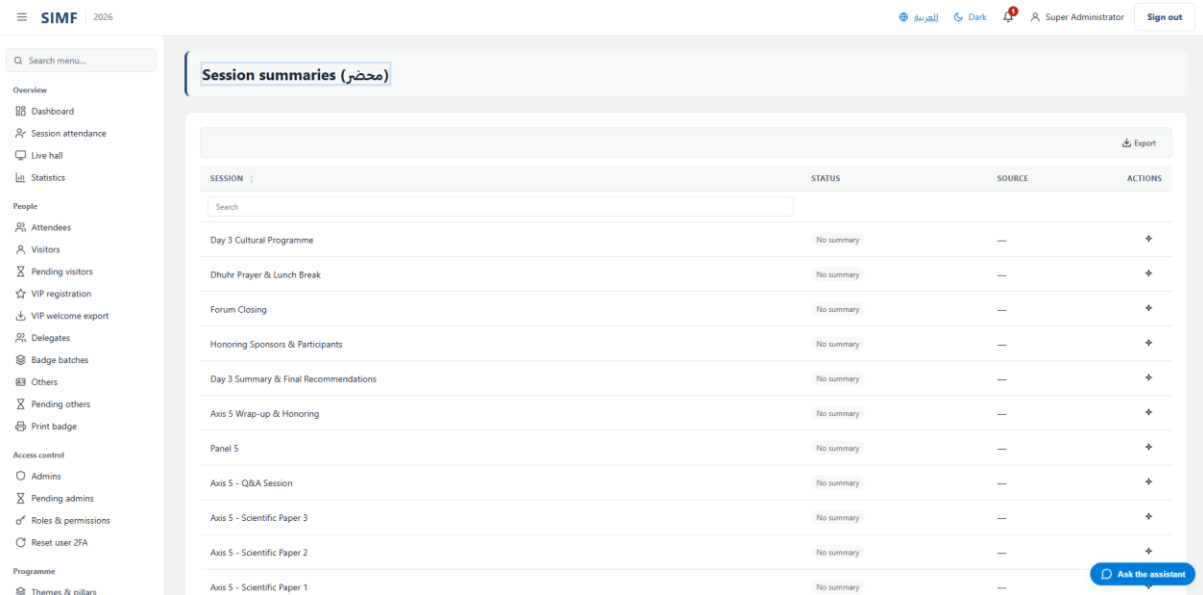


Figure 110 — Session summaries — /admin/session-summaries

Exhibition

Exhibitors (/admin/exhibitors)

Property	Value
Address	/admin/exhibitors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ExhibitorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ExhibitorsList.razor.cs
Page permission	Exhibitors.View
Menu permission	Exhibitors.View

What you can do here

Action	Permission it needs
Add	Exhibitors.Create
Edit	Exhibitors.Edit
Details	No permission of its own
Delete	Exhibitors.Delete
Import	Exhibitors.Import
Export	Exhibitors.Export
A button the page gates itself	Exhibitors.LinkAccount
A button the page gates itself	Exhibitors.RevokeAccount

The list shows: Name (English) · Name (Arabic) · Accounts · Active

It calls: /account/api/admin/exhibitors/list

/account/api/admin/exhibitors/{_accountsExhibitorId}/accounts

/account/api/admin/exhibitors/{_accountsExhibitorId}/accounts/link

/account/api/admin/exhibitors/{_accountsExhibitorId}/accounts/{membershipId}

/account/api/admin/exhibitors/{id}

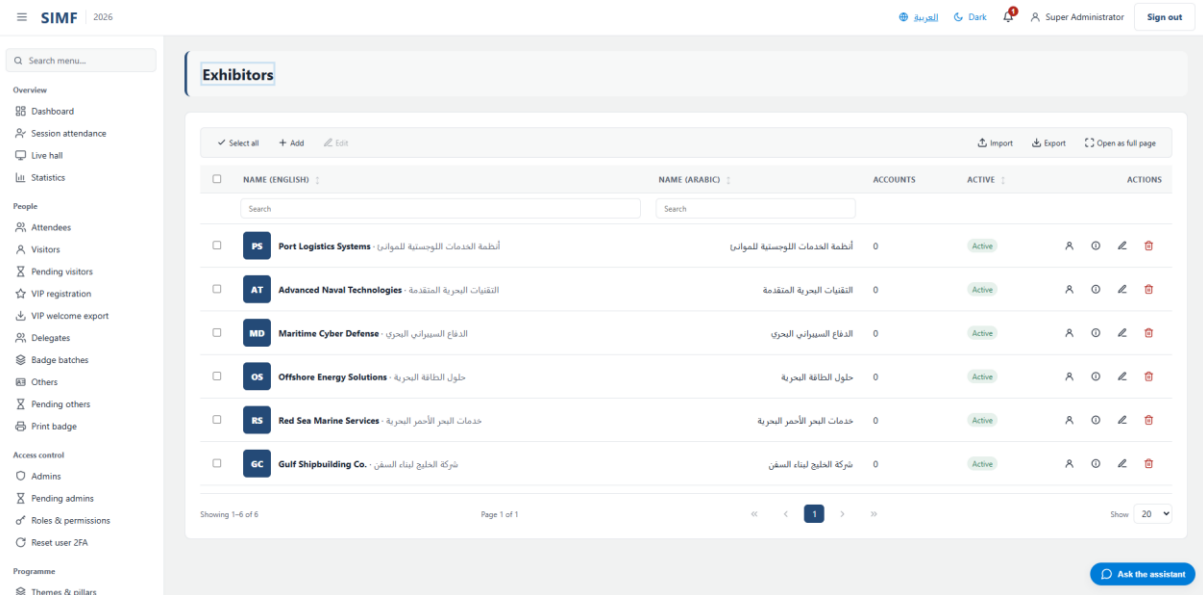


Figure 111 — Exhibitors — /admin/exhibitors

Booths (/admin/booths)

Property	Value
Address	/admin/booths
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BoothsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BoothsList.razor.cs
Page permission	Booths.View
Menu permission	Booths.View

What you can do here

Action	Permission it needs
Add	Booths.Create
Edit	Booths.Edit
Details	No permission of its own
Delete	Booths.Delete
Import	Booths.Import
Export	Booths.Export

The list shows: Code · Name (English) · Name (Arabic) · Exhibitor · Sector · Hall · Active

It calls: /account/api/admin/booths/list /account/api/admin/booths/{id}
/account/api/admin/exhibitors/list /account/api/admin/halls/list

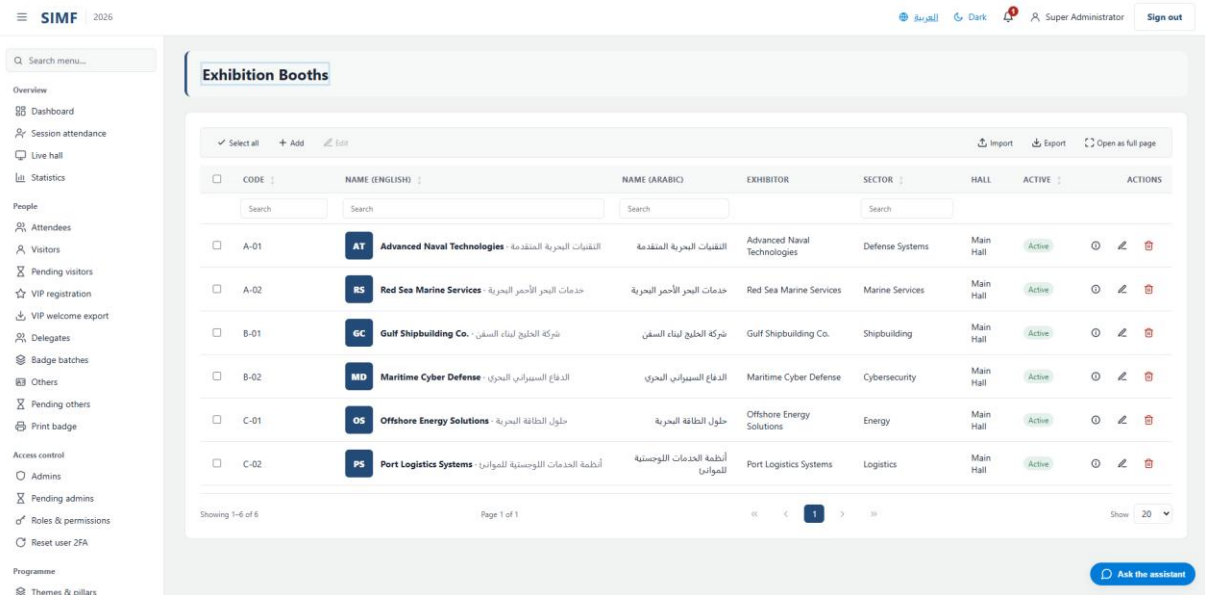


Figure 112 — Booths — /admin/booths

Sponsors (/admin/sponsors)

Property	Value
Address	/admin/sponsors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SponsorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SponsorsList.razor.cs
Page permission	Sponsors.View
Menu permission	Sponsors.View

What you can do here

Action	Permission it needs
Add	Sponsors.Create
Edit	Sponsors.Edit
Details	No permission of its own
Delete	Sponsors.Delete
Import	Sponsors.Import
Export	Sponsors.Export

The list shows: Name (English) · Tier · Link · Display order · Active

It calls: /account/api/admin/sponsors/list /account/api/admin/sponsors/{id}

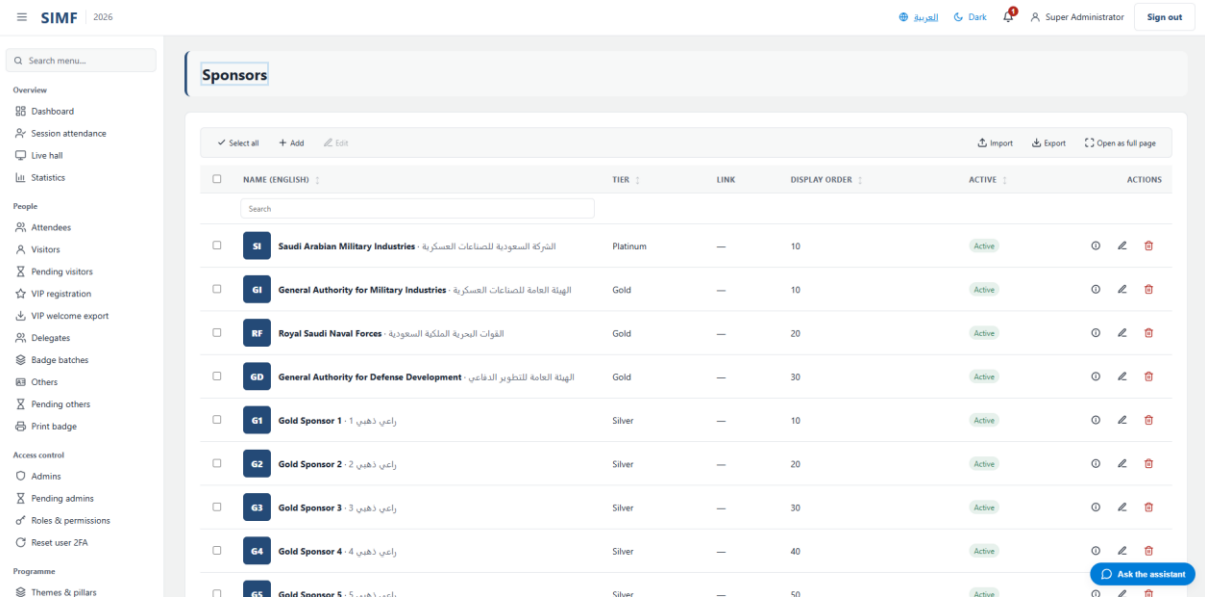


Figure 113 — Sponsors — /admin/sponsors

Venue map (/admin/venue-map)

Property	Value
Address	/admin/venue-map
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VenueMapList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VenueMapList.razor.cs
Page permission	VenueMap.View
Menu permission	VenueMap.View

What you can do here

Action	Permission it needs
Add	VenueMap.Create
Edit	VenueMap.Edit
Details	No permission of its own
Delete	VenueMap.Delete
Import	VenueMap.Import
Export	VenueMap.Export

The list shows: Label · Kind · Position (x, y) · Active

It calls: /account/api/admin/venue-map/list /account/api/admin/venue-map/{id}

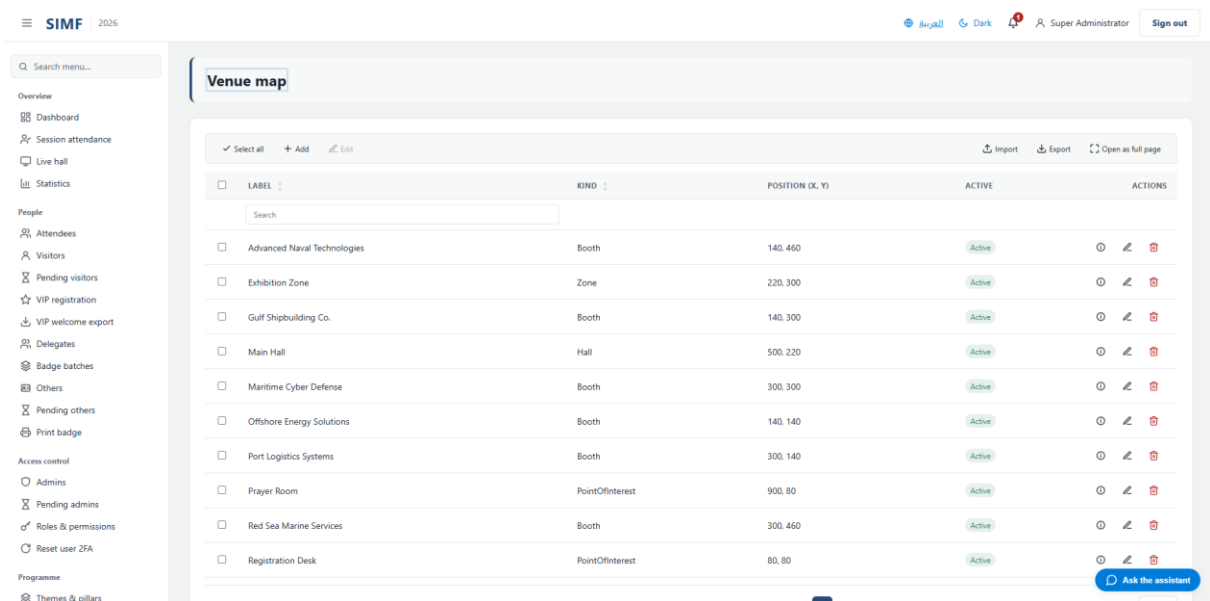


Figure 114 — Venue map — /admin/venue-map

Engagement

Live sessions (/m/live-sessions)

Property	Value
Address	/m/live-sessions
Implemented by	-
Code-behind	-
Page permission	-
Menu permission	Sessions.View
Placeholder	Yes — the module is not built yet

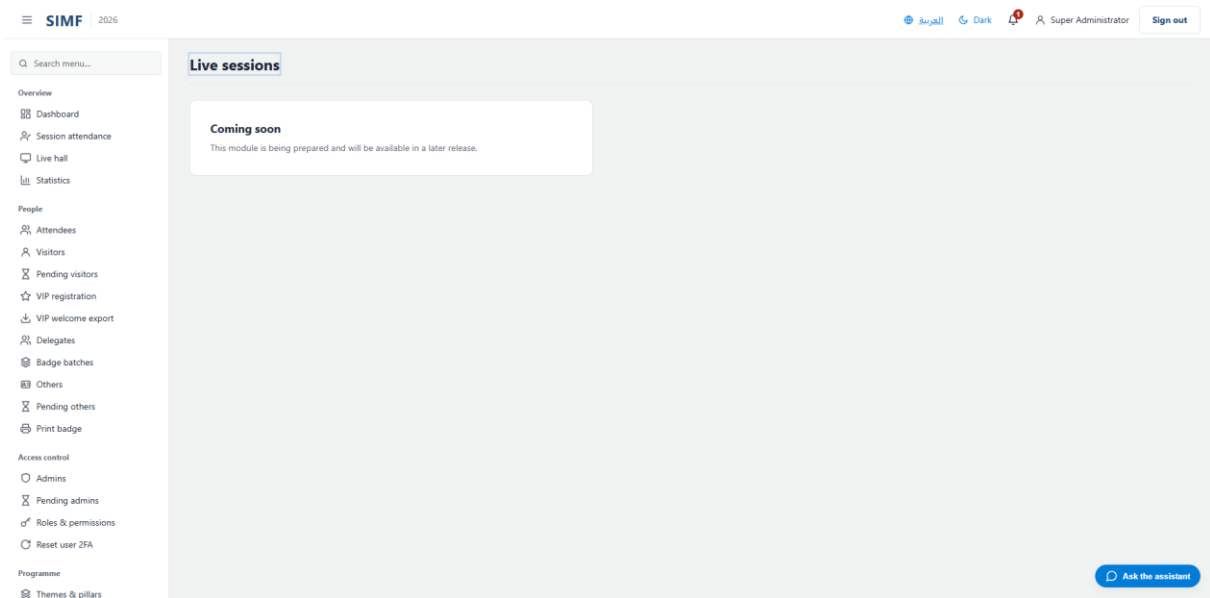


Figure 115 — Live sessions — /m/live-sessions

Ratings (/admin/ratings)

Property	Value
Address	/admin/ratings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingsList.razor.cs
Page permission	Ratings.View
Menu permission	Ratings.View

What you can do here

Action	Permission it needs
Export	Ratings.Export

The list shows: Type · Target · Overall · Answers · Comment · Active · Submitted at

It calls: /account/api/admin/feedback/ratings /account/api/admin/feedback/ratings/kpi
/account/api/admin/ratings/export

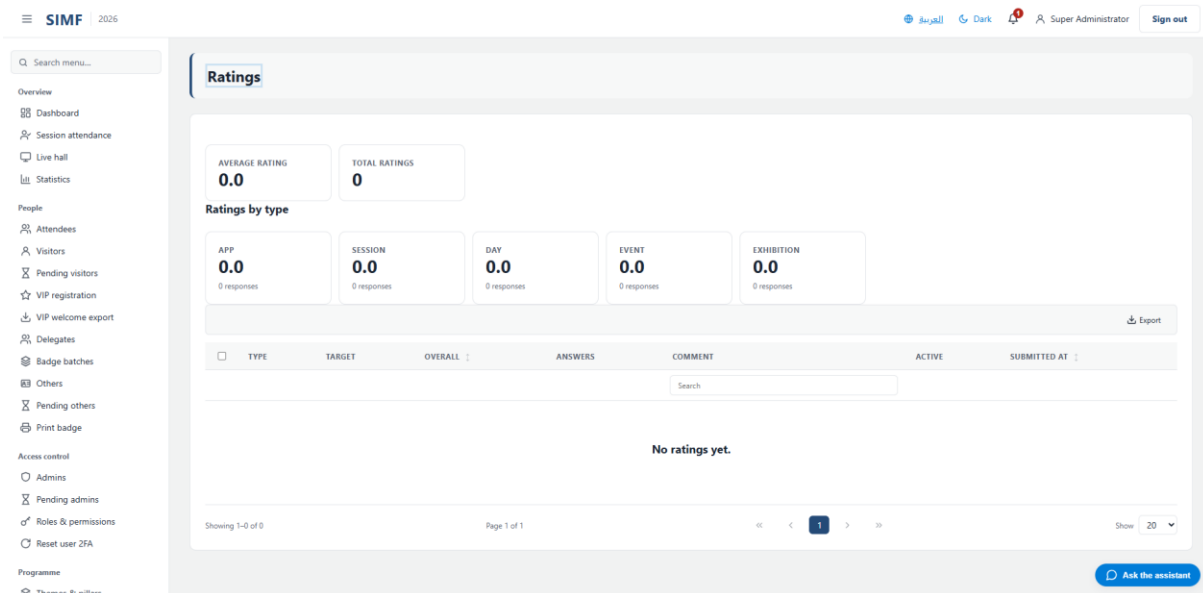


Figure 116 — Ratings — /admin/ratings

Rating configuration (/admin/rating-config)

Property	Value
Address	/admin/rating-config
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingConfig.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingConfig.razor.cs
Page permission	RatingConfig.View
Menu permission	RatingConfig.View

What you can do here

Action	Permission it needs
Add	RatingConfig.Create
Edit	RatingConfig.Edit
Details	No permission of its own
Delete	RatingConfig.Delete

The list shows: Code · Name · Scope · Built-in · Groups · Questions · Responses · Active · Name · Name (Arabic) · Order · Questions · Active · Question · Name (Arabic) · Group · Required · Order · Active

It calls: /account/api/admin/ratings/groups /account/api/admin/ratings/groups/{_groupEditId}
/account/api/admin/ratings/groups/{g.Id} /account/api/admin/ratings/questions
/account/api/admin/ratings/questions/{_questionEditId} /account/api/admin/ratings/questions/{q.Id}
/account/api/admin/ratings/types /account/api/admin/ratings/types/list
/account/api/admin/ratings/types/{_selectedType.Id}/groups/list
/account/api/admin/ratings/types/{_selectedType.Id}/questions/list
/account/api/admin/ratings/types/{_typeEditId} /account/api/admin/ratings/types/{t.Id}

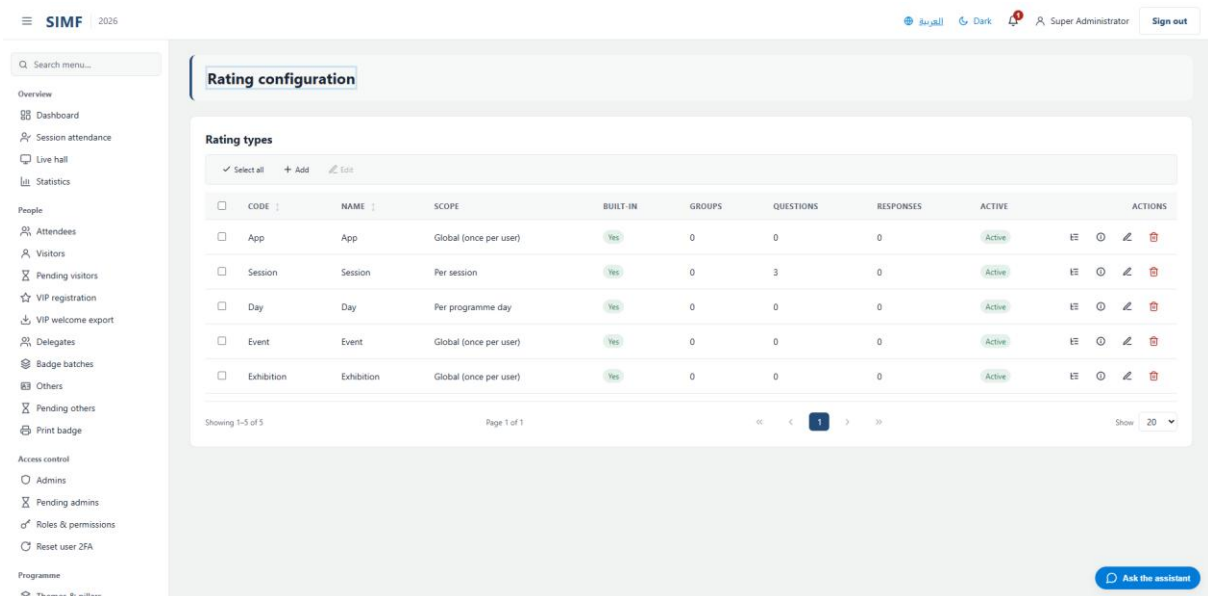


Figure 117 — Rating configuration — /admin/rating-config

Knowledge & AI

FAQ groups & entries (/admin/faq)

Property	Value
Address	/admin/faq
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/FaqManager.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/FaqManager.razor.cs
Page permission	Faq.View
Menu permission	Faq.View

What you can do here

Action	Permission it needs
Add	Faq.Create
Edit	Faq.Edit
Details	No permission of its own
Delete	Faq.Delete

The list shows: Name (EN) · Name (AR) · Order · Entries · Active · Question (EN) · Name (AR) · Order · Active

It calls: /account/api/admin/faq/entries /account/api/admin/faq/entries/{_entryEditId}
/account/api/admin/faq/entries/{e.Id} /account/api/admin/faq/groups
/account/api/admin/faq/groups/list /account/api/admin/faq/groups/{_groupEditId}
/account/api/admin/faq/groups/{_selectedGroupId}/entries/list /account/api/admin/faq/groups/{g.Id}

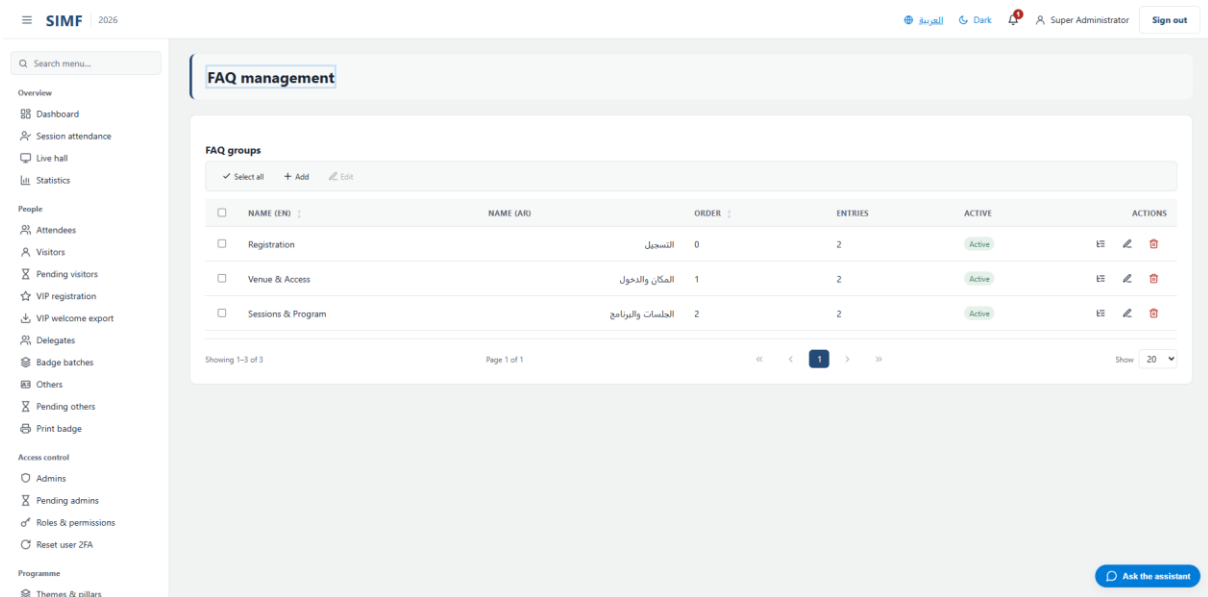


Figure 118 — FAQ groups & entries — /admin/faq

AI dashboard (/admin/ai)

Property	Value
Address	/admin/ai
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiDashboard.razor.cs
Page permission	AiDashboard.View
Menu permission	AiDashboard.View

It calls: /account/api/admin/ai/dashboard

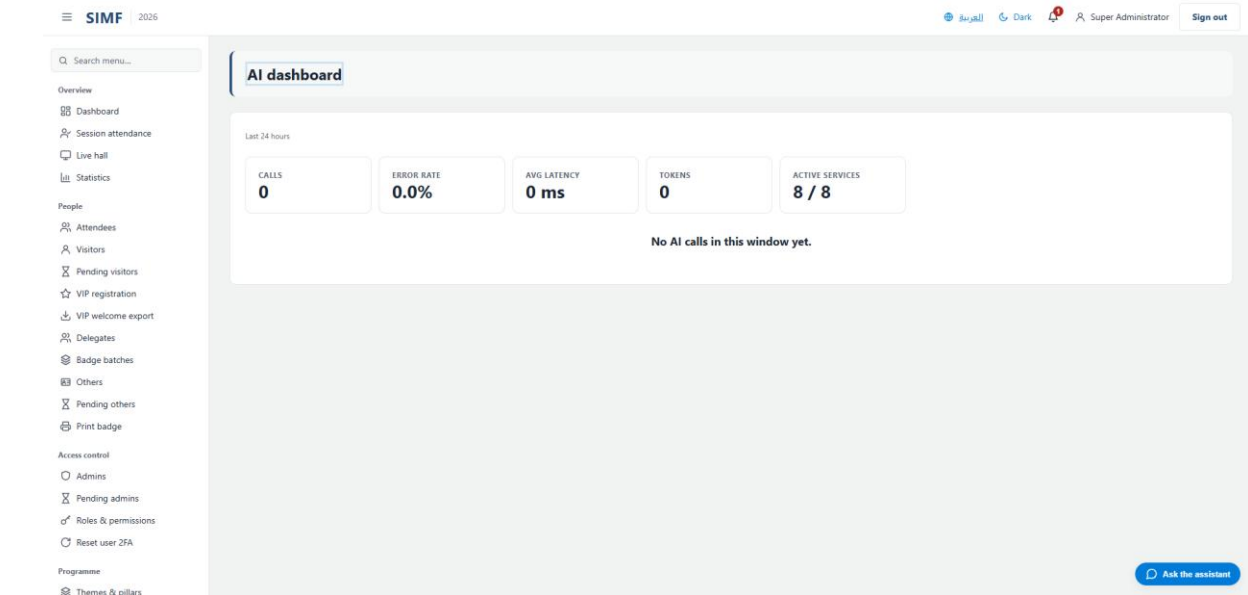


Figure 119 — AI dashboard — /admin/ai

AI services (/admin/ai/services)

Property	Value
Address	/admin/ai/services
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiServicesConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiServicesConsole.razor.cs
Page permission	AiPrompts.View
Menu permission	AiPrompts.View

What you can do here

Action	Permission it needs
A button the page gates itself	AiPrompts.Edit

The list shows: Service · Active prompt · Provider · Model · Hosting · Prompts

It calls: /account/api/admin/ai/prompts/list

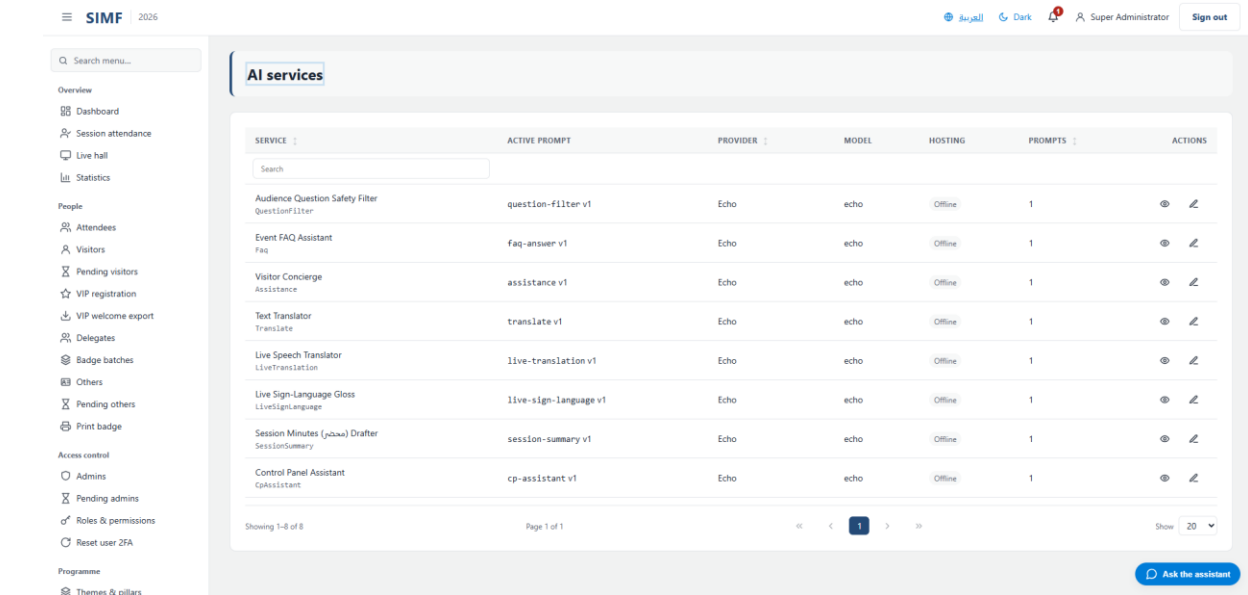


Figure 120 — AI services — /admin/ai/services

AI prompts (/admin/ai/prompts)

Property	Value
Address	/admin/ai/prompts
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiPromptsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiPromptsList.razor.cs
Page permission	AiPrompts.View
Menu permission	AiPrompts.View

What you can do here

Action	Permission it needs
Add	AiPrompts.Create
Edit	AiPrompts.Edit
Details	No permission of its own
Delete	AiPrompts.Delete
Import	AiPrompts.Import
Export	AiPrompts.Export
A button the page gates itself	AiPrompts.Test
A button the page gates itself	AiPrompts.View

The list shows: Key · Feature · Name · Provider · Model · Hosting · Version · Active

It calls: /account/api/admin/ai/prompts/list

/account/api/admin/ai/prompts/{_historyPromptId}/history/list

/account/api/admin/ai/prompts/{_testTargetId}/test /account/api/admin/ai/prompts/{id}

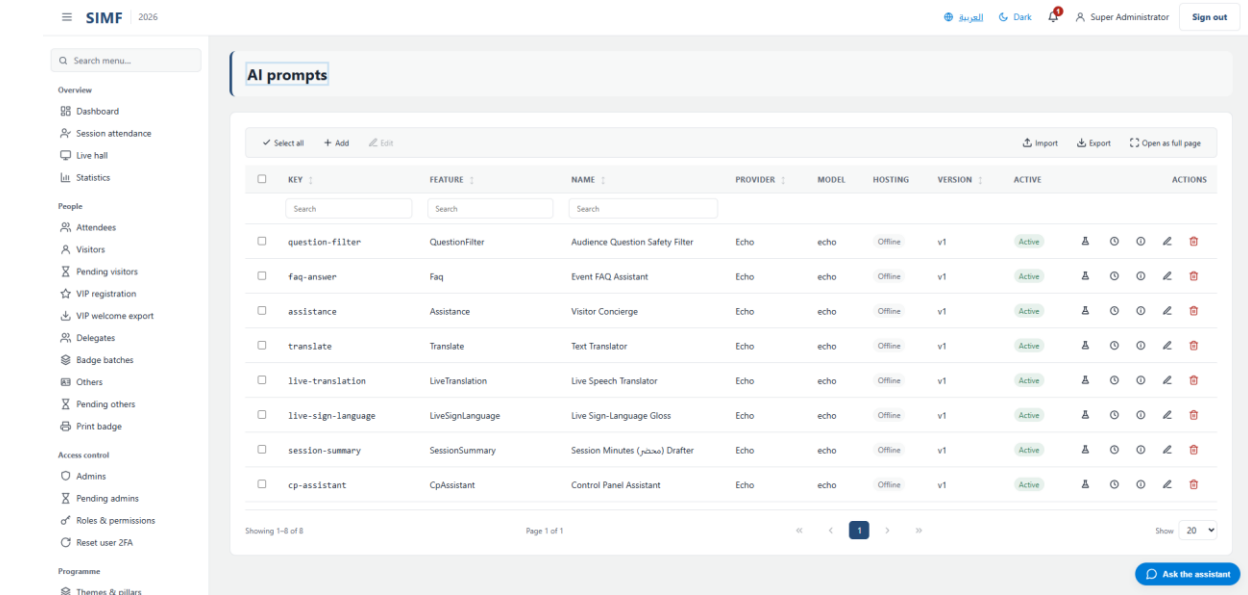


Figure 121 — AI prompts — /admin/ai/prompts

AI invocations (/admin/ai/invocations)

Property	Value
Address	/admin/ai/invocations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiInvocationsLog.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiInvocationsLog.razor.cs
Page permission	AiInvocations.View
Menu permission	AiInvocations.View

What you can do here

Action	Permission it needs
A button the page gates itself	AiInvocations.View

The list shows: Time · Prompt key · Feature · Provider · Caller · Latency · Tokens (in/out) · Error

It calls: /account/api/admin/ai/invocations/list /account/api/admin/ai/invocations/{row.Id}

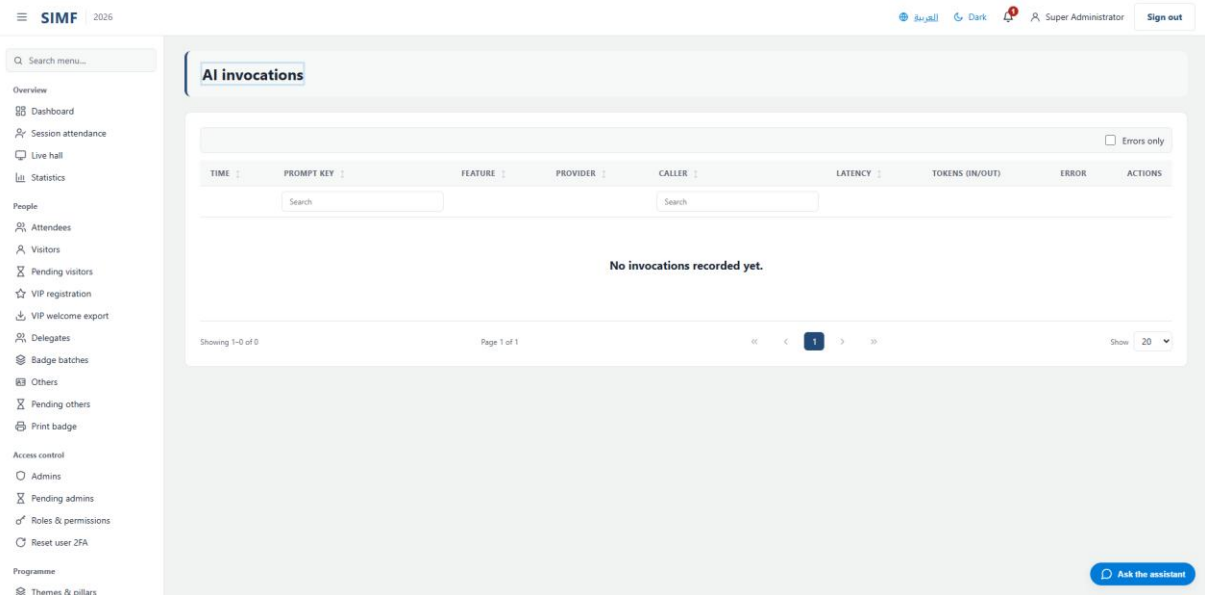


Figure 122 — AI invocations — /admin/ai/invocations

Content

Media library (/admin/media-library)

Property	Value
Address	/admin/media-library
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaLibraryList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaLibraryList.razor.cs
Page permission	MediaLibrary.View
Menu permission	MediaLibrary.View

What you can do here

Action	Permission it needs
Manage	No permission of its own
A button the page gates itself	MediaLibrary.Manage

The list shows: Category · Owner · Preview · Kind · Source · Active

It calls: /account/api/admin/assets/item/{_deactivateTarget.Id}
 /account/api/admin/assets/item/{_detailsTarget.Id}/restore /account/api/admin/assets/item/{row.Id}
 /account/api/admin/assets/list /account/api/admin/assets/{a.Category}/{a.OwnerId}/image

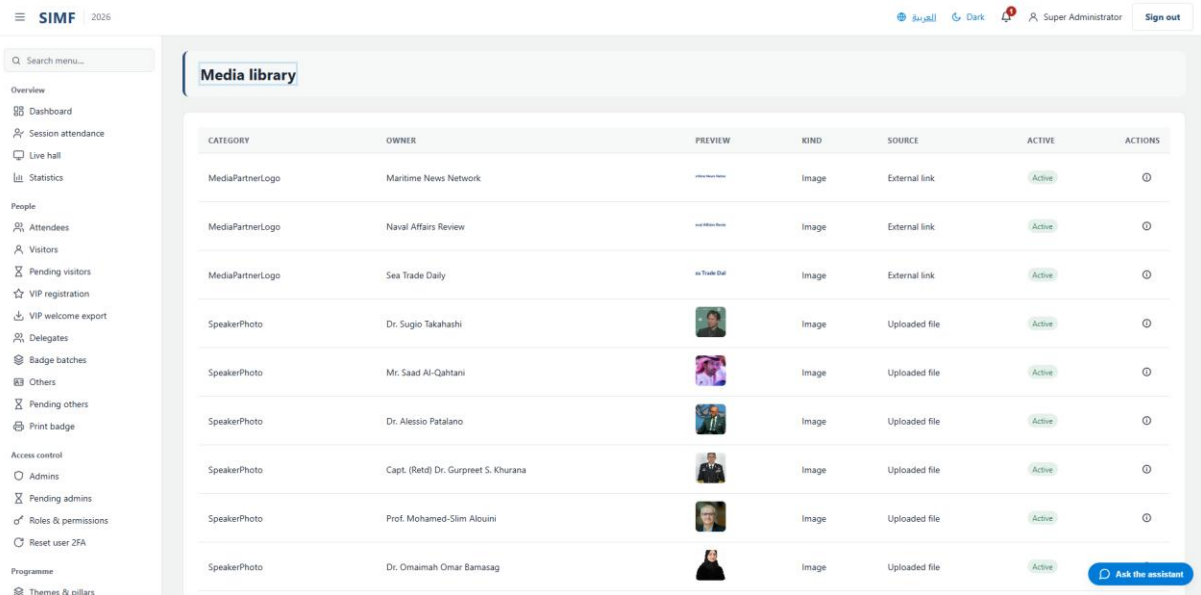


Figure 123 — Media library — /admin/media-library

Content blocks (/admin/content-blocks)

Property	Value
Address	/admin/content-blocks
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContentBlocksList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContentBlocksList.razor.cs
Page permission	ContentBlocks.View
Menu permission	ContentBlocks.View

What you can do here

Action	Permission it needs
Add	ContentBlocks.Edit
Edit	ContentBlocks.Edit
Details	No permission of its own
Delete	ContentBlocks.Delete
Import	ContentBlocks.Import
Export	ContentBlocks.Export

The list shows: Key · English · Last updated · Active

It calls: /account/api/admin/content-blocks/list

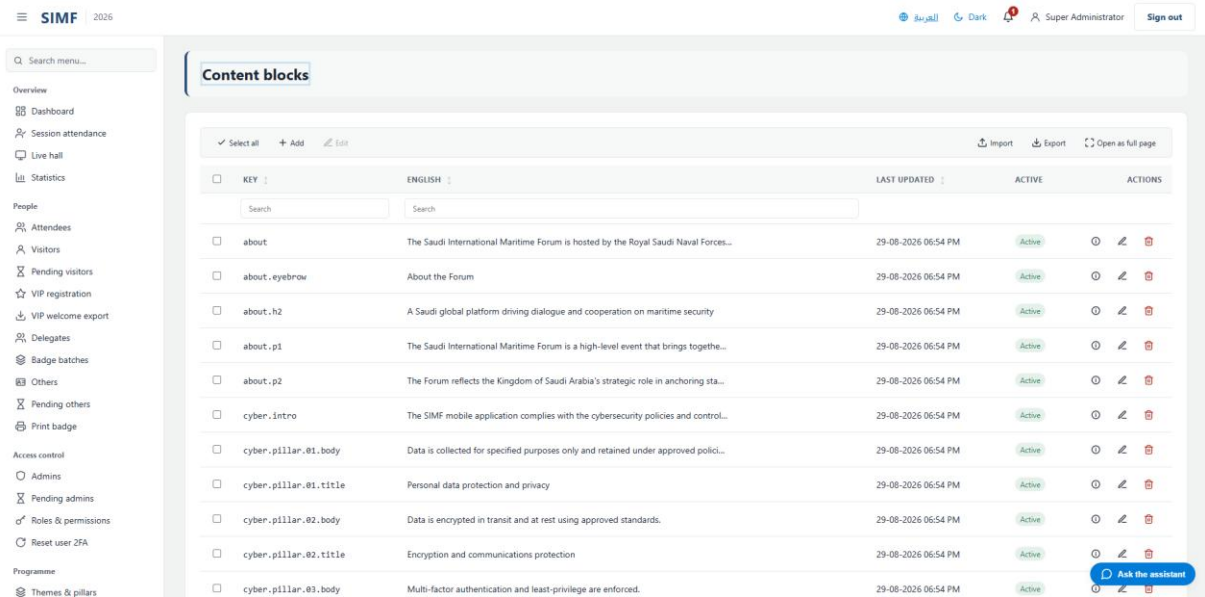


Figure 124 — Content blocks — /admin/content-blocks

Banners (/admin/banners)

Property	Value
Address	/admin/banners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BannersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BannersList.razor.cs
Page permission	Banners.View
Menu permission	Banners.View

What you can do here

Action	Permission it needs
Add	Banners.Create
Edit	Banners.Edit
Details	No permission of its own
Delete	Banners.Delete
Import	Banners.Import
Export	Banners.Export

The list shows: Title · Start · End · Order · Active

It calls: /account/api/admin/banners/list /account/api/admin/banners/{id}

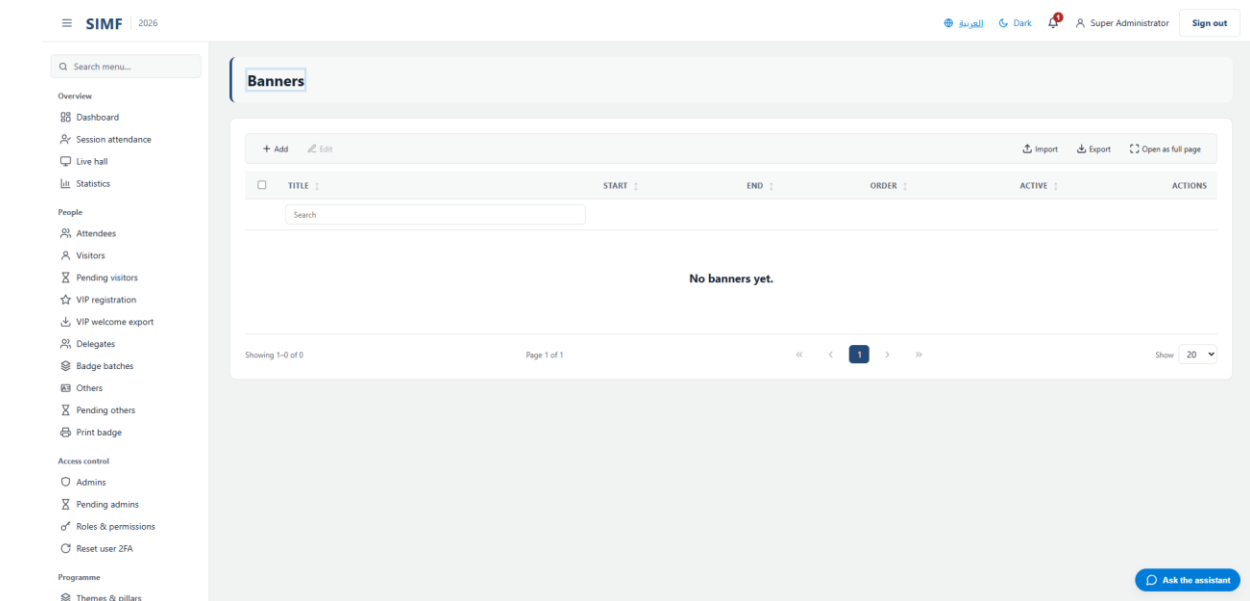


Figure 125 — Banners — /admin/banners

Media Center (/admin/media)

Property	Value
Address	/admin/media
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaList.razor.cs
Page permission	Media.View
Menu permission	Media.View

What you can do here

Action	Permission it needs
Add	Media.Create
Edit	Media.Edit
Details	No permission of its own
Delete	Media.Delete
Import	Media.Import
Export	Media.Export

The list shows: Type · Title (English) · Title (Arabic) · Album (English) · Album (Arabic) · Image · Order · Active

It calls: /account/api/admin/media/list /account/api/admin/media/{id}

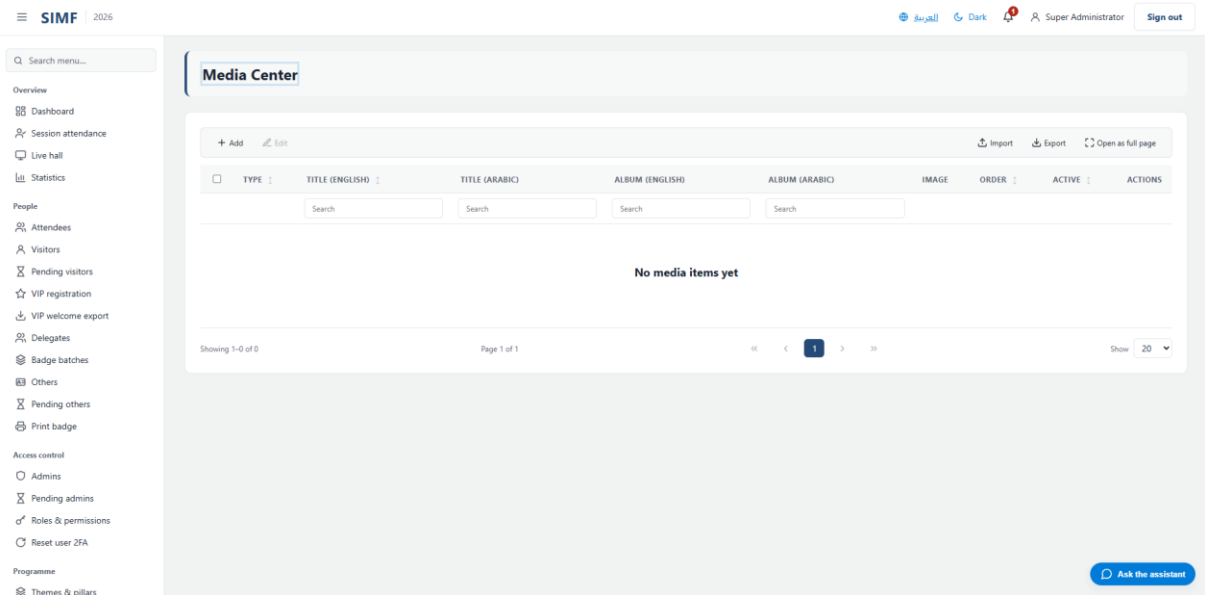


Figure 126 — Media Center — /admin/media

News (/admin/news)

Property	Value
Address	/admin/news
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/NewsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/NewsList.razor.cs
Page permission	News.View
Menu permission	News.View

What you can do here

Action	Permission it needs
Add	News.Create
Edit	News.Edit
Details	No permission of its own
Delete	News.Delete
Import	News.Import
Export	News.Export

The list shows: Title (EN) · Title (AR) · Category (EN) · Category (AR) · Published · Order · Active

It calls: /account/api/admin/news/list /account/api/admin/news/{id}

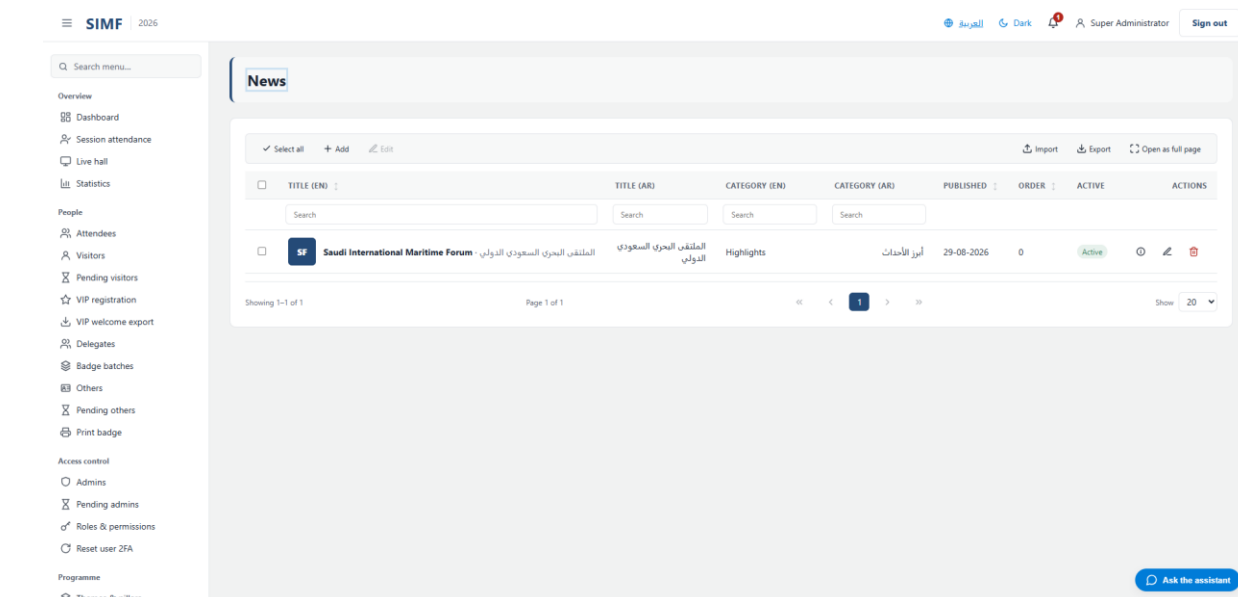


Figure 127 — News — /admin/news

Media Partners (/admin/media-partners)

Property	Value
Address	/admin/media-partners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaPartnersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaPartnersList.razor.cs
Page permission	MediaPartners.View
Menu permission	MediaPartners.View

What you can do here

Action	Permission it needs
Add	MediaPartners.Create
Edit	MediaPartners.Edit
Details	No permission of its own
Delete	MediaPartners.Delete
Import	MediaPartners.Import
Export	MediaPartners.Export

The list shows: Name (English) · Link · Display order · Active

It calls: /account/api/admin/media-partners/list /account/api/admin/media-partners/{id}

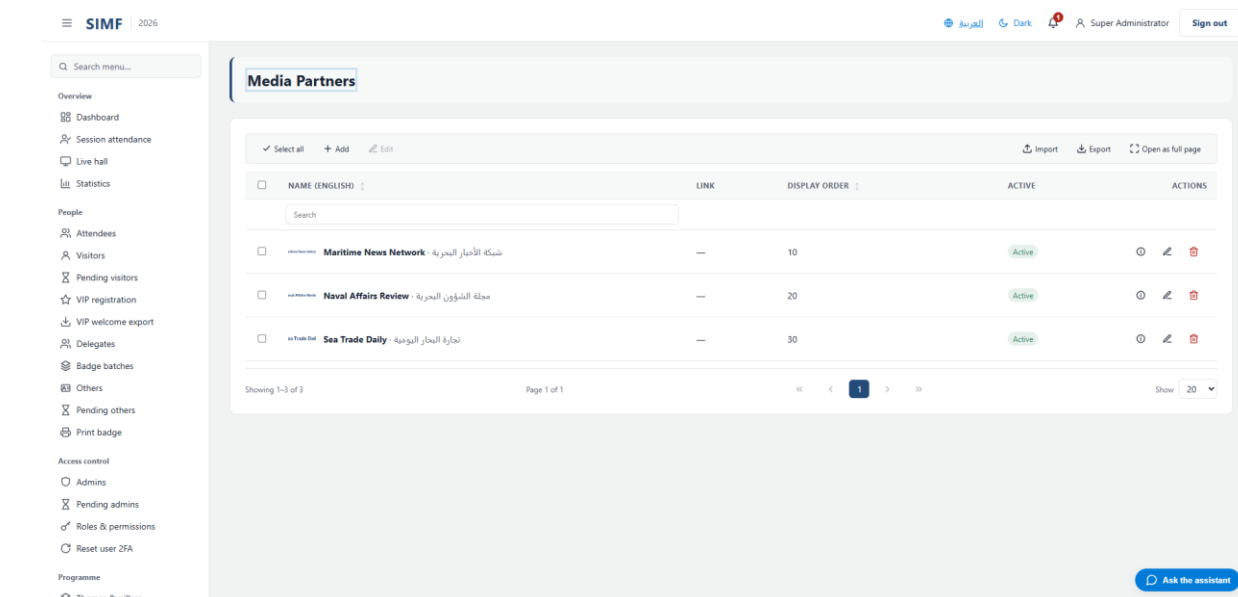


Figure 128 — Media Partners — /admin/media-partners

Previous editions (/admin/archive)

Property	Value
Address	/admin/archive
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ArchiveList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ArchiveList.razor.cs
Page permission	Archive.View
Menu permission	Archive.View

What you can do here

Action	Permission it needs
Add	Archive.Create
Edit	Archive.Edit
Details	No permission of its own
Delete	Archive.Delete
Import	Archive.Import
Export	Archive.Export
A button the page gates itself	Archive.Snapshot

The list shows: Year · Title (English) · Title (Arabic) · Attendees · Sessions · Speakers · Active

It calls: /account/api/admin/archive/list /account/api/admin/archive/snapshot-current

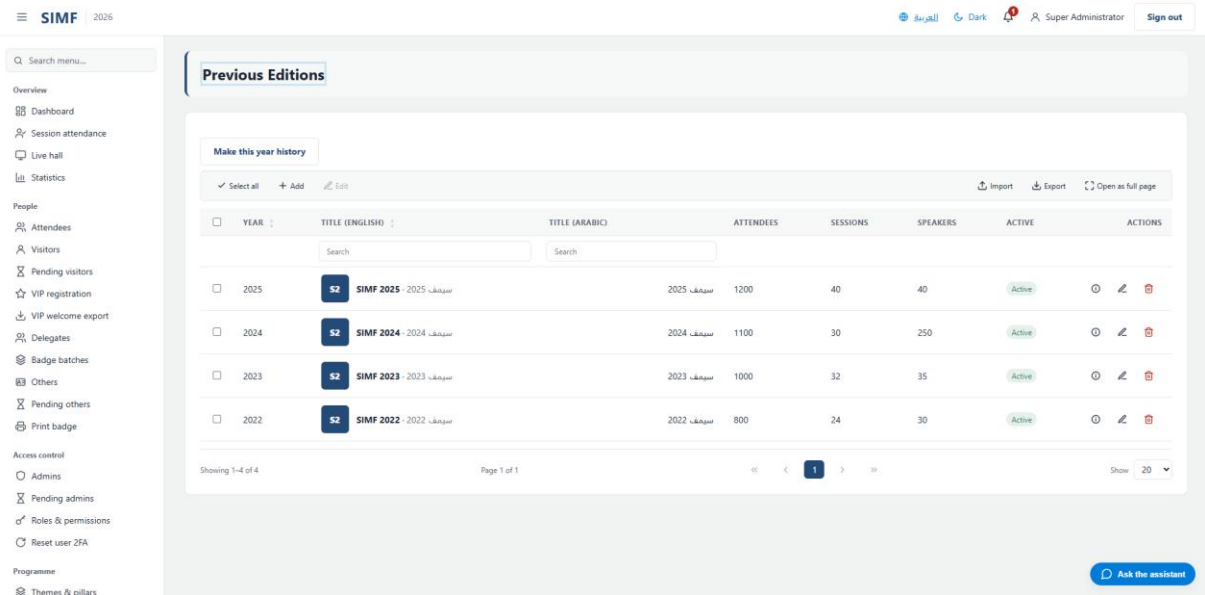


Figure 129 — Previous editions — /admin/archive

Public relations

Invitations (/admin/invitations)

Property	Value
Address	/admin/invitations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InvitationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InvitationsList.razor.cs
Page permission	Invitations.View
Menu permission	Invitations.View

What you can do here

Action	Permission it needs
New invitation	Invitations.Manage
Edit	Invitations.Manage
Details	No permission of its own
Cancel invitation	Invitations.Manage
Export	Invitations.Export

The list shows: Recipient · Profile type · State · Sent · Sent by · Active

It calls: /account/api/admin/invitations/export /account/api/admin/invitations/list
/account/api/admin/invitations/{id}

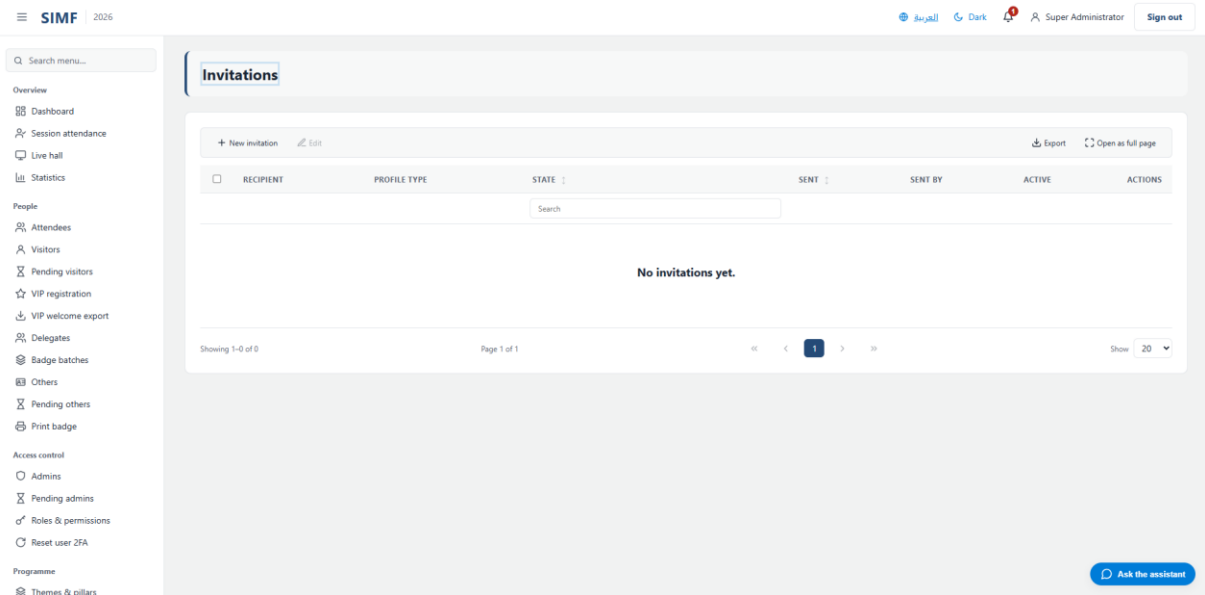


Figure 130 — Invitations — /admin/invitations

VIPs (/admin/vips)

Property	Value
Address	/admin/vips
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipsList.razor.cs
Page permission	Vips.View
Menu permission	Vips.View

What you can do here

Action	Permission it needs
Export	Vips.Export
A button the page gates itself	Vips.Notify

The list shows: Name · Job title · Profile type · Email

It calls: /account/api/admin/vips/export /account/api/admin/vips/list /account/api/admin/vips/notify

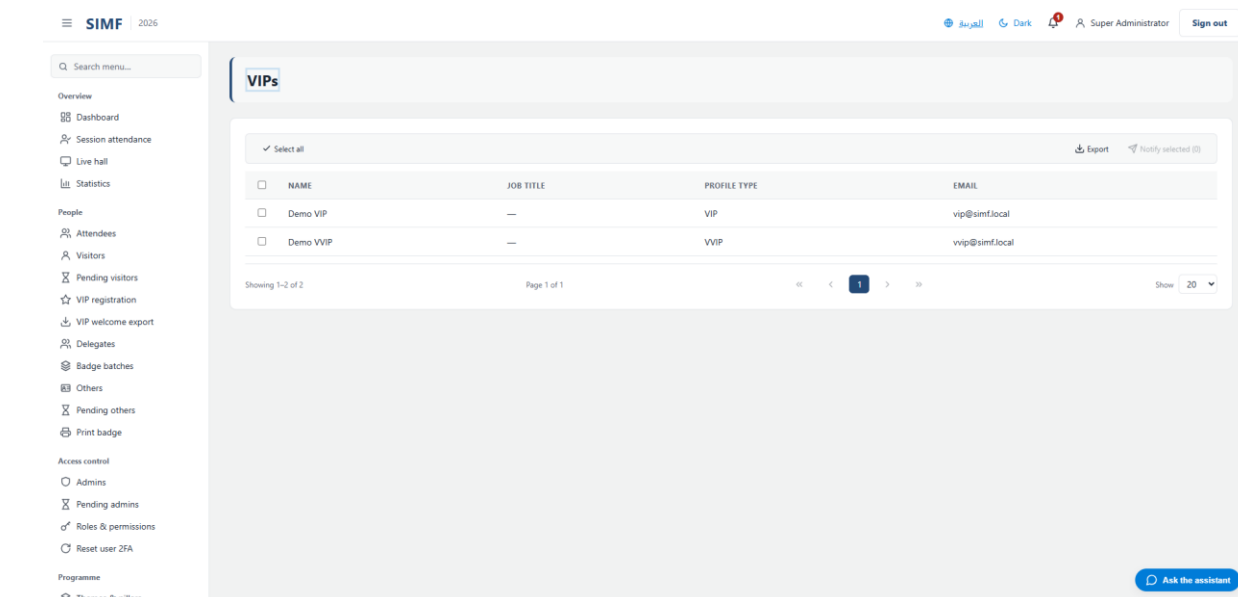


Figure 131 — VIPs — /admin/vips

Announcements (/admin/announcements)

Property	Value
Address	/admin/announcements
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Announcements.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Announcements.razor.cs
Page permission	Announcements.View
Menu permission	Announcements.View

What you can do here

Action	Permission it needs
A button the page gates itself	Announcements.Send

The list shows: When · Target · Message · Status · Recipients · Emails

It calls: /account/api/admin/notifications/broadcast

/account/api/admin/notifications/broadcast/estimate

/account/api/admin/notifications/broadcasts/list /account/api/admin/sessions/list

Figure 132 — Announcements — /admin/announcements

Contact inquiries (/admin/contact-inquiries)

Property	Value
Address	/admin/contact-inquiries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContactInquiriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContactInquiriesList.razor.cs
Page permission	ContactInquiries.View
Menu permission	ContactInquiries.View

What you can do here

Action	Permission it needs
A button the page gates itself	ContactInquiries.Manage

The list shows: Name · Email · Message · Status · Received

It calls: /account/api/admin/contact-inquiries/list /account/api/admin/contact-inquiries/{row.Id}/handled

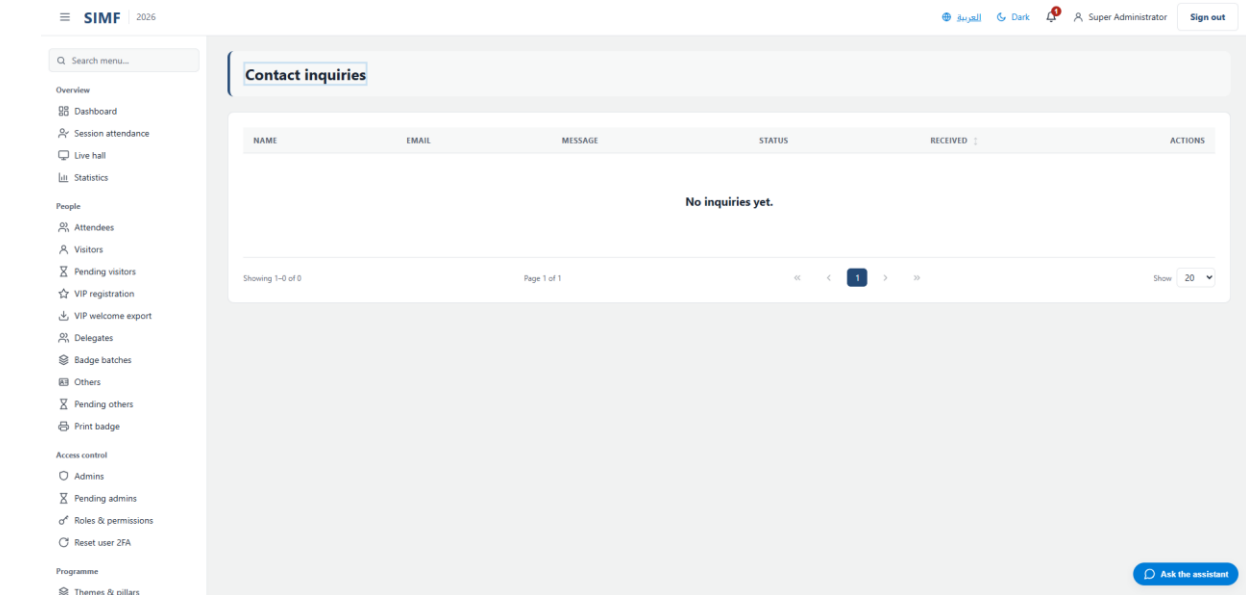


Figure 133 — Contact inquiries — /admin/contact-inquiries

Gates & arrivals

Gates (/admin/gates)

Property	Value
Address	/admin/gates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesList.razor.cs
Page permission	Gates.Manage
Menu permission	Gates.Manage

What you can do here

Action	Permission it needs
Add gate	Gates.Manage
Edit	Gates.Manage
Details	No permission of its own
Deactivate	Gates.Manage
Import	Gates.Import
Export	Gates.Export

The list shows: Code · Name · Name (Arabic) · Direction · Allowed types · Operators · Status

It calls: /account/api/admin/gates/list /account/api/admin/gates/{id}

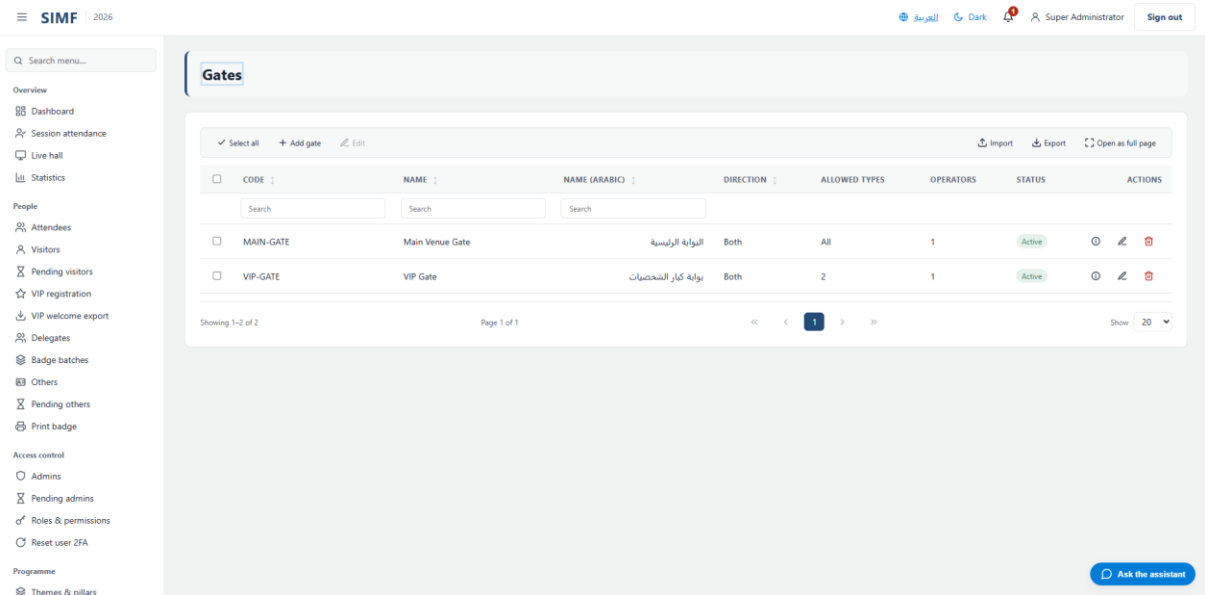


Figure 134 — Gates — /admin/gates

Gate operator (/admin/gates/operator)

Property	Value
Address	/admin/gates/operator
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GateOperatorConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GateOperatorConsole.razor.cs
Page permission	Gates.Operate
Menu permission	Gates.Operate

It calls: /account/api/gates/my-assignments /account/api/gates/my-reports/today
/account/api/gates/{_selectedGateId}/scans

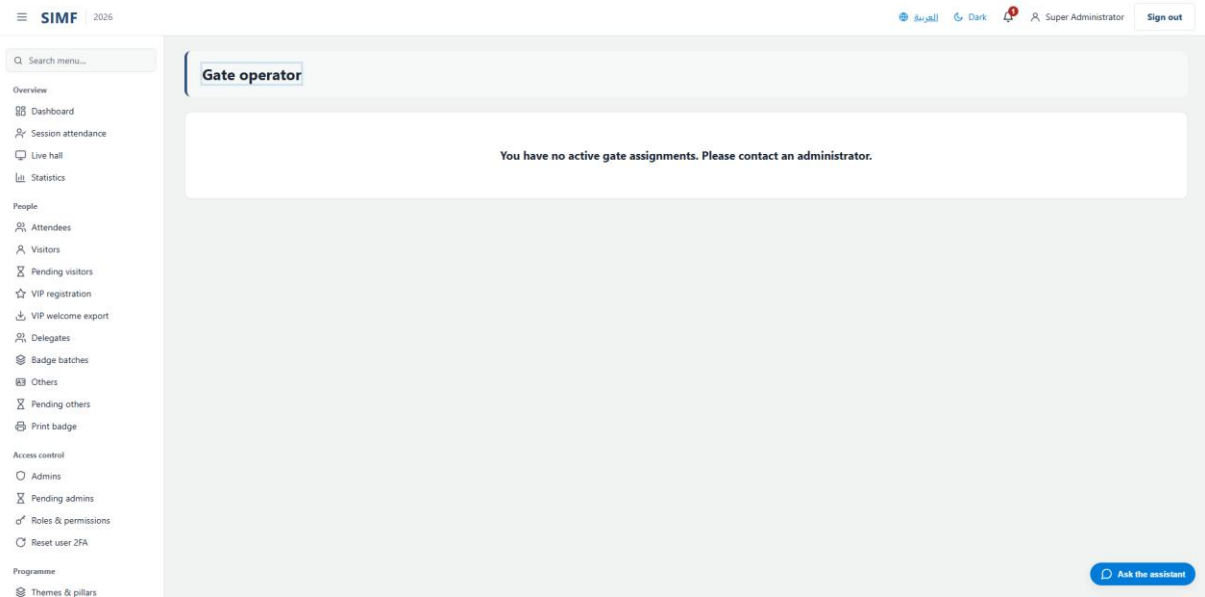


Figure 135 — Gate operator — /admin/gates/operator

Hall arrivals (/admin/hall-arrivals)

Property	Value
Address	/admin/hall-arrivals
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallArrivalsConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallArrivalsConsole.razor.cs
Page permission	HallArrivals.View
Menu permission	HallArrivals.View

What you can do here

Action	Permission it needs
A button the page gates itself	HallArrivals.Record

It calls: /account/api/admin/hall-arrivals/sessions/list
 /account/api/admin/sessions/{_selected.Id}/arrivals
 /account/api/admin/sessions/{_selected.Id}/departures

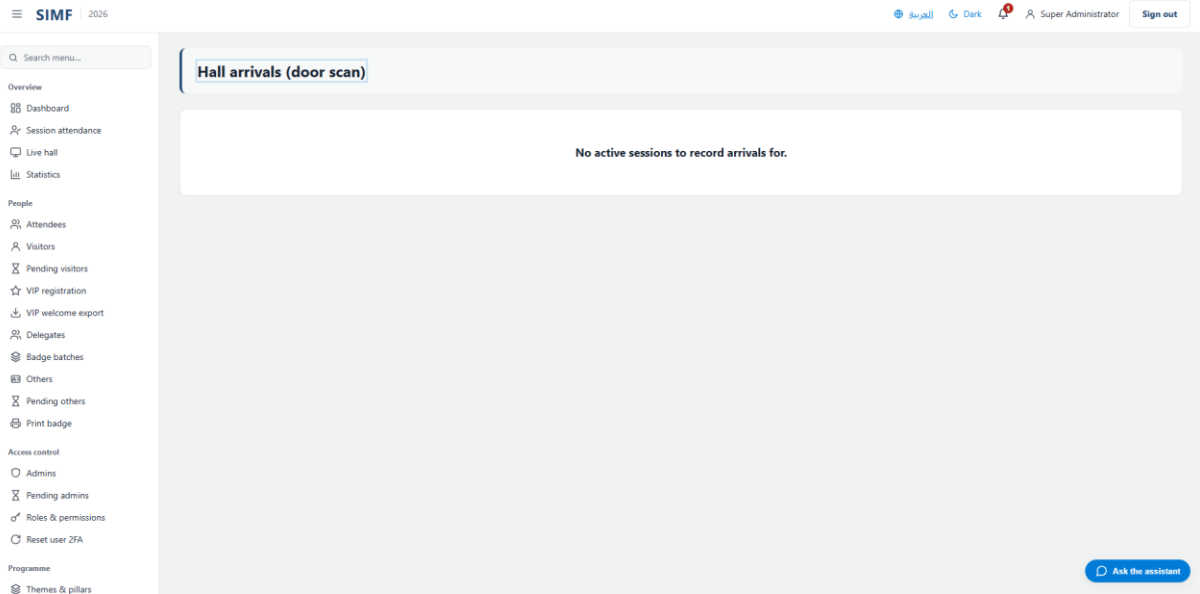


Figure 136 — Hall arrivals — /admin/hall-arrivals

Gates dashboard (/admin/gates/dashboard)

Property	Value
Address	/admin/gates/dashboard
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesOperationsDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesOperationsDashboard.razor.cs
Page permission	Gates.Manage
Menu permission	Gates.Manage

It calls: /account/api/admin/gates/list /account/api/admin/gates/reports/currently-inside/list

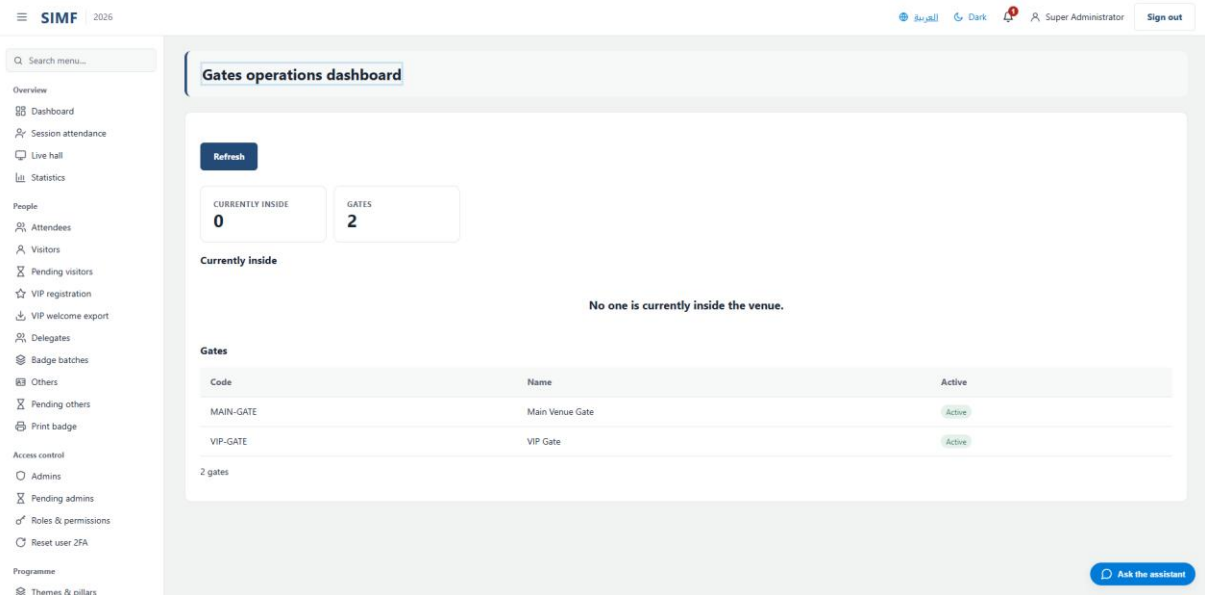


Figure 137 — Gates dashboard — /admin/gates/dashboard

Reference data

Interests (/admin/interests)

Property	Value
Address	/admin/interests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InterestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InterestsList.razor.cs
Page permission	Interests.View
Menu permission	Interests.View

What you can do here

Action	Permission it needs
Add interest	Interests.Create
Edit	Interests.Edit
Details	No permission of its own
Deactivate	Interests.Delete
Import	Interests.Import
Export	Interests.Export

The list shows: Name · Name (Arabic) · Order · Status

It calls: /account/api/admin/interests/list

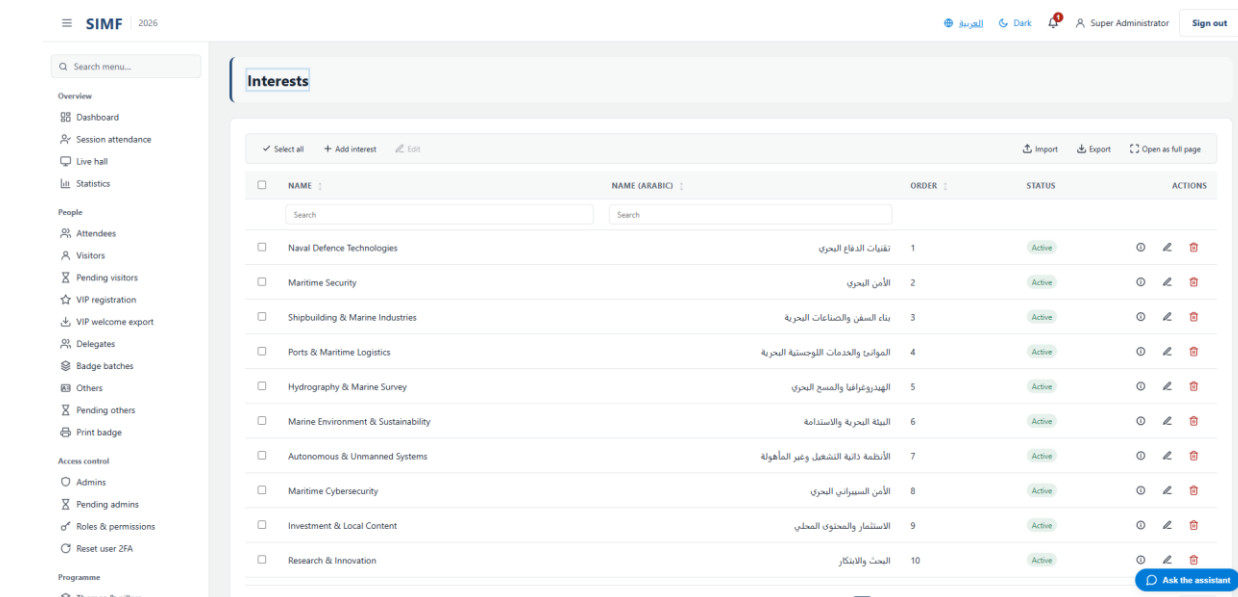


Figure 138 — Interests — /admin/interests

Countries (/admin/countries)

Property	Value
Address	/admin/countries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CountriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CountriesList.razor.cs
Page permission	Countries.View
Menu permission	Countries.View

What you can do here

Action	Permission it needs
Add country	Countries.Create
Edit	Countries.Edit
Details	No permission of its own
Deactivate	Countries.Delete
Import	Countries.Import
Export	Countries.Export

The list shows: ISO id · Code · Name (English) · Name (Arabic) · Dial code · Order · Status

It calls: /account/api/admin/countries/list /account/api/admin/countries/{id}

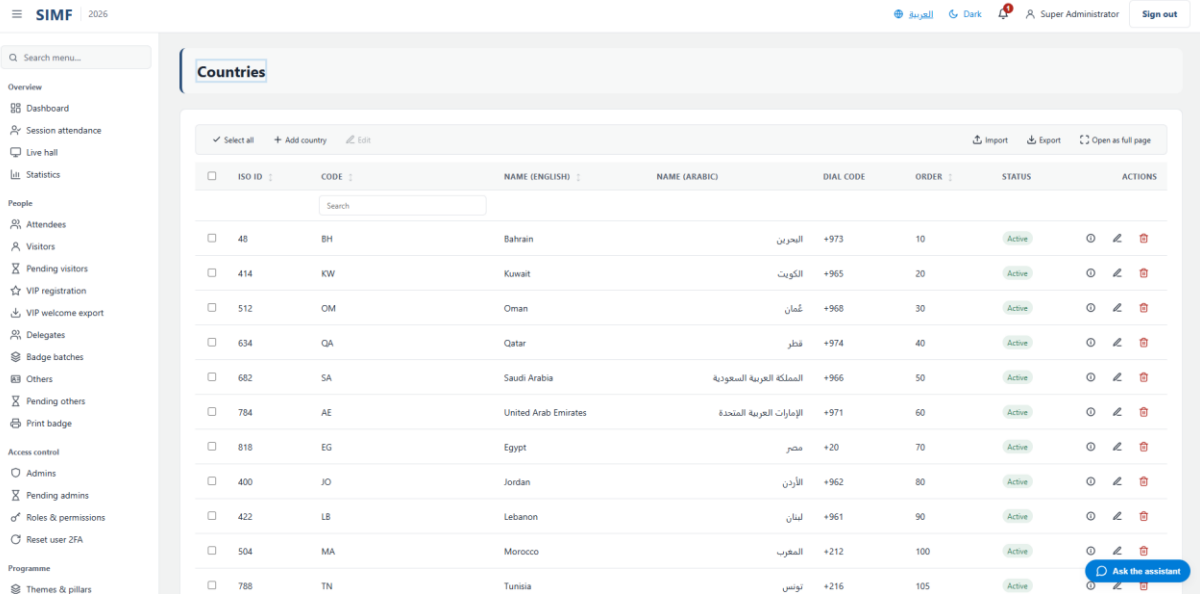


Figure 139 — Countries — /admin/countries

Organisations (/admin/organisations)

Property	Value
Address	/admin/organisations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganisationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganisationsList.razor.cs
Page permission	Organisations.View
Menu permission	Organisations.View

What you can do here

Action	Permission it needs
Add	Organisations.Create
Edit	Organisations.Edit
Details	No permission of its own
Delete	Organisations.Delete
Import Excel	Organisations.Import
Export	Organisations.Export

The list shows: Name (Arabic) · Name (English) · CR · Sector · City · Active

It calls: /account/api/admin/organisations/export /account/api/admin/organisations/import
/account/api/admin/organisations/list /account/api/admin/organisations/{id}

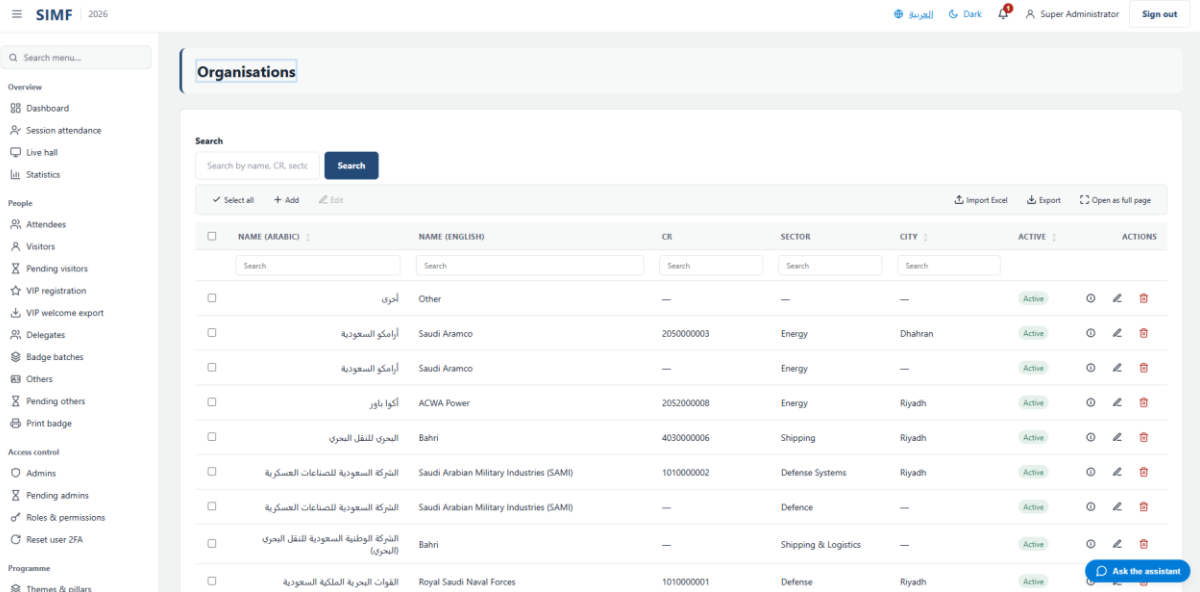


Figure 140 — Organisations — /admin/organisations

Regions (/admin/regions)

Property	Value
Address	/admin/regions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RegionsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RegionsList.razor.cs
Page permission	Regions.View
Menu permission	Regions.View

What you can do here

Action	Permission it needs
Add	Regions.Create
Edit	Regions.Edit
Details	No permission of its own
Delete	Regions.Delete

The list shows: Code · Name (Arabic) · Name (English) · Active

It calls: /account/api/admin/regions/list /account/api/admin/regions/{id}

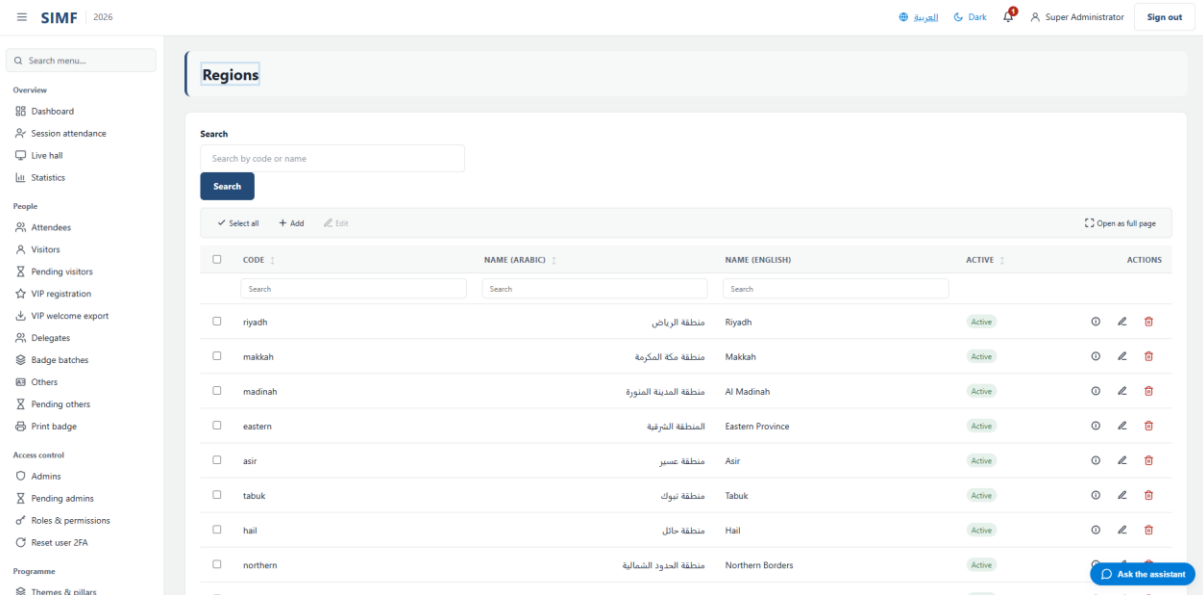


Figure 141 — Regions — /admin/regions

Visitor profile types (/admin/profile-types/visitor)

Property	Value
Address	/admin/profile-types/visitor
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/VisitorProfileTypesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/VisitorProfileTypesList.razor.cs
Page permission	ProfileTypes.View
Menu permission	ProfileTypes.View

What you can do here

Action	Permission it needs
Add profile type	ProfileTypes.Create
Edit profile type	ProfileTypes.Edit
Details	No permission of its own
Deactivate profile type	ProfileTypes.Delete

The list shows: Account type · Name · Name (Arabic) · Page colour · Active

It calls: /account/api/admin/profile-types/list /account/api/admin/profile-types/{_deleteTarget.Id}

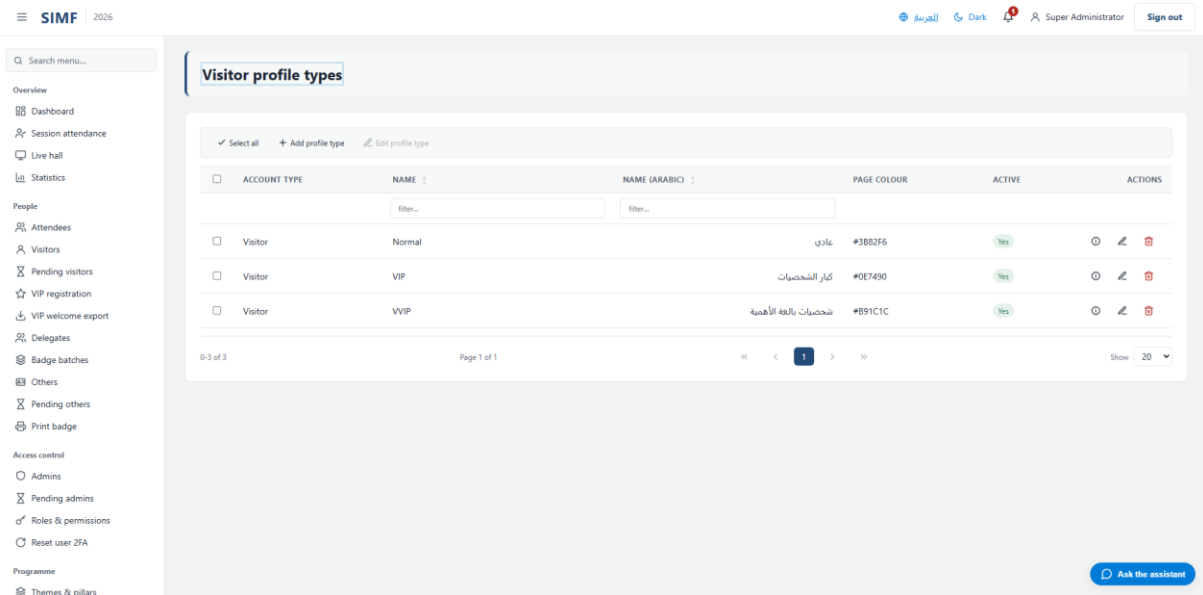


Figure 142 — Visitor profile types — /admin/profile-types/visitor

Other profile types (/admin/profile-types/other)

Property	Value
Address	/admin/profile-types/other
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/OtherProfileTypesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/OtherProfileTypesList.razor.cs
Page permission	ProfileTypes.View
Menu permission	ProfileTypes.View

What you can do here

Action	Permission it needs
Add profile type	ProfileTypes.Create
Edit profile type	ProfileTypes.Edit
Details	No permission of its own
Deactivate profile type	ProfileTypes.Delete

The list shows: Account type · Name · Name (Arabic) · Page colour · Mobile-app role · Active

It calls: /account/api/admin/profile-types/list /account/api/admin/profile-types/{_deleteTarget.Id}

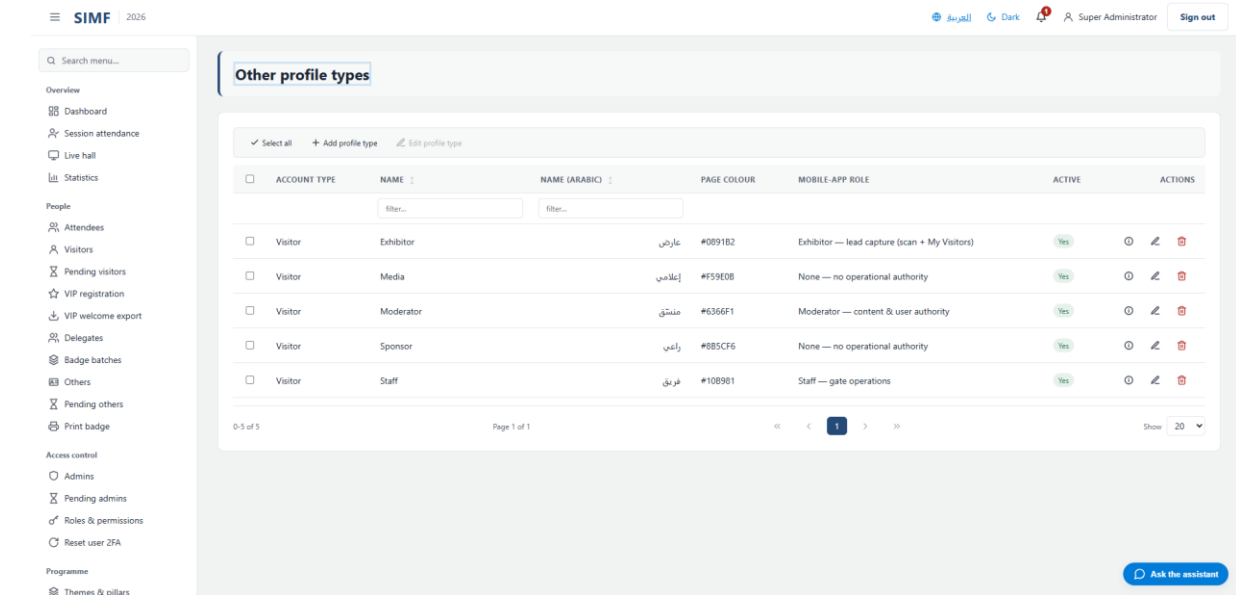


Figure 143 — Other profile types — /admin/profile-types/other

System

Configuration (/admin/configuration)

Property	Value
Address	/admin/configuration
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ConfigurationList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ConfigurationList.razor.cs
Page permission	Configuration.View
Menu permission	Configuration.View

What you can do here

Action	Permission it needs
Add	Configuration.Create
Edit	Configuration.Edit
Details	No permission of its own
Delete	Configuration.Delete
Import	Configuration.Import
Export	Configuration.Export

The list shows: Key · Value · Description · Active

It calls: /account/api/admin/system-settings/list /account/api/admin/system-settings/{id}

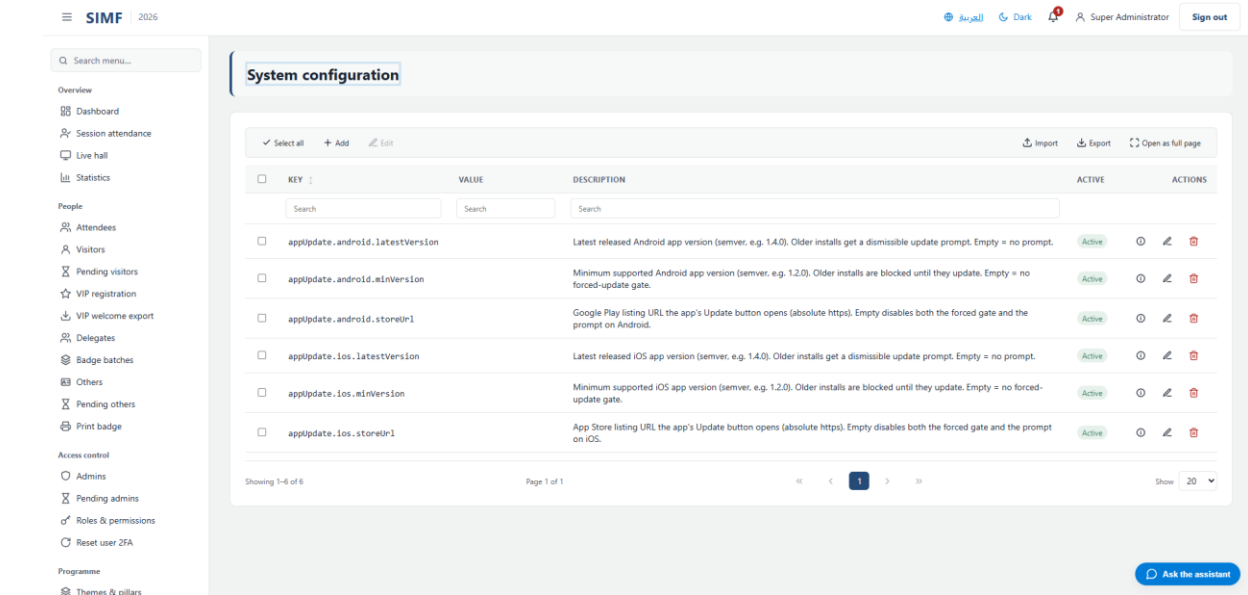


Figure 144 — Configuration — /admin/configuration

Site Settings (/admin/site-settings)

Property	Value
Address	/admin/site-settings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SiteSettingsPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SiteSettingsPage.razor.cs
Page permission	Configuration.Edit
Menu permission	Configuration.Edit

It calls: /account/api/admin/site-settings

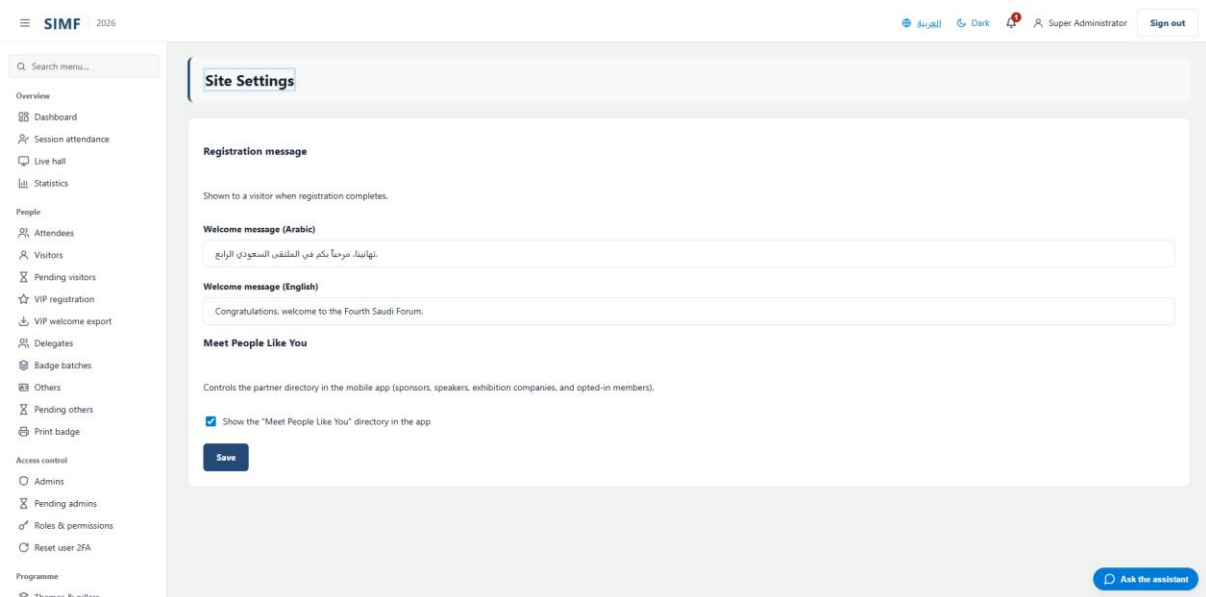


Figure 145 — Site Settings — /admin/site-settings

Walk-in Mode (/admin/walk-in-mode)

Property	Value
Address	/admin/walk-in-mode
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/WalkInModePage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/WalkInModePage.razor.cs
Page permission	WalkInMode.View
Menu permission	WalkInMode.View

It calls: /account/api/admin/walk-in-mode

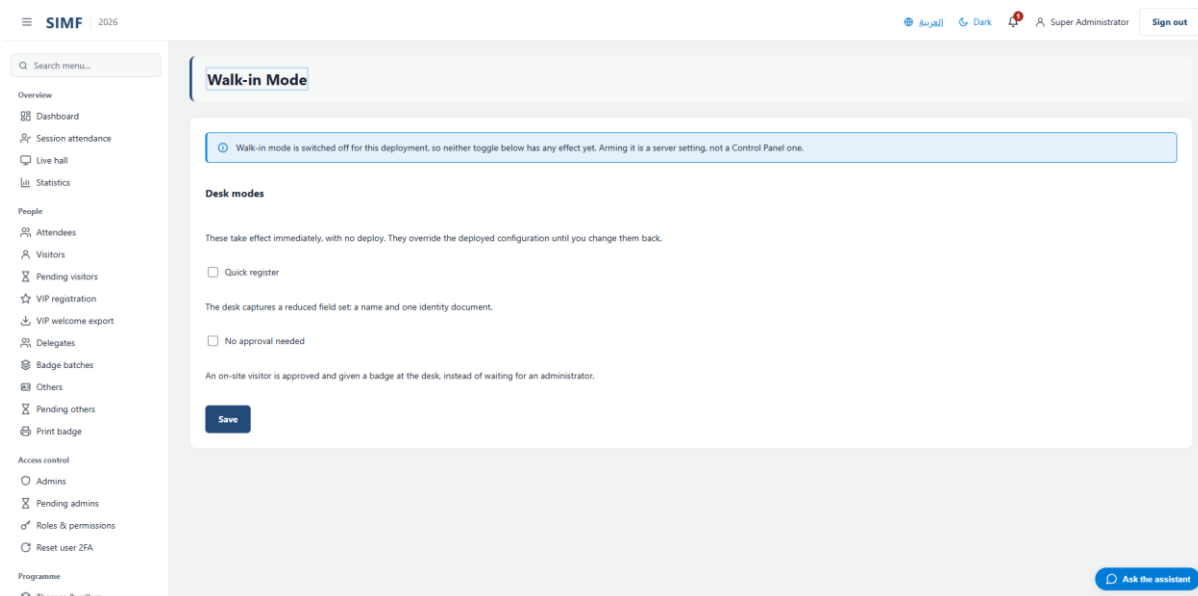


Figure 146 — Walk-in Mode — /admin/walk-in-mode

Email Templates (/admin/email/templates)

Property	Value
Address	/admin/email/templates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EmailTemplatesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EmailTemplatesList.razor.cs
Page permission	EmailTemplates.View
Menu permission	EmailTemplates.View

The list shows: Template · Subject · Customised · Version · Updated

It calls: /account/api/admin/email/templates/list /account/api/admin/email/templates/{row.Type}

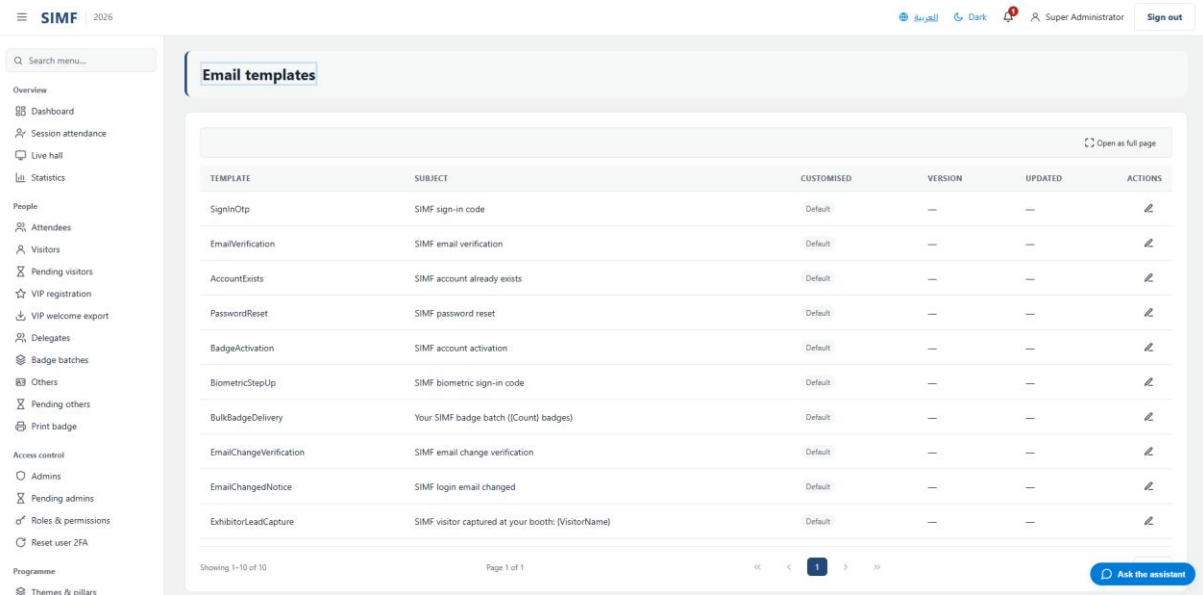


Figure 147 — Email Templates — /admin/email/templates

Organization Profile (/admin/organization-profile)

Property	Value
Address	/admin/organization-profile
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganizationProfilePage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganizationProfilePage.razor.cs
Page permission	OrganizationProfile.View
Menu permission	OrganizationProfile.View

What you can do here

Action	Permission it needs
+ Add about item	No permission of its own
A button the page gates itself	OrganizationProfile.Manage

It calls: /account/api/admin/organization-profile /account/api/admin/organization-profile/hero-video

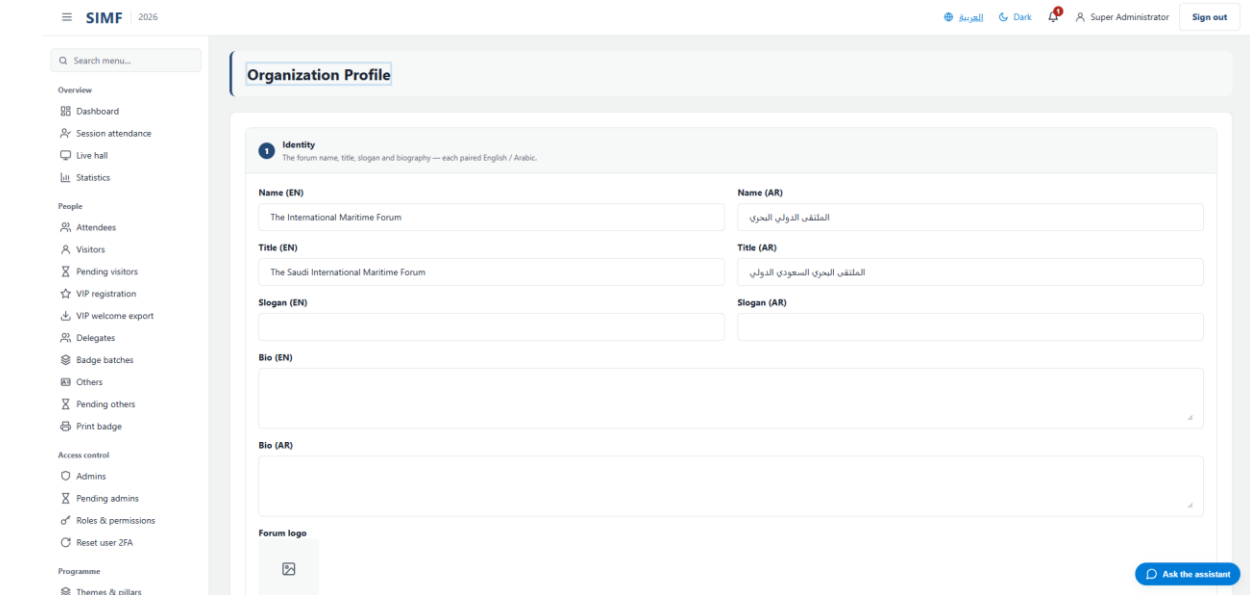


Figure 148 — Organization Profile — /admin/organization-profile

Logs (/admin/logs)

Property	Value
Address	/admin/logs
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/LogsViewer.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/LogsViewer.razor.cs
Page permission	Logs.View
Menu permission	Logs.View

It calls: /account/api/admin/logs/download /account/api/admin/logs/list /account/api/admin/logs/tail

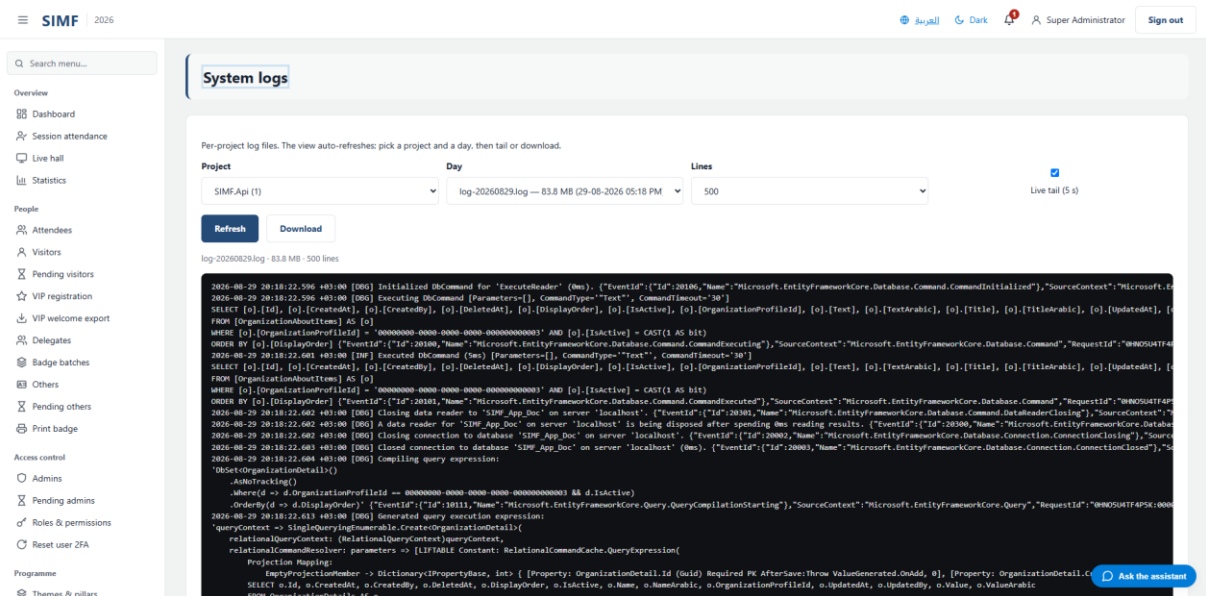


Figure 149 — Logs — /admin/logs

Background services (/admin/ops/services)

Property	Value
Address	/admin/ops/services
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ServicesMonitor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ServicesMonitor.razor.cs
Page permission	ServicesMonitor.View
Menu permission	ServicesMonitor.View

The list shows: Service · Status · Last run · Last success · Runs · Failures · Last error

It calls: /account/api/admin/ops/workers

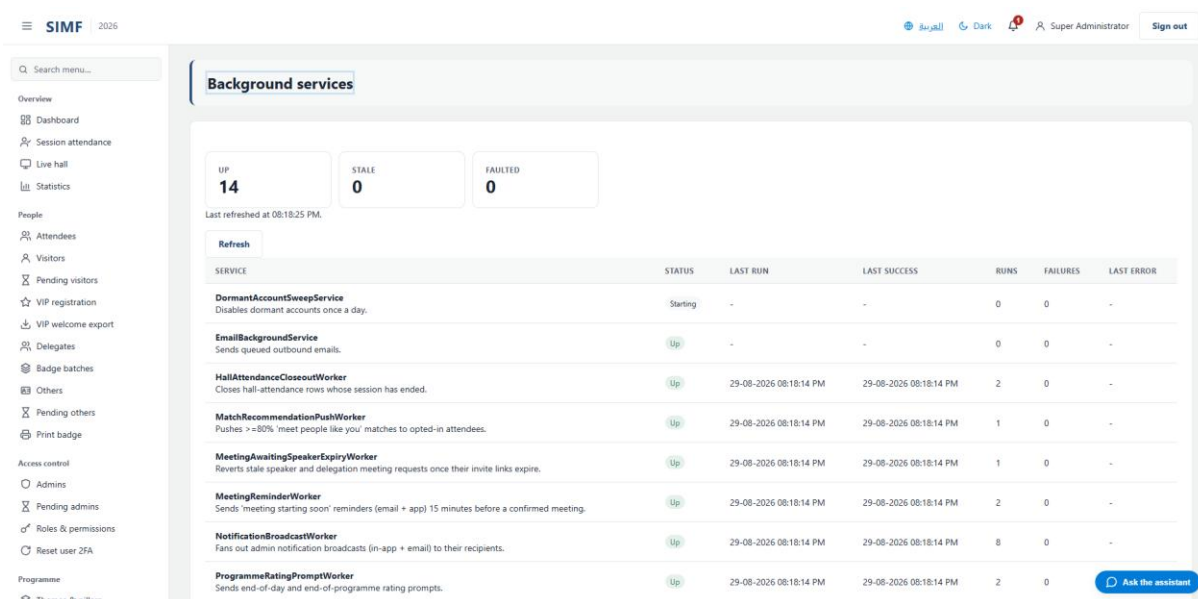


Figure 150 — Background services — /admin/ops/services

Operation log (/admin/operation-log)

Property	Value
Address	/admin/operation-log
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationLogViewer.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationLogViewer.razor.cs
Page permission	OperationLog.View
Menu permission	OperationLog.View

What you can do here

Action	Permission it needs
Details	No permission of its own
A button the page gates itself	OperationLog.Export

The list shows: When (local) · Event · Outcome · Subject email · Source IP

It calls: /account/api/admin/operation-log/export /account/api/admin/operation-log/list
/account/api/admin/operation-log/{row.Id}

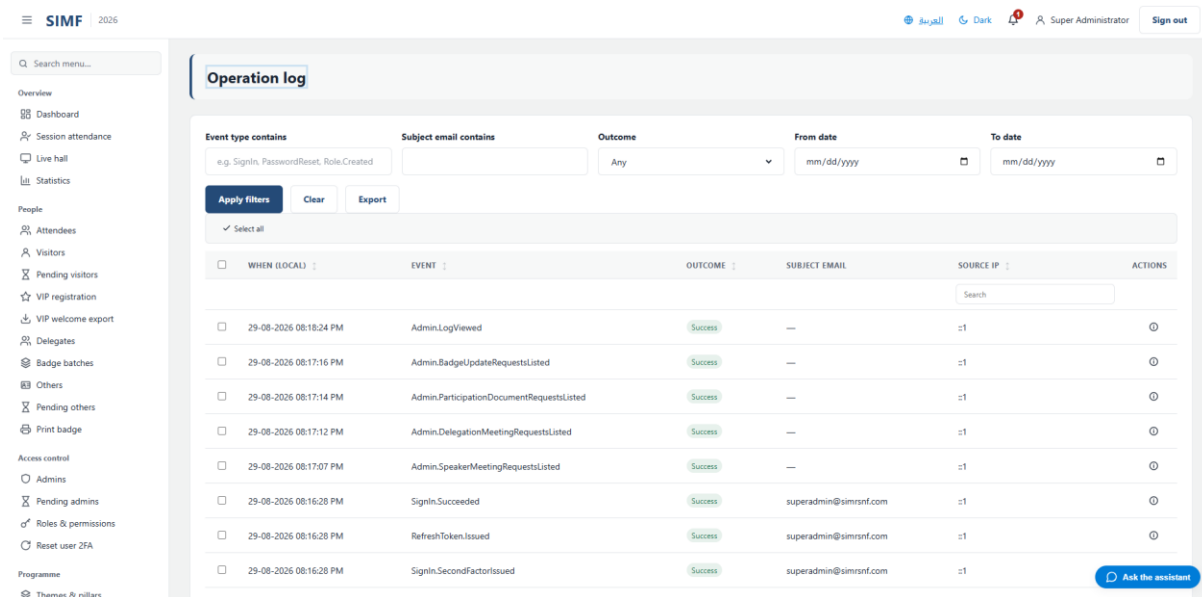


Figure 151 — Operation log — /admin/operation-log

Operations toggles (/admin/operations)

Property	Value
Address	/admin/operations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationsToggles.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationsToggles.razor.cs
Page permission	Operations.View
Menu permission	Operations.View

What you can do here

Action	Permission it needs
A button the page gates itself	Operations.Edit

It calls: /account/api/admin/archive/visibility /account/api/admin/registration-gate

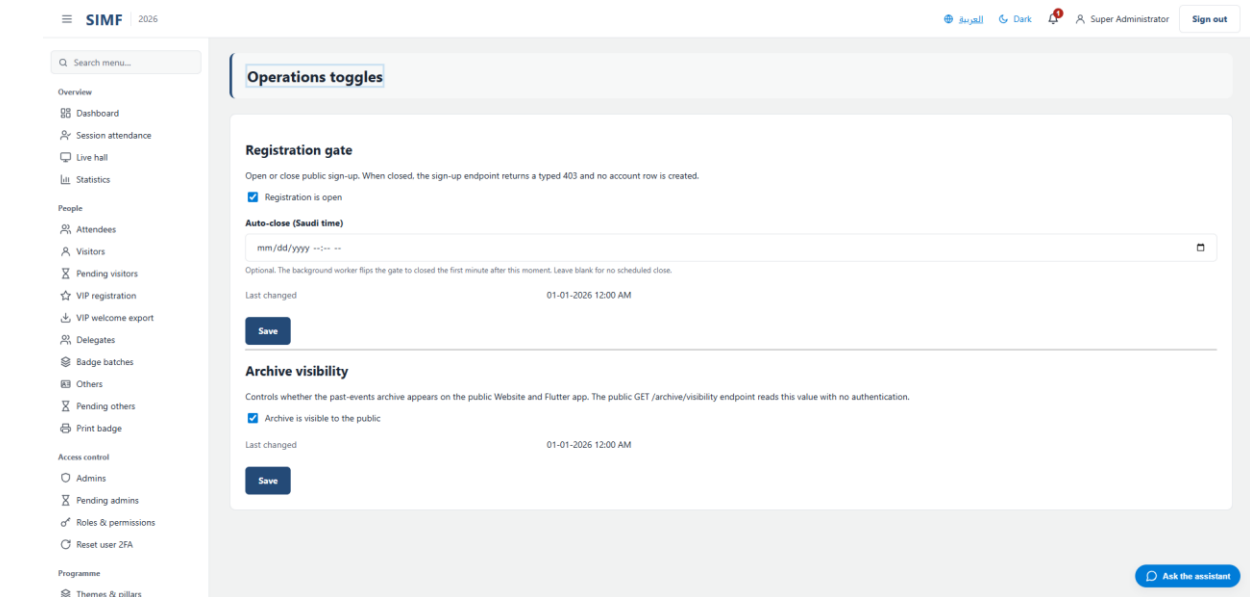


Figure 152 — Operations toggles — /admin/operations

Event edition (/admin/editions)

Property	Value
Address	/admin/editions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EventEdition.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EventEdition.razor.cs
Page permission	Editions.View
Menu permission	Editions.View

What you can do here

Action	Permission it needs
A button the page gates itself	Editions.Open

It calls: /account/api/admin/editions/current /account/api/admin/editions/open

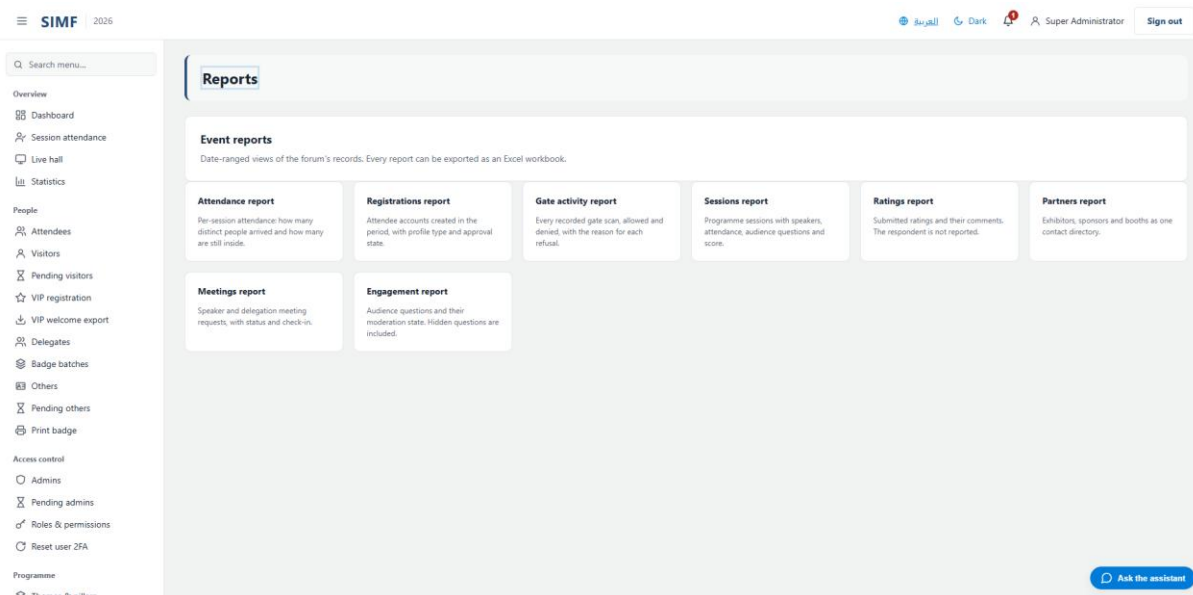


Figure 154 — All reports — /admin/reports

Attendance report (/admin/reports/attendance)

Property	Value
Address	/admin/reports/attendance
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/AttendanceReport.razor
Code-behind	-
Page permission	Reports.Attendance
Menu permission	Reports.Attendance

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Code · Session · Hall · Start · Attendees · Inside now

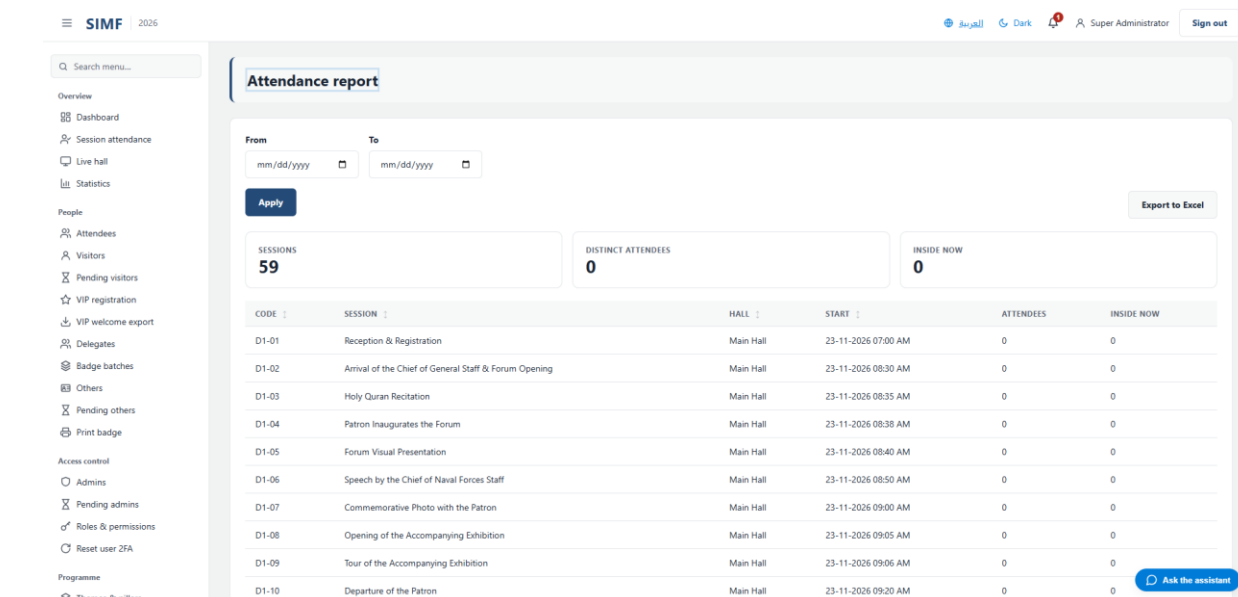


Figure 155 — Attendance report — /admin/reports/attendance

Registrations report (/admin/reports/registrations)

Property	Value
Address	/admin/reports/registrations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/RegistrationsReport.razor
Code-behind	-
Page permission	Reports.Registrations
Menu permission	Reports.Registrations

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Name · Email · Profile type · Account state · Registered

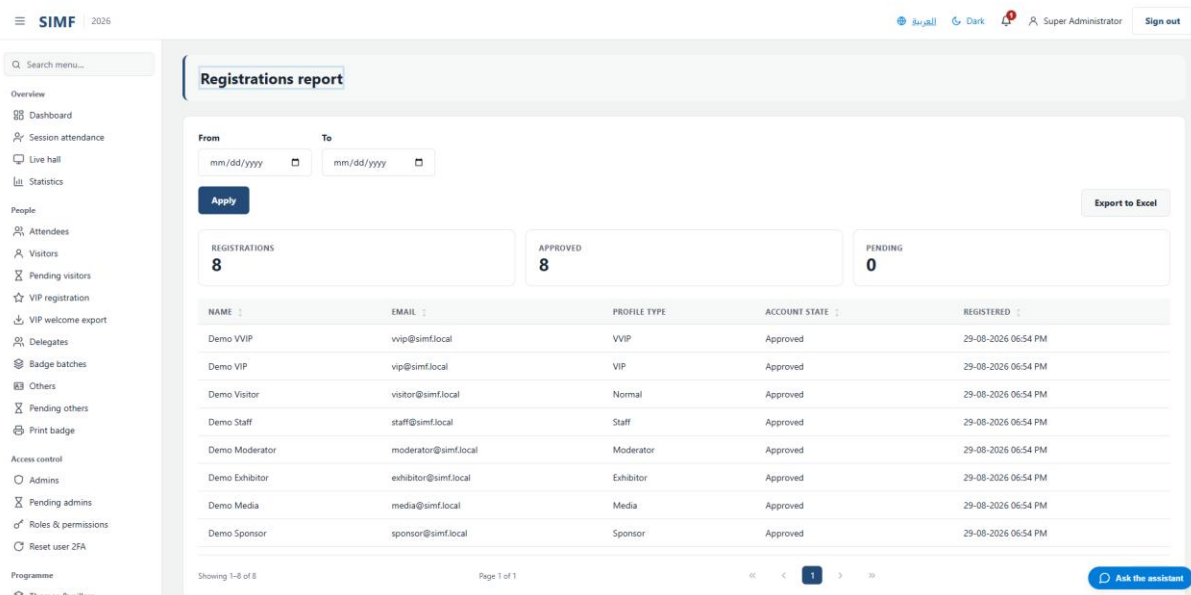


Figure 156 — Registrations report — /admin/reports/registrations

Gate activity report (/admin/reports/gates)

Property	Value
Address	/admin/reports/gates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/GateActivityReport.razor
Code-behind	-
Page permission	Reports.Gates
Menu permission	Reports.Gates

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Gate · Scanned · Visitor · Profile type · Direction · Outcome · Denial reason

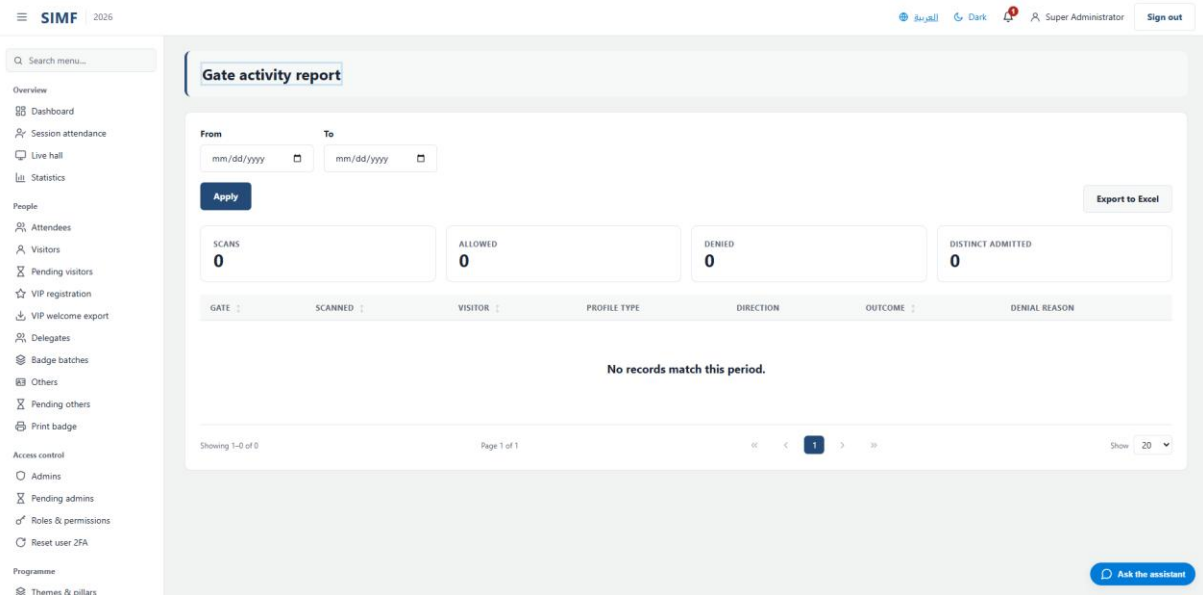


Figure 157 — Gate activity report — /admin/reports/gates

Sessions report (/admin/reports/sessions)

Property	Value
Address	/admin/reports/sessions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/SessionsReport.razor
Code-behind	-
Page permission	Reports.Sessions
Menu permission	Reports.Sessions

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Code · Session · Hall · Start · Speakers · Attendees · Questions · Average rating

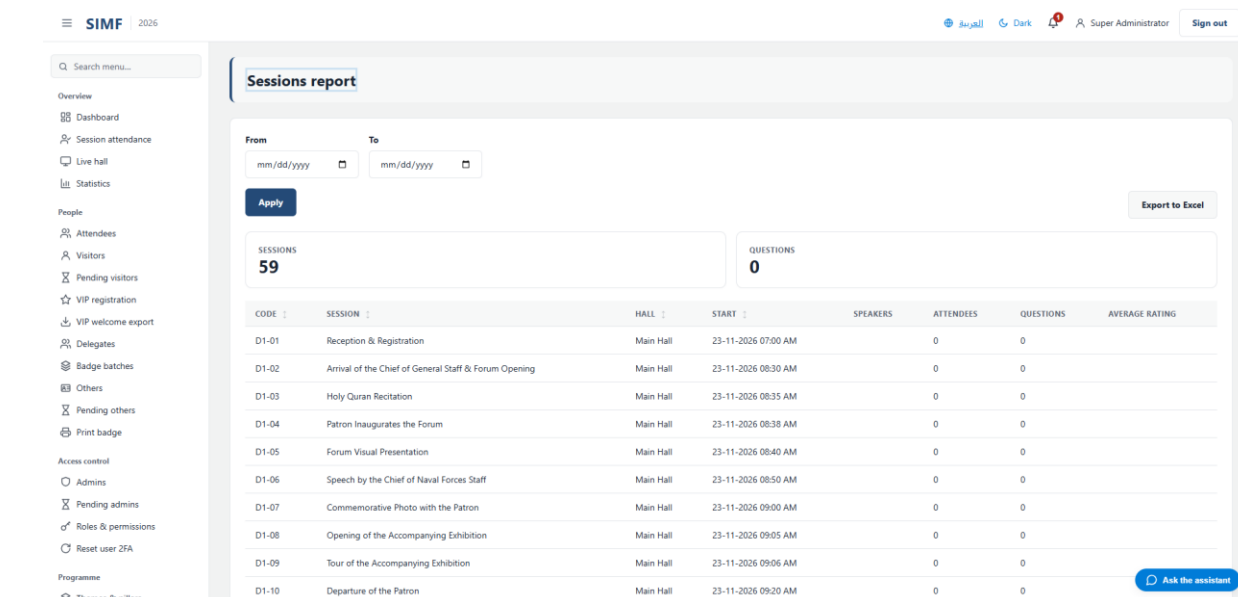


Figure 158 — Sessions report — /admin/reports/sessions

Ratings report (/admin/reports/ratings)

Property	Value
Address	/admin/reports/ratings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/RatingsReport.razor
Code-behind	-
Page permission	Reports.Ratings
Menu permission	Reports.Ratings

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Rating type · Scope · Stars · Comment · Submitted

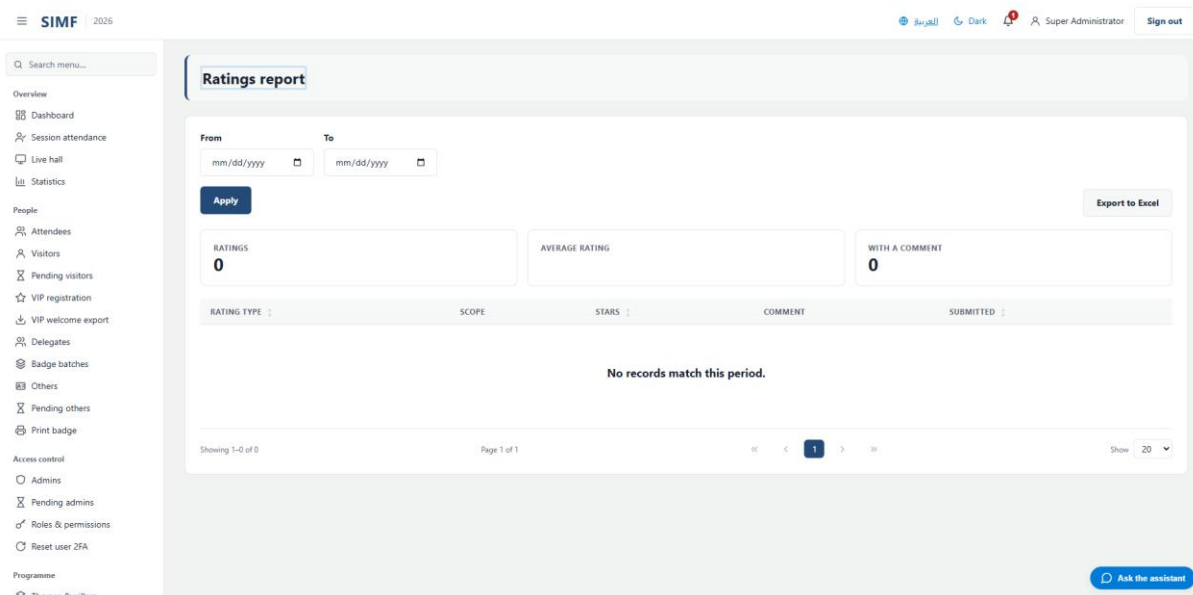


Figure 159 — Ratings report — /admin/reports/ratings

Partners report (/admin/reports/partners)

Property	Value
Address	/admin/reports/partners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/PartnersReport.razor
Code-behind	-
Page permission	Reports.Partners
Menu permission	Reports.Partners

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Kind · Name · Tier · Email · Phone · Website

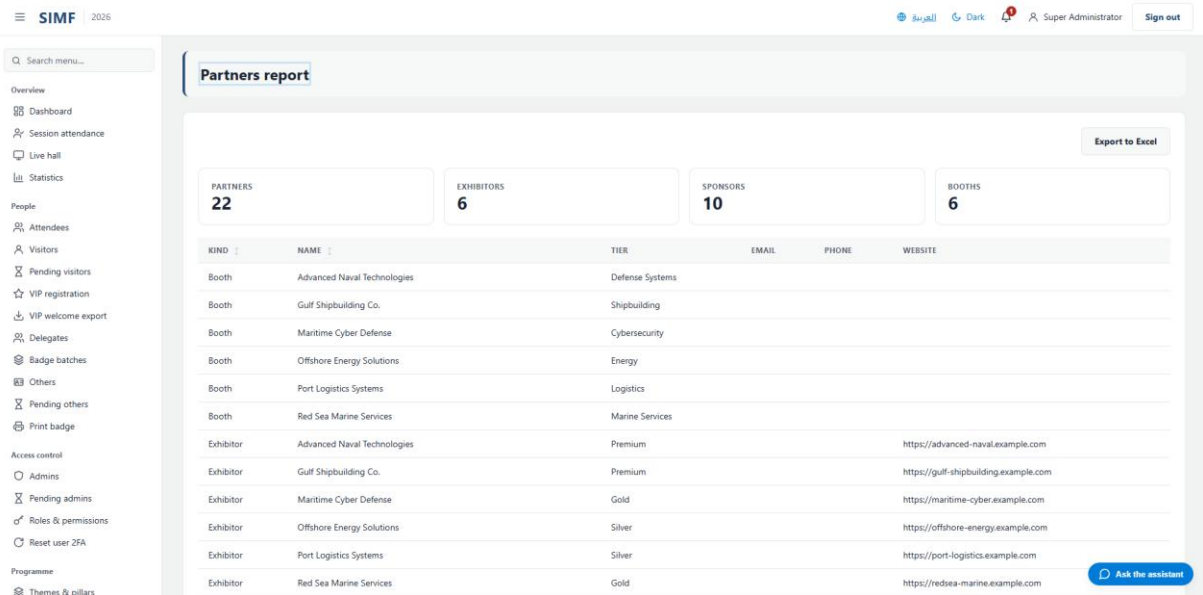


Figure 160 — Partners report — /admin/reports/partners

Meetings report (/admin/reports/meetings)

Property	Value
Address	/admin/reports/meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/MeetingsReport.razor
Code-behind	-
Page permission	Reports.Meetings
Menu permission	Reports.Meetings

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Kind · Requester · Target · Subject · Slot · Status · Requested

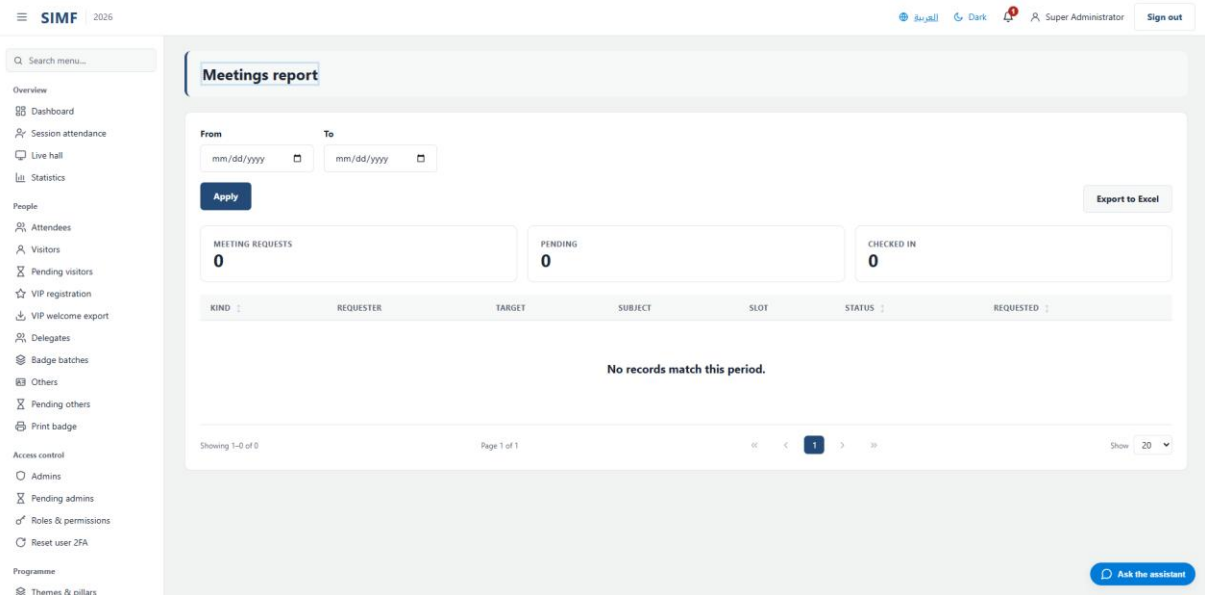


Figure 161 — Meetings report — /admin/reports/meetings

Engagement report (/admin/reports/engagement)

Property	Value
Address	/admin/reports/engagement
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/EngagementReport.razor
Code-behind	-
Page permission	Reports.Engagement
Menu permission	Reports.Engagement

What you can do here

Action	Permission it needs
Export	No permission of its own

The list shows: Code · Session · Question · Recipient · Status · Phase · Asked

SIMF

2026

المعرض

Dark

1

Super Administrator

Sign out

Q Search menu...

Overview

- Dashboard
- Session attendance
- Live hall
- Statistics

People

- Attendees
- Visitors
- Pending visitors
- VIP registration
- VIP welcome export
- Delegates
- Badge batches
- Others
- Pending others
- Print badge

Access control

- Admins
- Pending admins
- Roles & permissions
- Reset user 2FA

Programme

- Themes & pillars

Engagement report

From

To

mm/dd/yyyy

mm/dd/yyyy

Apply

Export to Excel

QUESTIONS

HIDDEN

PUSHED TO SPEAKER

0

0

0

CODE	SESSION	QUESTION	RECIPIENT	STATUS	PHASE	ASKED
No records match this period.						

Showing 1-0 of 0

Page 1 of 1

<<

<

1

>

>>

Show 20

Ask the assistant

Figure 162 — Engagement report — /admin/reports/engagement

180

Pages reached from inside another page

These pages have an address but no menu entry. They open from a button or a row inside another page, or they belong to the sign-in flow.

Something went wrong (/Error)

Property	Value
Address	/Error
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Error.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Error.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

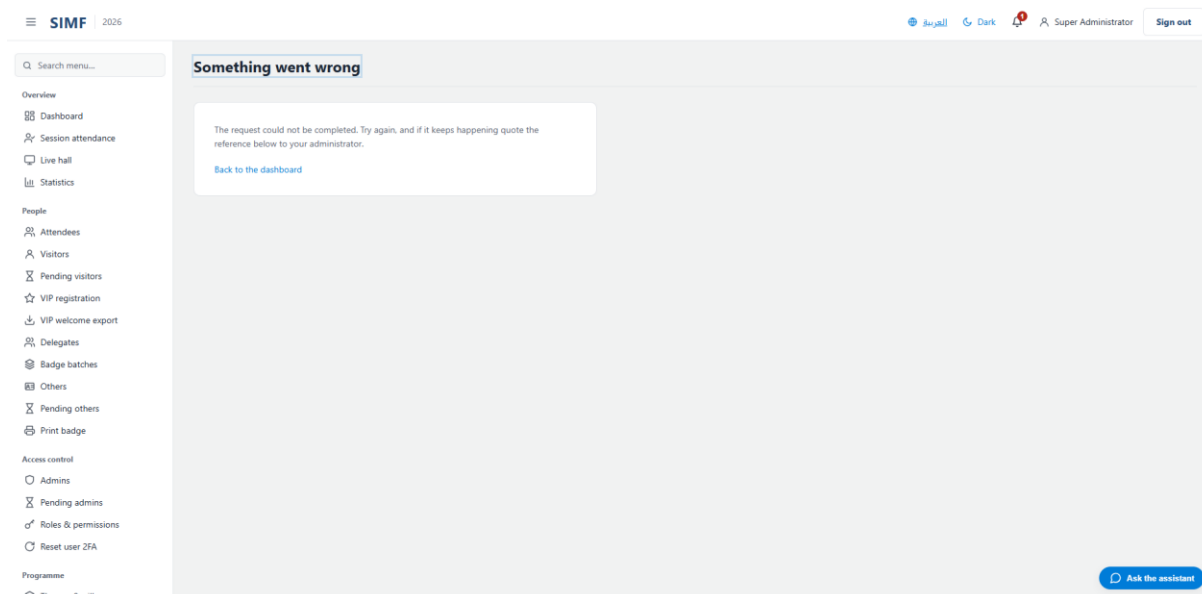


Figure 163 — /Error

Notifications (/account/notifications)

Property	Value
Address	/account/notifications
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Notifications.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Notifications.razor.cs
Page permission	Any signed-in user
Menu permission	-

What you can do here

Action	Permission it needs
Details	No permission of its own
Delete	No permission of its own
Delete (on the selected rows)	No permission of its own

The list shows: Title · Message · Type · Received

It calls: `/account/api/notifications/list` `/account/api/notifications/read-all`
`/account/api/notifications/{row.Id}` `/account/api/notifications/{row.Id}/read`

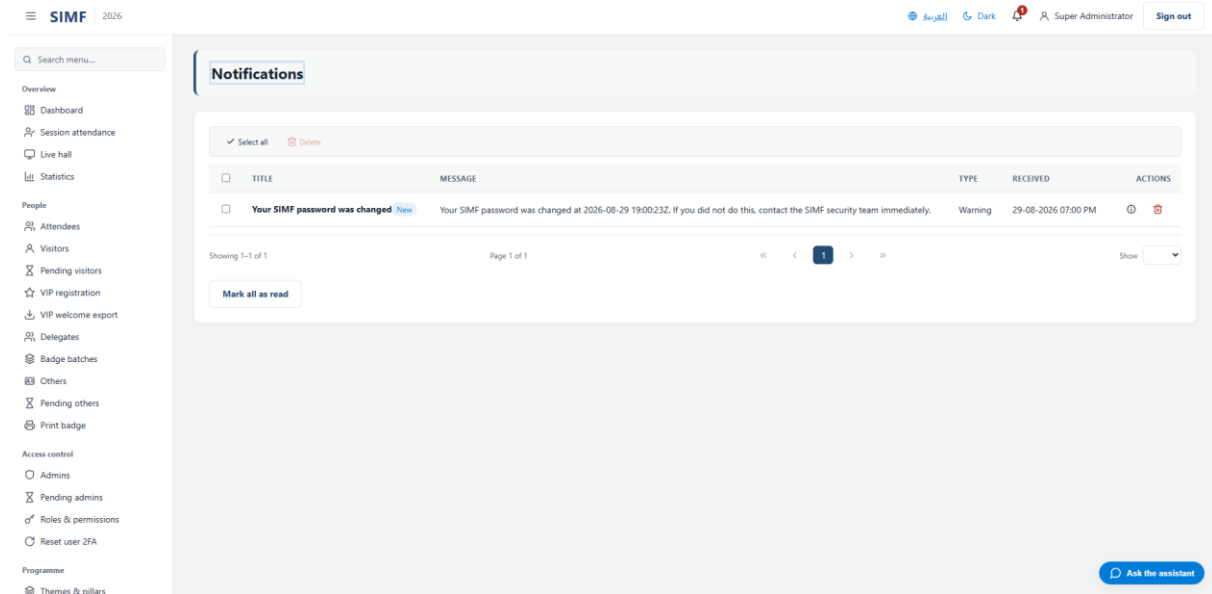


Figure 164 — `/account/notifications`

My profile (`/account/profile`)

Property	Value
Address	<code>/account/profile</code>
Implemented by	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Profile.razor</code>
Code-behind	<code>src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Profile.razor.cs</code>
Page permission	Any signed-in user
Menu permission	-

It calls: `/account/api/avatar` `/account/api/change-password` `/account/api/profile`
`/account/api/recovery-codes/regenerate` `/account/api/totp/confirm` `/account/api/totp/disable`
`/account/api/totp/setup`

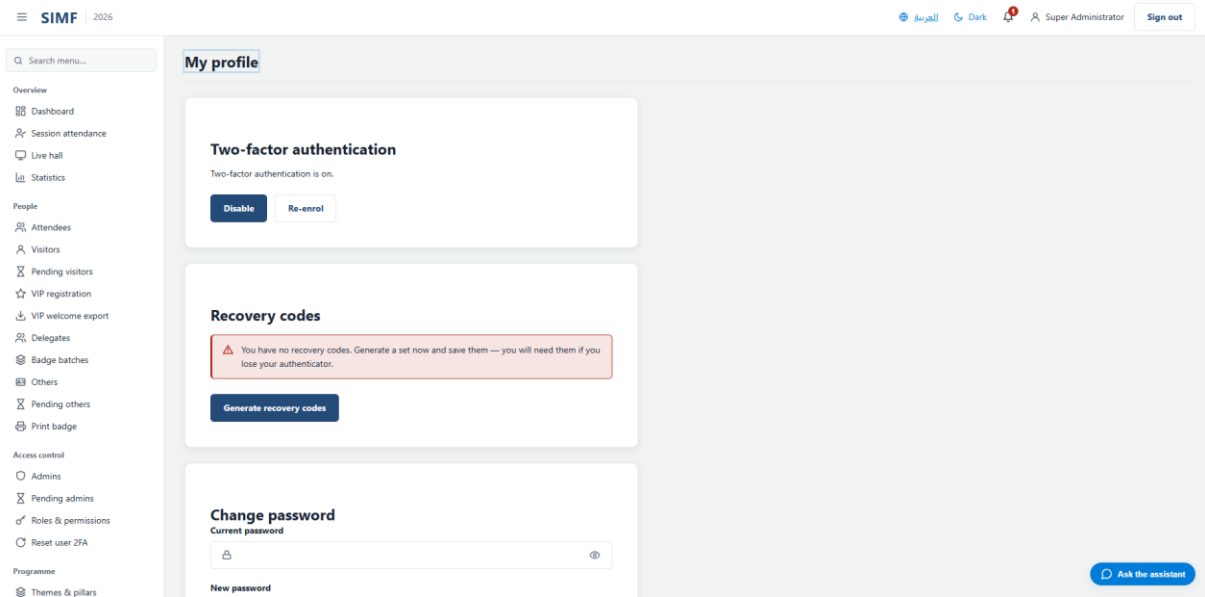


Figure 165 — /account/profile

Re-pair authenticator (/account/totp-pairing)

Property	Value
Address	/account/totp-pairing
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/TotpPairing.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/TotpPairing.razor.cs
Page permission	Any signed-in user
Menu permission	-

It calls: /account/api/totp/pairing /account/api/totp/pairing/verify

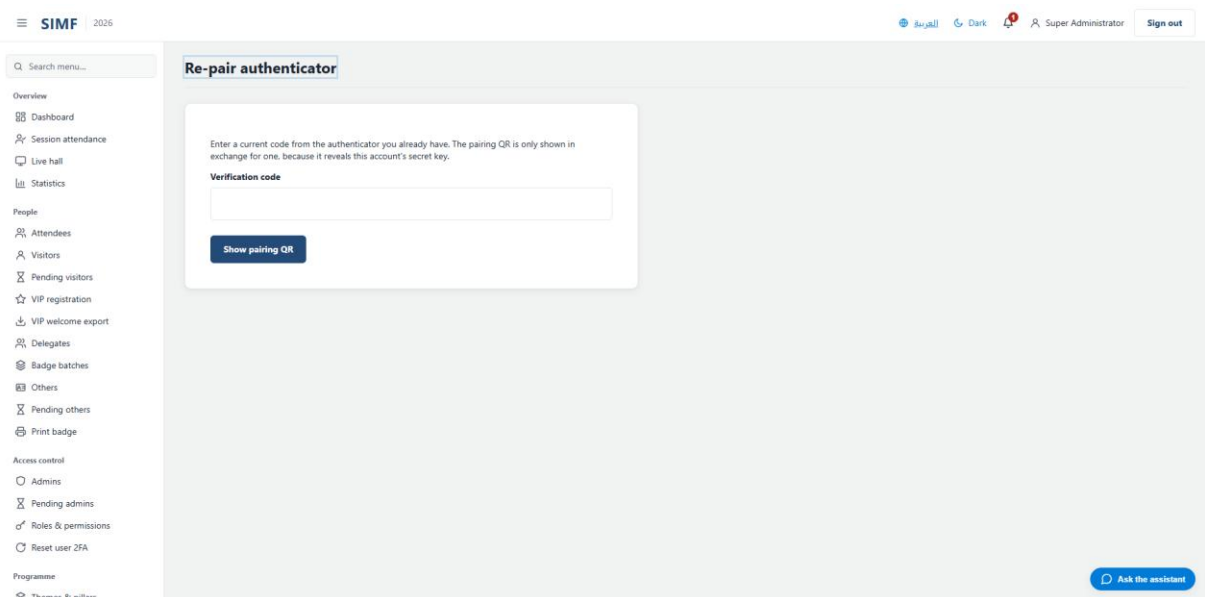


Figure 166 — /account/totp-pairing

Add a new user (/admin/admins/new)

Property	Value
Address	/admin/admins/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateUser.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateUser.razor.cs
Page permission	Admins.Create
Menu permission	-

Figure 167 — /admin/admins/new

AI service (/admin/ai/services/{Feature})

Property	Value
Address	/admin/ai/services/{Feature}
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AIServiceDetail.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AIServiceDetail.razor.cs
Page permission	AiPrompts.View
Menu permission	-

What you can do here

Action	Permission it needs
A button the page gates itself	AiPrompts.Edit

It calls: /account/api/admin/ai/dashboard /account/api/admin/ai/prompts/list

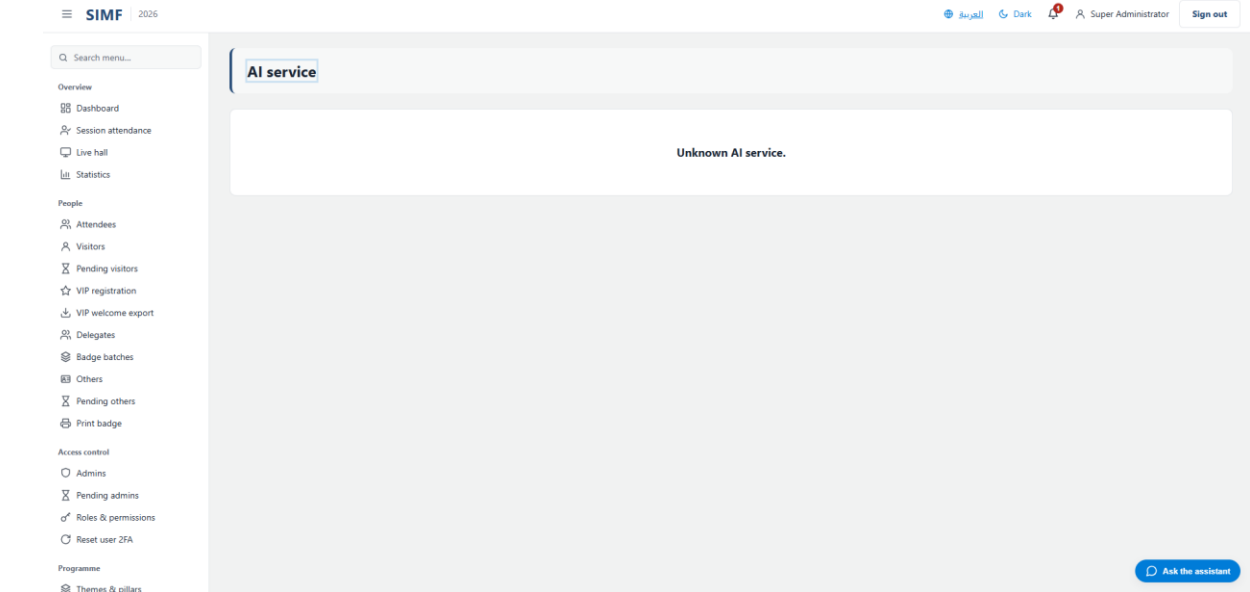


Figure 168 — /admin/ai/services/{Feature}

Add Other user (/admin/others/new)

Property	Value
Address	/admin/others/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateOther.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateOther.razor.cs
Page permission	Others.Create
Menu permission	-

The screenshot shows the 'Add Other user' form in the SIMF admin interface. The top navigation bar and left sidebar are identical to Figure 168. The main content area is titled 'Add Other user' and contains a form to create a new Other-typed user. The form includes a description: 'Create a new Other-typed user. The user receives a 7-day password-set invitation by email.' The form is divided into two sections: '1 Badge type' and '2 Identity'. The 'Badge type' section has five radio buttons: Exhibitor, Media, Moderator, Sponsor, and Staff. The 'Identity' section has two sub-sections: 'Name on badge' and 'Date of birth'. The 'Name on badge' section has a text input field and a note: 'Shown on the printed badge — usually first name + family name.' The 'Date of birth' section has a date picker with the format 'mm/dd/yyyy'. Below these are two more text input fields: 'Full name (English)' and 'Full name (Arabic)'. A blue button labeled 'Ask the assistant' is at the bottom right.

Figure 169 — /admin/others/new

/admin/roles/{RoleId:guid}/permissions (/admin/roles/{RoleId:guid}/permissions)

Property	Value
Address	/admin/roles/{RoleId:guid}/permissions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolePermissionsEditor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolePermissionsEditor.razor.cs
Page permission	Roles.AssignPermissions
Menu permission	-

It calls: /account/api/admin/roles/{RoleId}/permissions

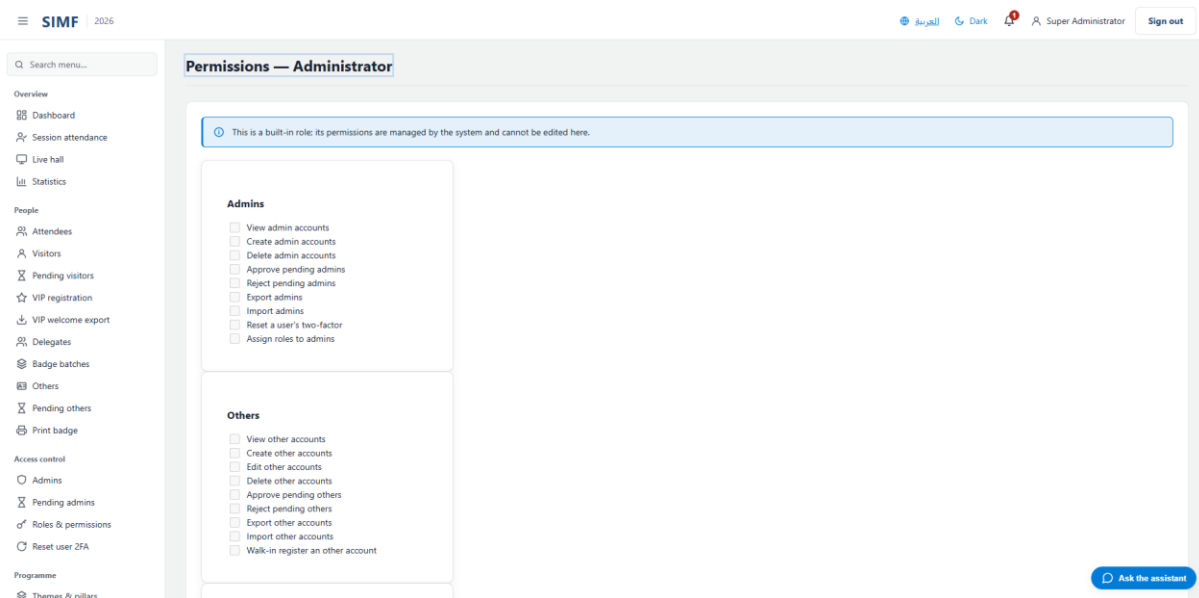


Figure 170 — /admin/roles/{RoleId:guid}/permissions

Add a new visitor (/admin/visitors/new)

Property	Value
Address	/admin/visitors/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateVisitor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateVisitor.razor.cs
Page permission	Visitors.Create
Menu permission	-

Figure 171 — /admin/visitors/new

Your account is waiting for approval (/auth/pending)

Property	Value
Address	/auth/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/PendingApproval.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/PendingApproval.razor.cs
Page permission	Any signed-in user
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Your account was not approved (/auth/rejected)

Property	Value
Address	/auth/rejected
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/Rejected.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/Rejected.razor.cs
Page permission	Any signed-in user
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Forgot password · SIMF Control Panel (/forgot-password)

Property	Value
----------	-------

Address	/forgot-password
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ForgotPassword.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ForgotPassword.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

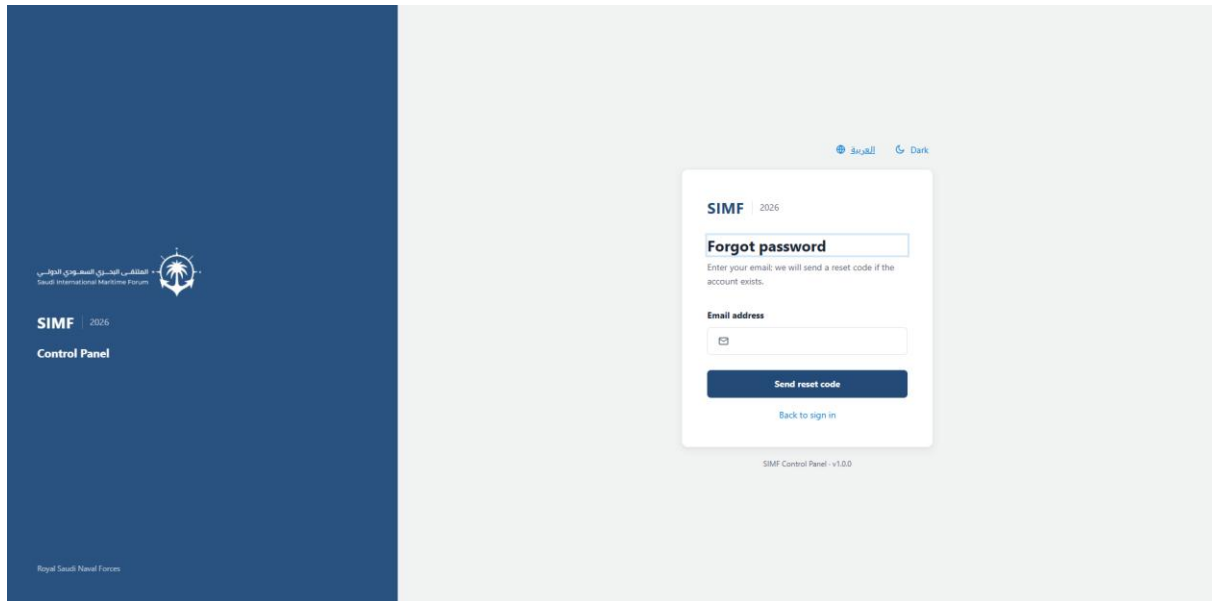


Figure 172 — /forgot-password

Sign in · SIMF Control Panel (/login)

Property	Value
Address	/login
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/SignIn.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/SignIn.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

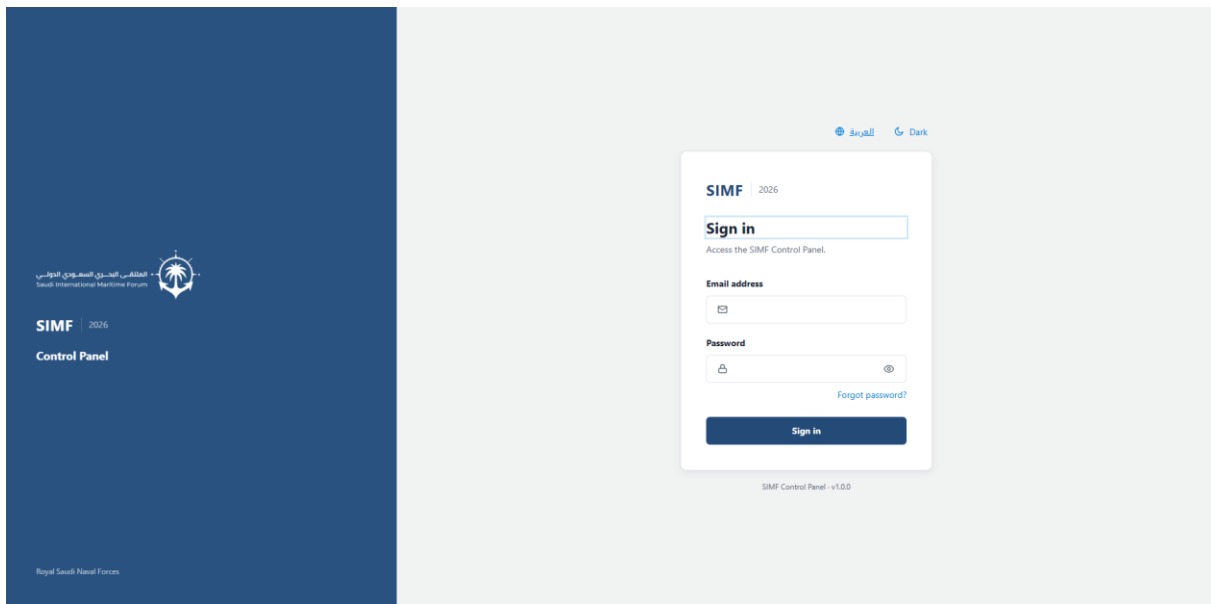


Figure 173 — /login

Set up two-factor authentication (/login/enrol-2fa)

Property	Value
Address	/login/enrol-2fa
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TwoFactorEnrolment.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TwoFactorEnrolment.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Recovery code · SIMF Control Panel (/login/recovery)

Property	Value
Address	/login/recovery
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/RecoveryCodeVerify.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/RecoveryCodeVerify.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Verify · SIMF Control Panel (/login/totp)

Property	Value
Address	/login/totp
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TotpVerify.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TotpVerify.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

/m/{Module} (/m/{Module})

Property	Value
Address	/m/{Module}
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/ModulePlaceholder.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/ModulePlaceholder.razor.cs
Page permission	Sessions.View
Menu permission	-

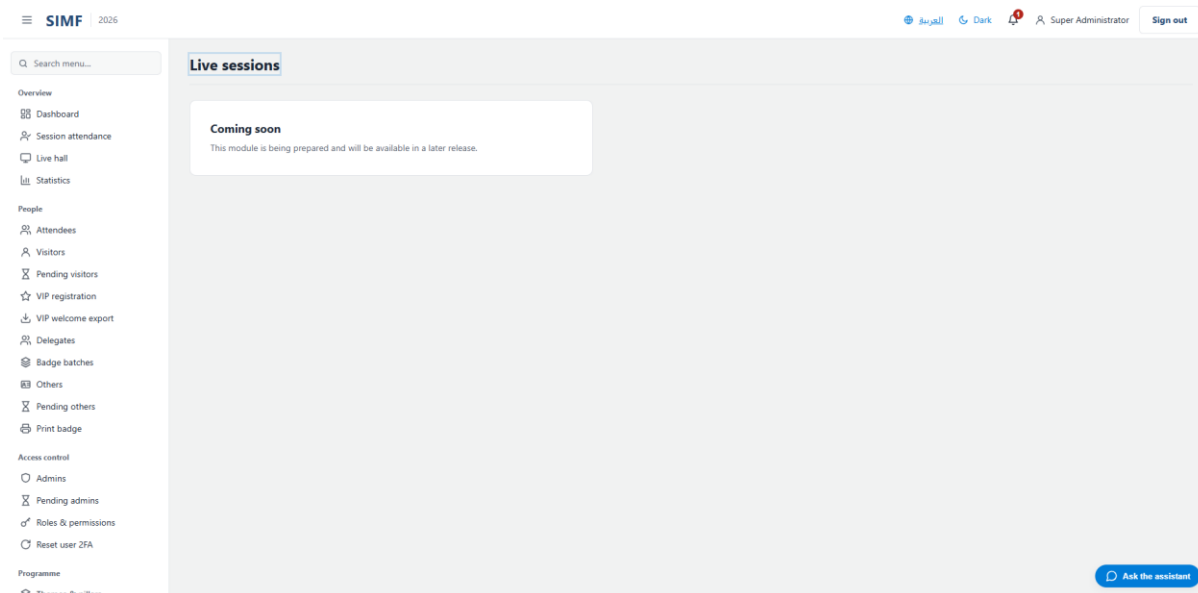


Figure 174 — /m/{Module}

Page not found (/not-found)

Property	Value
Address	/not-found
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/NotFound.razor
Code-behind	-
Page permission	Anyone, signed in or not

Menu permission	-
-----------------	---

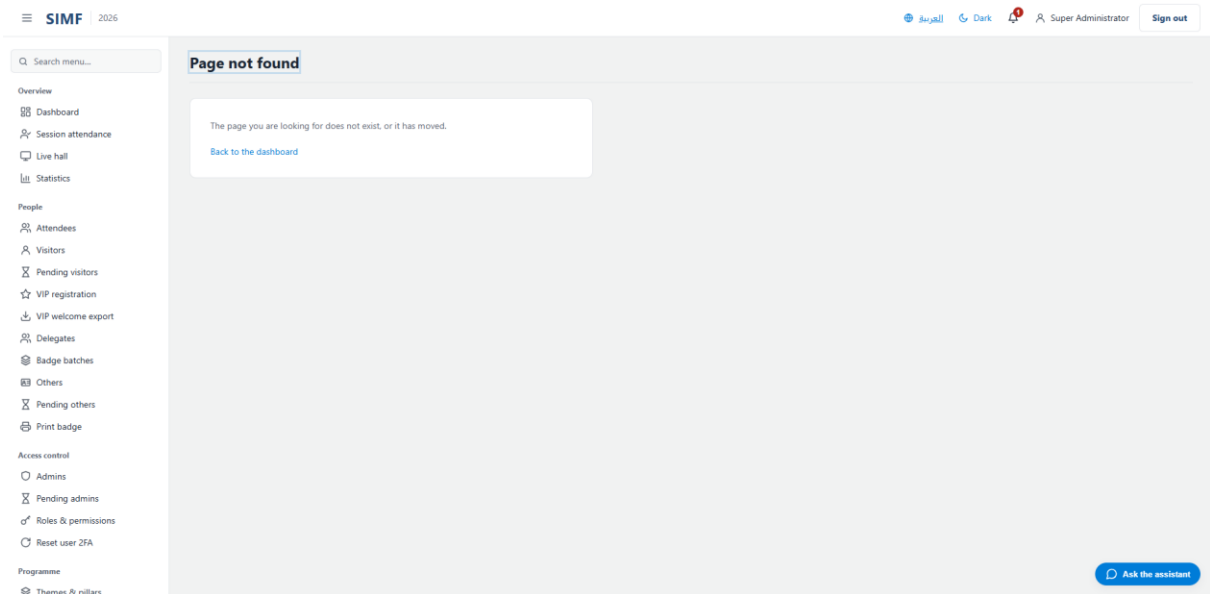


Figure 175 — /not-found

Not permitted (/not-permitted)

Property	Value
Address	/not-permitted
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/NotPermitted.razor
Code-behind	-
Page permission	Any signed-in user
Menu permission	-

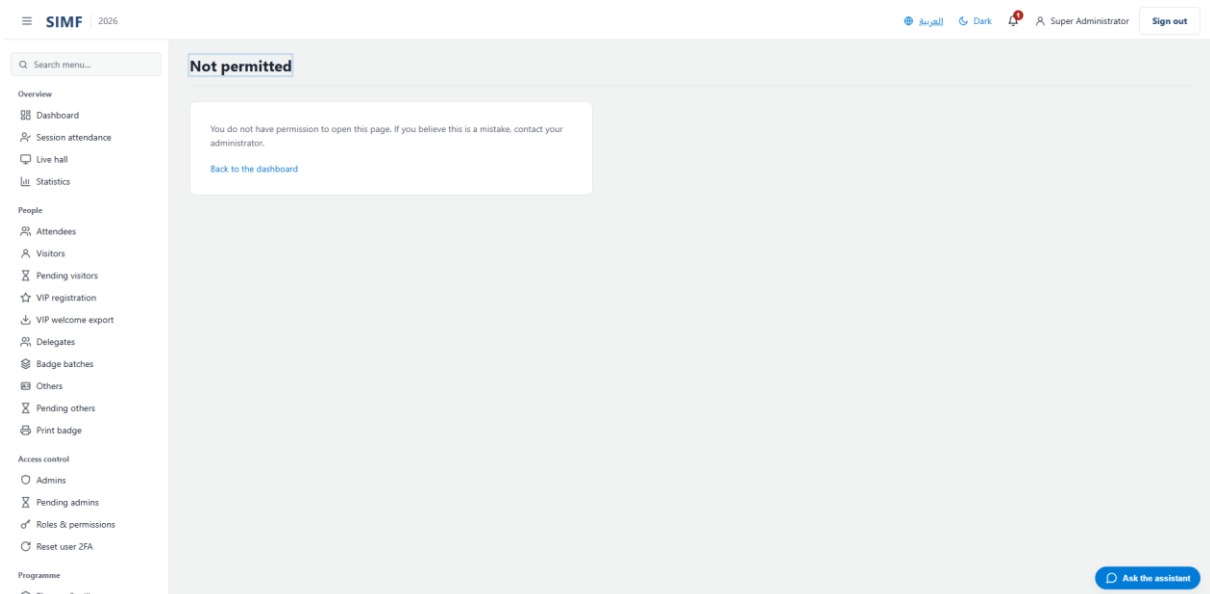


Figure 176 — /not-permitted

Reset password · SIMF Control Panel (/reset-password)

Property	Value
Address	/reset-password
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ResetPassword.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ResetPassword.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

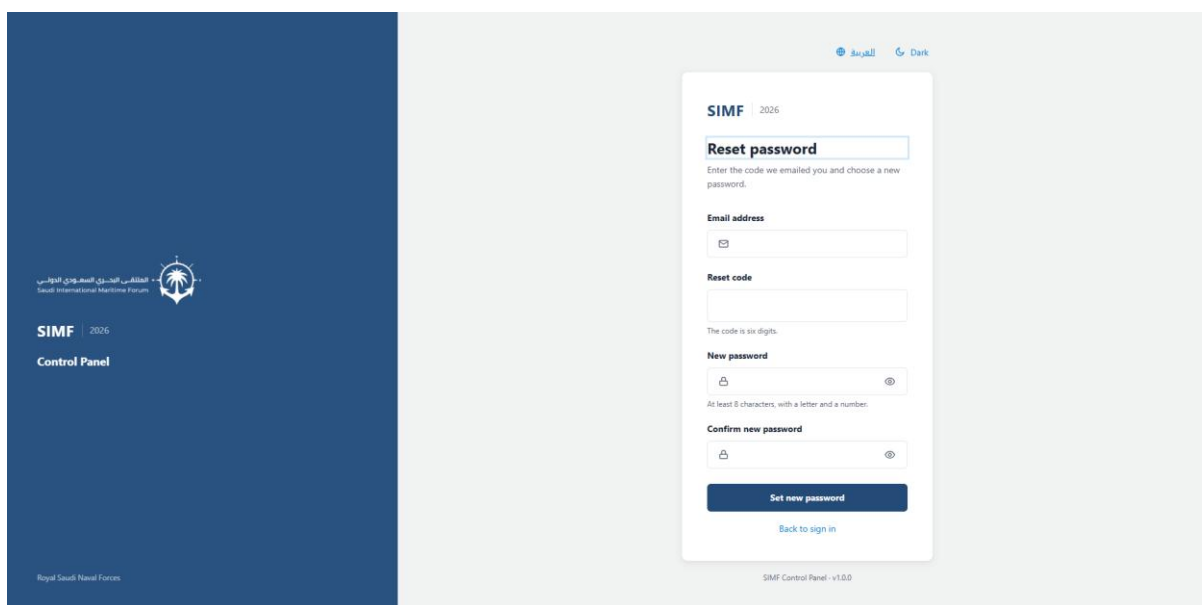


Figure 177 — /reset-password

Session Q&A moderation (/sessions/{SessionId:guid}/moderate)

Property	Value
Address	/sessions/{SessionId:guid}/moderate
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModerationDesk.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModerationDesk.razor.cs
Page permission	Questions.Moderate
Menu permission	-

What you can do here

Action	Permission it needs
A button the page gates itself	Questions.Moderate

It calls: /account/api/sessions/{SessionId}/questions/moderate
 /account/api/sessions/{SessionId}/questions/{row.Id}/hide
 /account/api/sessions/{SessionId}/questions/{row.Id}/push

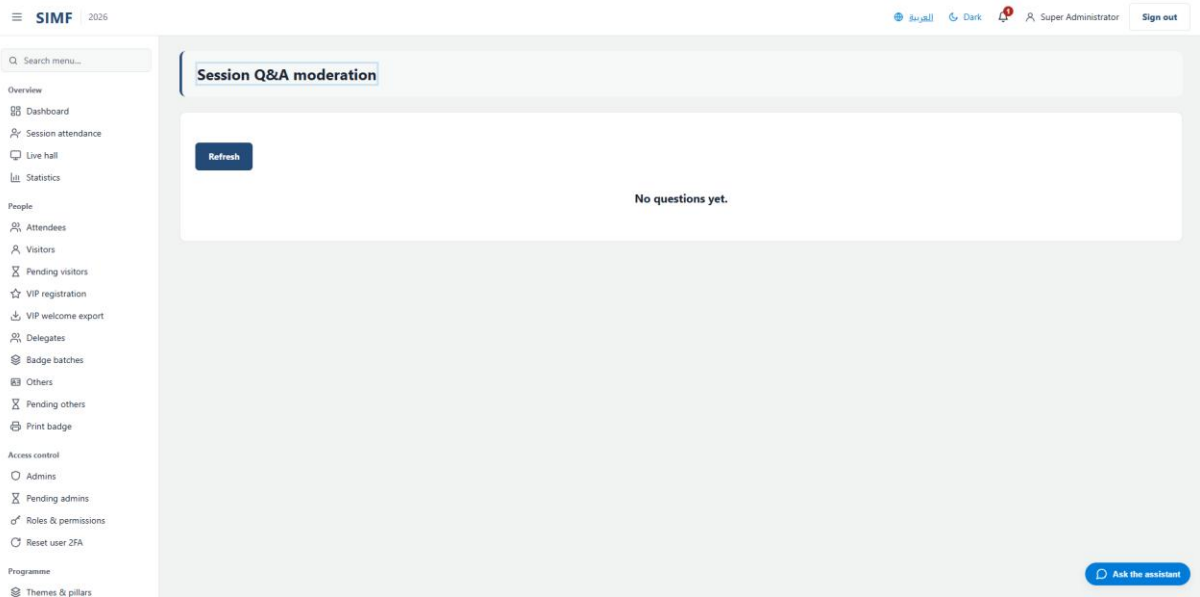


Figure 178 — /sessions/{SessionId:guid}/moderate