

SIMF Control Panel

Operations manual — creating users, configuring the system, and deploying it

Audience	Control Panel administrators and the team deploying the system
Covers	Every Control Panel page, account creation end to end, and the server deployment with its configuration
Screenshots	Captured from the running application, not drawn
Volumes	English and Arabic, published separately

Contents

Contents	2
Signing in for the first time	5
The sign-in screen	5
The forced password change	5
The second factor	6
Recovery codes.....	7
The dashboard.....	8
Creating a user by hand	9
Creating an administrator	10
Creating a visitor.....	13
Creating a partner or staff account.....	17
Registering a VIP.....	17
The profile picture.....	19
Where a picture is set	19
What the system accepts.....	19
Replacing and removing.....	20
Changing an account after it exists.....	21
The approval queues.....	21
Editing an account	21
Moving an account between types	22
Resetting a lost second factor	22
Withdrawing access.....	23
Roles and permissions.....	24
Permission names.....	24
Creating a role	24
Granting permissions to a role	25
Giving a person a role.....	25
The guards	26
Deploying to a server	27

The estate	27
The four applications	27
Before the first deployment.....	27
The order of a deployment.....	28
The databases	28
The first administrator	28
Every configuration value.....	29
How a variable name is built	29
How to set one	29
The values that stop a server starting.....	29
The API.....	31
The Control Panel	38
The Website	38
The mobile edge	38
The public web application.....	39
Every host	40
Appendix — what writing this manual found	41
Documents that disagreed with the code — corrected	41
Wording in the product that no longer matched its behaviour — corrected.....	41
Behaviour worth knowing before it surprises somebody	41
Every page in the Control Panel	43
Overview	43
People	45
Access control.....	52
Programme	55
Scientific committee	68
Exhibition	70
Engagement	73
Knowledge & AI	75
Content.....	78

Public relations 83

Gates & arrivals 86

Reference data..... 88

System 92

Reports 99

Pages reached from inside another page 106

Signing in for the first time

The Control Panel is the operations console for the Saudi International Maritime Forum. Everything in this manual is done from it, so this chapter comes first: it covers the sign-in screen, the password change the system forces on a new account, the second factor, and the recovery codes you are shown exactly once.

The sign-in screen

Open the Control Panel address in a browser. The sign-in page asks for an email address and a password, and offers a language switch and a light/dark switch in the top corner. The language switch changes the whole application, not just this page.

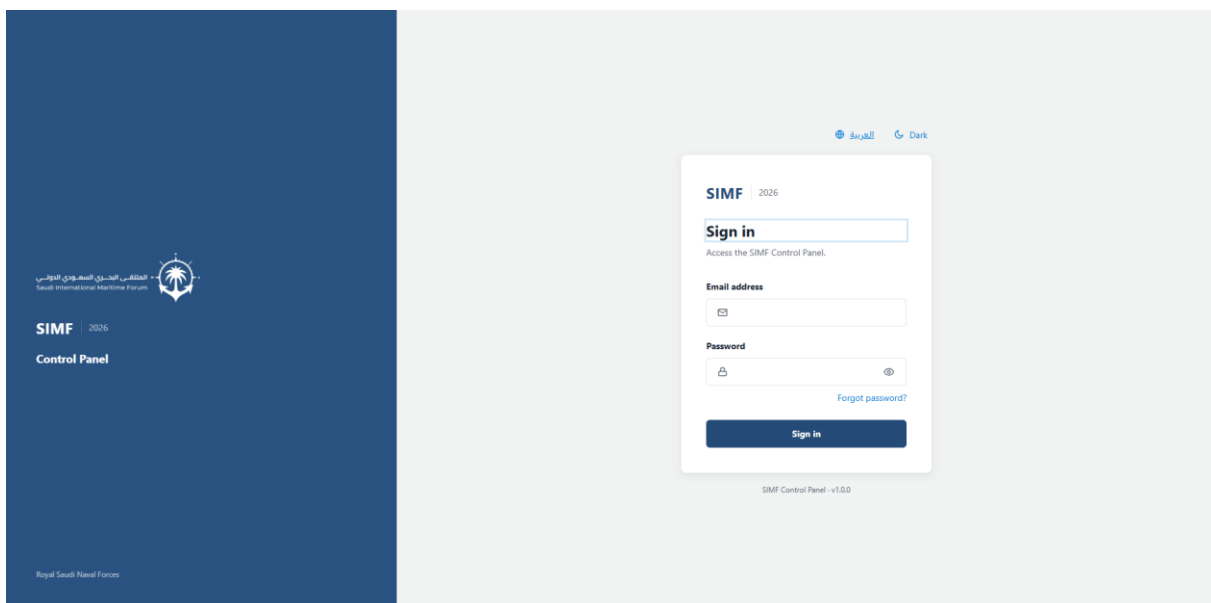


Figure 1 — The sign-in page as it opens.

The forced password change

A newly created account is issued a bootstrap password that the system insists is replaced. On the first sign-in the Control Panel therefore does not go to the dashboard: it opens a dialog over the sign-in page asking for a new password twice. Until that is done the account cannot get in.

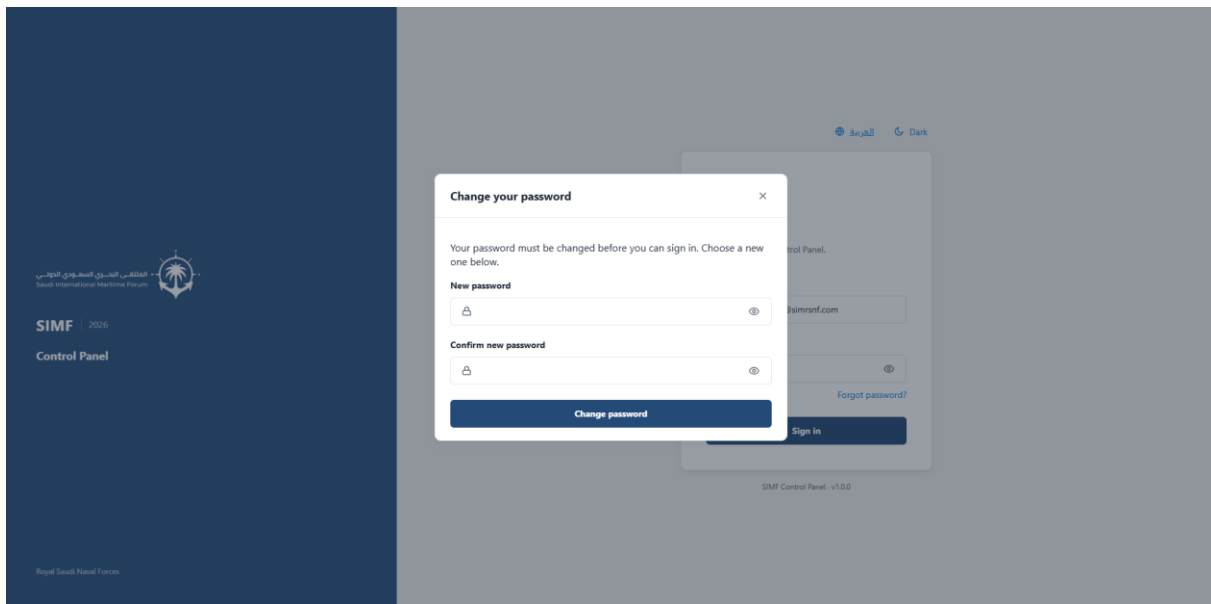


Figure 2 — The password change is a dialog over the sign-in page, not a separate address.

The new password must satisfy the rules the server applies to every password in the system. They are stricter than the length rule most people expect, and the two that surprise operators are the last two:

- Between 8 and 128 characters.
- At least one capital letter, one small letter, one digit and one symbol.
- No character repeated three times in a row — "aa" is allowed, "aaa" is not.
- No run of three characters in sequence within one class — "abc", "123", "cba" and "987" are all rejected.
- Not the account's own email address, and not a commonly used password (leet-speak spellings such as p@ssw0rd are folded back and rejected too).

These rules are enforced in PasswordPolicy.cs and applied by SimfPasswordValidator on every path that sets a password.

The second factor

The Control Panel requires two-factor authentication. After the password the system asks for the six-digit code from an authenticator application. If the account has never paired one, the system shows the pairing screen instead and will not let the account past it — enrolment is mandatory, not optional.

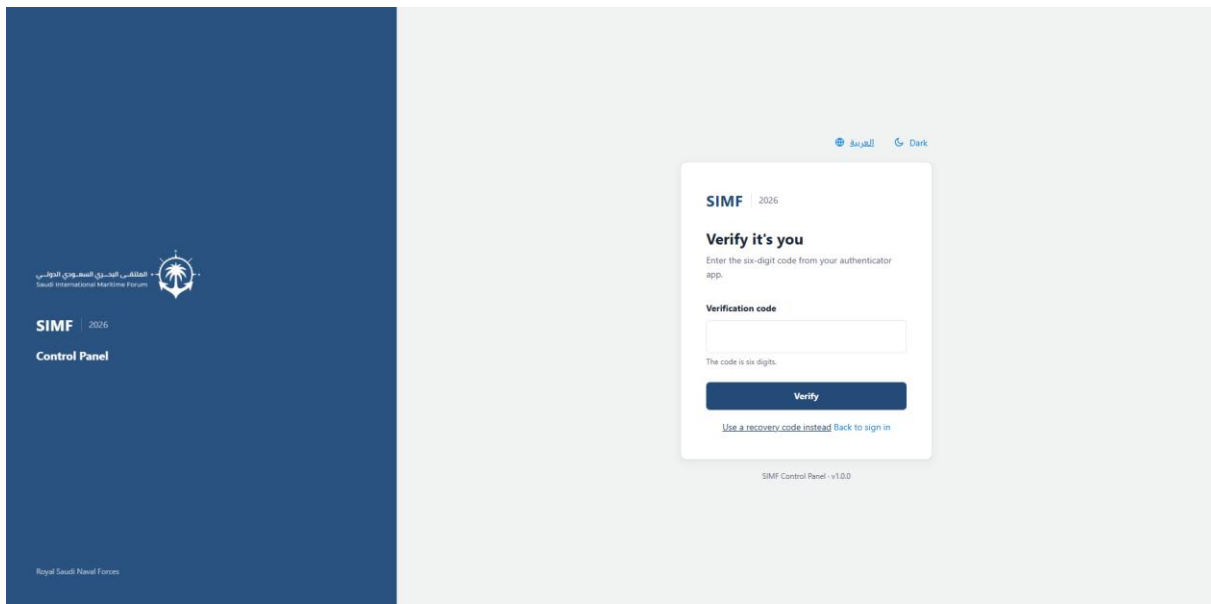


Figure 3 — The second-factor step, after the password has been accepted.

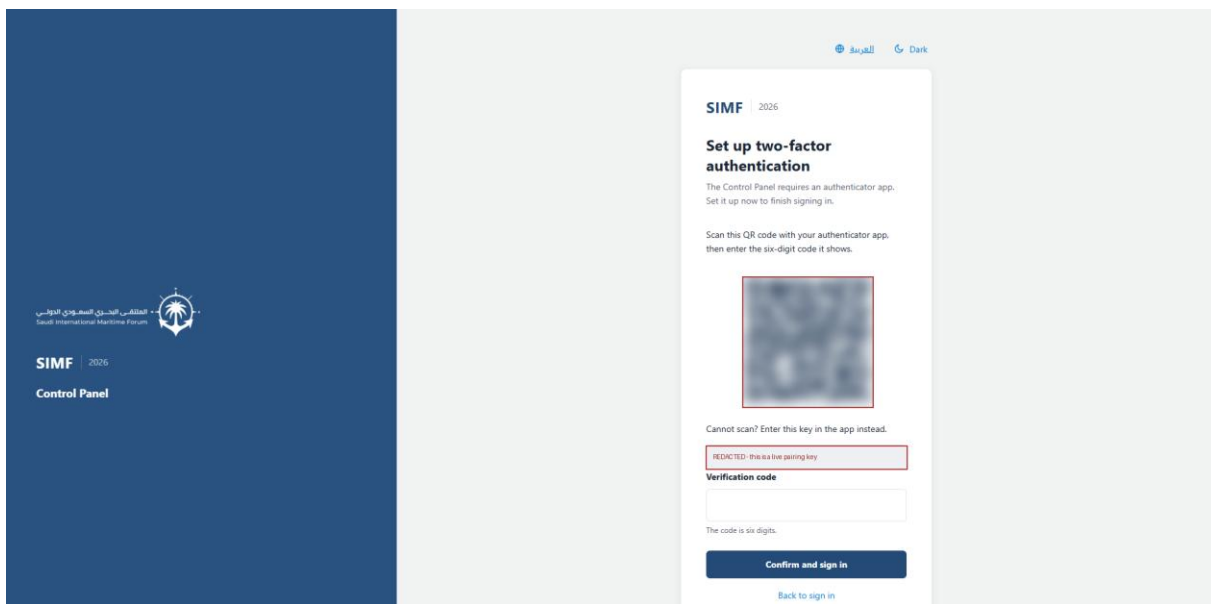


Figure 4 — The pairing screen an account meets when it has no authenticator yet. The QR code and the key beneath it are obscured here: they are a real credential, and a manual should never print one.

The requirement is controlled by `IdentityLifecycle:RequireControlPanelTwoFactorEnrolment`, which ships as `true`. It applies to the Control Panel only — the mobile application and the public website are not affected.

Recovery codes

When an account pairs its authenticator the system displays ten single-use recovery codes. They are shown once and never again. Print them or store them somewhere safe: they are what gets the

account back in when the phone is lost. If they are lost as well, an administrator must reset the account's second factor from Reset user 2FA, which is covered later in this manual.

The dashboard

A completed sign-in lands on the dashboard: a summary of the event and, down the left, the menu that this manual follows chapter by chapter.

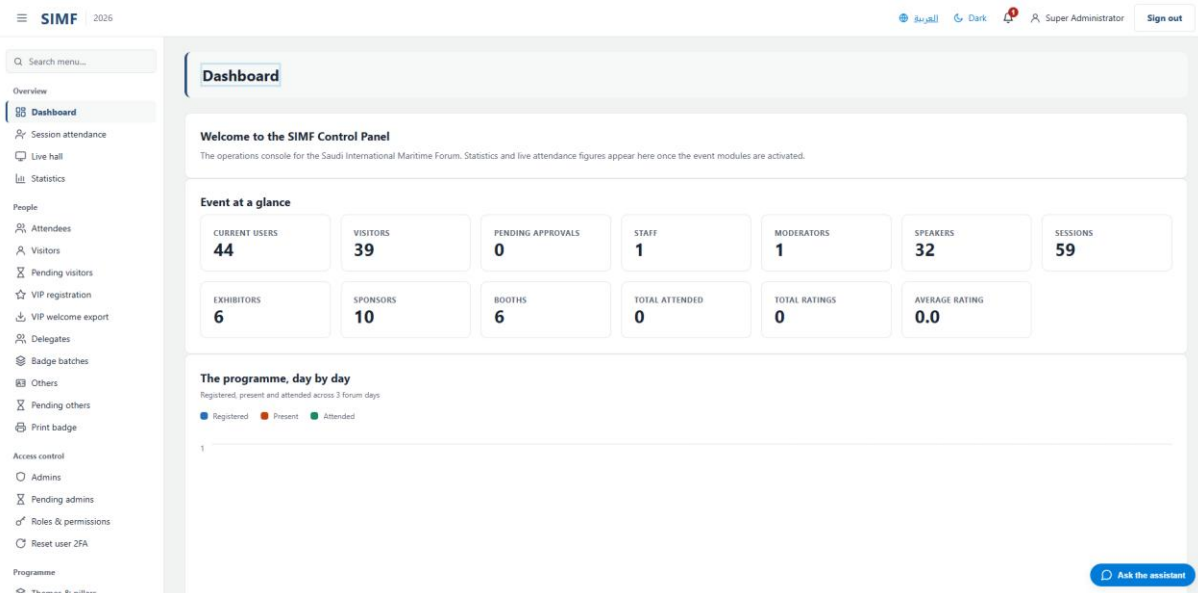


Figure 5 — The dashboard after signing in.

Creating a user by hand

The Control Panel creates three kinds of account, and they are not variations of one form — they are three separate pipelines with different screens, different fields, different rules and different outcomes. Choosing the wrong one is the most common mistake, so this chapter starts with how to choose.

To create	Use	Address	The account ends up
An operator of this Control Panel	Admins	/admin/admins	Awaiting approval, with a 7-day emailed invitation
A visitor or guest attending the forum	Visitors	/admin/visitors	Awaiting approval, with no password and no email
A partner, exhibitor, media or staff account	Others	/admin/others	Awaiting approval, always — never auto-approved
A VIP or VVIP guest	VIP registration	/admin/visitors/vip	As a visitor, plus the VIP protocol fields

The distinction that matters: an administrator receives an emailed invitation and sets a password. A visitor or partner receives neither — their credential is the QR badge, and the badge is only minted when the account is approved.

Creating an administrator

An administrator is somebody who signs in to this Control Panel. Open the menu group Access control, choose Admins, and use the Add button on the grid toolbar. The form is deliberately short — an administrator has no visitor profile, no badge and no identity documents.

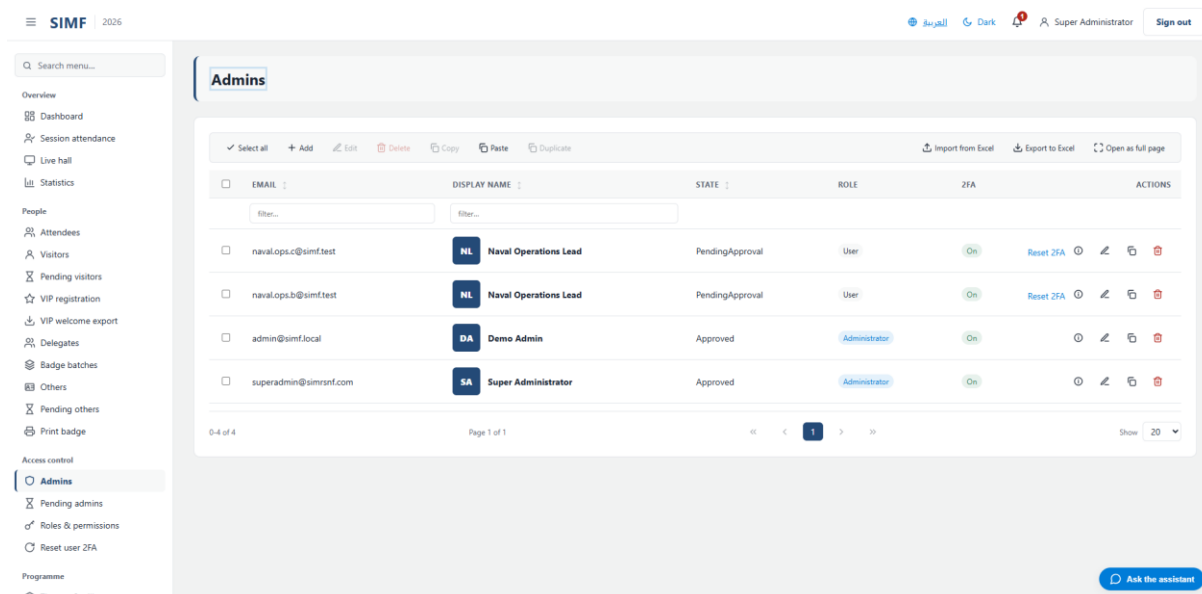


Figure 6 — The administrators list. The Add button opens the create form.

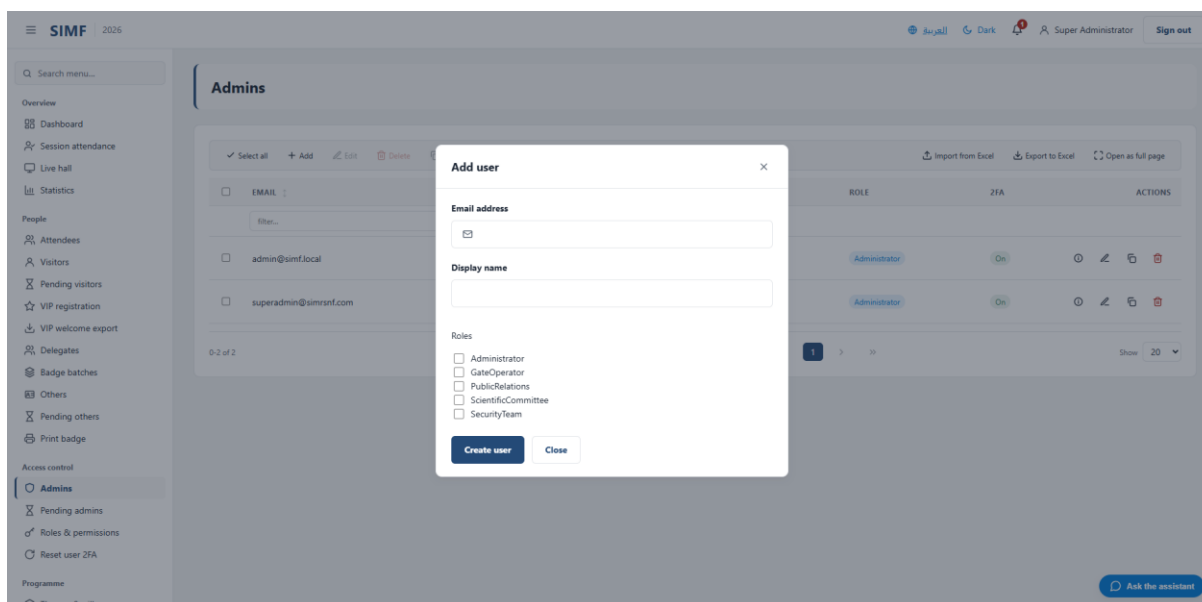


Figure 7 — The create form: an email address, a display name, and one tick box per role.

Field	Required	Limit	Rule the server enforces
Email address	Yes	256 characters	Must be a valid email address, and must not already belong to an account.
Display name	Yes	2 to 128 characters	The name shown

			throughout the Control Panel.
Roles	No	—	One tick box per role. Assigning a role here requires the role-assignment permission as well as the create permission.

The screenshot shows the 'Add user' modal in the SIMF Admins interface. The 'Email address' field has the value 'not-an-email' and a red error message: 'Please include an @ in the email address. 'not-an-email' is missing an @.' The 'Display name' field contains the character 'X'. The modal also shows a list of roles: Administrator, GateOperator, PublicRelations, ScientificCommittee, and SecurityTeam, each with an unchecked checkbox. The background displays a table of existing users with columns for EMAIL, ROLE, 2FA, and ACTIONS.

Figure 8 — A refused submission. The email box is a typed field, so the browser catches a malformed address before the form is sent at all; the form's own checks report a short display name and a missing address the same way, and nothing reaches the server until both are right.

The screenshot shows the 'Add user' modal with the form correctly filled out. The 'Email address' field contains 'naval.ops.br@simf.test' and the 'Display name' field contains 'Naval Operations Lead'. In the 'Roles' section, the 'Administrator' checkbox is now checked. The background interface remains the same as in Figure 8.

Figure 9 — The same form filled in and ready to submit.

On save the account is created in the awaiting-approval state, an invitation valid for seven days is emailed to the address, and every other approved administrator is notified that an account is waiting. Two-factor is armed on the account from the moment it is created, so the new administrator will be taken through the pairing screen on their first sign-in.

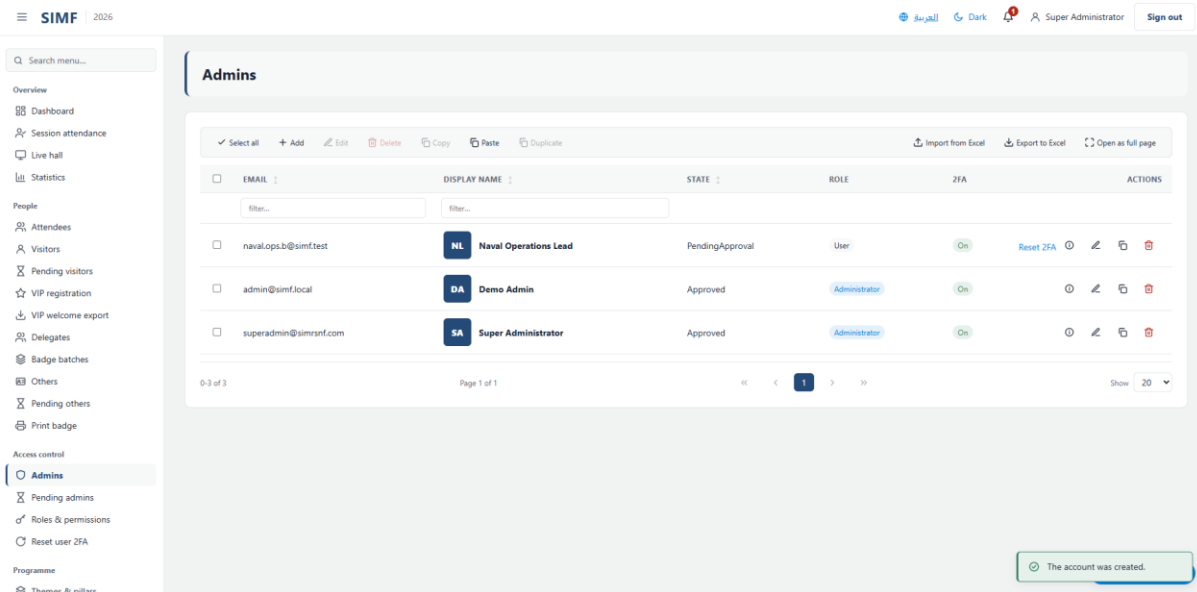


Figure 10 — The new account in the list, awaiting approval, with the confirmation message.

A duplicate email is refused with the error ADMIN_EMAIL_ALREADY_REGISTERED and the form stays open. If the mail server is not configured the account is still created — only the invitation fails to arrive, and it fails quietly, in the background.

Creating a visitor

A visitor is an attendee. The form is the on-site registration desk wizard, and it is long because it captures the identity the gate will check. It is organised into numbered sections; the fields that appear depend on two choices — the profile type, and whether the visitor is Saudi.

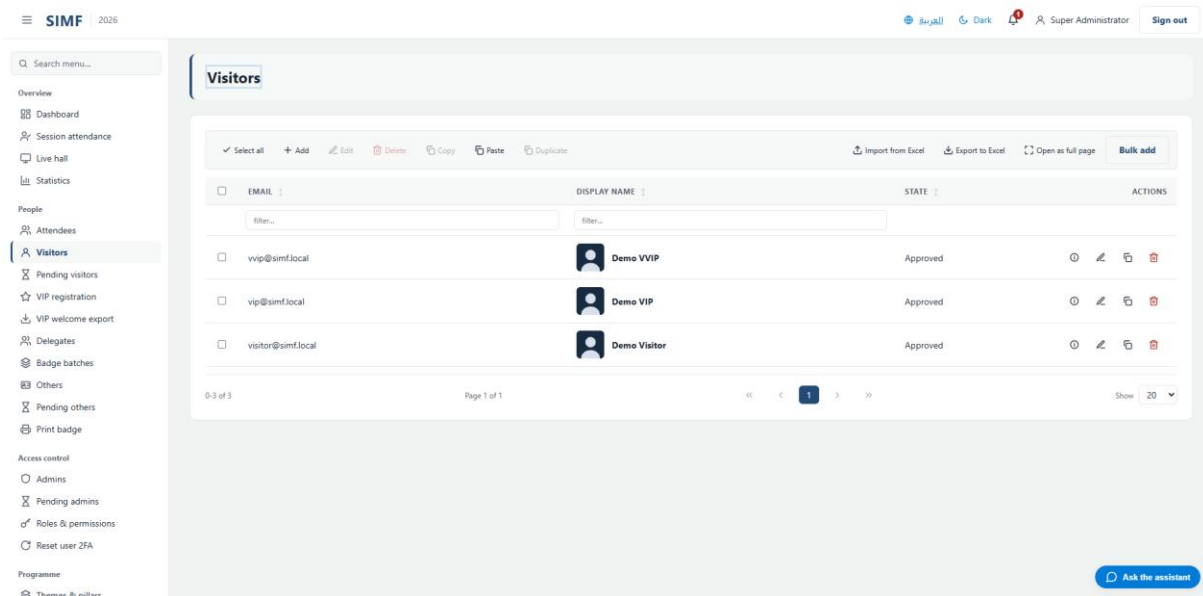


Figure 11 — The visitors list. Add opens the registration wizard.

Figure 12 — The wizard opens on the profile type, which decides much of what follows.

Figure 13 — The identity section.

Identity

Field	Required	Limit	Rule the server enforces
Name on badge	Yes	128 characters	—
Full name (Arabic)	No	50 characters	The form allows 128 characters; the server rejects anything over 50. Keep to 50.
Full name (English)	No	50 characters	Same 128-versus-50 mismatch as the Arabic name.
Job title (optional)	No	100 characters	—
Job title in Arabic (optional)	No	100 characters	—
Place of birth	No	128 characters	A region picker for a Saudi visitor; free text otherwise.

Nationality and identity document

Field	Required	Limit	Rule the server enforces
Saudi national ID	No	10 digits	Saudi visitors. Must start with 1 and pass the check-digit test; a number that fails it is refused.
Iqama number	No	10 digits	Non-Saudi residents. Must start with 2 and pass the same check-digit test.
Passport number	No	20 characters	Length only — the desk applies no format check, so a passport the mobile application would reject is accepted here.

One profile may hold one document of each kind. The same number may appear on more than one profile — the constraint that once made a number unique across all profiles was removed deliberately, because it blocked legitimate registrations.

Figure 14 — The nationality section, which decides whether a national ID, an Iqama or a passport is asked for.

Contact and organisation

Field	Required	Limit	Rule the server enforces
Saudi mobile	No	32 characters	Must be 05XXXXXXXX or +9665XXXXXXXX.
International mobile	No	32 characters	Must be the international format: a plus sign, the country code, then the number.
Email (optional)	No	256 characters	—
Organisation	Yes	150 characters	Chosen from the organisation list. If the employer is not listed, pick the "Other" entry and type the name — this is why that entry exists.

The screenshot displays the SIMF 2025 registration interface. On the left is a sidebar menu with categories: Overview (Dashboard, Session attendance, Live hall, Statistics), People (Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge), Access control (Admins, Pending admins, Roles & permissions, Reset user 2FA), and Programme (Themes & pillars). The main form area contains the following sections:

- Contact:** Includes a 'Saudi mobile' field with an example number (+966500000000) and an 'Email (optional)' field with a note: 'Leave blank if the visitor has no email — the QR badge is the access key.'
- ID document:** A section for optional scan of national ID, Iqama, or passport (PNG / JPEG / WebP, up to 5 MB, stored encrypted at rest).
- ID document image (optional):** A file upload field with a 'Choose File' button and 'No file chosen' text.
- Profile photo (optional):** A file upload field with a 'Choose File' button and 'No file chosen' text. A note below states: 'A photo or logo for the badge. PNG, JPEG or WebP, up to 2 MB.'
- Interests:** A section for optional selection of up to 10 topics. The selected topics are: Naval Defence Technologies, Maritime Security, Shipbuilding & Marine Industries, Ports & Maritime Logistics, Hydrography & Marine Survey, Marine Environment & Sustainability, Autonomous & Unmanned Systems, Maritime Cybersecurity, Investment & Local Content, and Research & Innovation.

At the bottom right of the form are 'Register' and 'Cancel' buttons, and a blue 'Ask the assistant' button.

Figure 15 — The lower sections: contact, the identity document and the profile photo.

Interests are offered for visitors only, and at most ten may be chosen.

On save the visitor is created awaiting approval, with no password and no badge. The badge is minted when the account is approved from the pending queue. There is a configuration option that approves a walk-in visitor immediately and prints the badge at the desk, but it ships switched off, and it never applies to partner accounts.

Creating a partner or staff account

The Others page uses the same wizard as the visitor page, with two differences: there is no interests section, and the account is never approved automatically. Every account created here waits for a person to approve it.

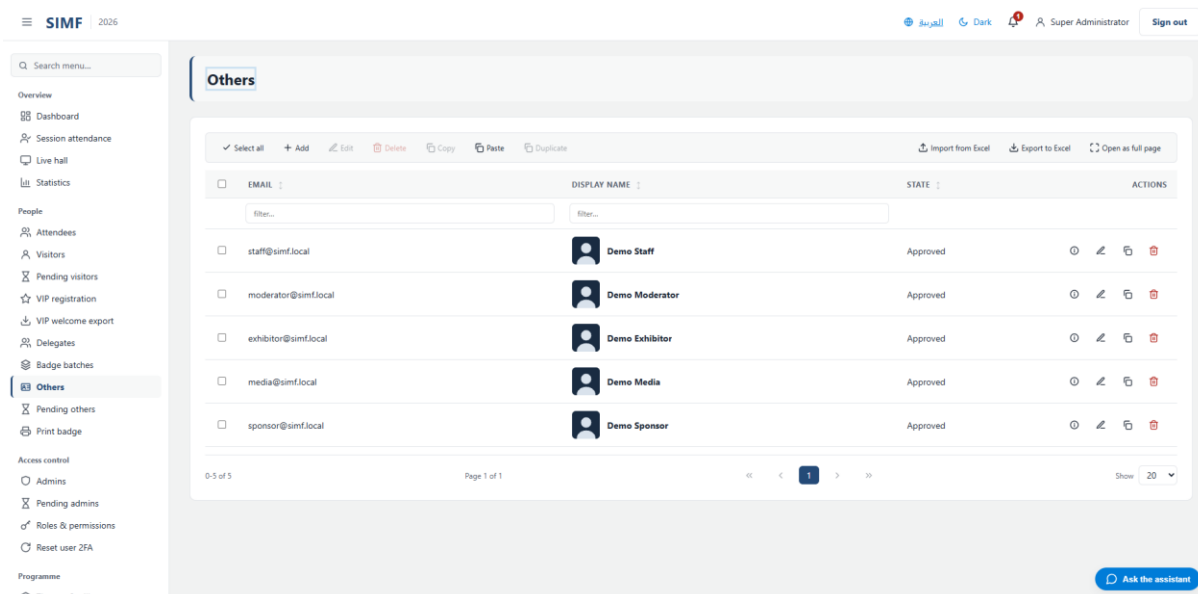


Figure 16 — The partner and staff accounts list.

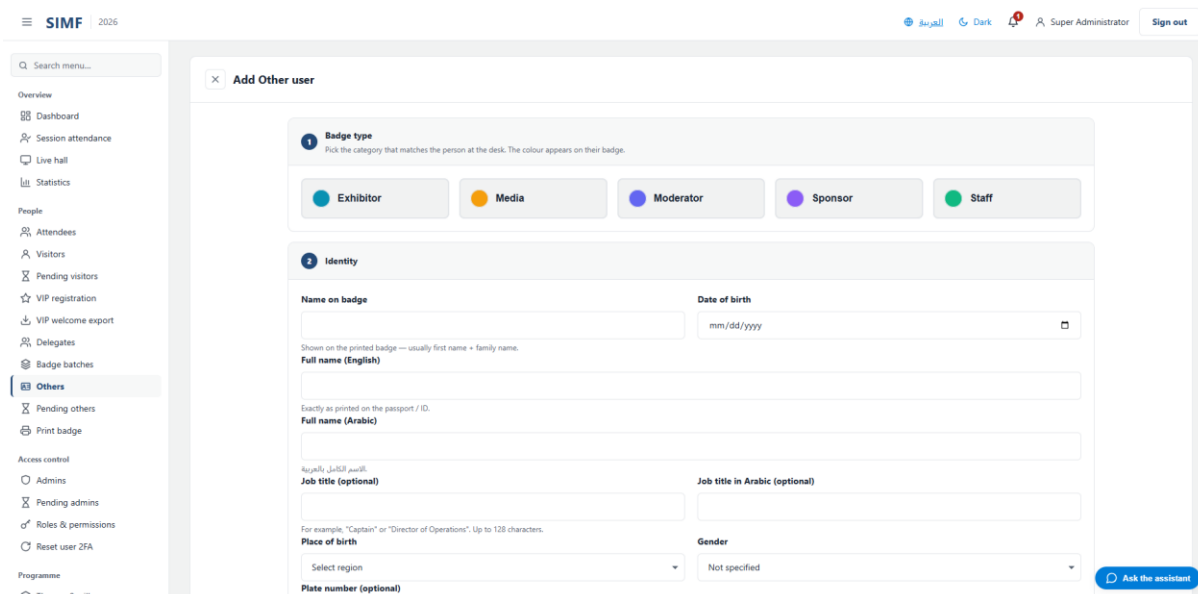


Figure 17 — The same wizard, without the interests section.

Registering a VIP

The VIP page is the visitor wizard with a protocol section added at the top, and a welcome photo alongside the profile photo.

Field	Required	Limit	Rule the server enforces
Mawj system ID (optional)	No	64 characters	—
Honorific / title (optional)	No	64 characters	—
Honorific / title in Arabic (optional)	No	64 characters	—
Preferred language (optional)	No	16 characters	Arabic or English.

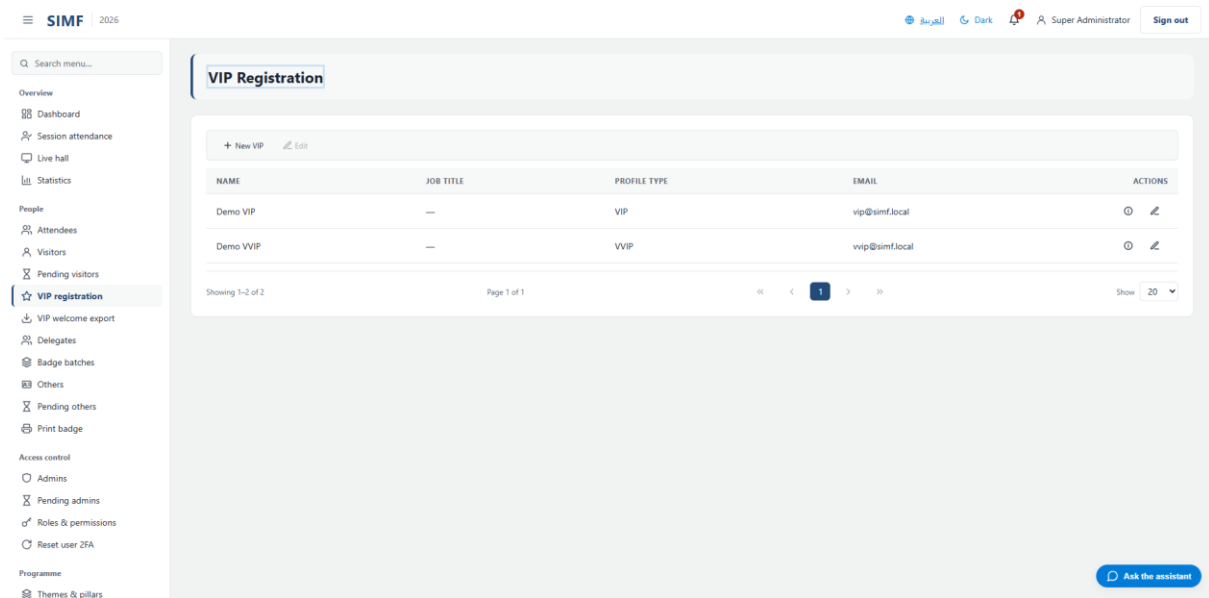


Figure 18 — The VIP registration page.

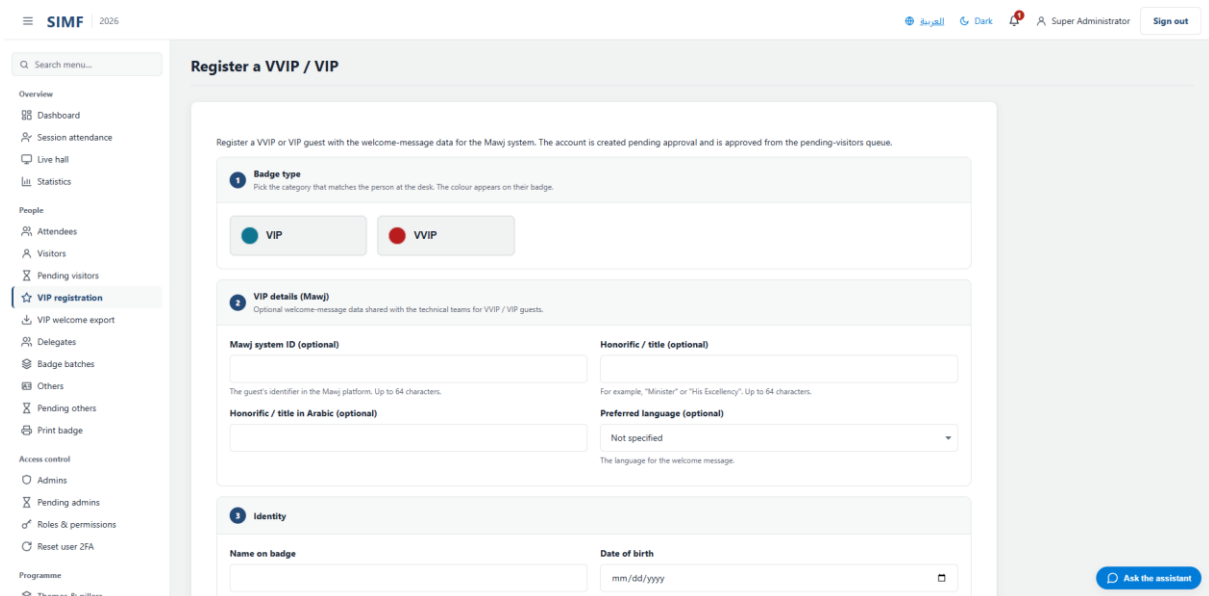


Figure 19 — The VIP wizard, with the protocol section above the identity section.

The profile picture

A profile picture is stored in the system's central file store, encrypted, and served back only to the account itself or to an administrator holding the right permission. It is not a file sitting in a public folder, and it cannot be reached by guessing an address.

Where a picture is set

- By the account owner, from My profile — this is the only place with a cropping tool.
- By an administrator, on the edit form of a visitor or partner account.
- By the registration desk, as part of the create wizard, alongside the identity document.

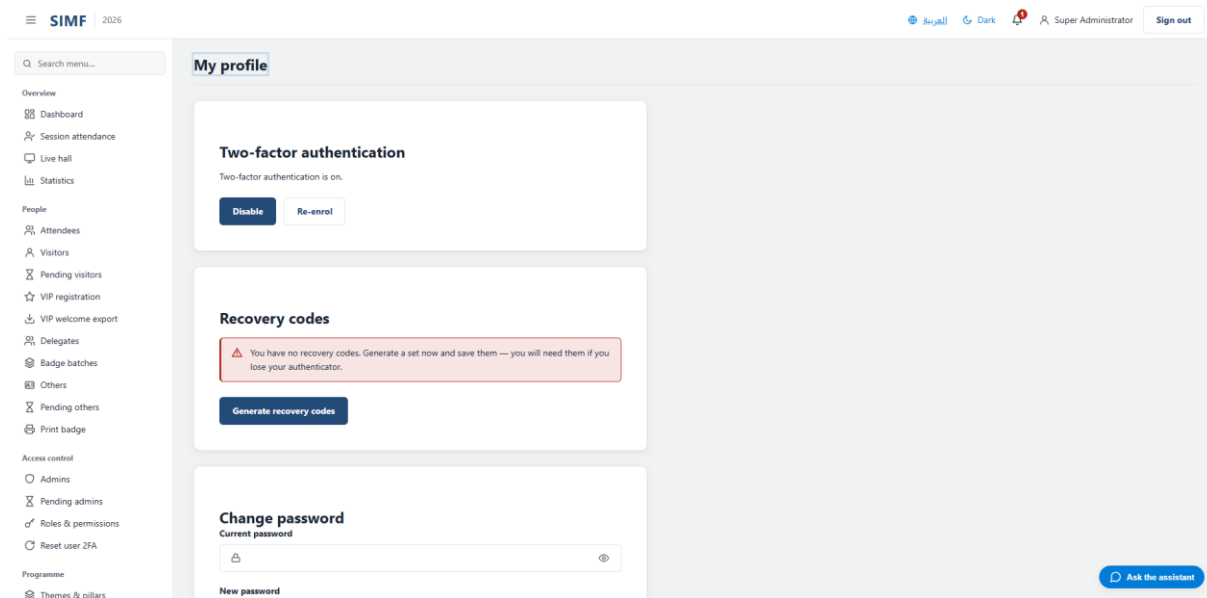


Figure 20 — My profile, where an account sets its own picture.

What the system accepts

Rule	Value
File types	PNG, JPEG or WebP — nothing else
Maximum size	2 MB for a profile picture; 5 MB for an identity document
Checked how	The file's declared type must match its actual content, so renaming a file to .png does not get it past the check
Cropping	Square, produced at 400 by 400 pixels
Stored	Encrypted, one active picture per account

There is no size check in the browser: an oversized file is uploaded and then refused by the server, so the failure appears after the wait rather than before it.

Replacing and removing

Uploading a new picture retires the previous one in the same step; there is never more than one active picture on an account. Where an account has no picture the Control Panel shows a tile with the person's initials rather than a broken image, so an empty grid cell means no picture was ever set.

Changing an account after it exists

A new account is not usable yet. It waits in a queue until somebody approves it, and only then does it get its badge. This chapter covers the approval queues, editing an account, moving it between types, resetting a lost second factor, and withdrawing access.

The approval queues

There is one queue per kind of account, and each is a separate page with its own permissions. Approving is what mints the QR badge, so until it happens the person cannot pass a gate.

Queue	Address	Approve needs	Reject needs
Pending visitors	/admin/visitors/pending	Visitors.Approve	Visitors.Reject
Pending others	/admin/others/pending	Others.Approve	Others.Reject
Pending admins	/admin/admins/pending	Admins.Approve	Admins.Reject

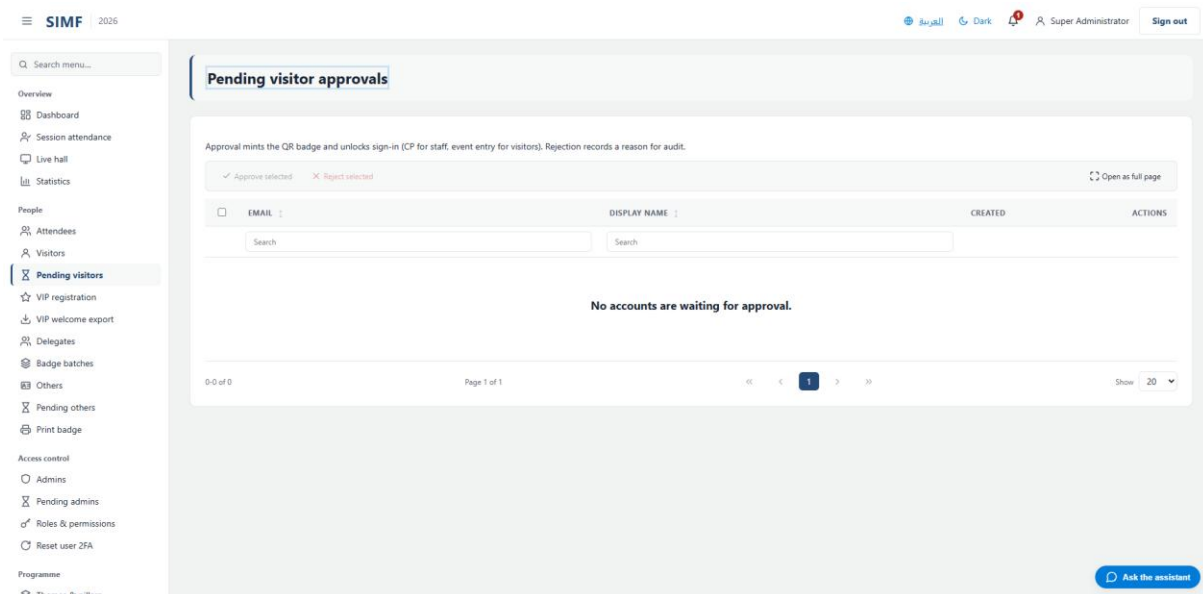


Figure 21 — The pending visitors queue.

Rows can be handled one at a time or in bulk. Rejecting requires a written reason of between 10 and 500 characters, and the button stays disabled until the reason is long enough. The reason is audited, so write something a colleague reading it in six months can act on.

When approving a visitor you may also set the tier at the same time, which saves editing the account afterwards.

Editing an account

The edit form is reached from the row actions on any of the account lists. It changes the email address, the display name, the profile type, the nationality, the two mobile numbers, the meeting

preferences and the pictures. It does not change the password — nobody can set another person's password; the account resets its own from the sign-in page.

For a partner or staff account the profile type is required, and the form will not save without one. For a visitor it is optional.

Moving an account between types

An account created in the wrong pipeline does not have to be deleted and rebuilt. The account details view carries a change type control, gated by its own permission, which moves the account between the visitor and partner sides and asks for the profile type it should land on.

Resetting a lost second factor

When somebody loses the phone holding their authenticator, and has no recovery code left, an administrator clears the second factor from Reset user 2FA. The person then pairs a new authenticator on their next sign-in.

The screenshot shows the SIMF 2025 web application interface. On the left is a sidebar menu with categories: Overview (Dashboard, Session attendance, Live hall, Statistics), People (Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge), Access control (Admins, Pending admins, Roles & permissions), and Programme (Themes & pillars). The 'Reset user 2FA' option is highlighted in the sidebar. The main content area is titled 'Reset another user's 2FA' and contains a form with the following fields: 'User email' (with an email icon), 'Reason (audited)' (with a text area), and a 'Reset 2FA' button. A note above the form states: 'Use this only after verifying the user's identity out of band. Wipes the user's authenticator, recovery codes and active sessions, and forces them to set up 2FA again at their next sign-in.' Below the form, a question asks: 'How did you verify the user's identity? Who reported the loss?'. At the bottom right of the form area is a button labeled 'Ask the assistant'.

Figure 22 — Resetting a user's second factor.

- A reason is required, 10 to 500 characters, and it is audited.
- You cannot reset your own second factor here — use a recovery code, or ask another administrator.
- You cannot reset another administrator's second factor. The most privileged accounts are re-paired through configuration on the server, deliberately, so that no single administrator can take over another.

Withdrawing access

Delete on an account list is not a deletion. It disables the account, revokes its sessions and notifies the person by email. The row action and the bulk action open the same dialog, which asks for an audited reason of 10 to 500 characters.

Your own row is skipped if you include it, and the result reports it as skipped rather than failing — so a bulk action that reports one fewer than you selected is usually this.

Roles and permissions

What an administrator can see and do is decided by permissions, and permissions are granted to roles, never to a person. To give somebody an ability you put them in a role that holds it. This is the whole model, and it has one deliberate exception: the Administrator role holds a wildcard that grants everything.

Permission names

A permission is written as the page it governs, a full stop, and the action — Visitors.Approve, Roles.AssignPermissions, Admins.ResetTwoFactor. Two permissions guard every page: one lets the page open at all, and one puts it in the menu. They are usually the same, and where they differ the manual's page reference lists both.

A button is gated by the permission of the endpoint it calls, which is not always the page's own. On a page holding two grids over two different things they differ, and on the partner queue the bulk approve and the per-row approve are gated separately because the server gates them separately.

Creating a role

Open Roles and permissions and use Add. A role needs only a name, between 1 and 64 characters, and the name must be unique. A new role starts with no permissions at all, so it grants nothing until permissions are assigned to it.

NAME	TYPE	USERS	PERMISSIONS	ACTIONS
Administrator	Built-in	2	0	Permissions
GateOperator	Built-in	0	3	Permissions
PublicRelations	Built-in	0	13	Permissions
ScientificCommittee	Built-in	0	32	Permissions
SecurityTeam	Built-in	0	9	Permissions

Figure 23 — The roles list.

Granting permissions to a role

The permissions editor lists every permission in the system, grouped by the page it governs, with the ones the role already holds ticked. Tick, untick, and save.

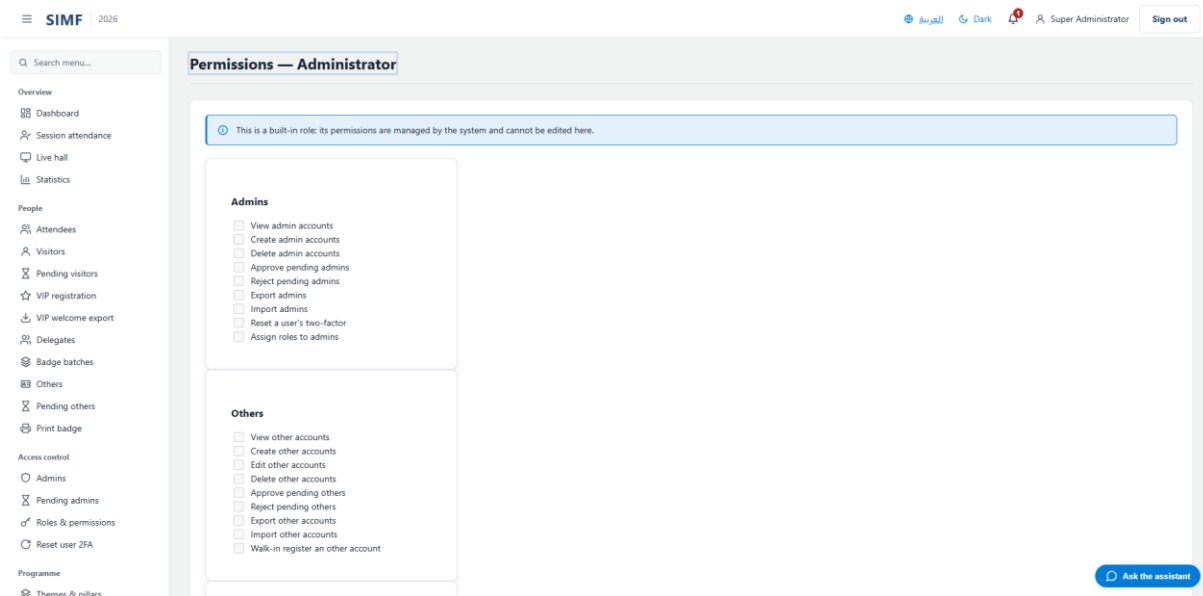


Figure 24 — The permissions editor for one role.

The baseline roles that ship with the system are read-only here. They cannot be edited, renamed or deleted, because the system's own behaviour depends on them.

Giving a person a role

Roles are assigned to administrators only — a visitor or partner account carries none, because it does not sign in to this Control Panel. Assign them either when creating the administrator, or afterwards from the Edit action on the administrators list.

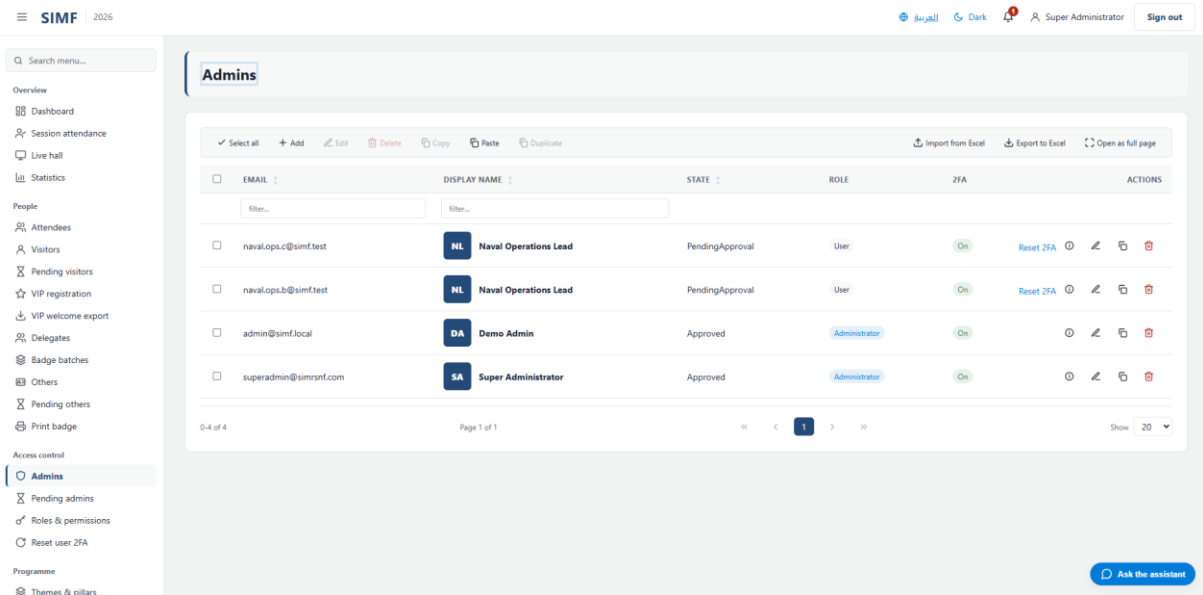


Figure 25 — The administrators list, where roles are assigned.

The guards

- The last administrator cannot have the Administrator role taken away. The system refuses, rather than leaving itself with nobody who can administer it.
- A role still held by somebody cannot be deleted; the error says how many people hold it.
- Assigning a role while creating an account needs the role-assignment permission on top of the create permission, so somebody who may add administrators cannot silently make one powerful.

Deploying to a server

SIMF is installed on premises, on Windows Server with IIS and SQL Server. A deployment is three separate things, done in this order: the pipeline copies the built files onto the server, an operator sets that server's configuration, and the application creates or updates its own database the first time it starts. Nothing else creates the database, and nothing in the pipeline sets a single configuration value.

The estate

There are two servers, and each runs all four applications. The single most important thing to know before running a deployment is that the environment names are misleading:

Environment name	What it actually is	Address
SIMF-Prod	PRE-PRODUCTION	simf.zagali-ict.com
SIM-RNSF	PRODUCTION	web / cp / api.simrsnf.com

This is not a typo to be corrected. Those are the names as registered, and the one that reads like production is not. Anyone who "fixes" the mapping on sight deploys straight to production while believing they are rehearsing. Trust the job names in the pipeline, never the environment string.

The four applications

Application	IIS site	Folder on the server	Public address
API	SIMF.API	D:\System\v1.0.1\api	api.simrsnf.com (internal)
Control Panel	SIMF.CP	D:\System\v1.0.1\cp	cp.simrsnf.com
Website	SIMF.WEB	D:\System\v1.0.1\web	web.simrsnf.com
Mobile edge	SIMF.EDGE	D:\System\v1.0.1\edge	edge.simrsnf.com

The IIS sites and application pools must already exist. The deployment copies files into them; it does not create them. Create them by hand in IIS Manager before the first deployment, with the .NET CLR version set to No Managed Code.

Before the first deployment

- Windows Server with IIS and the ASP.NET Core hosting bundle installed — without the bundle the application pool starts and immediately stops.
- SQL Server, reachable from the application server on port 1433.
- A TLS certificate for each public host name. The one for the API is the one that gets forgotten, because it is internal.
- The host time zone set to Arab Standard Time.
- Write access, for each application pool identity, to the log directory and to the file-store directory.

- For the Flutter web bundle only: the IIS URL Rewrite and Application Request Routing modules, with proxying enabled.

The order of a deployment

- The pipeline builds all four applications and publishes them as one artefact.
- It confirms the target machine, and refuses to continue if the machine is the one named as forbidden for that job — this is what stops a pre-production run reaching production.
- For each application in turn — API first, edge last — it stops the site and its pool, mirrors the files into place, and starts them again, proving both reached the started state.
- The operator then runs that server's configuration scripts as an administrator.
- The operator restarts IIS. Recycling the pool is not enough: the worker process inherits its environment from the service that launched it, so a recycled pool keeps the old values.
- The API is started; it creates or migrates both databases and seeds the first administrator.

The databases

There are two, deliberately kept apart: one holds accounts, roles and permissions, the other holds everything else. There is no manual migration step — the API applies its own migrations at startup, and it applies them to the second database before the first. That order is required, not incidental.

Booting the API against an empty database creates it. Content — the programme, the speakers, the news, the sponsors and the archive — is applied separately, by hand, from the seed scripts. One step in that process is copying the speaker photographs into the file store; without it every photograph returns not-found while the database rows look perfectly healthy.

The first administrator

The system creates exactly one administrator on first boot, from configuration. Its email, its starting password and its authenticator secret are all configuration values. Once it has signed in, change the password, pair a fresh authenticator, and then change those configuration values to new throwaway ones. That last step is the line between deployed and secure.

Two traps. If the configured password or email is blank the seeder writes no administrator, logs the reason, and the system starts up perfectly healthy — every sign-in then fails with nothing visibly wrong. And a password containing a run such as 12345 is rejected by the password rules, with exactly the same silent outcome.

Every configuration value

Configuration reaches the applications as machine-wide environment variables set on the server. The files shipped inside each application carry only non-secret defaults, and they are overwritten by every deployment, so nothing that matters may be edited there.

How a variable name is built

Each application reads its own prefix, and a colon in the setting name becomes a double underscore in the variable name.

Application	Prefix	Example
API	SIMF_API_	SIMF_API_ConnectionStrings__SimfAppDb
Control Panel	SIMF_CP_	SIMF_CP_Api__BaseUrl
Website	SIMF_WEB_	SIMF_WEB_Api__BaseUrl
Mobile edge	SIMF_EDGE_	SIMF_EDGE_ReverseProxy__KnownProxies__0

A bare SIMF_ prefix binds to nothing. Worse, each application refuses to start if it finds variables using that retired prefix, naming them in the error — so an upgraded server must have the new variables written first and the old ones cleared afterwards, never the other way round. The one exception is ASPNETCORE_ENVIRONMENT, which is read before any prefix applies and stays unprefixed on every host.

How to set one

From an elevated PowerShell prompt on the server, machine scope, then restart IIS so the worker process picks up the new environment block:

```
[Environment]::SetEnvironmentVariable(
    'SIMF_API_ConnectionStrings__SimfAppDb',
    'Server=...;Database=SIMF_App;...',
    [EnvironmentVariableTarget]::Machine)
```

iisreset

Recycling the application pool is not enough, and this is the most common reason a correctly set value appears to have no effect.

The values that stop a server starting

Seven values are boot gates: in production, the application refuses to start without its own. This is deliberate — each one protects something that would otherwise fail silently and much later.

Variable	Application
SIMF_API_FileStorage__EncryptionKey	API
SIMF_API_Storage__UserIdDocumentEncryptionKey	API
SIMF_API_Ai__PromptHash__Secret	API
SIMF_CP_DataProtection__KeyRingPath	Control Panel
SIMF_WEB_DataProtection__KeyRingPath	Website

SIMF_EDGE_ReverseProxy__Clusters__api__Destinations__primary__Address	Mobile edge
SIMF_EDGE_ReverseProxy__KnownProxies__0	Mobile edge

Two of the API's three are encryption keys, and they behave differently under change. The file-store key wraps a per-file key, so it has a rotation path in principle — but the job that finishes a rotation has never been built, so treat it as set once. The identity-document key has no such path at all: changing it strands every encrypted column permanently, with no way back. Escrow both, with the version number stamped alongside the file-store key, before the system carries any real data.

```
# Generate a 32-byte key, base64-encoded:
openssl rand -base64 32
```

```
# The JWT signing key wants more:
openssl rand -base64 48
```

The API

The API reads by far the most configuration — the connection strings, every key, the mail server, the bootstrap administrator and the AI provider. Its script on a provisioned server carries 82 variables.

Databases

Variable	What it controls	Ships as	Set it to
SIMF_API_ConnectionStrings__SimfIdentityDb	The accounts, roles and permissions database.	empty	Required
SIMF_API_ConnectionStrings__SimfAppDb	Everything else — profiles, programme, gates, meetings.	empty	Required

Both are required. The application throws on the first database access if either is missing — it does not start and then misbehave.

Keys and tokens

Variable	What it controls	Ships as	Set it to
SIMF_API_Jwt__SigningKey	Signs every access token. Also derives the one-time-code and meeting-link hashes, so changing it invalidates those too.	empty	At least 32 bytes; 48 recommended
SIMF_API_Jwt__Issuer	The token issuer name.	SIMF	SIMF
SIMF_API_Jwt__Audience	The token audience name.	SIMF	SIMF
SIMF_API_Jwt__AccessTokenMinutes	How long an access token stays valid.	5	5
SIMF_API_Jwt__SessionLifetimeHours	How long a signed-in session may be refreshed for.	24	24
SIMF_API_Storage__UserIdDocumentEncryptionKey	Encrypts the national ID, Iqama, passport and mobile columns. Cannot be changed once data exists.	empty	A secret — generate one per environment (32 bytes, base64)
SIMF_API_FileStorage__EncryptionKey	Wraps the key of every encrypted stored file.	empty	A secret — generate one per environment (32 bytes, base64)
SIMF_API_FileStorage__KekVersion	The version stamp written into every encrypted file. On a restore the right key under the wrong version fails every read.	1	1

SIMF_API_FileStorage__PreviousEncryptionKey	The superseded key, during a rotation only.	empty	Leave empty
SIMF_API_Ai__PromptHash__Secret	Signs the AI prompt fingerprints. Without it the application falls back to a publicly derivable key.	empty	A secret — generate one per environment

The first administrator

Variable	What it controls	Ships as	Set it to
SIMF_API_SuperAdmin__Email	The bootstrap administrator's address.	superadmin@simrsnf.com	The real address
SIMF_API_SuperAdmin__TempPassword	Its starting password. Must satisfy the password rules, including the no-sequential-run rule.	empty	A secret — generate one per environment
SIMF_API_SuperAdmin__TotpSecret	Its authenticator secret. Without it the most privileged account in the system is protected by a password alone.	empty	A secret — generate one per environment (base32)
SIMF_API_SuperAdmin__PasswordChangeRequired	Force a password change at the first sign-in.	true	true
SIMF_API_Seed__DemoPassword	The shared password of the sample accounts.	empty	Leave empty in production
SIMF_API_Seed__EnableDemoAccounts	Create the sample accounts outside development.	false	false

The sample accounts must not exist on a production system. They are created only in development, or when the switch above is turned on deliberately.

Mail

Variable	What it controls	Ships as	Set it to
SIMF_API_Email__Host	The mail server.	empty	Required
SIMF_API_Email__Port	Its port.	587	587
SIMF_API_Email__User	The mail account.	empty	Required
SIMF_API_Email__Password	Its password.	empty	A secret — generate one per environment

SIMF_API_Email__FromAddress	The address mail is sent from.	no-reply@ammn.com.sa	The verified sender
SIMF_API_Email__FromName	The display name on sent mail.	SIMF	SIMF
SIMF_API_Email__FailureAlertRecipients	Who is told when mail delivery starts failing.	empty	An operations address

Mail failure is invisible from the interface. Sending is queued in the background, so a wrong password does not throw, does not appear on screen, and does not stop an account being created — the messages simply never arrive. Set the alert recipients, and test delivery after every change.

An EMPTY mail host is worse than a wrong one, and this was observed rather than reasoned about. With no host configured the first message to be sent fails in a way the retry logic does not catch, the background sender stops for good, and the health check reports the API as unhealthy from that moment — while the site keeps serving pages normally. If a load balancer is watching that endpoint it will take a working server out of rotation because nobody filled in an SMTP host.

Network and limits

Variable	What it controls	Ships as	Set it to
SIMF_API_ReverseProxy__KnownProxies__0	The trusted proxy, so a visitor's real address is recovered.	empty	The proxy's IP ADDRESS
SIMF_API_Cors__WebAppOrigins__0	A browser origin allowed to call the API. Numbered from zero.	empty	Each public site address
SIMF_API_RateLimit__PermitLimit	Requests allowed per address in the window.	20	20
SIMF_API_RateLimit__WindowSeconds	The window, in seconds.	60	60
SIMF_API_Swagger__AllowSwagger	Publish the interactive API documentation in production.	false	false
SIMF_API_FileStorage__RootPath	Where uploaded files are written.	empty	An explicit path that is backed up
SIMF_API_Storage__LogDirectory	Where the log files are written.	logs	An explicit path

The trusted-proxy entry must be an IP address. A host name is read, fails to parse, and is dropped without a word — the setting then looks configured while every visitor shares one rate-limit bucket. If the file-store path is left empty the files land in a default location under ProgramData that nobody chose and that a backup may not cover.

Walk-in desk and offline badges

These govern the on-site registration desk. Every switch ships off, so the desk behaves conservatively until somebody deliberately opens it up for an event day.

Variable	What it controls	Ships as	Set it to
----------	------------------	----------	-----------

SIMF_API_WalkInMode__Enabled	The desk features as a whole.	false	true on event days
SIMF_API_WalkInMode__ExpiresAt	When the desk switches itself off again.	empty	Blank means never
SIMF_API_WalkInMode__QuickRegister	The shortened desk form.	false	false
SIMF_API_WalkInMode__QuickRegisterRequiresIdentityDocument	Whether the short form still demands an identity document.	true	true
SIMF_API_WalkInMode__AutoApprove	Approve a desk visitor immediately and print the badge. Never applies to partner accounts.	false	Only on an event day
SIMF_API_WalkInMode__SessionWalkIn	Admission to a session at the door.	false	false
SIMF_API_WalkInMode__ArrivalGraceMinutes	How late an arrival still counts. Capped at 240.	15	15
SIMF_API_WalkInMode__AcceptOfflineBadges	Honour badges issued by a desk with no network.	false	false
SIMF_API_WalkInMode__OfflineUpload	Accept a batch uploaded from an offline desk.	false	false
SIMF_API_WalkInMode__AllowBadgeActivation	Let a badge be activated at the desk.	false	false
SIMF_API_WalkInMode__BadgeKey	Signs offline badges. Only meaningful when offline badges are accepted.	empty	A secret — generate one per environment
SIMF_API_WalkInMode__BadgeKeyVersion	Its version stamp.	0	0
SIMF_API_WalkInMode__PreviousBadgeKey	The superseded badge key, during a rotation only.	empty	Leave empty
SIMF_API_WalkInMode__PreviousBadgeKeyVersion	Its version stamp.	0	0

The offline badge desk carries its own copy of the badge key and its version. The two must match the API values exactly, or every badge the desk issues is refused at the gate.

Account lifecycle and devices

Variable	What it controls	Ships as	Set it to
SIMF_API_IdentityLifecycle__RequireControlPanelTwoFactorEnrolment	Force every Control Panel account through authenticator enrolment.	true	true
SIMF_API_IdentityLifecycle__PasswordMaxAgeDays	Expire a password after this many days. Zero means never.	0	0
SIMF_API_IdentityLifecycle__PasswordHistoryCount	How many previous passwords may not be reused. Zero disables it.	0	0
SIMF_API_IdentityLifecycle__DormantAccountDisableDays	Disable an account unused for this long. Zero means never.	0	0
SIMF_API_DeviceKey__RequireStepUpForEnrol	Demand a second factor before a device key is enrolled.	true	true
SIMF_API_DeviceKey__MaxActiveKeysPerUser	How many devices one account may keep enrolled.	5	5
SIMF_API_Jwt__StreamAudience	The audience of the short-lived token that authorises a video stream.	simf-stream	simf-stream
SIMF_API_Jwt__StreamTokenMinutes	How long that token lasts.	180	180

Artificial intelligence

The AI features answer with a harmless echo until a provider is configured, so an unconfigured deployment degrades quietly rather than failing.

Variable	What it controls	Ships as	Set it to
SIMF_API_Ai__DefaultProvider	Which	Echo	Anthropic

	provider answers: Echo, Anthropic, Gemini or OpenAi.		
SIMF_API_Ai_Anthropic_ApiKey	The Anthropic key.	empty	A secret — generate one per environment
SIMF_API_Ai_Anthropic_DefaultModel	The model used by default.	claude-haiku-4-5-20251001	claude-haiku-4-5-20251001
SIMF_API_Ai_Anthropic_BaseUrl	The provider address.	https://api.anthropic.com	https://api.anthropic.com
SIMF_API_Ai_Anthropic_DefaultMaxTokens	The reply length ceiling.	2048	2048
SIMF_API_Ai_Gemini_ApiKey	The Gemini key, if used.	empty	Leave empty unless used
SIMF_API_Ai_OpenAi_ApiKey	The OpenAI key, if used.	empty	Leave empty unless used

Uploads, media and links

Variable	What it controls	Ships as	Set it to
SIMF_API_UploadScanning_Enabled	Scan every upload before it is stored.	true	true
SIMF_API_FaceDetection_Enabled	Check that an identity photograph contains a face.	true	true
SIMF_API_FaceDetection_MinConfidence	How sure that check must be.	0.5	0.5
SIMF_API_SessionRecordingStorage_MaxUploadBytes	The largest session recording accepted (1 GB).	1073741824	1073741824
SIMF_API_OrganizationHeroVideo_MaxUploadBytes	The largest banner video accepted (200 MB).	209715200	209715200
SIMF_API_OrganizationHeroVideo_PublicApiBaseUrl	The address that video is	empty	The edge address

	served from publicly.		
SIMF_API_MeetingLinks__PublicWebBaseUrl	The site a meeting confirmation link points at. Without it the links in those emails go nowhere.	empty	https://web.simrsnf.com
SIMF_API_MeetingLinks__TokenTtlHours	How long such a link stays valid.	72	72
SIMF_API_Swagger__Username	Guards the interactive documentation when it is published.	empty	Required only if the documentation is published
SIMF_API_Swagger__Password	Its password.	empty	A secret — generate one per environment
SIMF_API_Serilog__MinimumLevel__Default	How much is logged.	Information	Information
SIMF_API_AllowedHosts	The host names the API answers for.	*	api.simrsnf.com

The Control Panel

The Control Panel holds no database of its own. It talks to the API, and it needs somewhere shared to keep the keys that protect its session cookies.

Variable	What it controls	Ships as	Set it to
SIMF_CP_Api__BaseUrl	The API address, with a trailing slash.	http://localhost:5175/	https://api.simrsnf.com/
SIMF_CP_DataProtection__KeyRingPath	Where the cookie-protection keys live.	empty	A shared, backed-up path
SIMF_CP_Session__LifetimeHours	How long a session lasts.	8	8
SIMF_CP_Storage__LogDirectory	Where its logs are written.	logs	An explicit path
SIMF_CP_AllowedHosts	The host names it will answer for.	*	cp.simrsnf.com

The Control Panel and the Website must be given the SAME API address and the SAME key-ring path. A build-time test fails if the two disagree.

The Website

Variable	What it controls	Ships as	Set it to
SIMF_WEB_Api__BaseUrl	The API address; must match the Control Panel's.	http://localhost:5175/	https://api.simrsnf.com/
SIMF_WEB_DataProtection__KeyRingPath	Its key ring; must match the Control Panel's path.	empty	The same shared path
SIMF_WEB_AllowedHosts	The host names it will answer for.	*	web.simrsnf.com

The mobile edge

The edge is the only application the mobile app talks to. It is a reverse proxy in front of the API, and it exists so the API itself never has to be published to the internet.

Variable	What it controls	Ships as	Set it to
----------	------------------	----------	-----------

	Is		
SIMF_EDGE_ReverseProxy__Clusters__api__Destinations__primary__Address	Where the edge forwards to.	empty	https://api.simrsnf.com/
SIMF_EDGE_ReverseProxy__KnownProxies__0	The trusted hop in front of the edge.	empty	The load balancer's IP ADDRESS
SIMF_EDGE_AllowedHosts	The host names it will answer for.	*	edge.simrsnf.com

The public web application

The Flutter web bundle is different in kind: its settings are COMPILED INTO the build rather than read from the server, so changing one means rebuilding and redeploying the bundle, not setting a variable and restarting.

Variable	What it controls	Ships as	Set it to
ApiBase	The address the application calls. Must be https and must end in the API version path; the build refuses otherwise.	empty	https://edge.simrsnf.com/api/v1
OutDir	Where the built bundle is written.	empty	The site folder
AppKey	The application key, if the gate is in use.	empty	A secret — generate one per environment
SupportPhone	The support number shown in the application.	empty	The real number
SupportEmail	The support address.	empty	The real address
SocialX, SocialInstagram, SocialLinkedIn, SocialYouTube, SocialTikTok	The social links in the footer. Any left empty is hidden.	empty	The real profiles
VisitSaudiUrl	The tourism link.	https://www.visitsaudi.com	https://www.visitsaudi.com

Every host

Variable	What it controls	Ships as	Set it to
ASPNETCORE_ENVIRONMENT	Which environment the application believes it is in. Unprefixed, and identical on every server.	not set	Production

Setting this to anything other than Production disables the boot gates, turns on the sample-data seeding, and publishes the interactive API documentation. It is the single most consequential value on the server.

Appendix — what writing this manual found

This appendix records what was found while every page was opened and every constraint checked against the code. The first two groups were CORRECTED in the same change that produced this manual, and are kept here because the pattern matters more than any single line: a document and the code drift apart silently, and the drift is only visible to somebody reading both. The third group is behaviour, not error - nothing to fix, but worth knowing before it surprises somebody.

Documents that disagreed with the code — corrected

What a document says	What the code does
Thirteen page references described the page guard as a role check on Administrator — because the TEMPLATE they were copied from did, which is why one error appeared thirteen times	Pages are guarded by a named permission, not by a role. The template now says so, and says why
The administrator manual says the Edit action on the administrators list is an unbuilt placeholder	Edit opens a working role editor and saves through a live endpoint
The administrator manual gives the Control Panel address as cp.simf.local	The repository's own index gives localhost:5158 for a local run
The operations document describes one shared configuration prefix	There have been four, one per application, since August 2026
The operations document lists two storage paths as required	Both were removed; setting them does nothing
The operations document gives the access-token lifetime as 30 minutes	It is 5
The deployment guide says the API configuration script carries 62 values	It declares 82
The recovery procedure says the seeder re-applies the configured authenticator secret on every start	It re-applies it only while two-factor is still switched on for that account

Wording in the product that no longer matched its behaviour — corrected

- Saving a new visitor said an invitation had been sent. None is sent on that path — the wording predated the registration wizard that replaced it. It now says the visitor was registered.
- Saving a partner account showed the ADMINISTRATORS' message, which promises an invitation email that this path never queues. Partner accounts now have their own message, and it says the account is waiting for approval.
- The partner page's supporting line described a seven-day password invitation, which belongs to a create endpoint no page calls. It now describes what the page actually does.

Behaviour worth knowing before it surprises somebody

- With no mail host configured, the background sender stops for good the first time it is asked to send, and the health check reports the whole API as unhealthy from then on — while every page

keeps working. Seen during the writing of this manual, after creating an account triggered its first notification.

- On a fresh installation the organisation logo is absent, so its page requests an image that is not there. The page is unharmed; the logo simply has not been uploaded yet.
- The registration desk accepts a passport format that the mobile application would reject, because only the desk skips the format check.
- The Arabic and English name fields accept 128 characters in the browser and are refused above 50 by the server.
- Walking quickly from page to page exhausts the per-address request allowance, because every page fetches the signed-in profile for its header. Nothing breaks; the header request is refused until the window rolls over.

Every page in the Control Panel

This section lists every page the Control Panel serves, in the order the menu presents them. For each: the address, the file that implements it, the permission that gates the page, the permission that puts it in the menu, and a picture of the page as it renders. It is generated from the source code on every build, so it describes the system as it is rather than as it once was.

Overview

Dashboard (/)

Property	Value
Address	/
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Home.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Home.razor.cs
Page permission	Any signed-in user
Menu permission	-

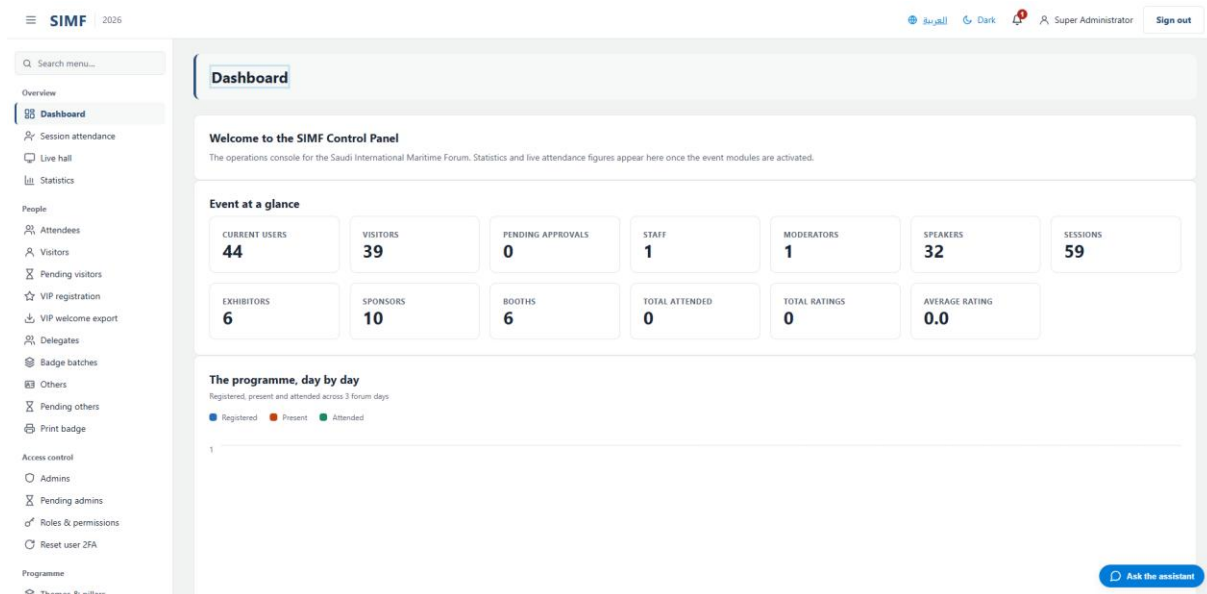


Figure 26 — Dashboard — /

Session attendance (/admin/attendance)

Property	Value
Address	/admin/attendance
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendanceDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendanceDashboard.razor.cs
Page permission	Attendance.View
Menu	Attendance.View

permission	
------------	--

Figure 27 — Session attendance — /admin/attendance

Live hall (/admin/sessions/live-hall)

Property	Value
Address	/admin/sessions/live-hall
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionLiveHall.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionLiveHall.razor.cs
Page permission	Attendance.View
Menu permission	Attendance.View

Figure 28 — Live hall — /admin/sessions/live-hall

Statistics (/admin/statistics)

Property	Value
Address	/admin/statistics
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/StatisticsDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/StatisticsDashboard.razor.cs
Page permission	Statistics.View
Menu permission	Statistics.View

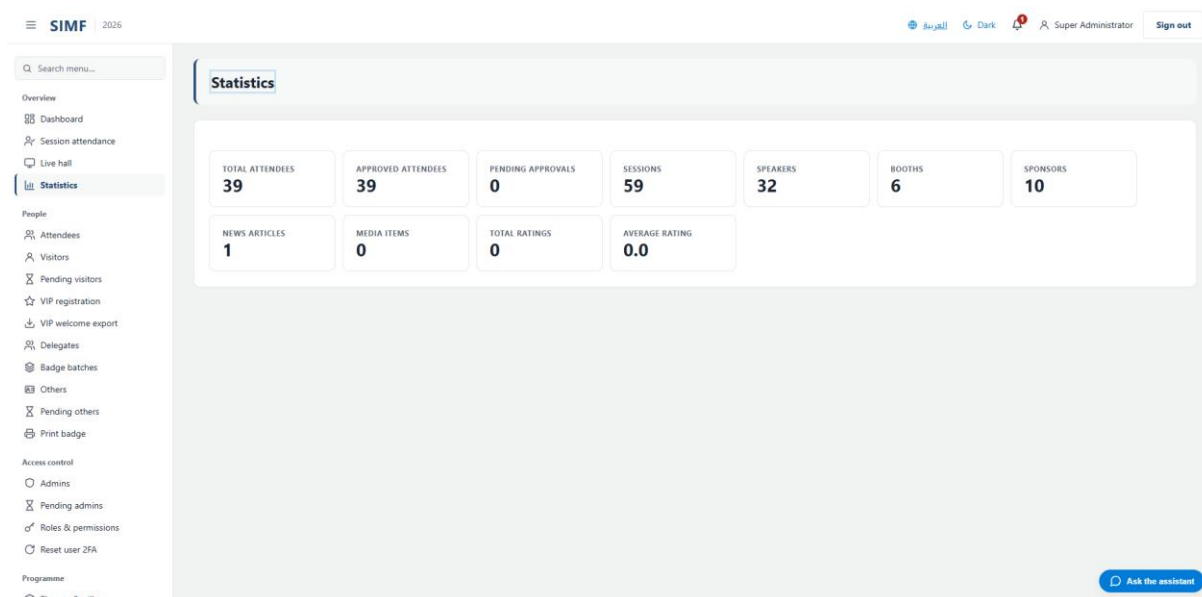


Figure 29 — Statistics — /admin/statistics

People

Attendees (/admin/attendees)

Property	Value
Address	/admin/attendees
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendeesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AttendeesList.razor.cs
Page permission	Attendees.View
Menu permission	Attendees.View

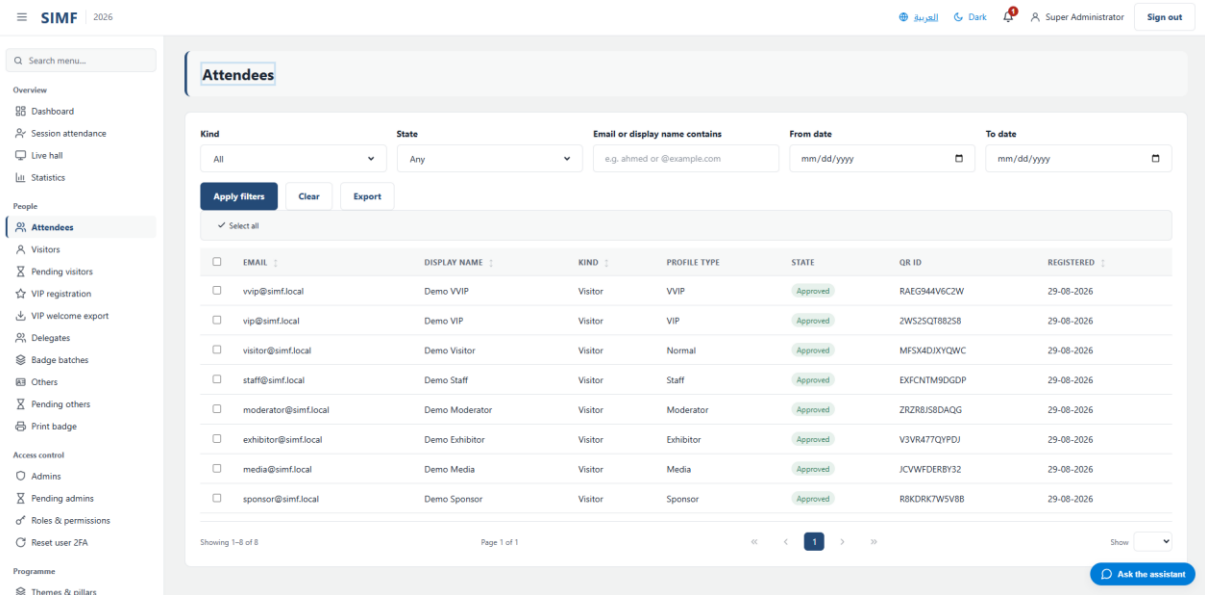


Figure 30 — Attendees — /admin/attendees

Visitors (/admin/visitors)

Property	Value
Address	/admin/visitors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VisitorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VisitorsList.razor.cs
Page permission	Visitors.View
Menu permission	Visitors.View

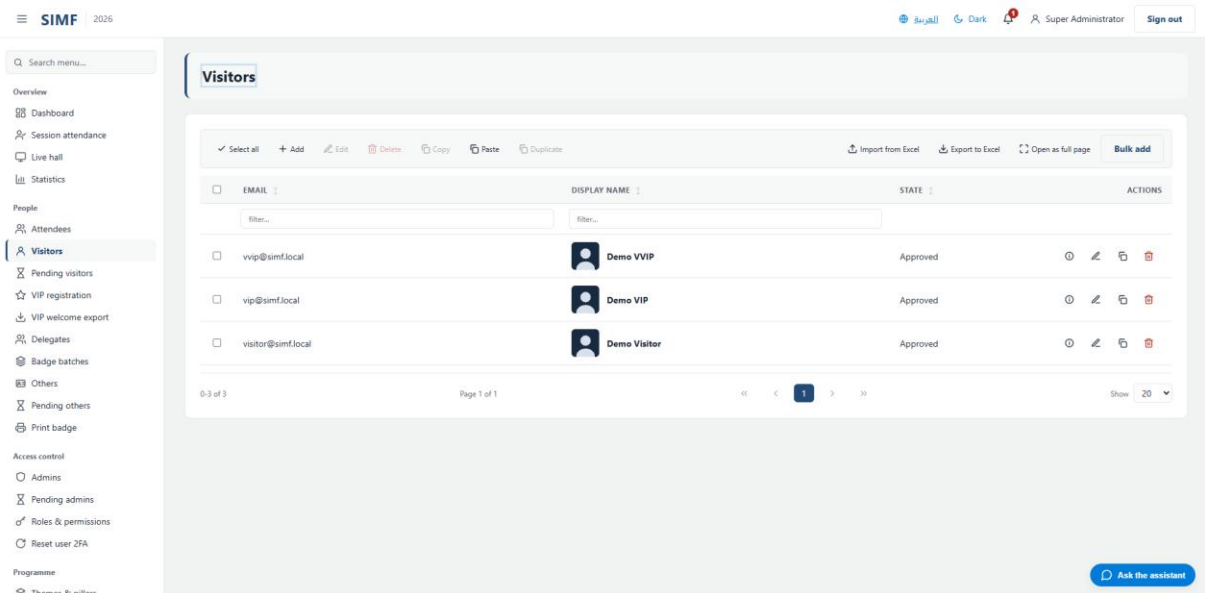


Figure 31 — Visitors — /admin/visitors

Pending visitors (/admin/visitors/pending)

Property	Value
Address	/admin/visitors/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingVisitors.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingVisitors.razor.cs
Page permission	Visitors.View
Menu permission	Visitors.View

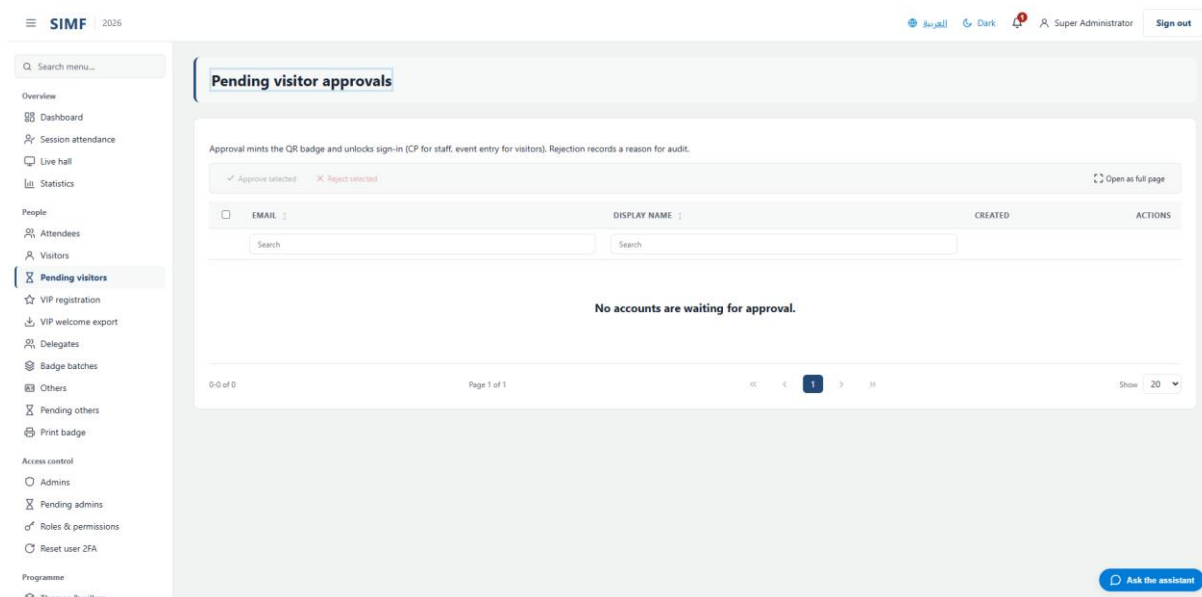


Figure 32 — Pending visitors — /admin/visitors/pending

VIP registration (/admin/visitors/vip)

Property	Value
Address	/admin/visitors/vip
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipRegistration.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipRegistration.razor.cs
Page permission	Visitors.RegisterOnsite
Menu permission	Visitors.RegisterOnsite

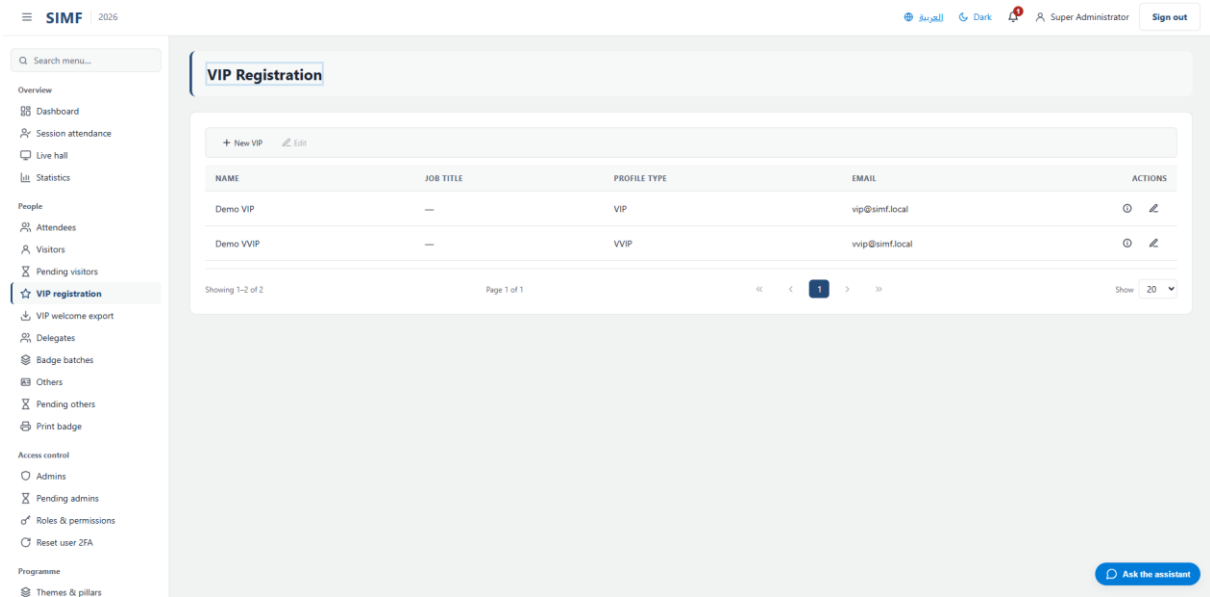


Figure 33 — VIP registration — /admin/visitors/vip

VIP welcome export (/admin/visitors/vip/export)

Property	Value
Address	/admin/visitors/vip/export
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipExport.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipExport.razor.cs
Page permission	Visitors.ExportVip
Menu permission	Visitors.ExportVip

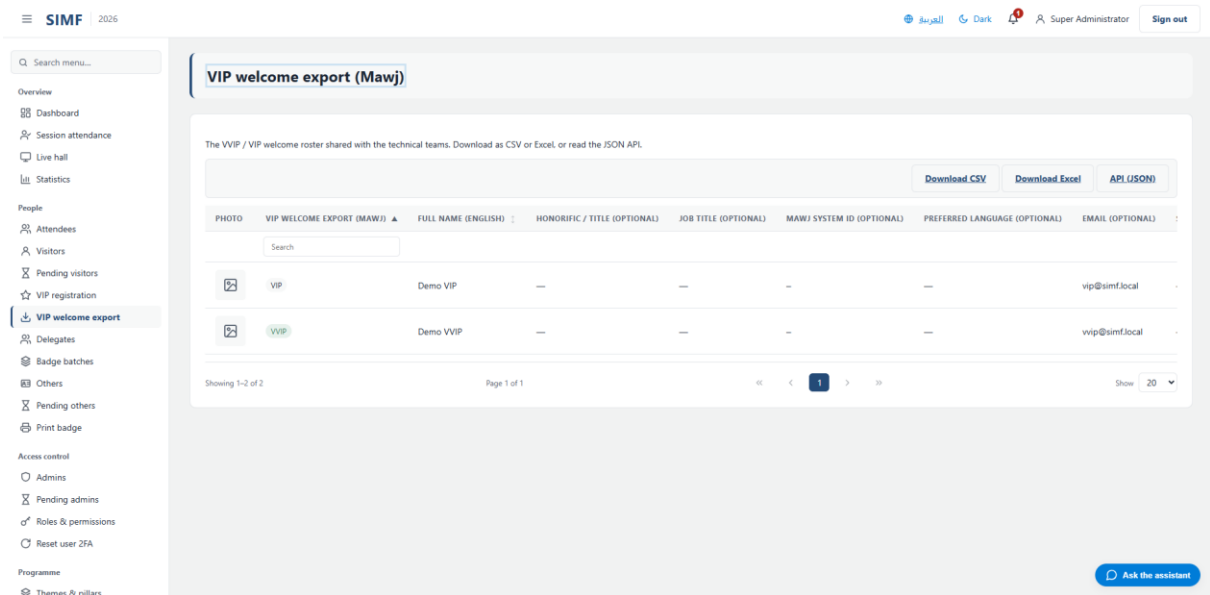


Figure 34 — VIP welcome export — /admin/visitors/vip/export

Delegates (/admin/delegates)

Property	Value
Address	/admin/delegates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegatesPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegatesPage.razor.cs
Page permission	Visitors.RegisterOnsite
Menu permission	Visitors.RegisterOnsite

The screenshot shows the 'Delegates' page in the SIMF system. The page title is 'Delegates'. Below the title is a section titled 'Register a delegate'. A note states: 'A delegate is a normal visitor flagged as a delegation member; their nationality must be a country invited to send a delegation.' The form is divided into two main sections: '1 Badge type' and '2 Identity'. In the 'Badge type' section, there are three radio buttons: 'Normal' (selected), 'VIP', and 'VVIP'. In the 'Identity' section, there are several input fields: 'Name on badge' (with a note 'Shown on the printed badge — usually first name + family name'), 'Date of birth' (with a date picker), 'Full name (English)', 'Full name (Arabic)', 'Job title (optional)', and 'Job title in Arabic (optional)'. There is also a note at the bottom: 'For example, "Captain" or "Director of Operations". Up to 128 characters.' A blue button labeled 'Ask the assistant' is located at the bottom right of the form.

Figure 35 — Delegates — /admin/delegates

Badge batches (/admin/visitors/badge-batches)

Property	Value
Address	/admin/visitors/badge-batches
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeBatchesPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeBatchesPage.razor.cs
Page permission	Visitors.ViewBatches
Menu permission	Visitors.ViewBatches

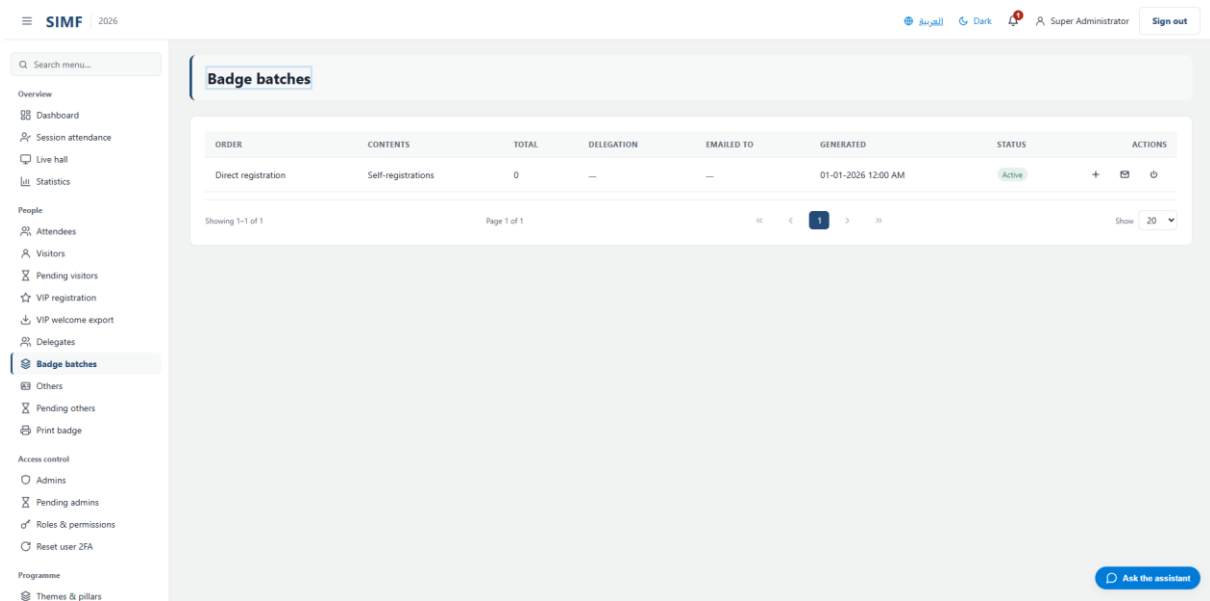


Figure 36 — Badge batches — /admin/visitors/badge-batches

Others (/admin/others)

Property	Value
Address	/admin/others
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OthersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OthersList.razor.cs
Page permission	Others.View
Menu permission	Others.View

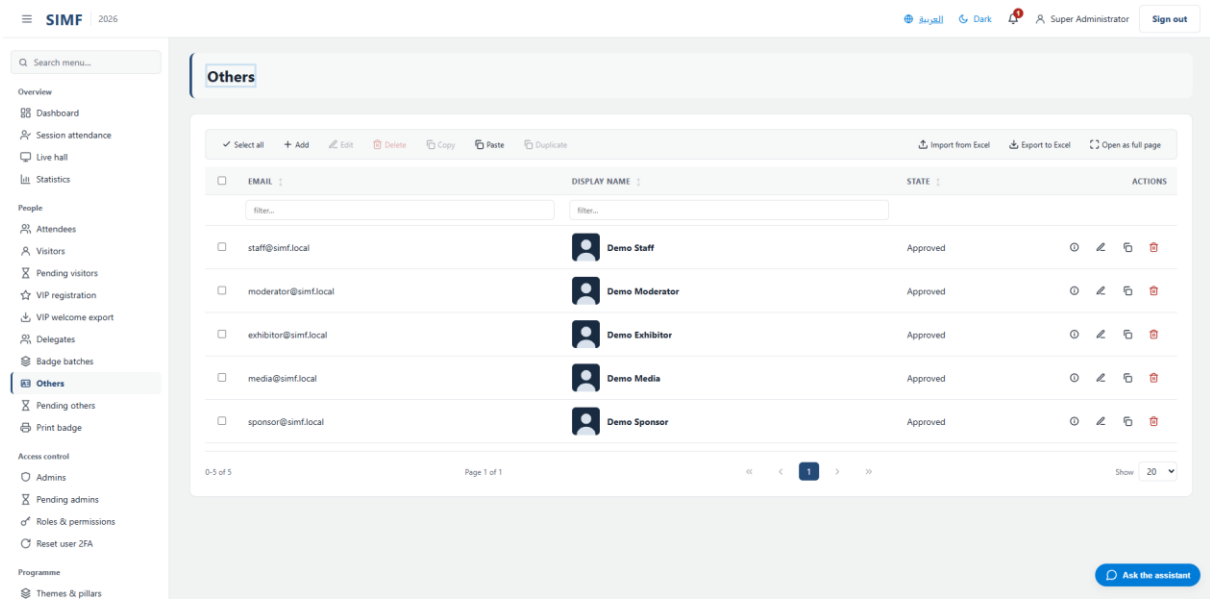


Figure 37 — Others — /admin/others

Pending others (/admin/others/pending)

Property	Value
Address	/admin/others/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingOthers.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingOthers.razor.cs
Page permission	Others.View
Menu permission	Others.View

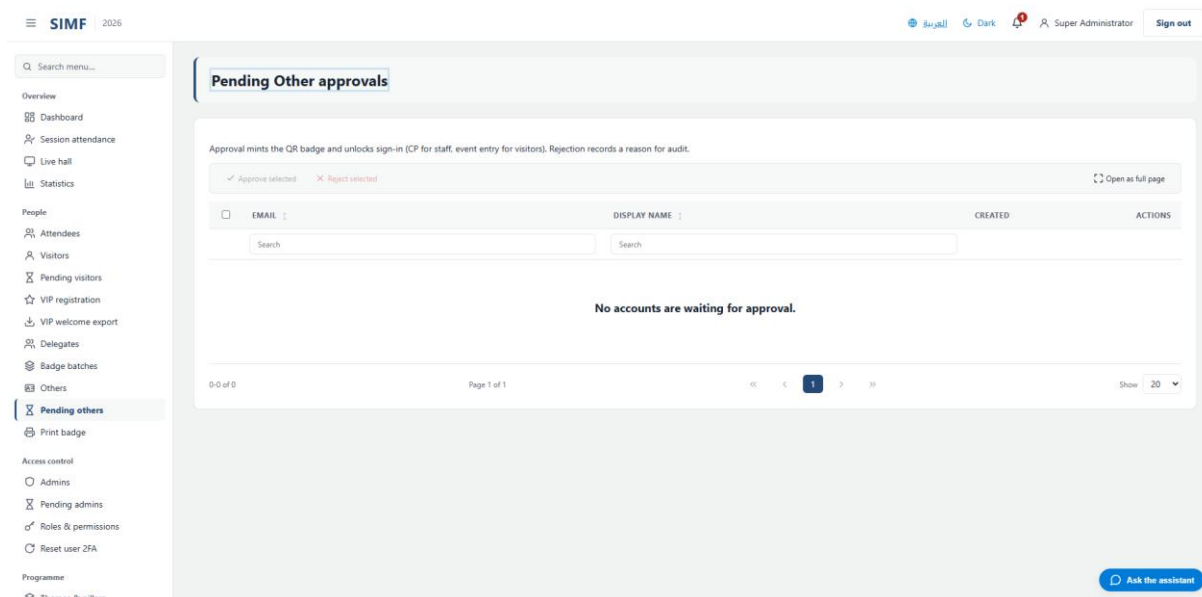


Figure 38 — Pending others — /admin/others/pending

Print badge (/admin/print-bag)

Property	Value
Address	/admin/print-bag
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PrintBag.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PrintBag.razor.cs
Page permission	Attendees.PrintBag
Menu permission	Attendees.PrintBag

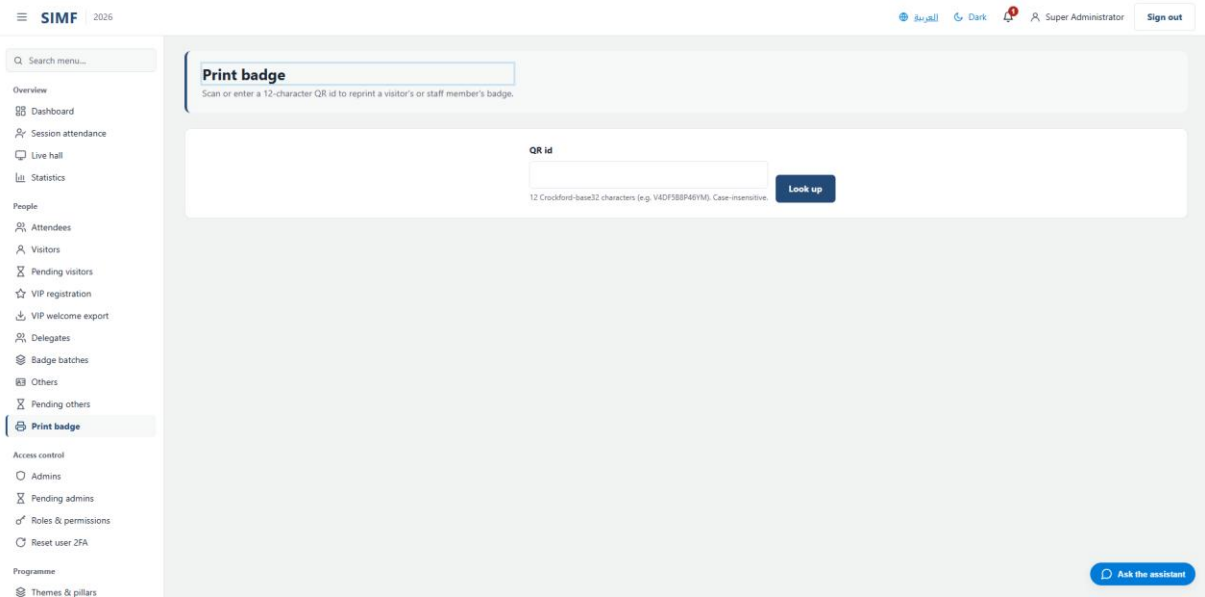


Figure 39 — Print badge — /admin/print-bag

Access control

Admins (/admin/admins)

Property	Value
Address	/admin/admins
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/UsersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/UsersList.razor.cs
Page permission	Admins.View
Menu permission	Admins.View

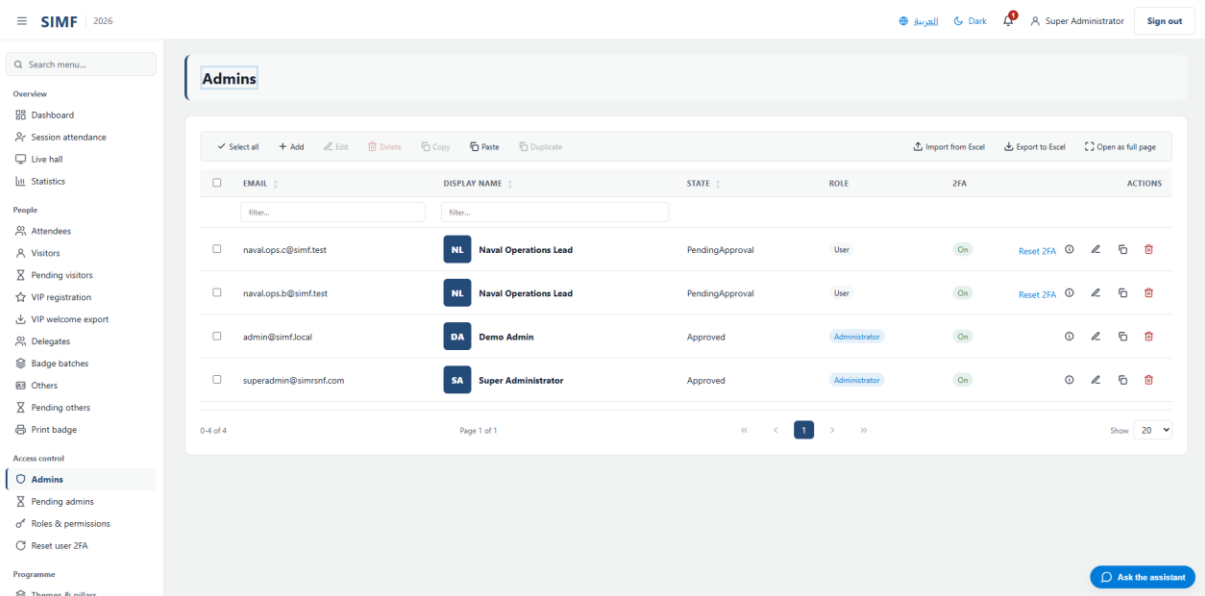


Figure 40 — Admins — /admin/admins

Pending admins (/admin/admins/pending)

Property	Value
Address	/admin/admins/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingStaff.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/PendingStaff.razor.cs
Page permission	Admins.View
Menu permission	Admins.View

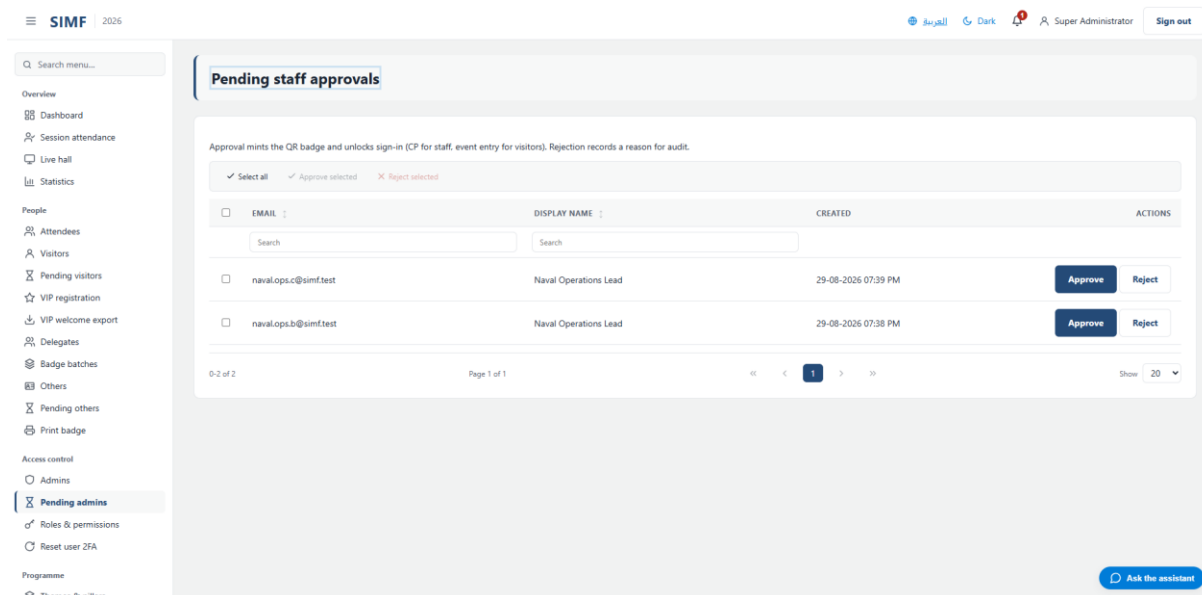


Figure 41 — Pending admins — /admin/admins/pending

Roles & permissions (/admin/roles)

Property	Value
Address	/admin/roles
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolesList.razor.cs
Page permission	Roles.View
Menu permission	Roles.View

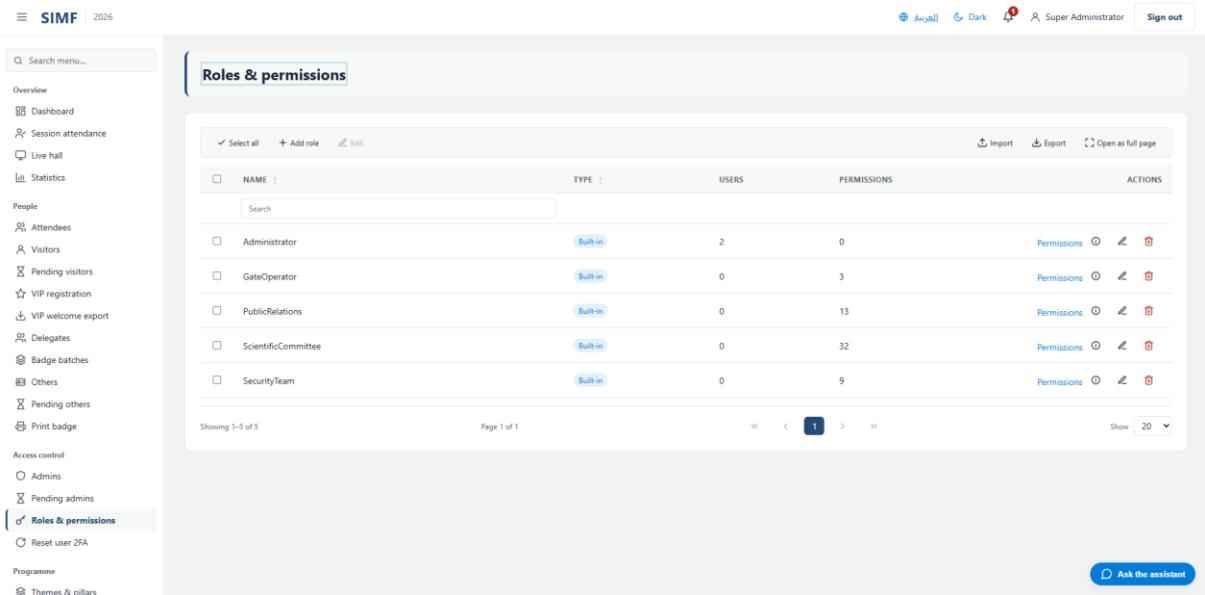


Figure 42 — Roles & permissions — /admin/roles

Reset user 2FA (/admin/reset-2fa)

Property	Value
Address	/admin/reset-2fa
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ResetTwoFactor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ResetTwoFactor.razor.cs
Page permission	Admins.ResetTwoFactor
Menu permission	Admins.ResetTwoFactor

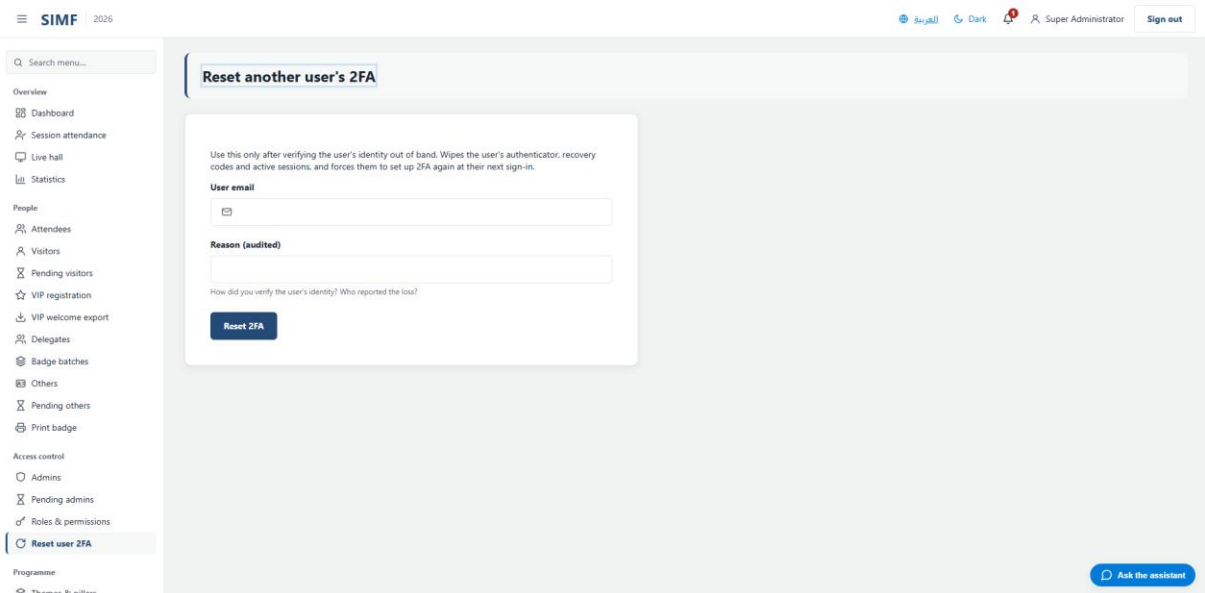


Figure 43 — Reset user 2FA — /admin/reset-2fa

Programme

Themes & pillars (/admin/themes)

Property	Value
Address	/admin/themes
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ThemesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ThemesList.razor.cs
Page permission	Themes.View
Menu permission	Themes.View

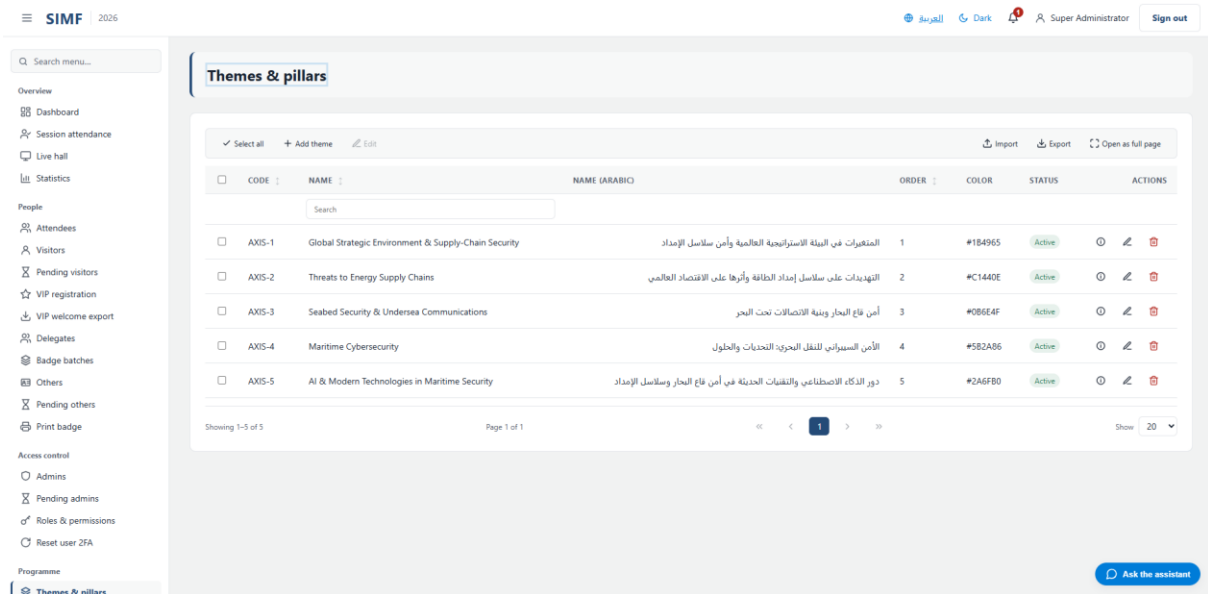


Figure 44 — Themes & pillars — /admin/themes

Sessions (/admin/sessions)

Property	Value
Address	/admin/sessions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionsList.razor.cs
Page permission	Sessions.View
Menu permission	Sessions.View

Figure 46 — Session categories — /admin/session-categories

Programme days (/admin/programme-days)

Property	Value
Address	/admin/programme-days
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeDaysList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeDaysList.razor.cs
Page permission	ProgrammeDays.View
Menu permission	ProgrammeDays.View

The screenshot displays the 'Programme days' management interface. On the left is a sidebar menu with categories: Overview (Dashboard, Session attendance, Live hall, Statistics), People (Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge), Access control (Admins, Pending admins, Roles & permissions, Reset user 2FA), and Programme (Themes & pillars). The main content area is titled 'Programme days' and features a table with columns: DATE, TITLE (EN), TITLE (AR), ORDER, LOGO, ACTIVE, and ACTIONS. The table contains three rows for dates 23-11-2026, 24-11-2026, and 25-11-2026, each with a title in English and Arabic, an order number, and an 'Active' status. Below the table is a pagination bar showing 'Page 1 of 1' and a 'Show 20' dropdown. A 'Ask the assistant' button is at the bottom right.

DATE	TITLE (EN)	TITLE (AR)	ORDER	LOGO	ACTIVE	ACTIONS
23-11-2026	Day One	اليوم الأول	0	None	Active	[Icons]
24-11-2026	Day Two	اليوم الثاني	1	None	Active	[Icons]
25-11-2026	Day Three	اليوم الثالث	2	None	Active	[Icons]

Figure 47 — Programme days — /admin/programme-days

Run of Show (/admin/programme/timeline)

Property	Value
Address	/admin/programme/timeline
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeTimeline.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProgrammeTimeline.razor.cs
Page permission	ProgrammeTimeline.View
Menu permission	ProgrammeTimeline.View

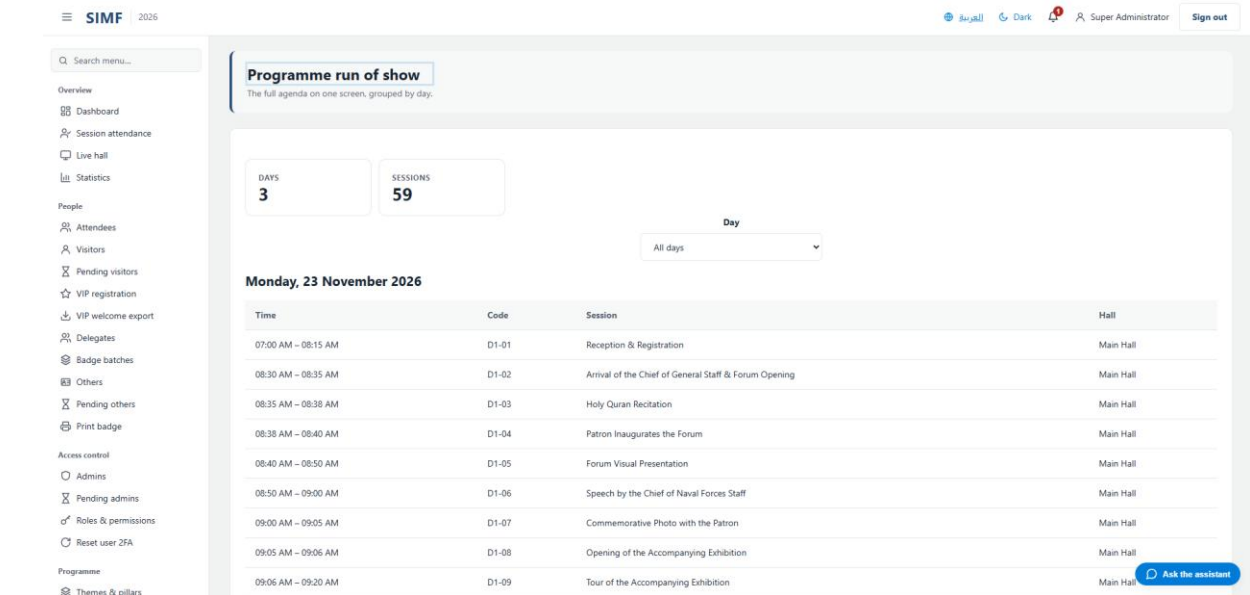


Figure 48 — Run of Show — /admin/programme/timeline

Halls & seating (/admin/halls)

Property	Value
Address	/admin/halls
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallsList.razor.cs
Page permission	Halls.View
Menu permission	Halls.View

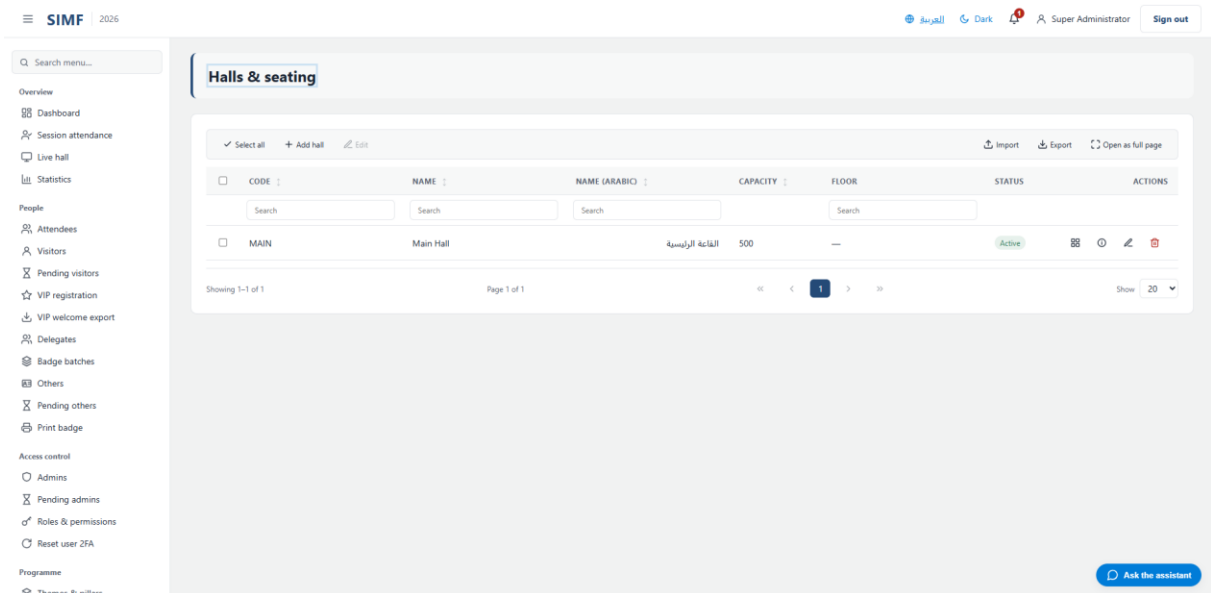


Figure 49 — Halls & seating — /admin/halls

Hall seat layouts (/admin/halls/seat-layouts)

Property	Value
Address	/admin/halls/seat-layouts
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallSeatLayoutEditor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallSeatLayoutEditor.razor.cs
Page permission	SeatLayouts.View
Menu permission	SeatLayouts.View

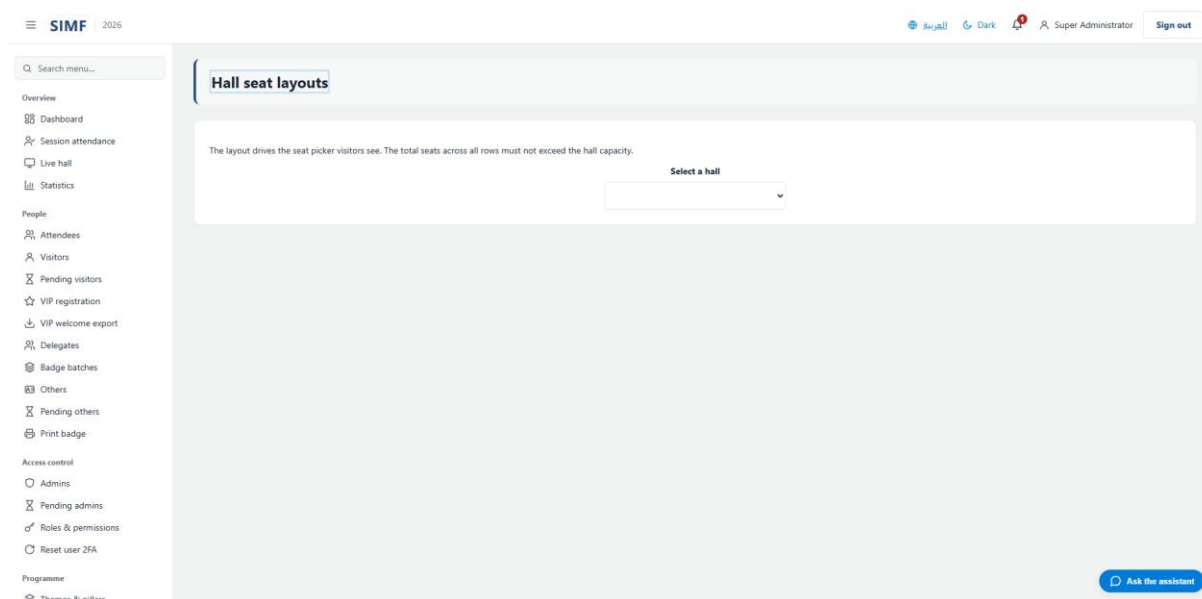


Figure 50 — Hall seat layouts — /admin/halls/seat-layouts

Session seat plans (/admin/sessions/seat-plans)

Property	Value
Address	/admin/sessions/seat-plans
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSeatPlan.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSeatPlan.razor.cs
Page permission	SeatPlans.View
Menu permission	SeatPlans.View

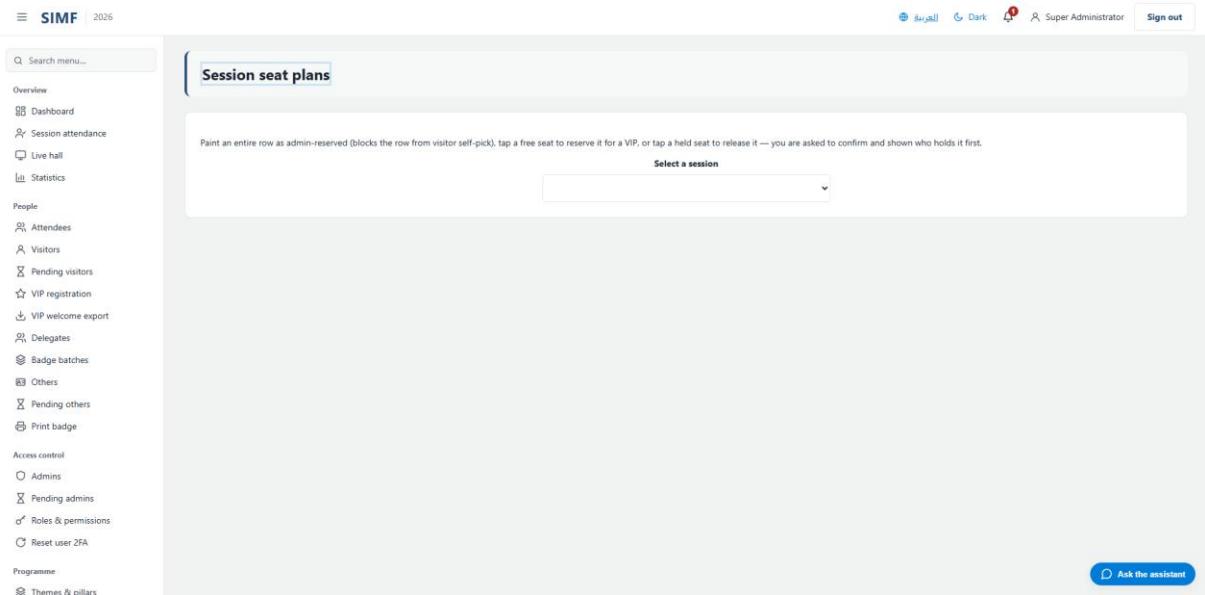


Figure 51 — Session seat plans — /admin/sessions/seat-plans

Speaker meeting requests (/admin/speaker-meeting-requests)

Property	Value
Address	/admin/speaker-meeting-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerMeetingRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerMeetingRequestsList.razor.cs
Page permission	SpeakerMeetingRequests.View
Menu permission	SpeakerMeetingRequests.View

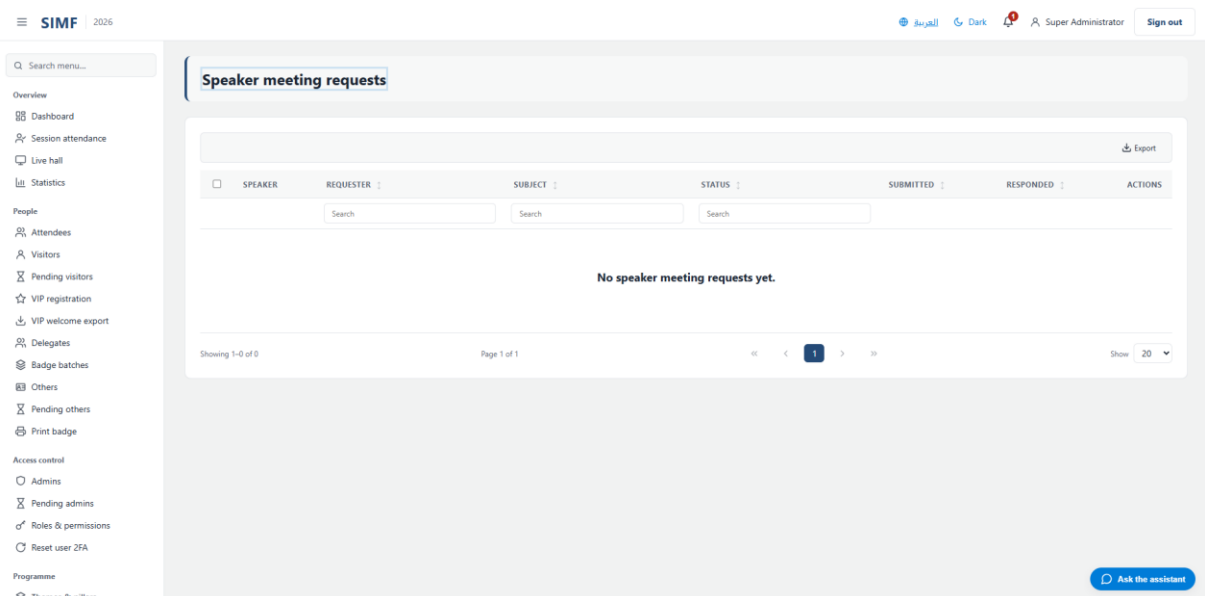


Figure 52 — Speaker meeting requests — /admin/speaker-meeting-requests

Speaker availability (/admin/speaker-availability)

Property	Value
Address	/admin/speaker-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerAvailabilityPage.razor.cs
Page permission	SpeakerMeetingRequests.Manage
Menu permission	SpeakerMeetingRequests.Manage

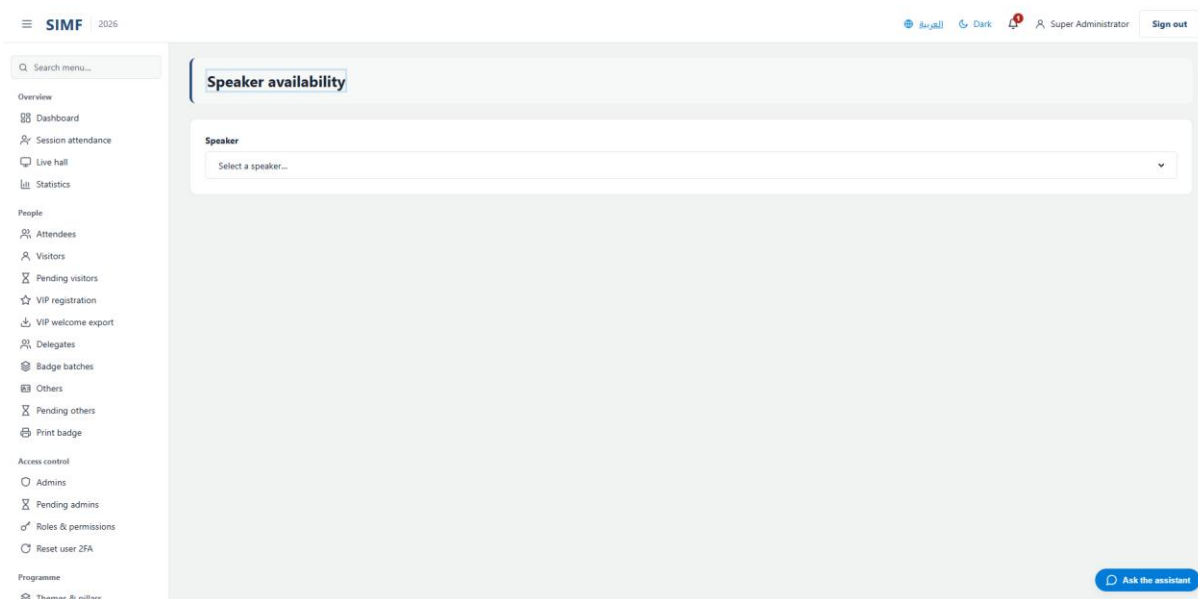


Figure 53 — Speaker availability — /admin/speaker-availability

Hall availability (/admin/hall-availability)

Property	Value
Address	/admin/hall-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallAvailabilityPage.razor.cs
Page permission	HallAvailability.Manage
Menu permission	HallAvailability.Manage

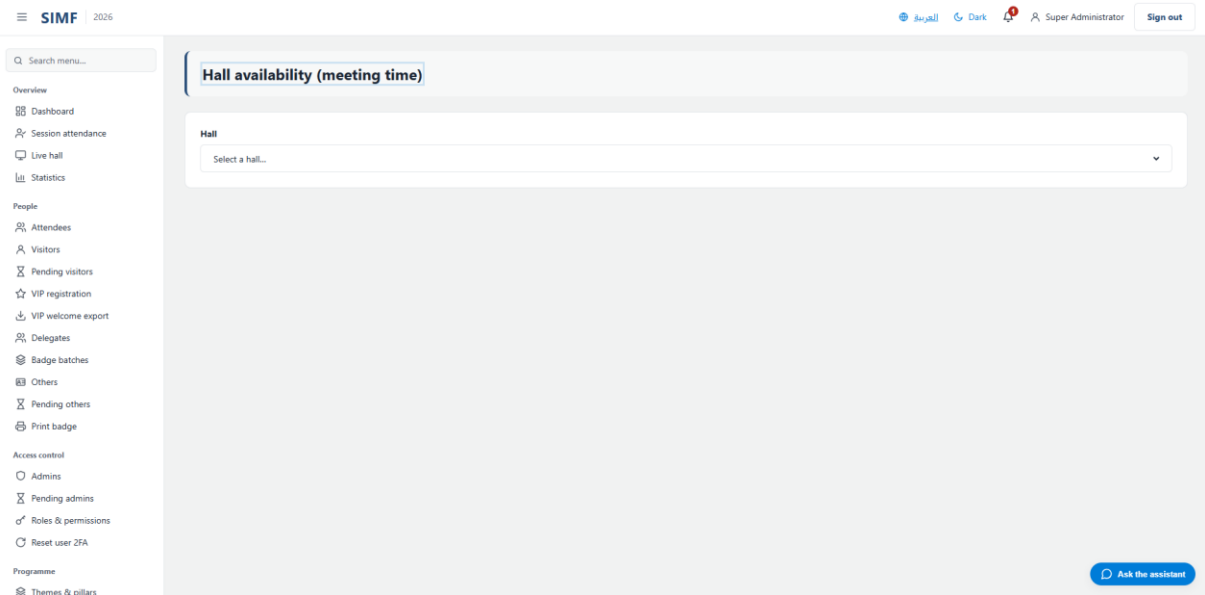


Figure 54 — Hall availability — /admin/hall-availability

Delegation meetings (/admin/delegation-meetings)

Property	Value
Address	/admin/delegation-meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationMeetingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationMeetingsList.razor.cs
Page permission	DelegationMeetings.View
Menu permission	DelegationMeetings.View

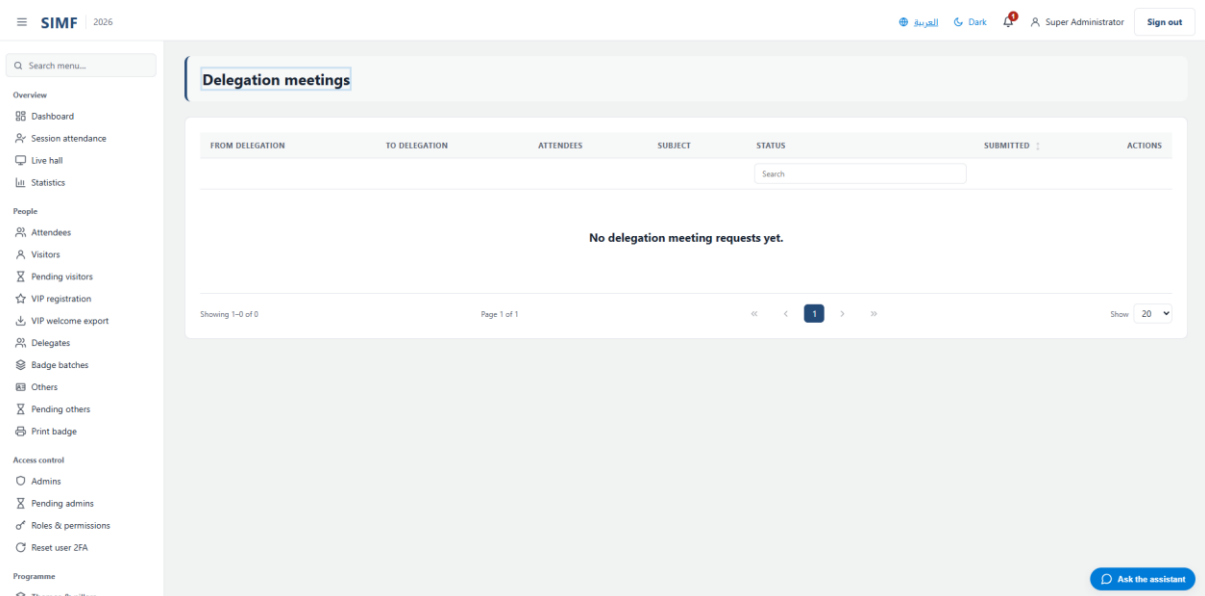


Figure 55 — Delegation meetings — /admin/delegation-meetings

Delegation availability (/admin/delegation-availability)

Property	Value
Address	/admin/delegation-availability
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationAvailabilityPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DelegationAvailabilityPage.razor.cs
Page permission	DelegationMeetings.Manage
Menu permission	DelegationMeetings.Manage

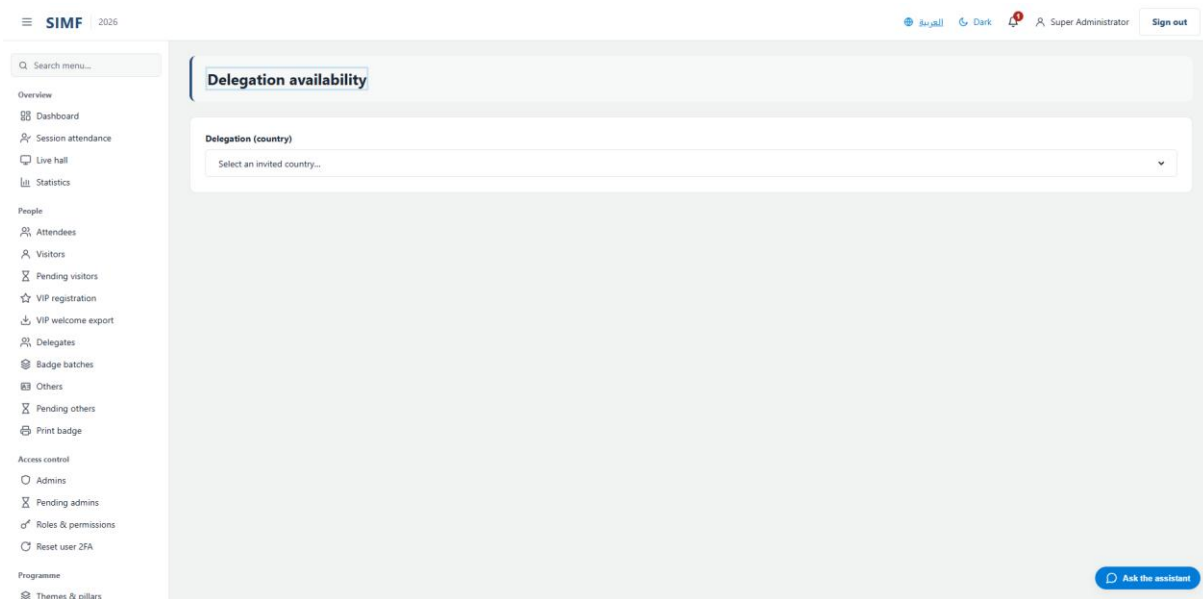


Figure 56 — Delegation availability — /admin/delegation-availability

Document requests (/admin/document-requests)

Property	Value
Address	/admin/document-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DocumentRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/DocumentRequestsList.razor.cs
Page permission	ParticipationDocumentRequests.View
Menu permission	ParticipationDocumentRequests.View

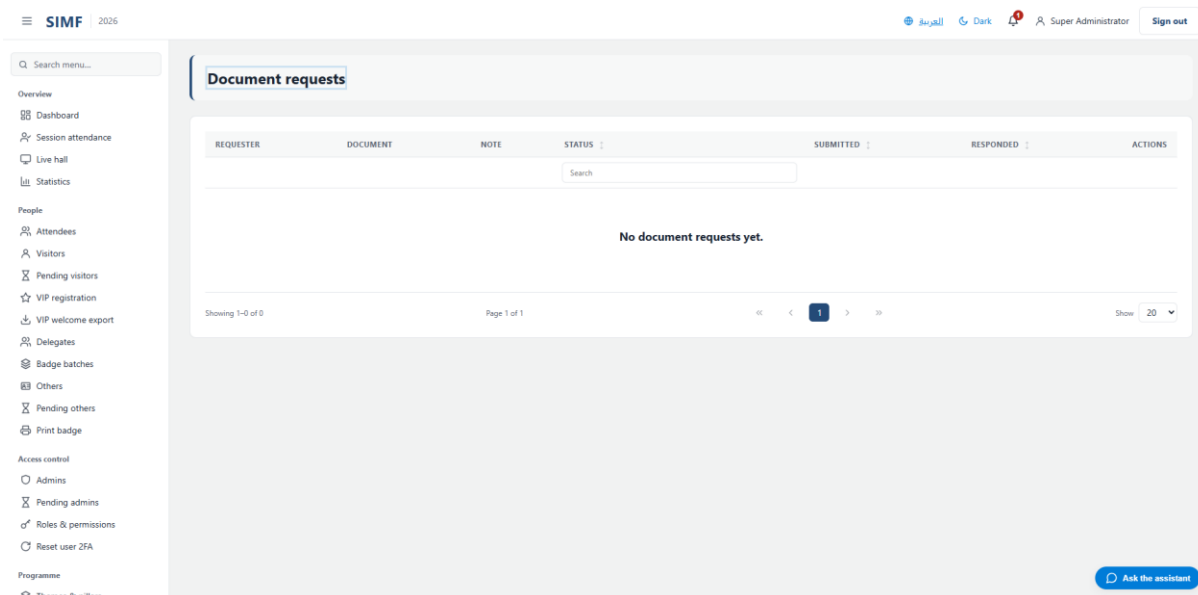


Figure 57 — Document requests — /admin/document-requests

Badge requests (/admin/badge-requests)

Property	Value
Address	/admin/badge-requests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeRequestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BadgeRequestsList.razor.cs
Page permission	BadgeUpdateRequests.View
Menu permission	BadgeUpdateRequests.View

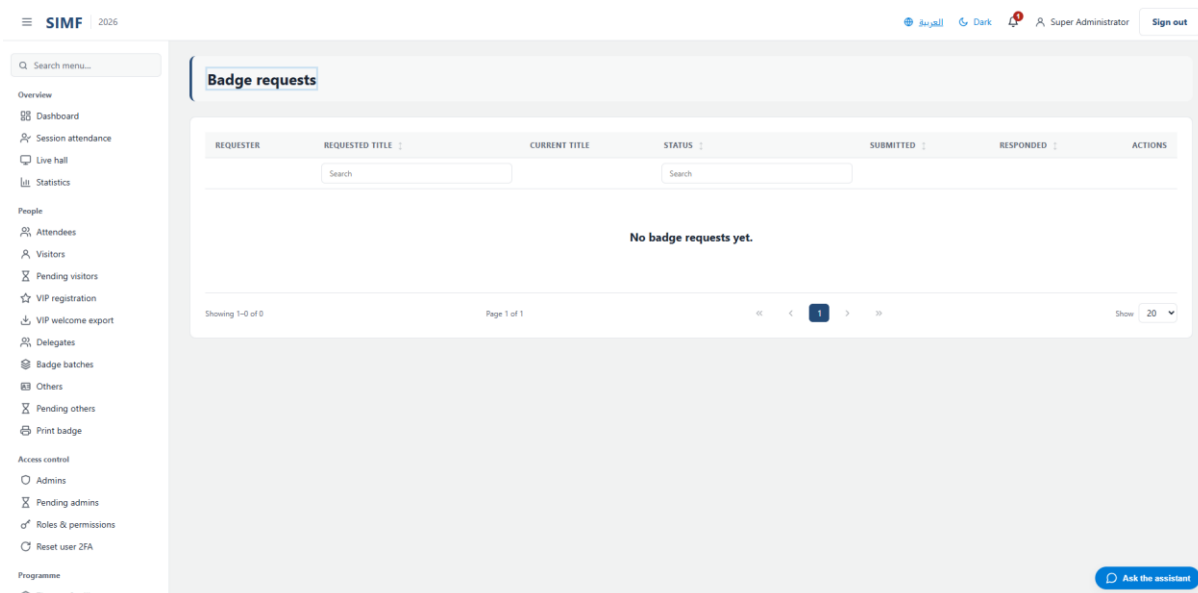


Figure 58 — Badge requests — /admin/badge-requests

Speakers (/admin/speakers)

Property	Value
Address	/admin/speakers
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakersList.razor.cs
Page permission	Speakers.View
Menu permission	Speakers.View

The screenshot shows the SIMF application's 'Speakers' management page. The sidebar on the left contains various navigation links. The main area features a table with the following data:

SPEAKER	COUNTRY	CODE	ORDER	STATUS	ACTIONS
Rear Adm. Prof. Tomasz Zubrzycki Commander, Polish Naval Academy	PL Poland	SIMF4-SPK-01	10	Active	[Icons]
Capt. (Retd) Dr. Gurpreet S. Khurana Maritime security researcher & analyst	IN India	SIMF4-SPK-02	20	Active	[Icons]
Dr. Christina Schori Liang Head of Terrorism & PVE, GCSP	CH Switzerland	SIMF4-SPK-03	30	Active	[Icons]
Dr. Alessio Patalano Professor of War & Strategy, KCL	GB United Kingdom	SIMF4-SPK-04	40	Active	[Icons]
Dr. Sugio Takahashi Head, Defense & Security Studies, NIDS	JP Japan	SIMF4-SPK-05	50	Active	[Icons]
Prof. Sanjay Chaturvedi Professor, South Asian University	IN India	SIMF4-SPK-06	60	Active	[Icons]
Dr. Omairah Omar Bameag Deputy Governor for Enablement, Transport Authority	SA Saudi Arabia	SIMF4-SPK-07	70	Active	[Icons]
Dr. Sadie Creese Professor of Cybersecurity, Univ. of Oxford	GB United Kingdom	SIMF4-SPK-08	80	Active	[Icons]
Dr. Kashif Naseer د. کاشف ناصر	PK Pakistan	SIMF4-SPK-09	90	Active	[Icons]

Figure 59 — Speakers — /admin/speakers

Speaker presentations (/admin/speaker-presentations)

Property	Value
Address	/admin/speaker-presentations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerPresentationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SpeakerPresentationsList.razor.cs
Page permission	Speakers.View
Menu permission	Speakers.View

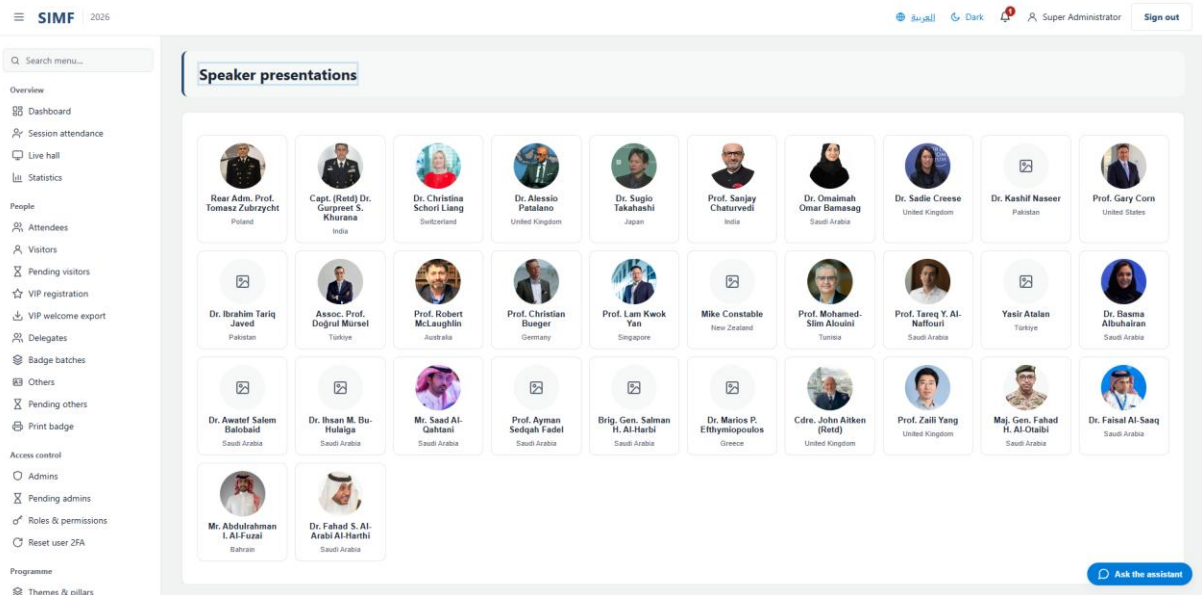


Figure 60 — Speaker presentations — /admin/speaker-presentations

Bookings (/admin/bookings)

Property	Value
Address	/admin/bookings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BookingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BookingsList.razor.cs
Page permission	Bookings.View
Menu permission	Bookings.View

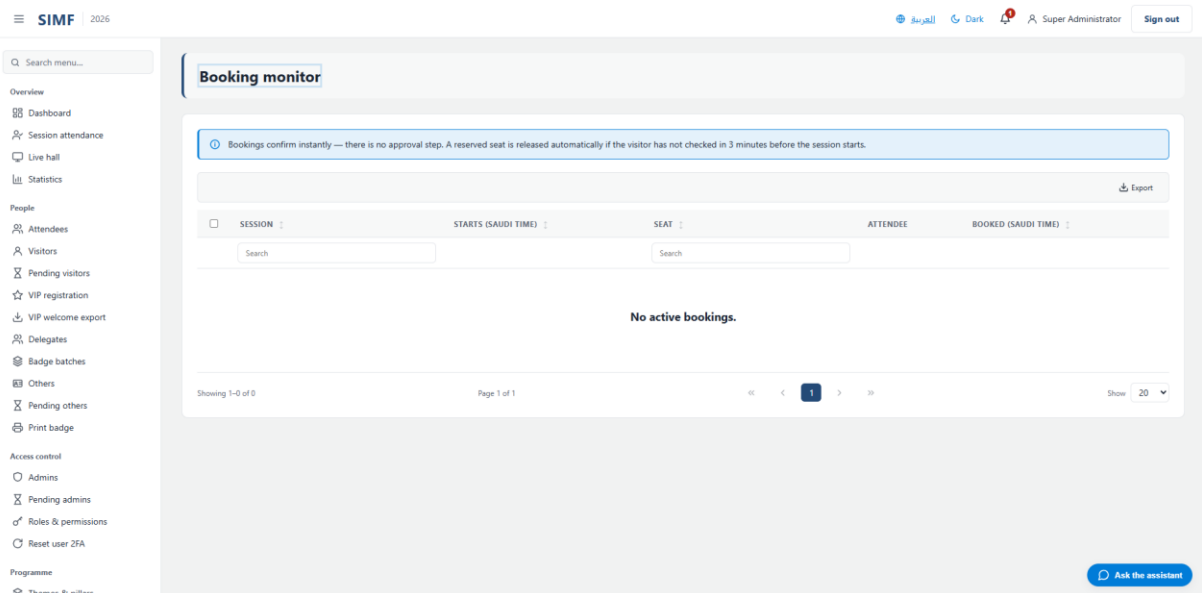


Figure 61 — Bookings — /admin/bookings

Meeting Tables (/admin/meeting-tables)

Property	Value
Address	/admin/meeting-tables
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MeetingTablesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MeetingTablesList.razor.cs
Page permission	MeetingTables.View
Menu permission	MeetingTables.View

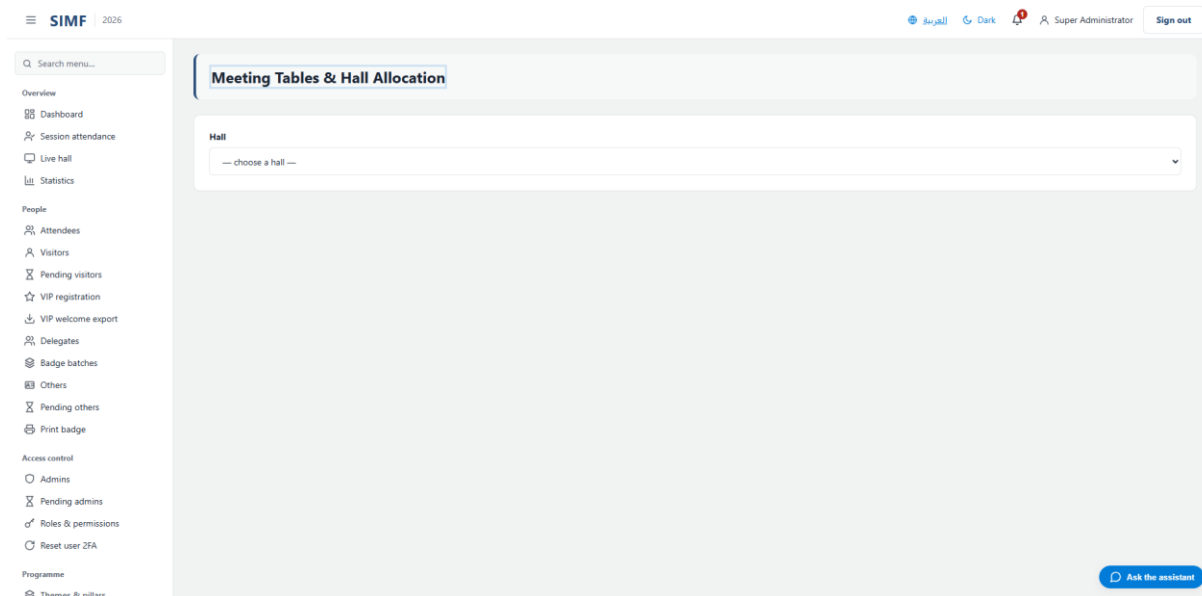


Figure 62 — Meeting Tables — /admin/meeting-tables

Business Meetings (/admin/business-meetings)

Property	Value
Address	/admin/business-meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BusinessMeetingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BusinessMeetingsList.razor.cs
Page permission	BusinessMeetings.View
Menu permission	BusinessMeetings.View

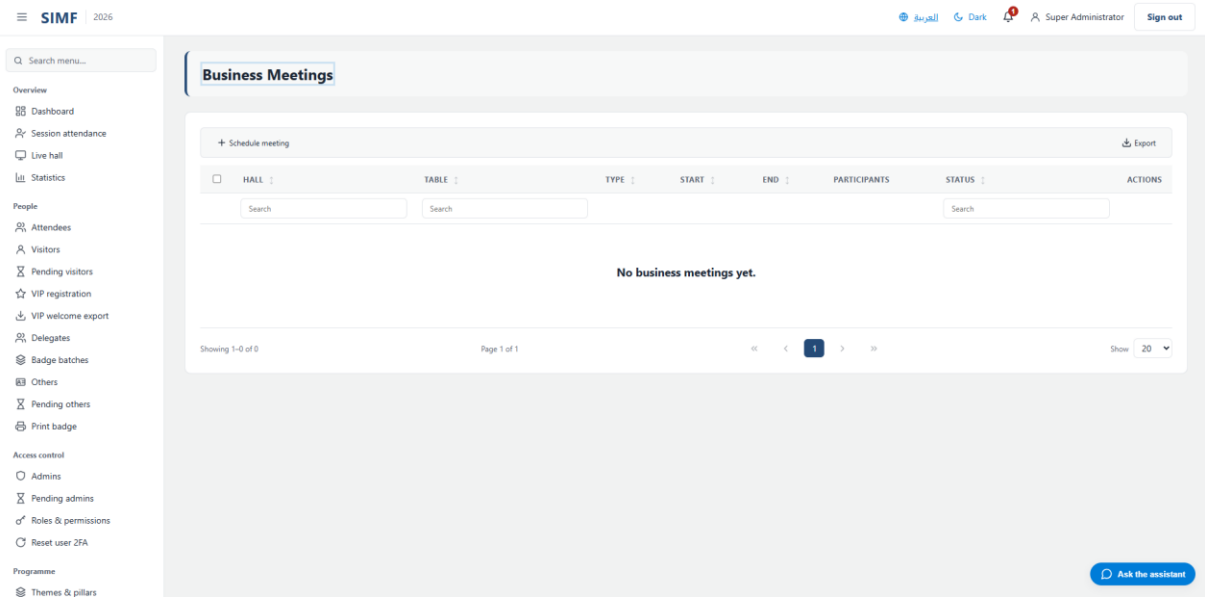


Figure 63 — Business Meetings — /admin/business-meetings

Scientific committee

Session moderators (/admin/session-moderators)

Property	Value
Address	/admin/session-moderators
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModeratorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModeratorsList.razor.cs
Page permission	SessionModerators.View
Menu permission	SessionModerators.View

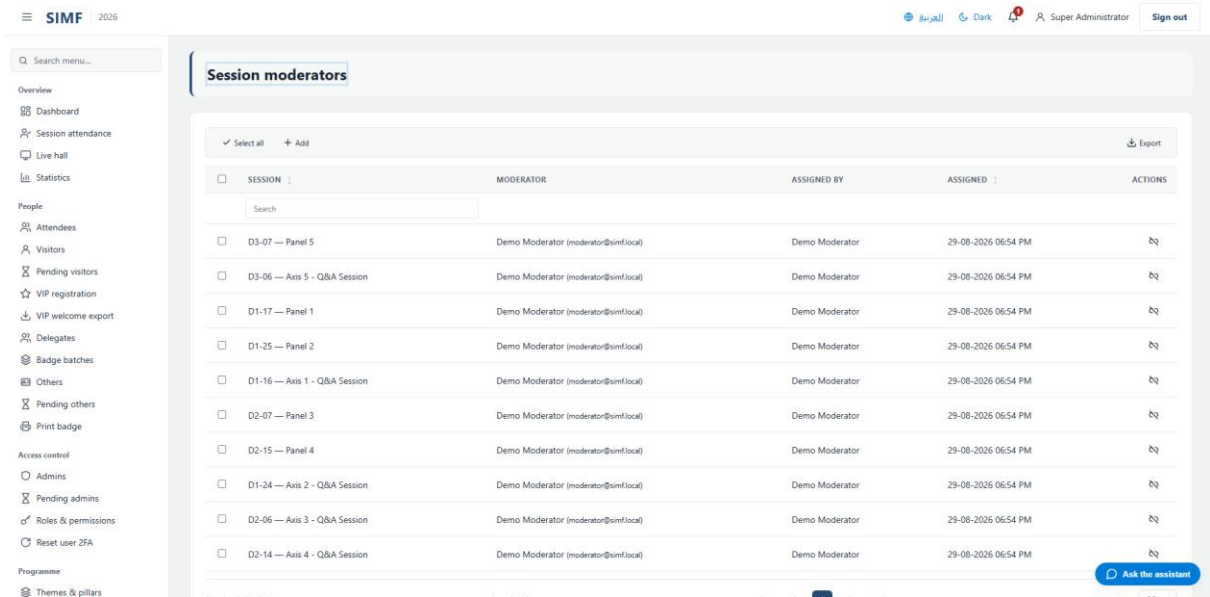


Figure 64 — Session moderators — /admin/session-moderators

Question queue (/admin/question-queue)

Property	Value
Address	/admin/question-queue
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/QuestionQueueList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/QuestionQueueList.razor.cs
Page permission	Questions.View
Menu permission	Questions.View

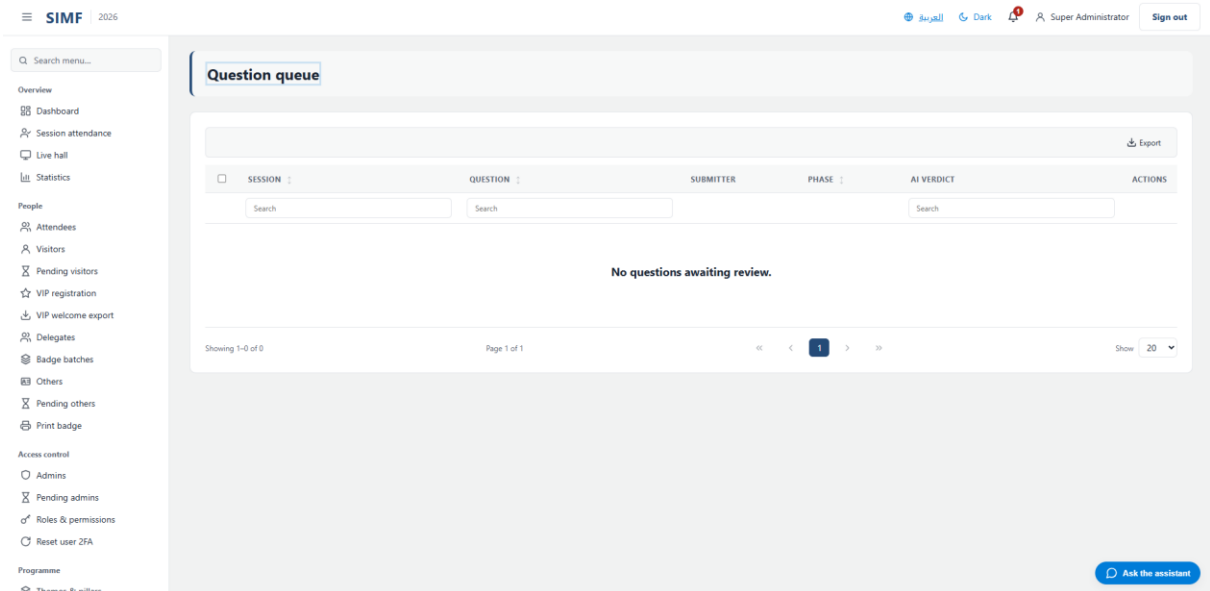


Figure 65 — Question queue — /admin/question-queue

Session summaries (/admin/session-summaries)

Property	Value
Address	/admin/session-summaries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSummariesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionSummariesList.razor.cs
Page permission	SessionSummaries.View
Menu permission	SessionSummaries.View

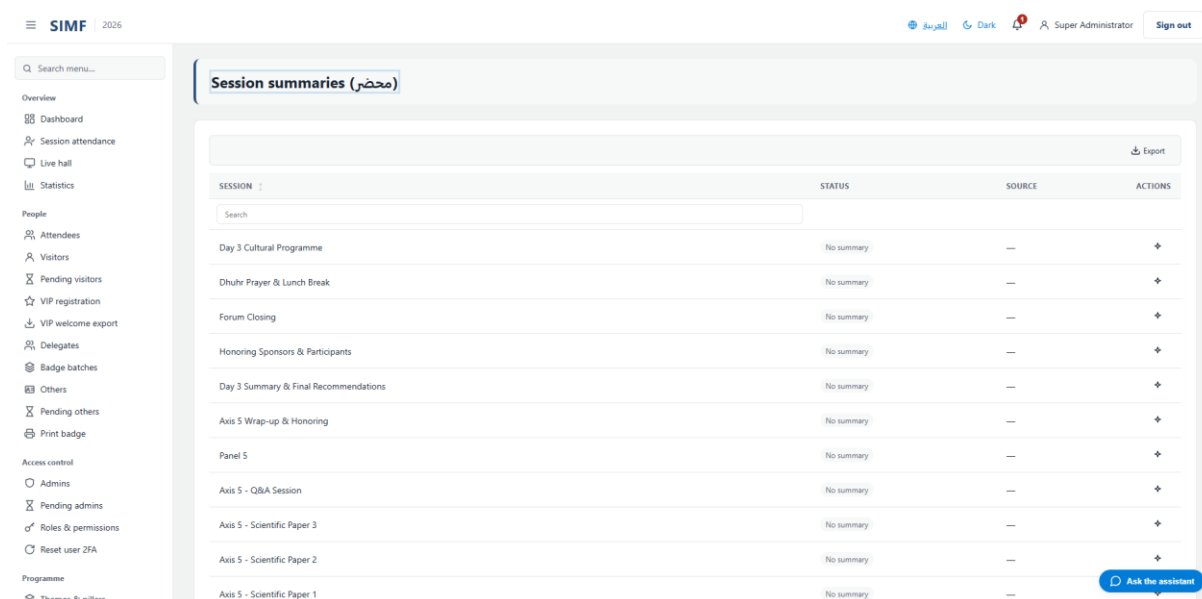


Figure 66 — Session summaries — /admin/session-summaries

Exhibition

Exhibitors (/admin/exhibitors)

Property	Value
Address	/admin/exhibitors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ExhibitorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ExhibitorsList.razor.cs
Page permission	Exhibitors.View
Menu permission	Exhibitors.View

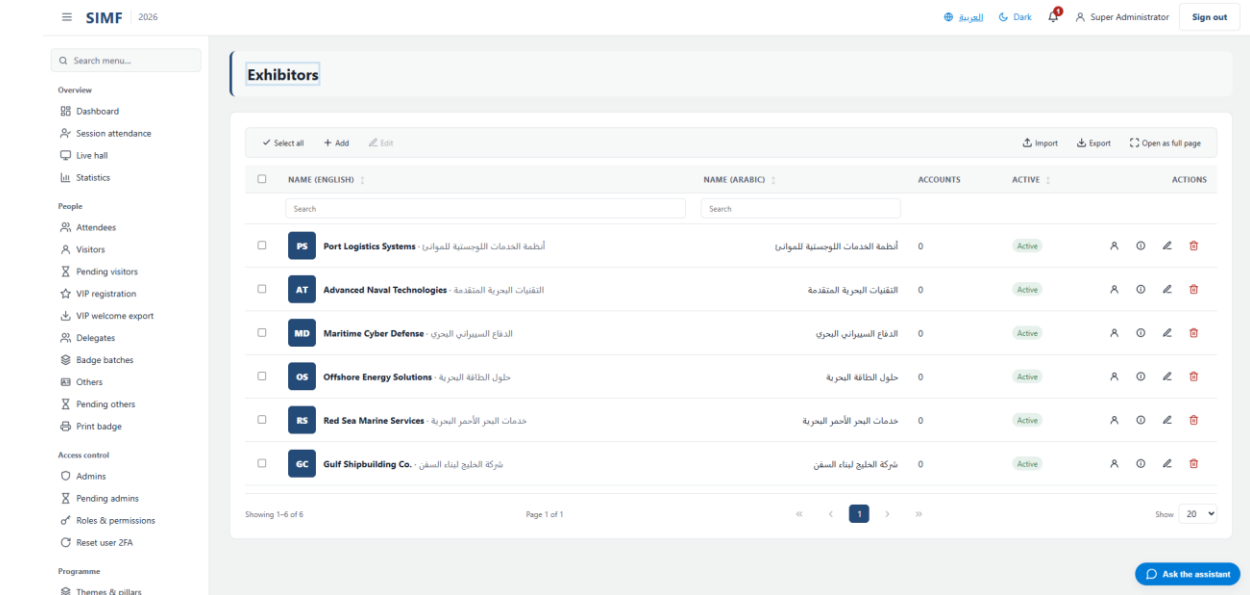


Figure 67 — Exhibitors — /admin/exhibitors

Booths (/admin/booths)

Property	Value
Address	/admin/booths
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BoothsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BoothsList.razor.cs
Page permission	Booths.View
Menu permission	Booths.View

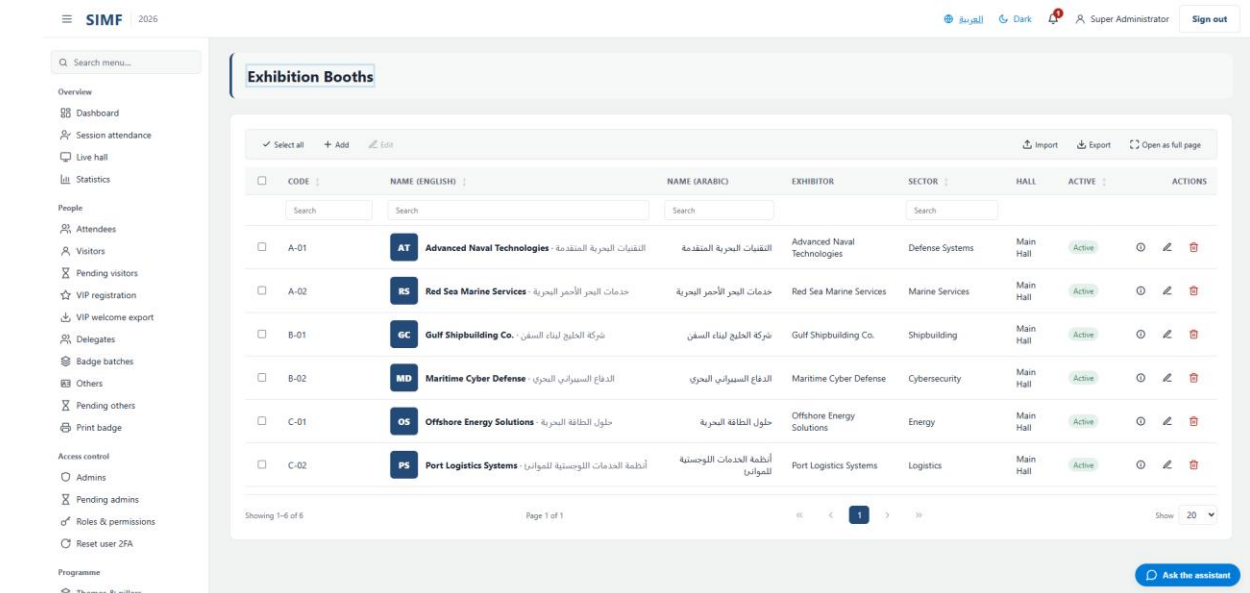


Figure 68 — Booths — /admin/booths

Sponsors (/admin/sponsors)

Property	Value
Address	/admin/sponsors
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SponsorsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SponsorsList.razor.cs
Page permission	Sponsors.View
Menu permission	Sponsors.View

The screenshot displays the SIMF Sponsors management interface. The main content area shows a table of sponsors with the following data:

NAME (ENGLISH)	TIER	LINK	DISPLAY ORDER	ACTIVE	ACTIONS
S1 Saudi Arabian Military Industries - الشركة السعودية للصناعات العسكرية	Platinum	—	10	Active	[Icons]
G1 General Authority for Military Industries - الهيئة العامة للصناعات العسكرية	Gold	—	10	Active	[Icons]
RF Royal Saudi Naval Forces - القوات البحرية الملكية السعودية	Gold	—	20	Active	[Icons]
GD General Authority for Defense Development - الهيئة العامة للتطوير الدفاعي	Gold	—	30	Active	[Icons]
G1 Gold Sponsor 1 - 1 راعي ذهبي	Silver	—	10	Active	[Icons]
G2 Gold Sponsor 2 - 2 راعي ذهبي	Silver	—	20	Active	[Icons]
G3 Gold Sponsor 3 - 3 راعي ذهبي	Silver	—	30	Active	[Icons]
G4 Gold Sponsor 4 - 4 راعي ذهبي	Silver	—	40	Active	[Icons]
G5 Gold Sponsor 5 - 5 راعي ذهبي	Silver	—	50	Active	[Icons]

Figure 69 — Sponsors — /admin/sponsors

Venue map (/admin/venue-map)

Property	Value
Address	/admin/venue-map
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VenueMapList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VenueMapList.razor.cs
Page permission	VenueMap.View
Menu permission	VenueMap.View

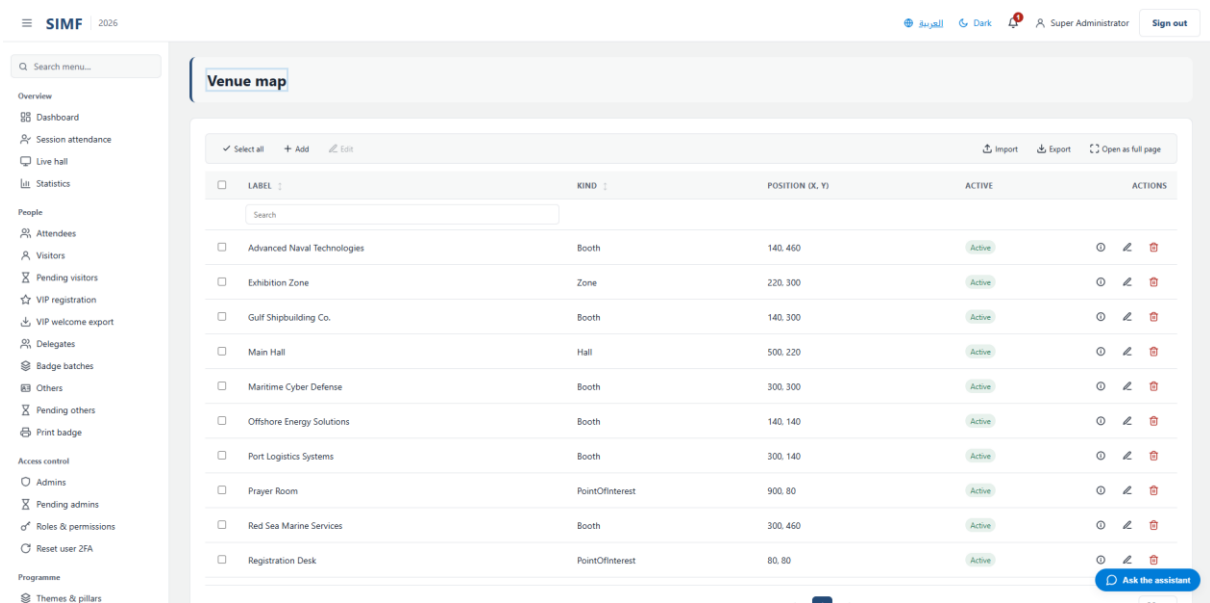


Figure 70 — Venue map — /admin/venue-map

Engagement

Live sessions (/m/live-sessions)

Property	Value
Address	/m/live-sessions
Implemented by	-
Code-behind	-
Page permission	-
Menu permission	Sessions.View
Placeholder	Yes — the module is not built yet

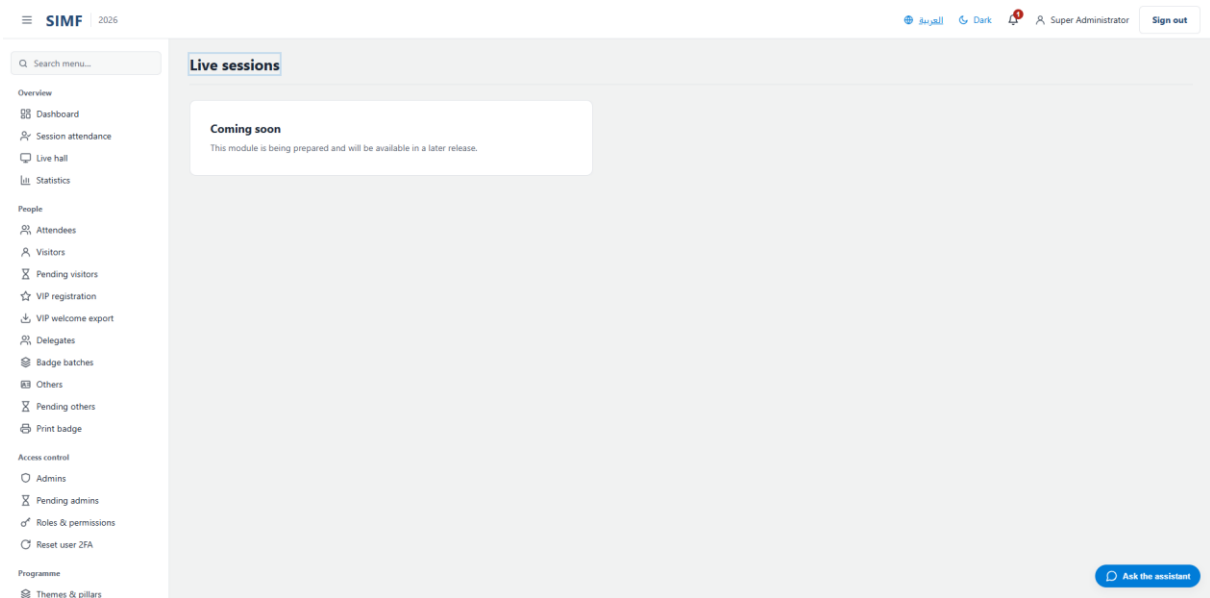


Figure 71 — Live sessions — /m/live-sessions

Ratings (/admin/ratings)

Property	Value
Address	/admin/ratings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingsList.razor.cs
Page permission	Ratings.View
Menu permission	Ratings.View

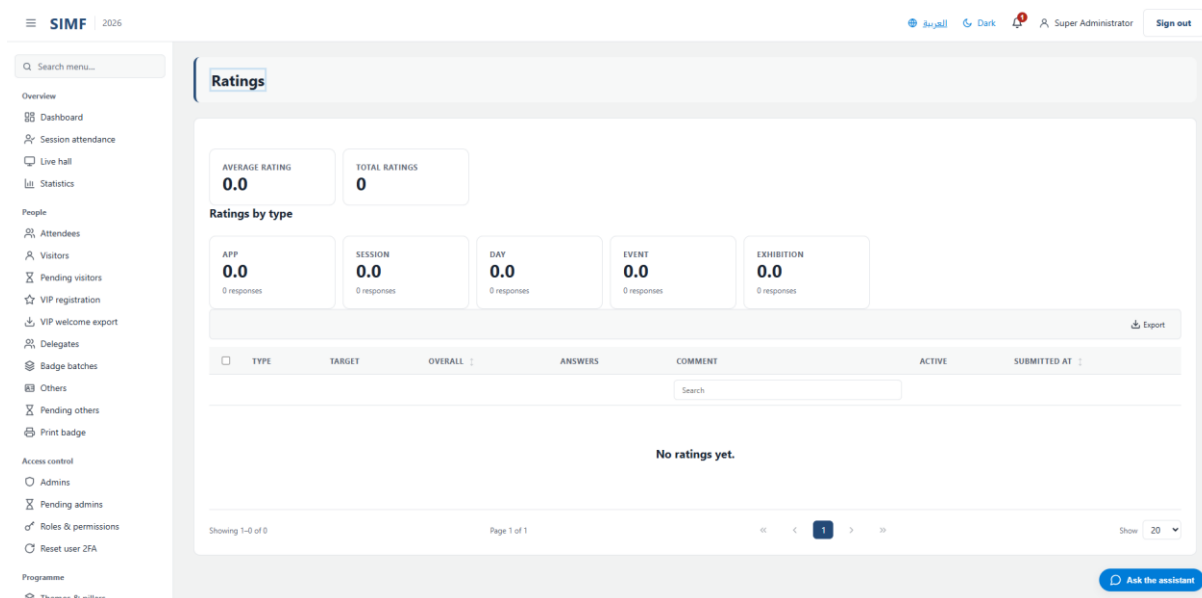


Figure 72 — Ratings — /admin/ratings

Rating configuration (/admin/rating-config)

Property	Value
Address	/admin/rating-config
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingConfig.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RatingConfig.razor.cs
Page permission	RatingConfig.View
Menu permission	RatingConfig.View

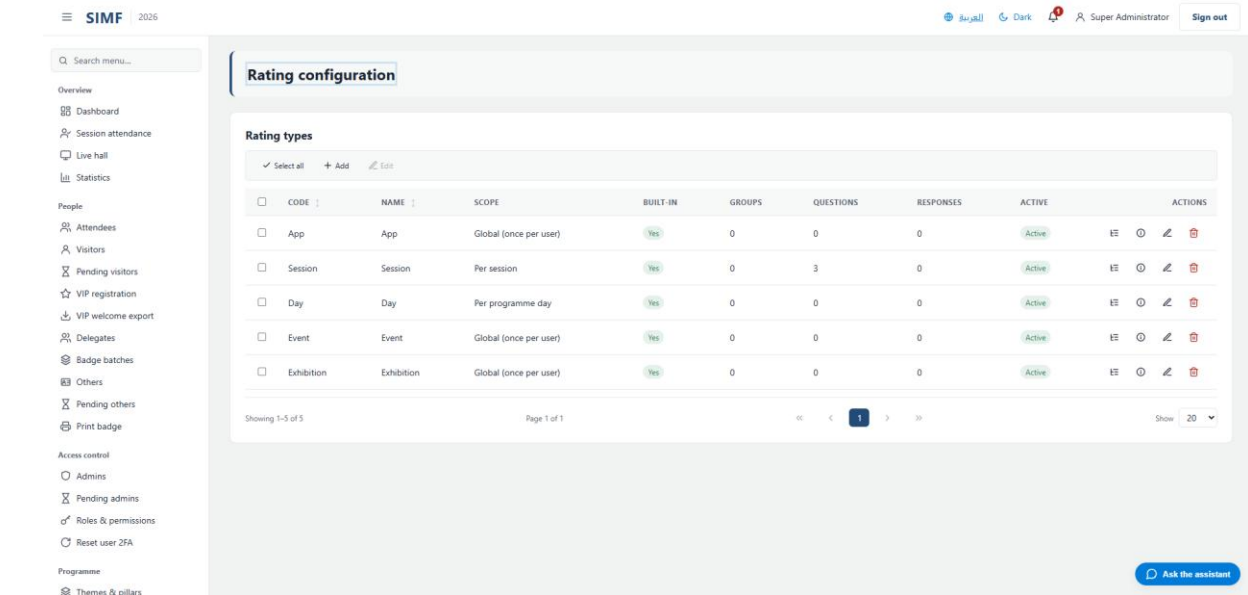


Figure 73 — Rating configuration — /admin/rating-config

Knowledge & AI

FAQ groups & entries (/admin/faq)

Property	Value
Address	/admin/faq
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/FaqManager.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/FaqManager.razor.cs
Page permission	Faq.View
Menu permission	Faq.View

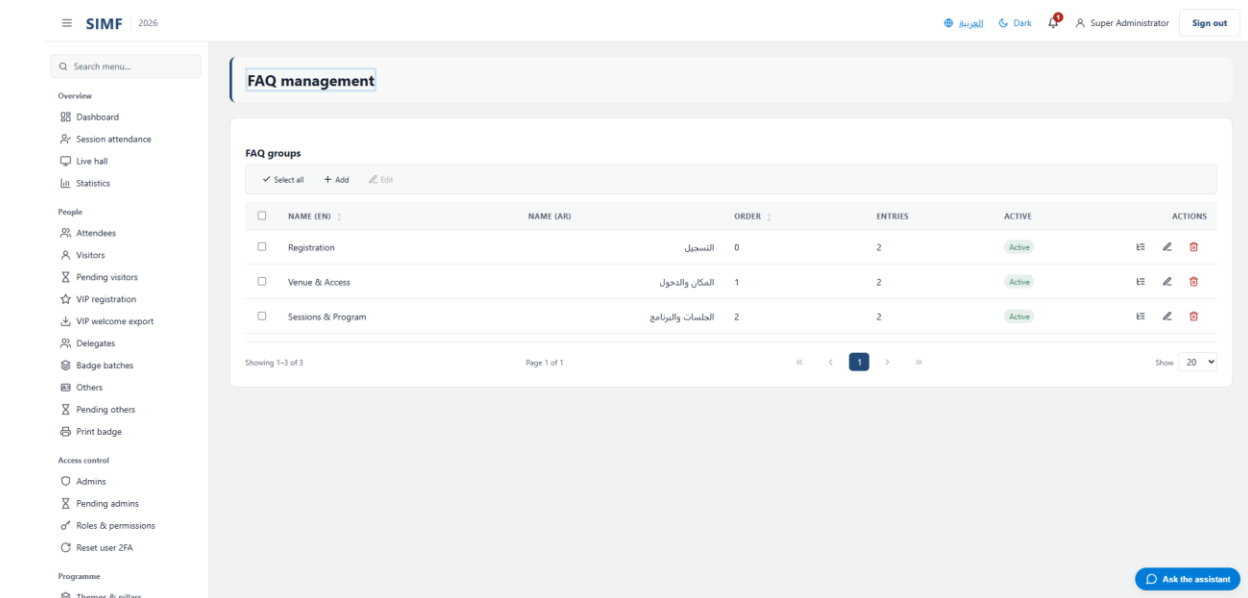


Figure 74 — FAQ groups & entries — /admin/faq

AI dashboard (/admin/ai)

Property	Value
Address	/admin/ai
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiDashboard.razor.cs
Page permission	AiDashboard.View
Menu permission	AiDashboard.View

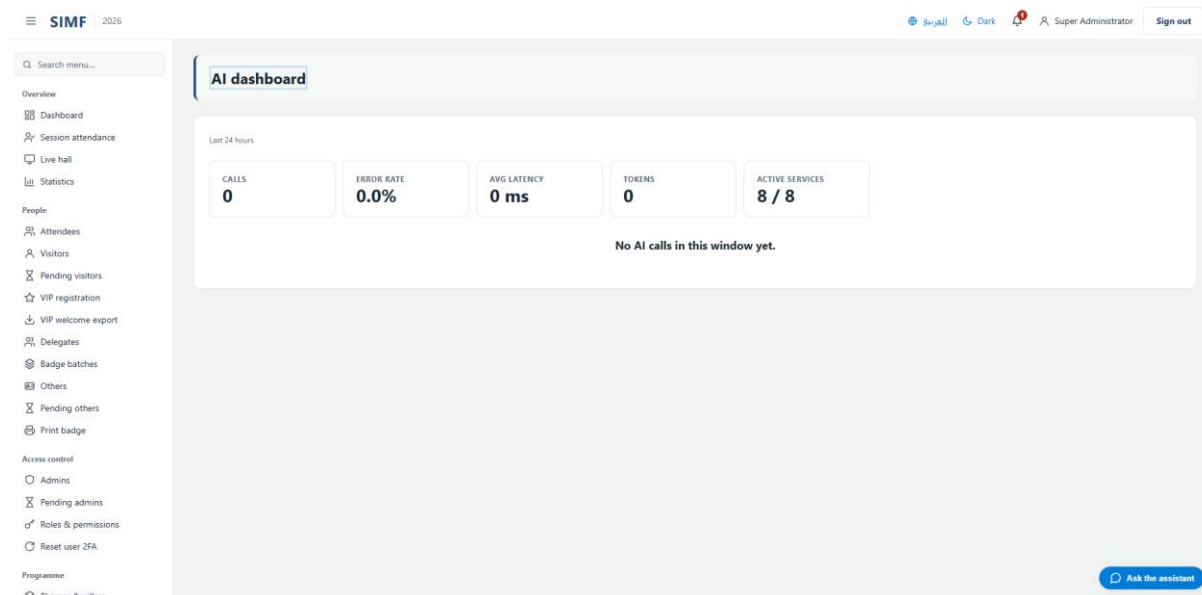


Figure 75 — AI dashboard — /admin/ai

AI services (/admin/ai/services)

Property	Value
Address	/admin/ai/services
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiServicesConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiServicesConsole.razor.cs
Page permission	AiPrompts.View
Menu permission	AiPrompts.View

Menu
2026

[الرئيسية](#)
[Dark](#)
[🔔](#)
[Super Administrator](#)
[Sign out](#)

Search menu...

Overview

- Dashboard
- Session attendance
- Live hall
- Statistics

People

- Attendees
- Visitors
- Pending visitors
- VIP registration
- VIP welcome export
- Delegates
- Badge batches
- Others
- Pending others
- Print badge

Access control

- Admins
- Pending admins
- Roles & permissions
- Reset user ZFA

Programme

AI services

SERVICE	ACTIVE PROMPT	PROVIDER	MODEL	HOSTING	PROMPTS	ACTIONS
Audience Question Safety Filter QuestionFilter	question-filter v1	Echo	echo	Offline	1	👁️ ✎
Event FAQ Assistant Faq	faq-answer v1	Echo	echo	Offline	1	👁️ ✎
Visitor Concierge Assistance	assistance v1	Echo	echo	Offline	1	👁️ ✎
Text Translator Translate	translate v1	Echo	echo	Offline	1	👁️ ✎
Live Speech Translator LiveTranslation	live-translation v1	Echo	echo	Offline	1	👁️ ✎
Live Sign-Language Gloss LiveSignLanguage	live-sign-language v1	Echo	echo	Offline	1	👁️ ✎
Session Minutes (الجلسة) Drafter SessionSummary	session-summary v1	Echo	echo	Offline	1	👁️ ✎
Control Panel Assistant CpAssistant	cp-assistant v1	Echo	echo	Offline	1	👁️ ✎

Showing 1-4 of 8
Page 1 of 1
« < 1 > »
Show 20 ▼

Figure 76 — AI services — /admin/ai/services

AI prompts (/admin/ai/prompts)

SIMF 2026

الموقع
Dark

 Super Administrator
Sign out

Overview

- Dashboard
- Session attendance
- Live hall
- Statistics

People

- Attendees
- Visitors
- Pending visitors
- VIP registration
- VIP welcome export
- Delegates
- Badge batches
- Others
- Pending others
- Print badge

Access control

- Admins
- Pending admins
- Roles & permissions
- Reset user ZFA

Programme

- Thematic Building

AI prompts

Select all
+ Add
Edit
Import
Export
Open as full page

☐	KEY	FEATURE	NAME	PROVIDER	MODEL	HOSTING	VERSION	ACTIVE	ACTIONS
	Search	Search	Search						
☐	question-filter	QuestionFilter	Audience Question Safety Filter	Echo	echo	Offline	v1	Active	
☐	faq-answer	Faq	Event FAQ Assistant	Echo	echo	Offline	v1	Active	
☐	assistance	Assistance	Visitor Concierge	Echo	echo	Offline	v1	Active	
☐	translate	Translate	Text Translator	Echo	echo	Offline	v1	Active	
☐	live-translation	LiveTranslation	Live Speech Translator	Echo	echo	Offline	v1	Active	
☐	live-sign-language	LiveSignLanguage	Live Sign-Language Gloss	Echo	echo	Offline	v1	Active	
☐	session-summary	SessionSummary	Session Minutes (موجز) Drafter	Echo	echo	Offline	v1	Active	
☐	cp-assistant	CpAssistant	Control Panel Assistant	Echo	echo	Offline	v1	Active	

Showing 1-8 of 8
Page 1 of 1
<
1
>
Show 20

Ask the assistant

Figure 77 — AI prompts — /admin/ai/prompts

AI invocations (/admin/ai/invocations)

Property	Value
Address	/admin/ai/invocations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiInvocationsLog.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AiInvocationsLog.razor.cs
Page permission	AiInvocations.View
Menu permission	AiInvocations.View

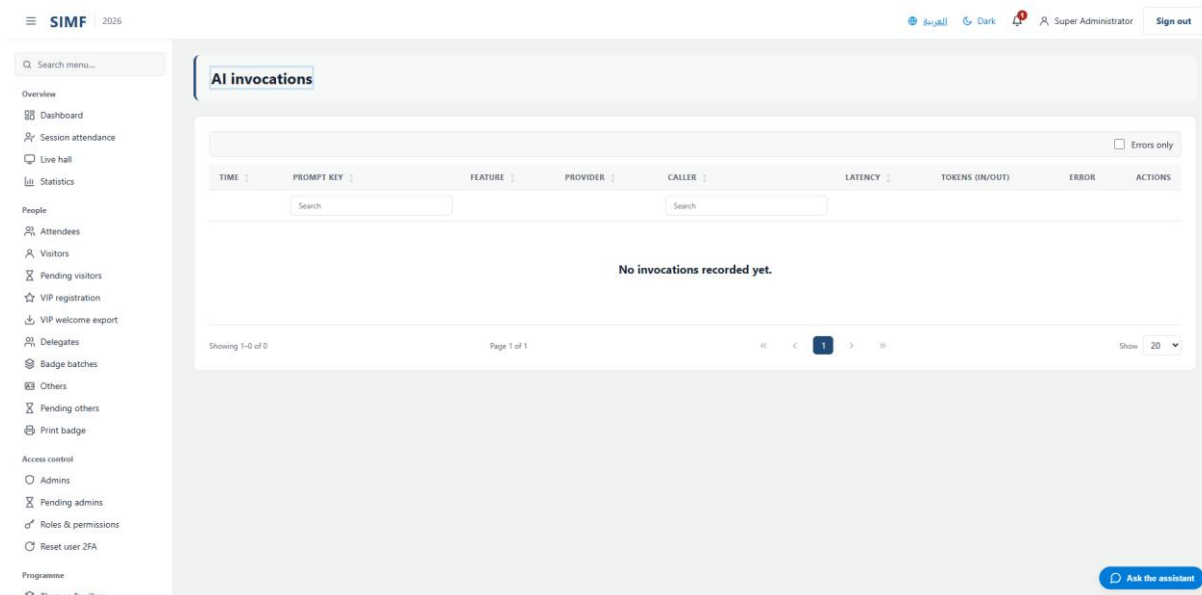


Figure 78 — AI invocations — /admin/ai/invocations

Content

Media library (/admin/media-library)

Property	Value
Address	/admin/media-library
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaLibraryList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaLibraryList.razor.cs
Page permission	MediaLibrary.View
Menu permission	MediaLibrary.View

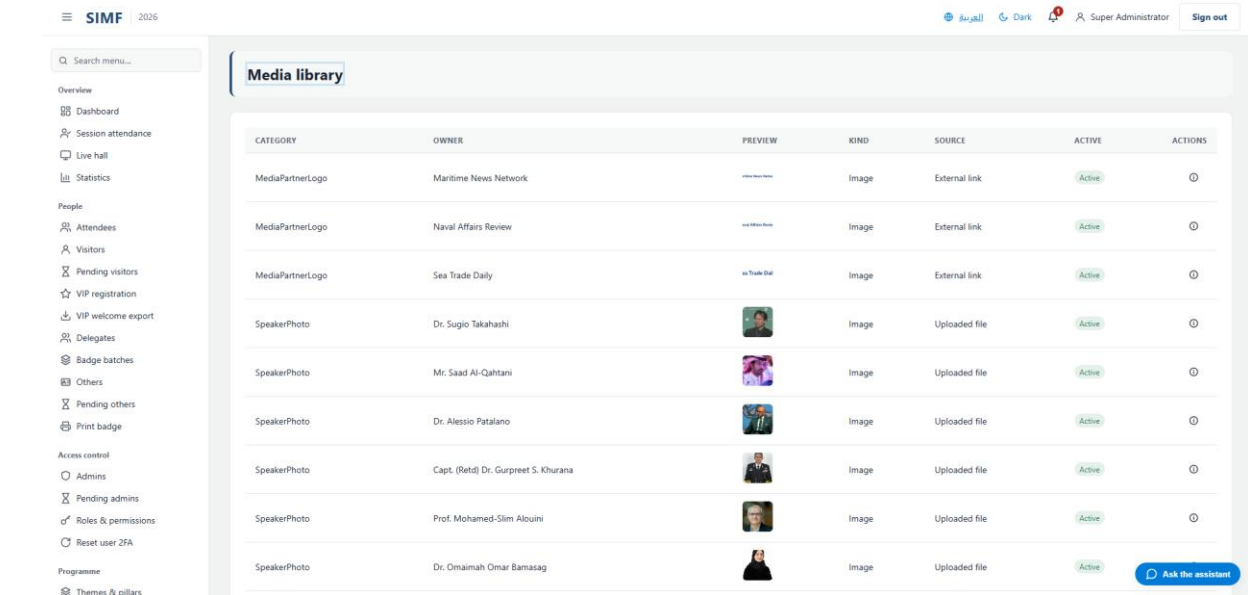


Figure 79 — Media library — /admin/media-library

Content blocks (/admin/content-blocks)

Property	Value
Address	/admin/content-blocks
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContentBlocksList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContentBlocksList.razor.cs
Page permission	ContentBlocks.View
Menu permission	ContentBlocks.View

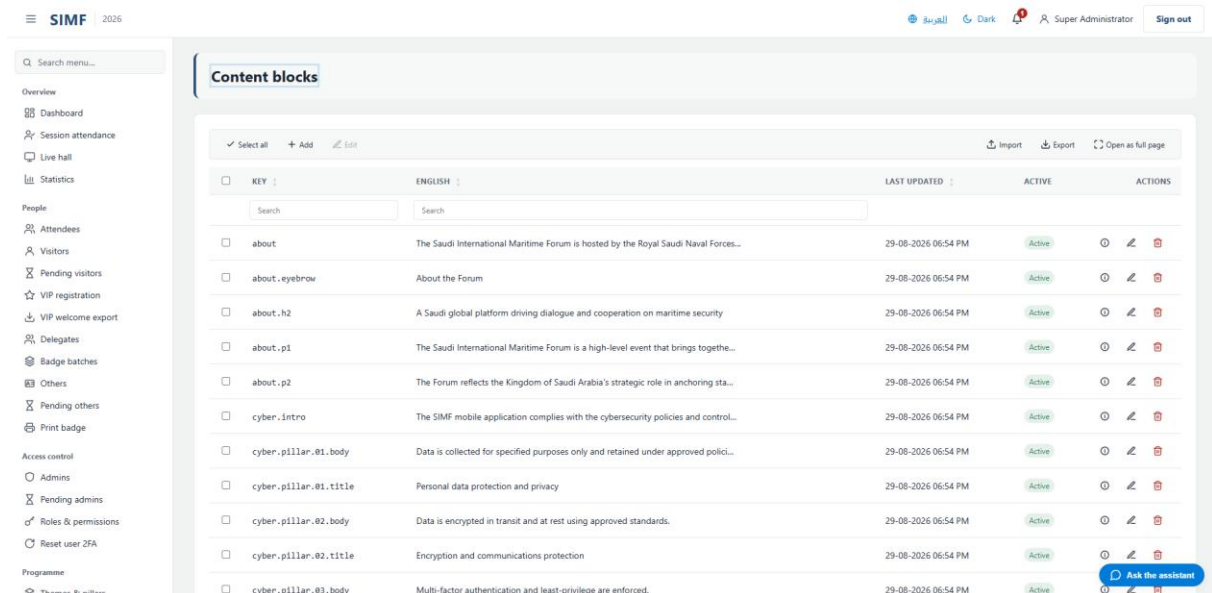


Figure 80 — Content blocks — /admin/content-blocks

Banners (/admin/banners)

Property	Value
Address	/admin/banners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BannersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/BannersList.razor.cs
Page permission	Banners.View
Menu permission	Banners.View

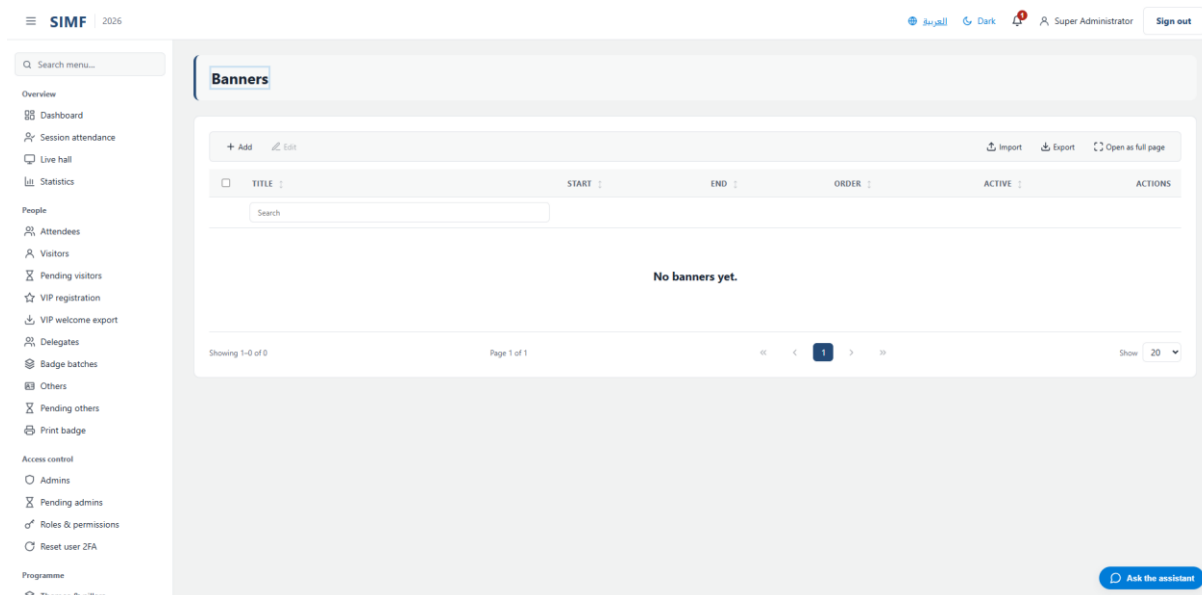


Figure 81 — Banners — /admin/banners

Media Center (/admin/media)

Property	Value
Address	/admin/media
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaList.razor.cs
Page permission	Media.View
Menu permission	Media.View

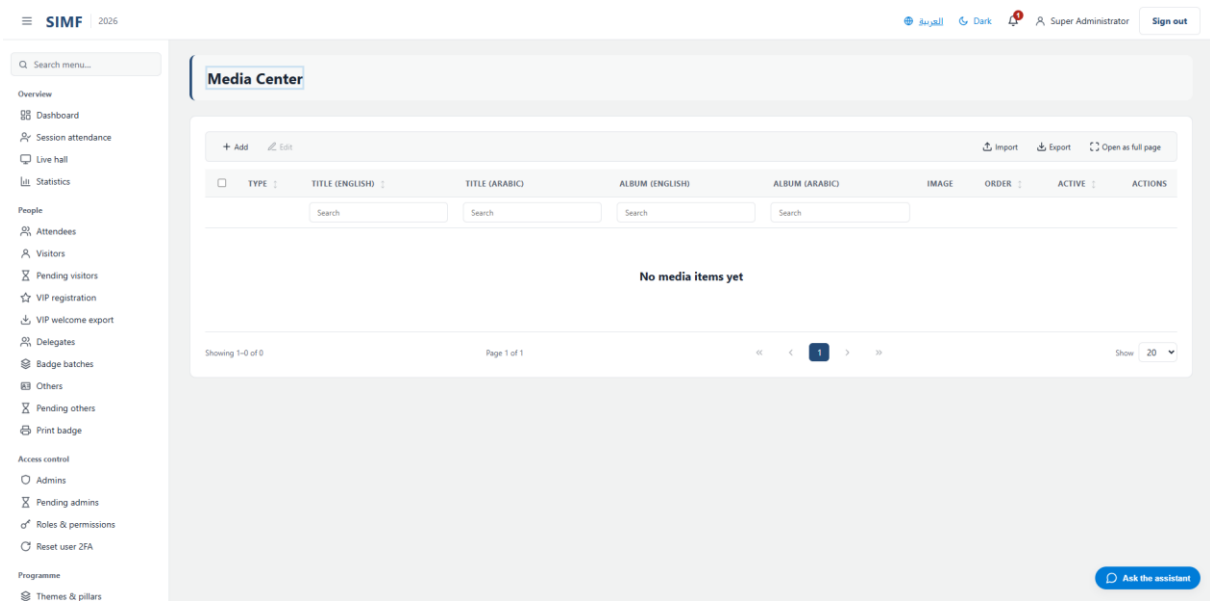


Figure 82 — Media Center — /admin/media

News (/admin/news)

Property	Value
Address	/admin/news
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/NewsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/NewsList.razor.cs
Page permission	News.View
Menu permission	News.View

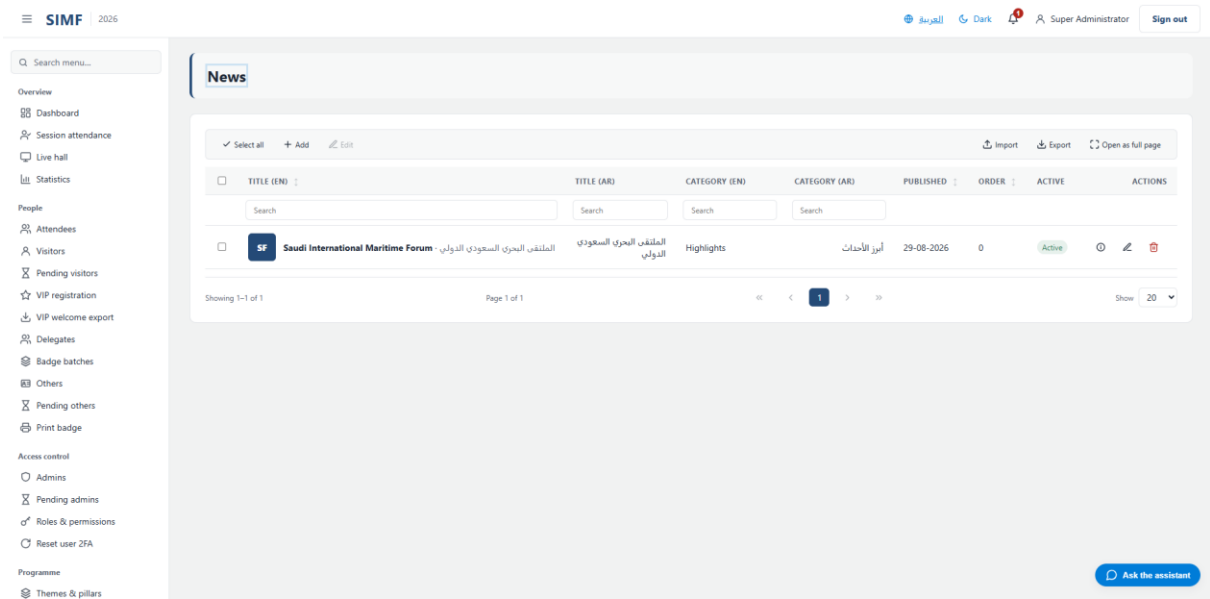


Figure 83 — News — /admin/news

Media Partners (/admin/media-partners)

Property	Value
Address	/admin/media-partners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaPartnersList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/MediaPartnersList.razor.cs
Page permission	MediaPartners.View
Menu permission	MediaPartners.View

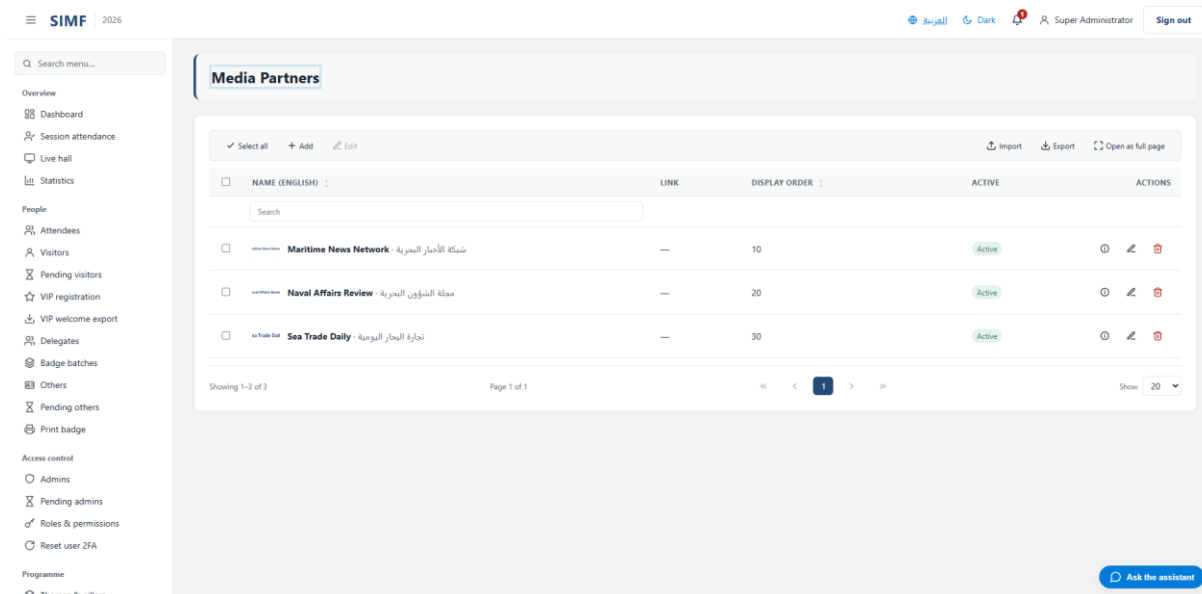


Figure 84 — Media Partners — /admin/media-partners

Previous editions (/admin/archive)

Property	Value
Address	/admin/archive
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ArchiveList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ArchiveList.razor.cs
Page permission	Archive.View
Menu permission	Archive.View

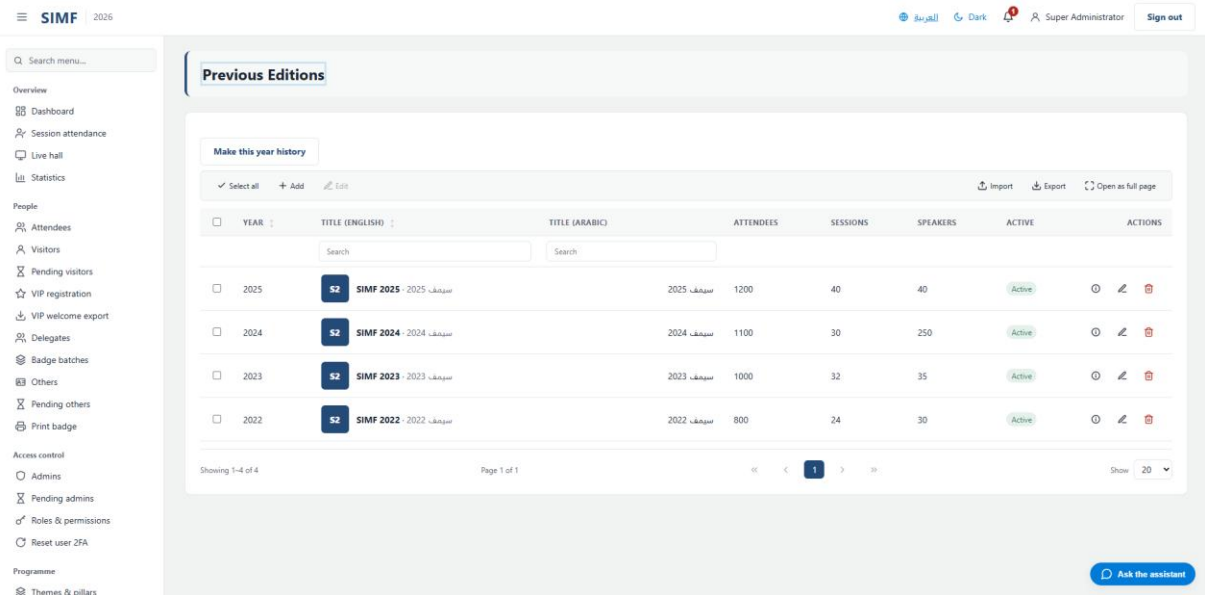


Figure 85 — Previous editions — /admin/archive

Public relations

Invitations (/admin/invitations)

Property	Value
Address	/admin/invitations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InvitationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InvitationsList.razor.cs
Page permission	Invitations.View
Menu permission	Invitations.View

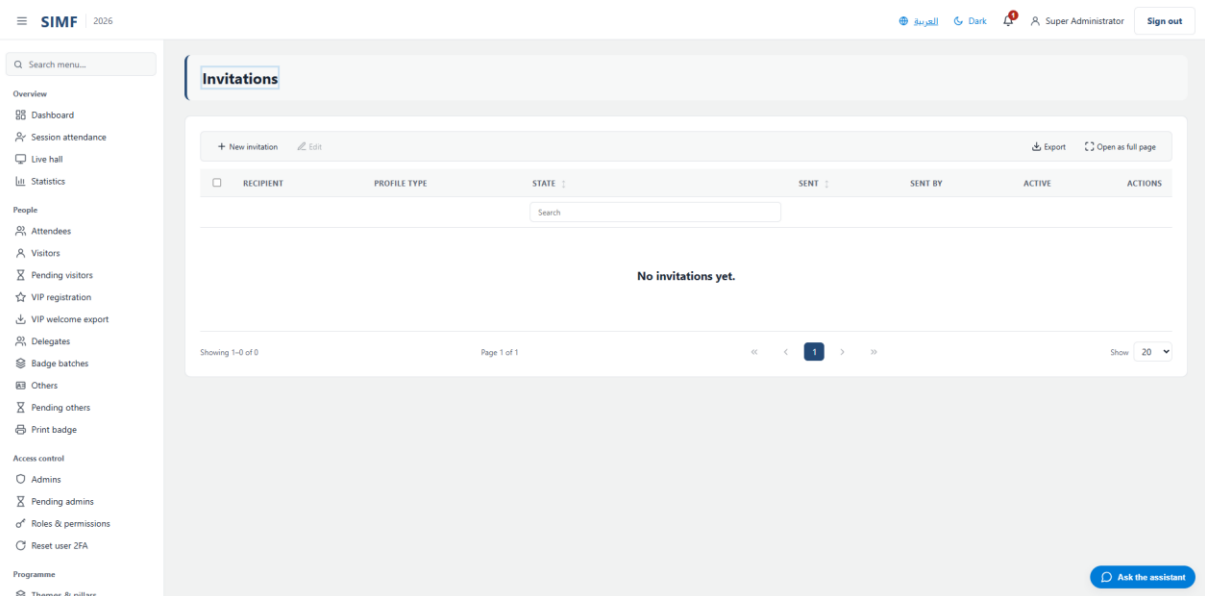


Figure 86 — Invitations — /admin/invitations

VIPs (/admin/vips)

Property	Value
Address	/admin/vips
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/VipsList.razor.cs
Page permission	Vips.View
Menu permission	Vips.View

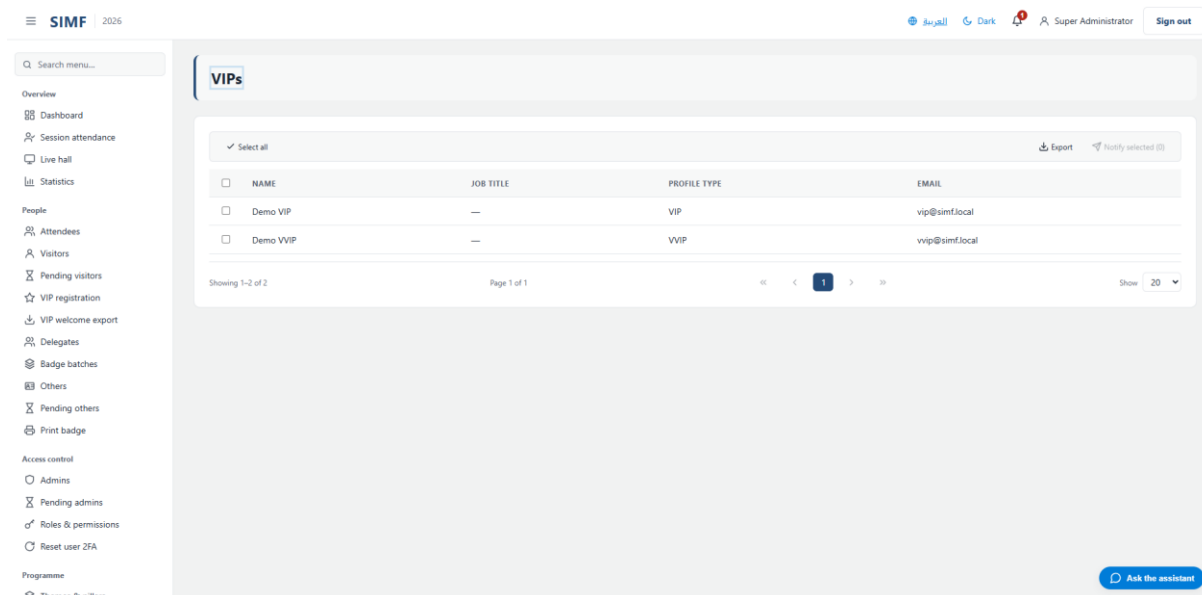


Figure 87 — VIPs — /admin/vips

Announcements (/admin/announcements)

Property	Value
Address	/admin/announcements
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Announcements.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Announcements.razor.cs
Page permission	Announcements.View
Menu permission	Announcements.View

Figure 88 — Announcements — /admin/announcements

Contact inquiries (/admin/contact-inquiries)

Property	Value
Address	/admin/contact-inquiries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContactInquiriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ContactInquiriesList.razor.cs
Page permission	ContactInquiries.View
Menu permission	ContactInquiries.View

Figure 89 — Contact inquiries — /admin/contact-inquiries

Gates & arrivals

Gates (/admin/gates)

Property	Value
Address	/admin/gates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesList.razor.cs
Page permission	Gates.Manage
Menu permission	Gates.Manage

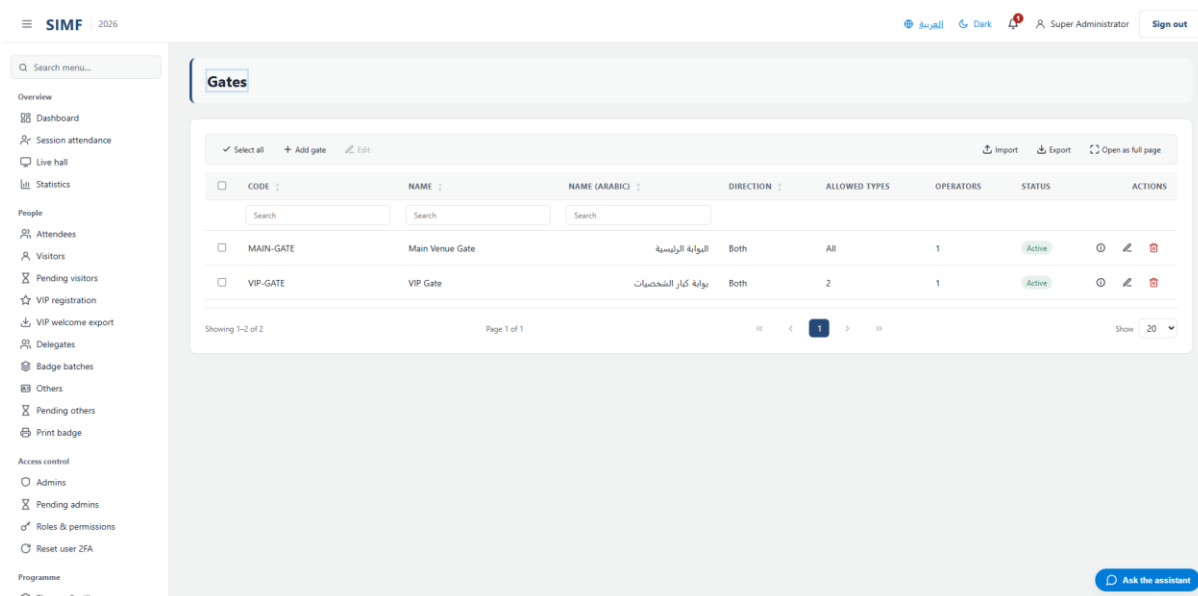


Figure 90 — Gates — /admin/gates

Gate operator (/admin/gates/operator)

Property	Value
Address	/admin/gates/operator
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GateOperatorConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GateOperatorConsole.razor.cs
Page permission	Gates.Operate
Menu permission	Gates.Operate

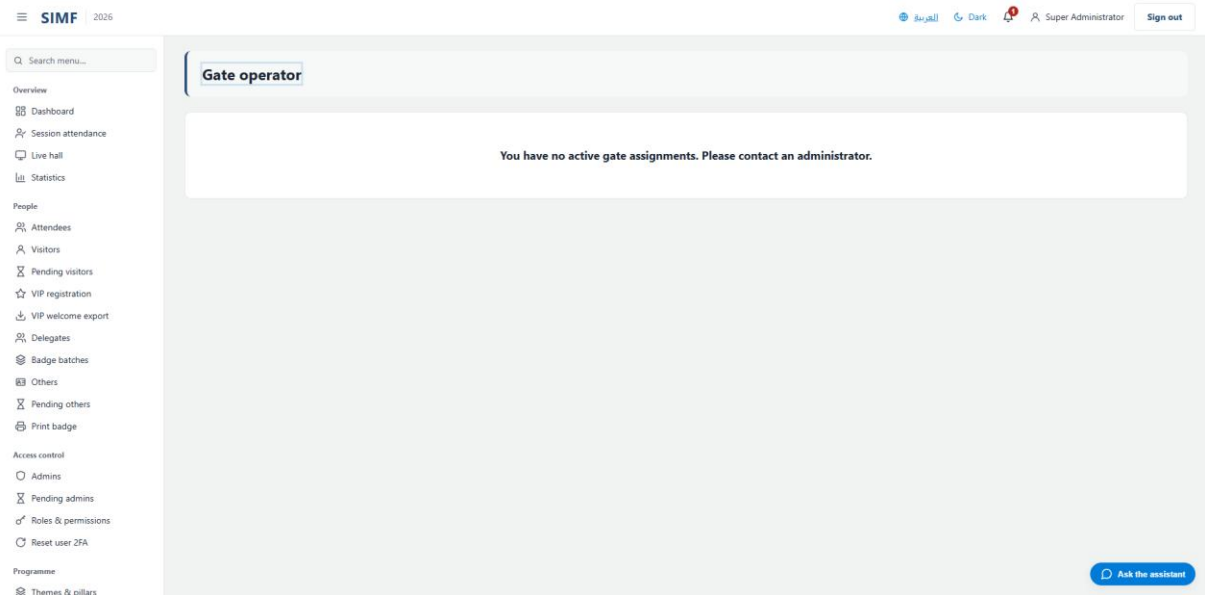


Figure 91 — Gate operator — /admin/gates/operator

Hall arrivals (/admin/hall-arrivals)

Property	Value
Address	/admin/hall-arrivals
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallArrivalsConsole.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/HallArrivalsConsole.razor.cs
Page permission	HallArrivals.View
Menu permission	HallArrivals.View

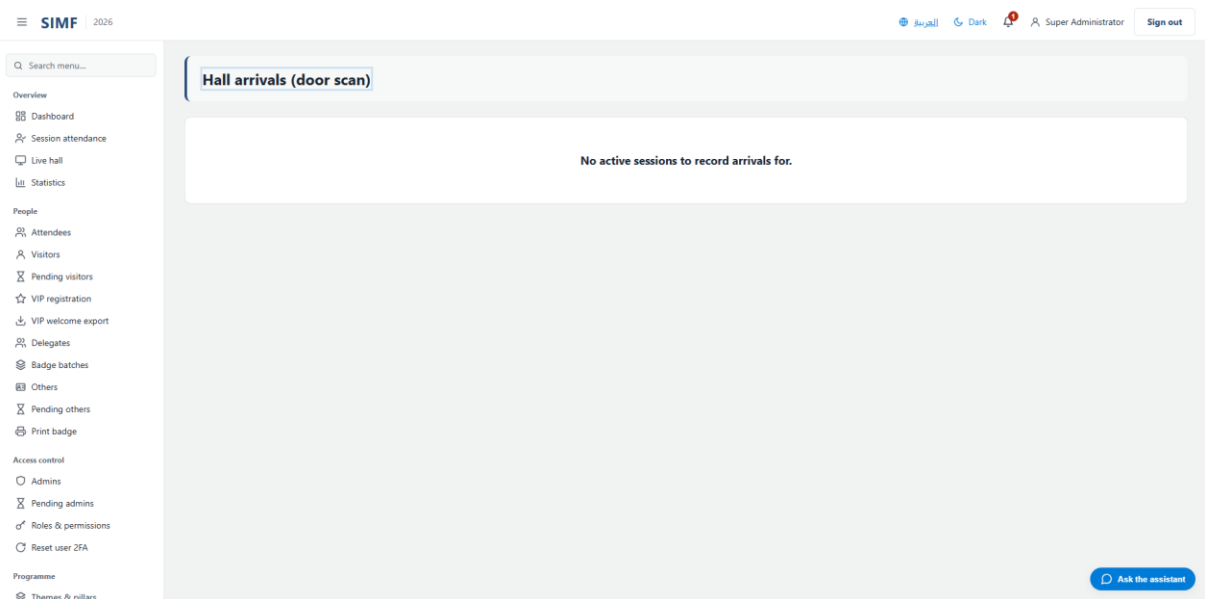


Figure 92 — Hall arrivals — /admin/hall-arrivals

Gates dashboard (/admin/gates/dashboard)

Property	Value
Address	/admin/gates/dashboard
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesOperationsDashboard.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/GatesOperationsDashboard.razor.cs
Page permission	Gates.Manage
Menu permission	Gates.Manage

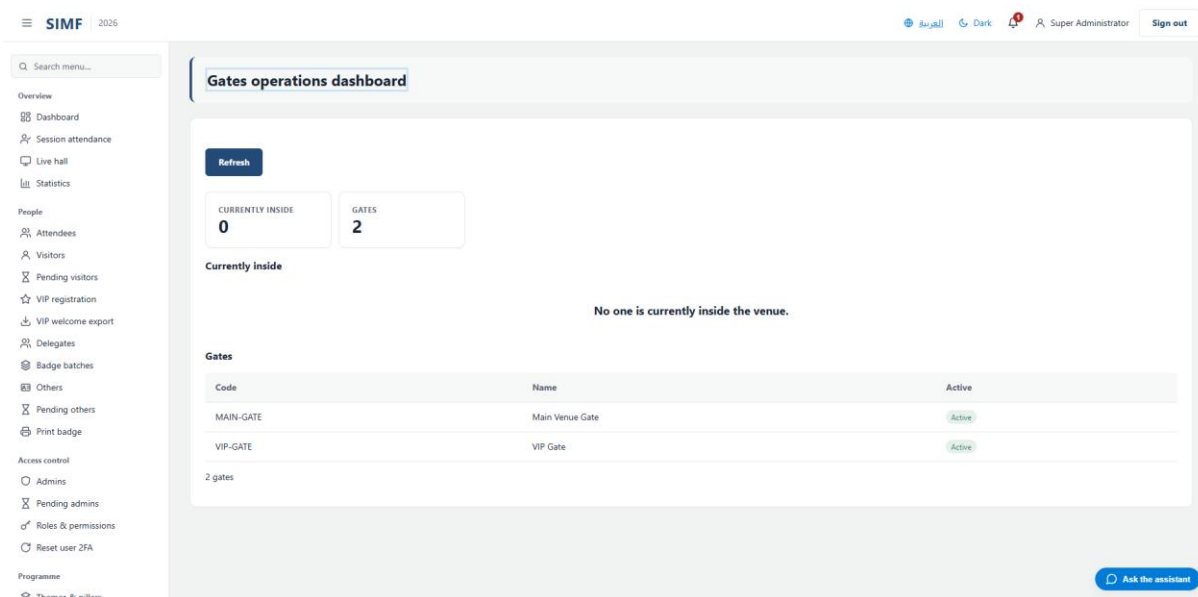


Figure 93 — Gates dashboard — /admin/gates/dashboard

Reference data

Interests (/admin/interests)

Property	Value
Address	/admin/interests
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InterestsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/InterestsList.razor.cs
Page permission	Interests.View
Menu permission	Interests.View

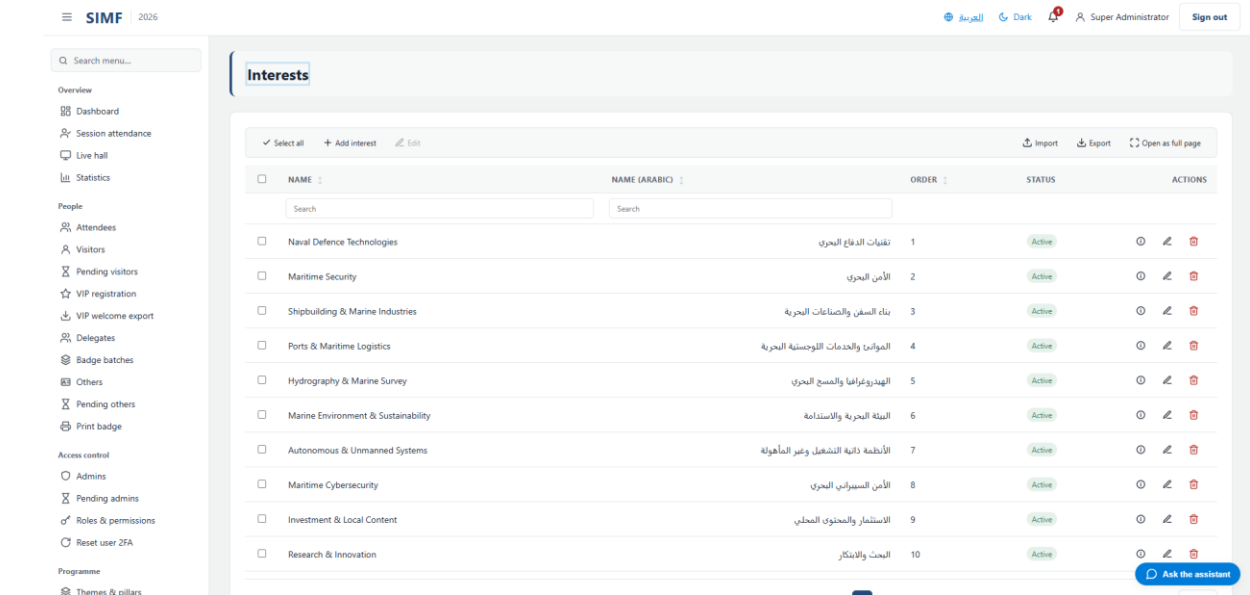


Figure 94 — Interests — /admin/interests

Countries (/admin/countries)

Property	Value
Address	/admin/countries
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CountriesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CountriesList.razor.cs
Page permission	Countries.View
Menu permission	Countries.View

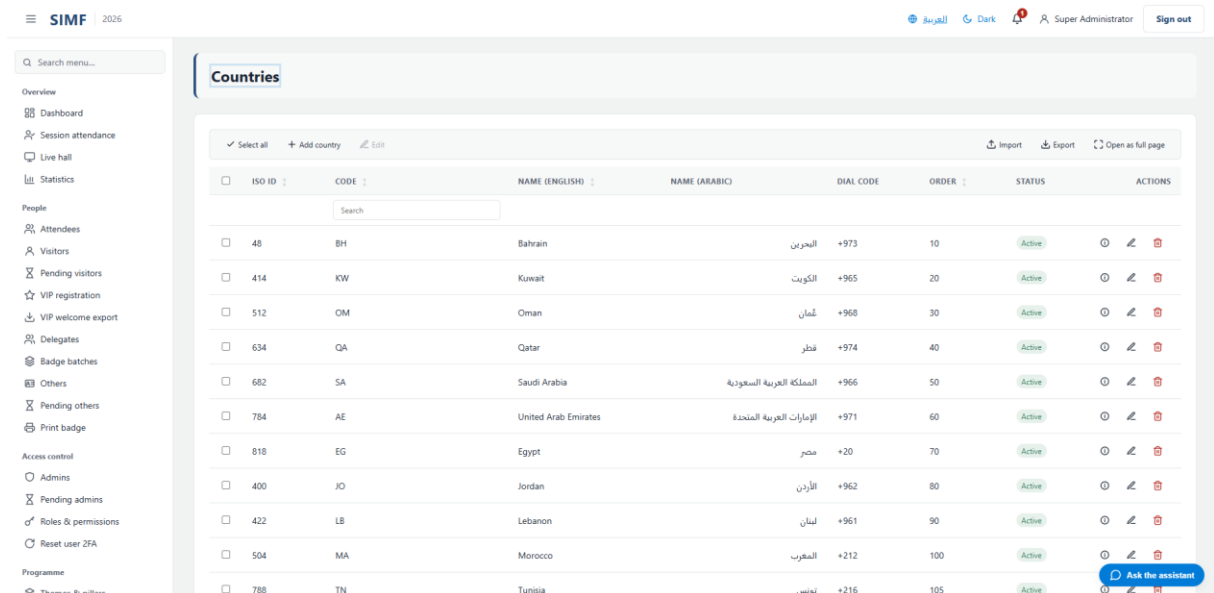


Figure 95 — Countries — /admin/countries

Organisations (/admin/organisations)

Property	Value
Address	/admin/organisations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganisationsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganisationsList.razor.cs
Page permission	Organisations.View
Menu permission	Organisations.View

The screenshot shows the 'Organisations' management interface in the SIMF 2026 Admin Panel. The interface includes a sidebar with navigation options like Overview, Dashboard, Session attendance, Live hall, Statistics, People, Attendees, Visitors, Pending visitors, VIP registration, VIP welcome export, Delegates, Badge batches, Others, Pending others, Print badge, Access control, Admins, Pending admins, Roles & permissions, Reset user ZFA, Programme, and Themes & pillars. The main content area features a search bar and a table of organisations. The table has columns for NAME (ARABIC), NAME (ENGLISH), CR, SECTOR, CITY, ACTIVE, and ACTIONS. The table lists several organisations, including Saudi Aramco, ACWA Power, and Saudi Arabian Military Industries (SAMI).

NAME (ARABIC)	NAME (ENGLISH)	CR	SECTOR	CITY	ACTIVE	ACTIONS
أخرى	Other	—	—	—	Active	Edit Delete
أرامكو السعودية	Saudi Aramco	2050000003	Energy	Dhahran	Active	Edit Delete
أرامكو السعودية	Saudi Aramco	—	Energy	—	Active	Edit Delete
أكوا باور	ACWA Power	2052000008	Energy	Riyadh	Active	Edit Delete
البحري للنقل البحري	Bahri	4030000006	Shipping	Riyadh	Active	Edit Delete
الشركة السعودية للصناعات العسكرية	Saudi Arabian Military Industries (SAMI)	1010000002	Defense Systems	Riyadh	Active	Edit Delete
الشركة السعودية للصناعات العسكرية	Saudi Arabian Military Industries (SAMI)	—	Defence	—	Active	Edit Delete
الشركة الوطنية السعودية للنقل البحري (البحري)	Bahri	—	Shipping & Logistics	—	Active	Edit Delete
القوات البحرية الملكية السعودية	Royal Saudi Naval Forces	1010000001	Defense	Riyadh	Active	Edit Delete

Figure 96 — Organisations — /admin/organisations

Regions (/admin/regions)

Property	Value
Address	/admin/regions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RegionsList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RegionsList.razor.cs
Page permission	Regions.View
Menu permission	Regions.View

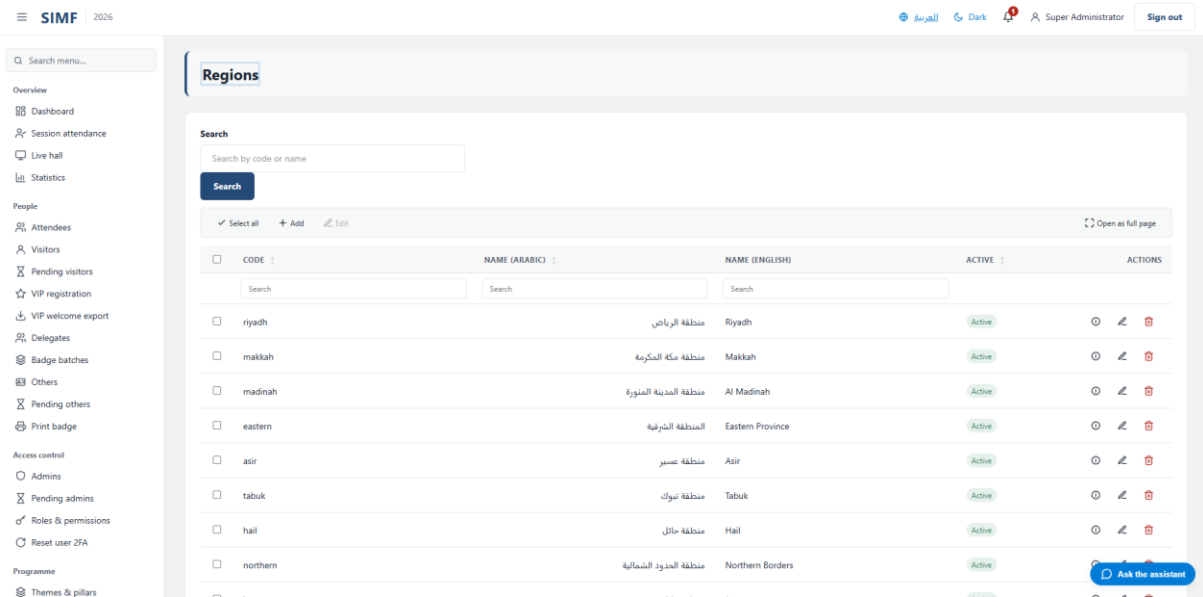


Figure 97 — Regions — /admin/regions

Visitor profile types (/admin/profile-types/visitor)

Property	Value
Address	/admin/profile-types/visitor
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/VisitorProfileTypesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/VisitorProfileTypesList.razor.cs
Page permission	ProfileTypes.View
Menu permission	ProfileTypes.View

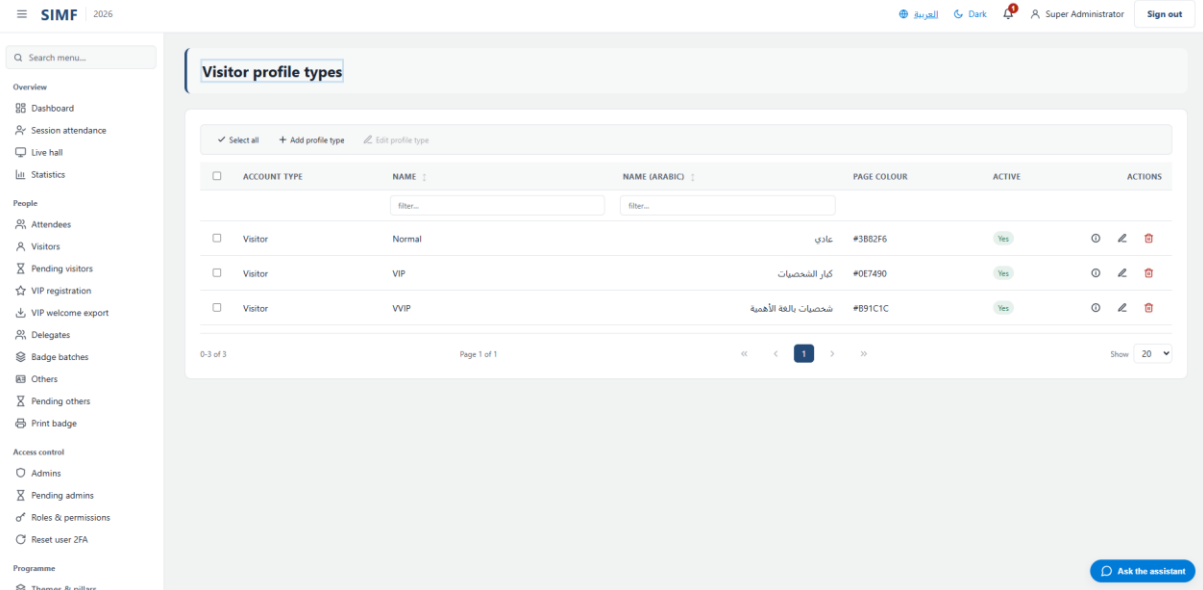


Figure 98 — Visitor profile types — /admin/profile-types/visitor

Other profile types (/admin/profile-types/other)

Property	Value
Address	/admin/profile-types/other
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/OtherProfileTypesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ProfileTypes/OtherProfileTypesList.razor.cs
Page permission	ProfileTypes.View
Menu permission	ProfileTypes.View

Other profile types

✓ Select all + Add profile type Edit profile type

☐	ACCOUNT TYPE	NAME	NAME (ARABIC)	PAGE COLOUR	MOBILE APP ROLE	ACTIVE	ACTIONS
☐	Visitor	Exhibitor	عارض	#009182	Exhibitor — lead capture (scan + My Visitors)	Yes	
☐	Visitor	Media	إعلامي	#F39E00	None — no operational authority	Yes	
☐	Visitor	Moderator	مفتق	#6366F1	Moderator — content & user authority	Yes	
☐	Visitor	Sponsor	راعي	#005CF5	None — no operational authority	Yes	
☐	Visitor	Staff	فريق	#10B981	Staff — gate operations	Yes	

0-5 of 5 Page 1 of 1 < 1 > Show 20

Ask the assistant

Figure 99 — Other profile types — /admin/profile-types/other

System

Configuration (/admin/configuration)

Property	Value
Address	/admin/configuration
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ConfigurationList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ConfigurationList.razor.cs
Page permission	Configuration.View
Menu permission	Configuration.View

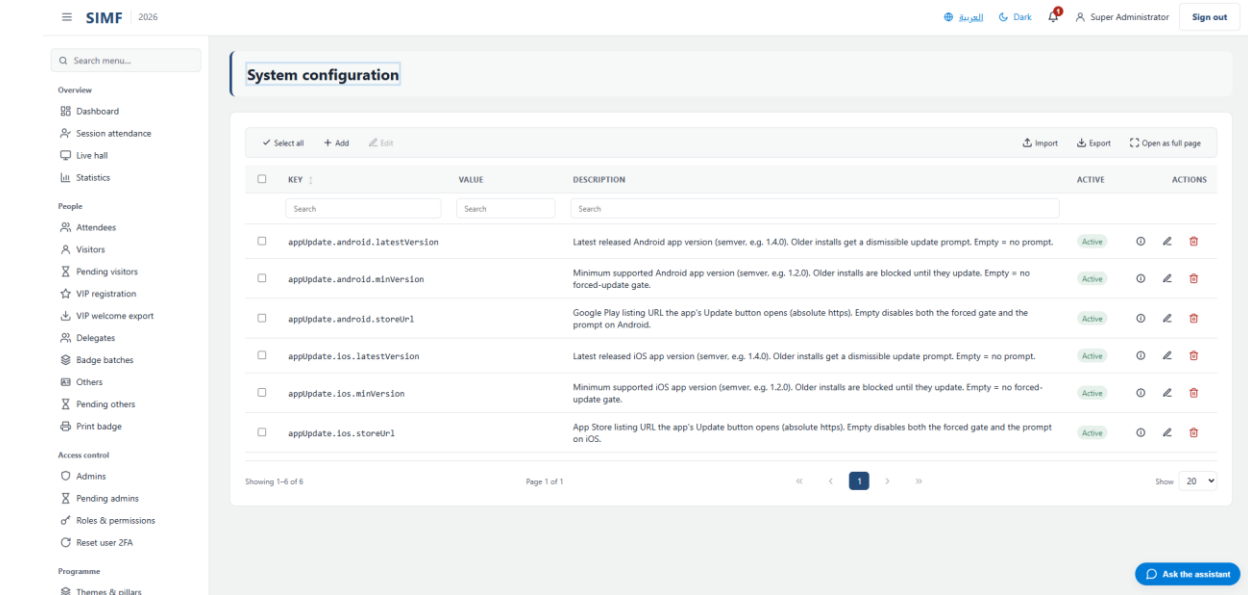


Figure 100 — Configuration — /admin/configuration

Site Settings (/admin/site-settings)

Property	Value
Address	/admin/site-settings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SiteSettingsPage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SiteSettingsPage.razor.cs
Page permission	Configuration.Edit
Menu permission	Configuration.Edit

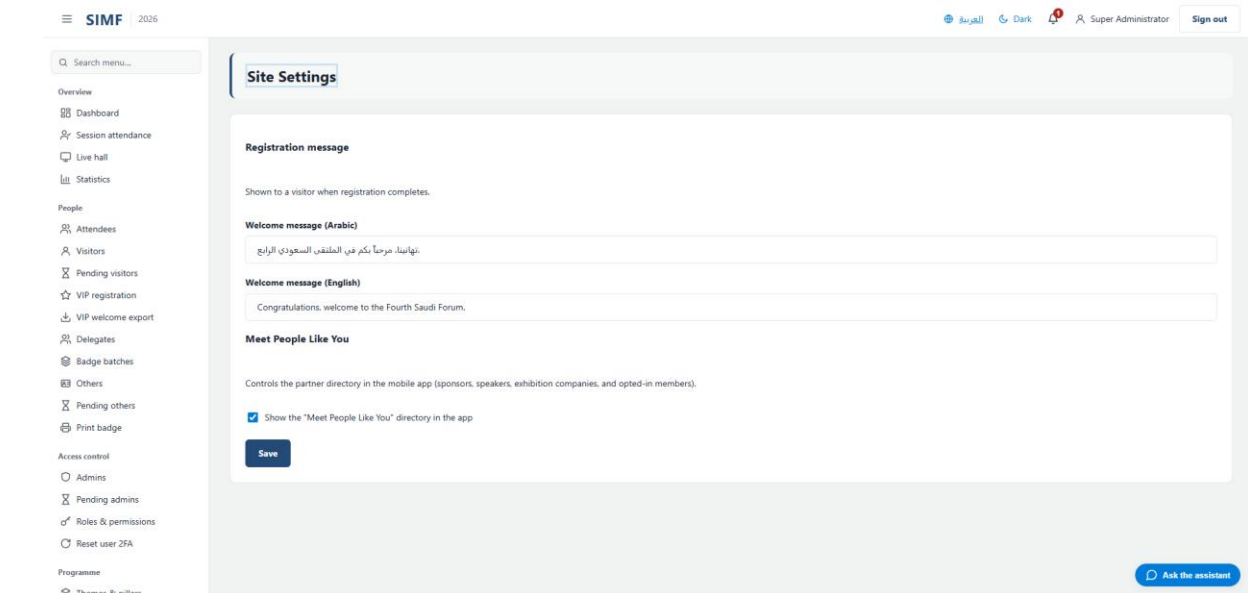


Figure 101 — Site Settings — /admin/site-settings

Walk-in Mode (/admin/walk-in-mode)

Property	Value
Address	/admin/walk-in-mode
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/WalkInModePage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/WalkInModePage.razor.cs
Page permission	WalkInMode.View
Menu permission	WalkInMode.View

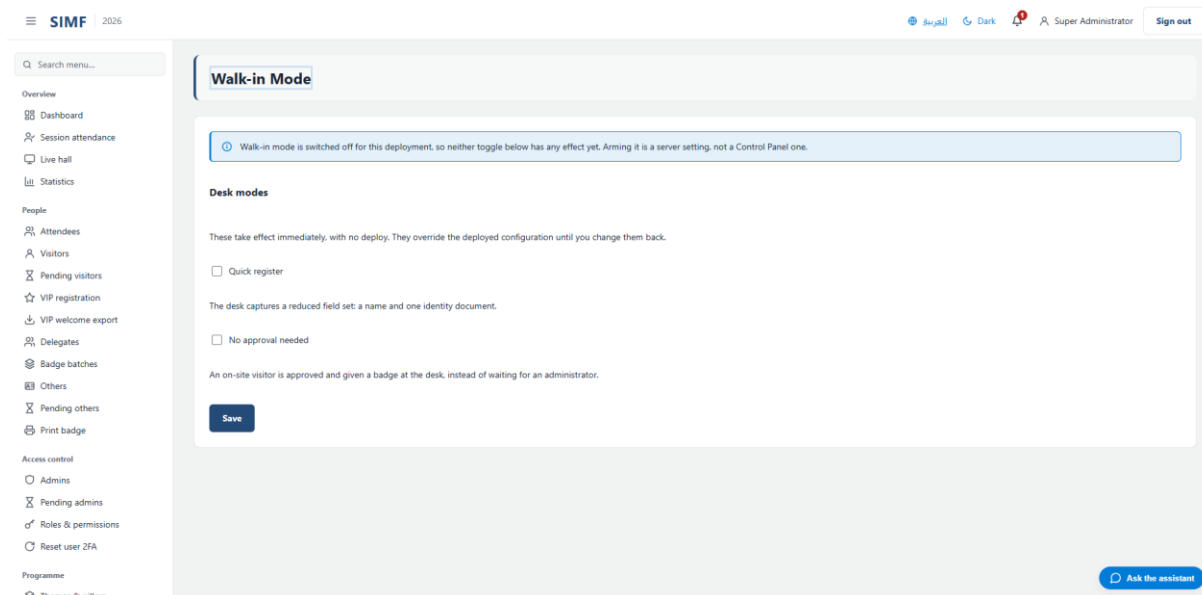


Figure 102 — Walk-in Mode — /admin/walk-in-mode

Email Templates (/admin/email/templates)

Property	Value
Address	/admin/email/templates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EmailTemplatesList.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EmailTemplatesList.razor.cs
Page permission	EmailTemplates.View
Menu permission	EmailTemplates.View

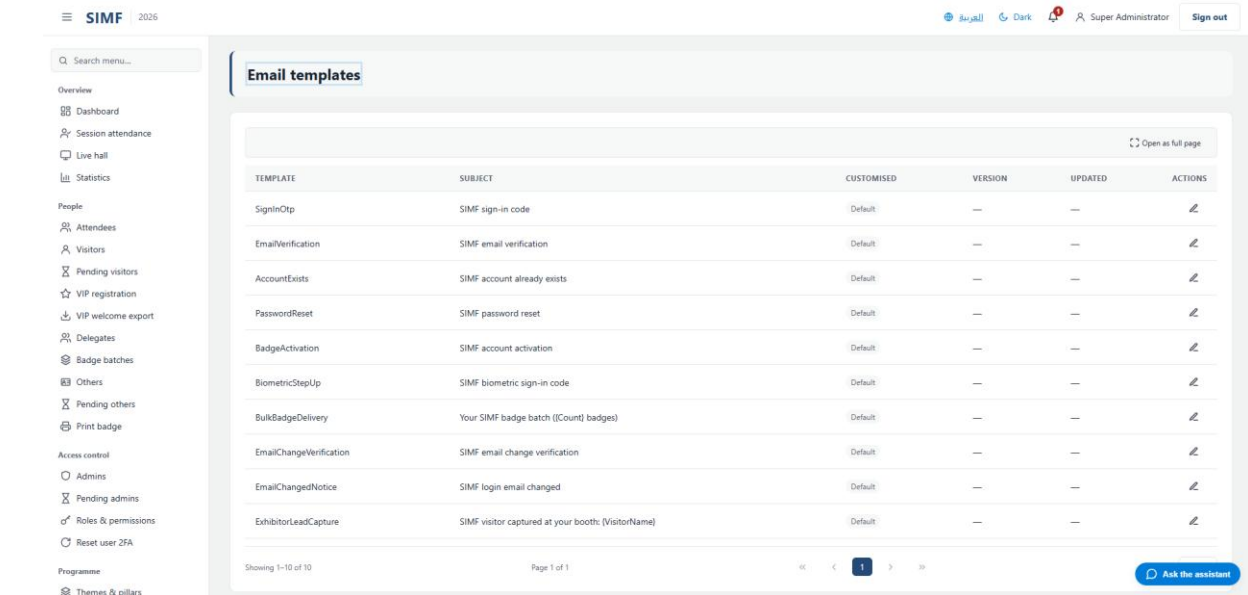


Figure 103 — Email Templates — /admin/email/templates

Organization Profile (/admin/organization-profile)

Property	Value
Address	/admin/organization-profile
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganizationProfilePage.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OrganizationProfilePage.razor.cs
Page permission	OrganizationProfile.View
Menu permission	OrganizationProfile.View

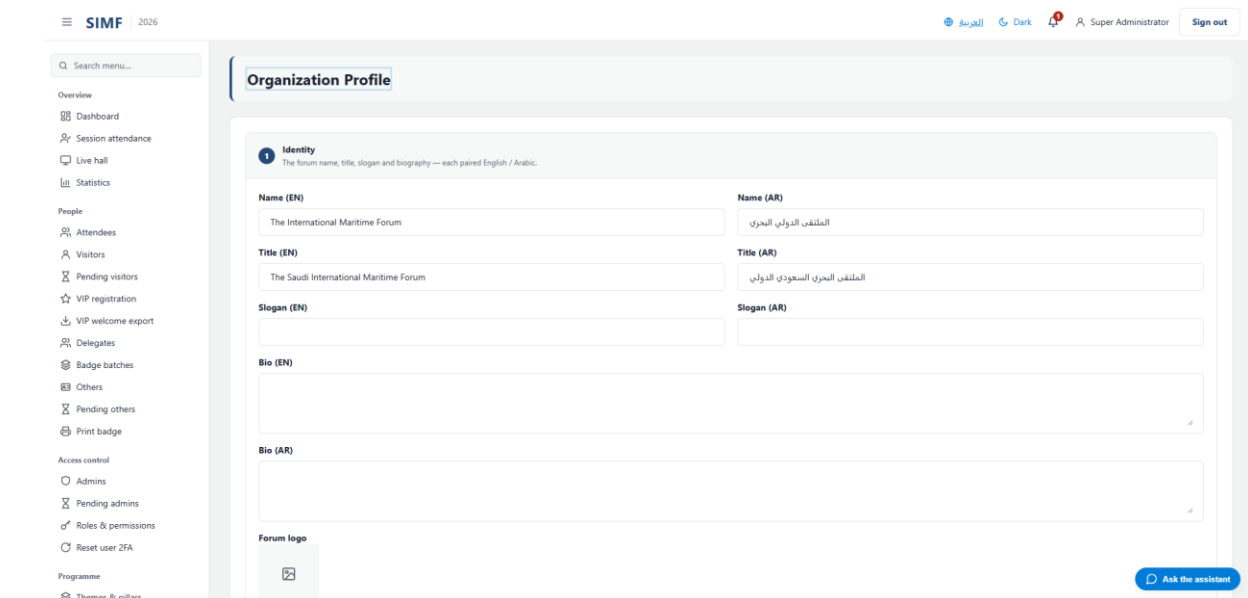


Figure 104 — Organization Profile — /admin/organization-profile

Logs (/admin/logs)

Property	Value
Address	/admin/logs
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/LogsViewer.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/LogsViewer.razor.cs
Page permission	Logs.View
Menu permission	Logs.View

Figure 105 — Logs — /admin/logs

Background services (/admin/ops/services)

Property	Value
Address	/admin/ops/services
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ServicesMonitor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/ServicesMonitor.razor.cs
Page permission	ServicesMonitor.View
Menu permission	ServicesMonitor.View

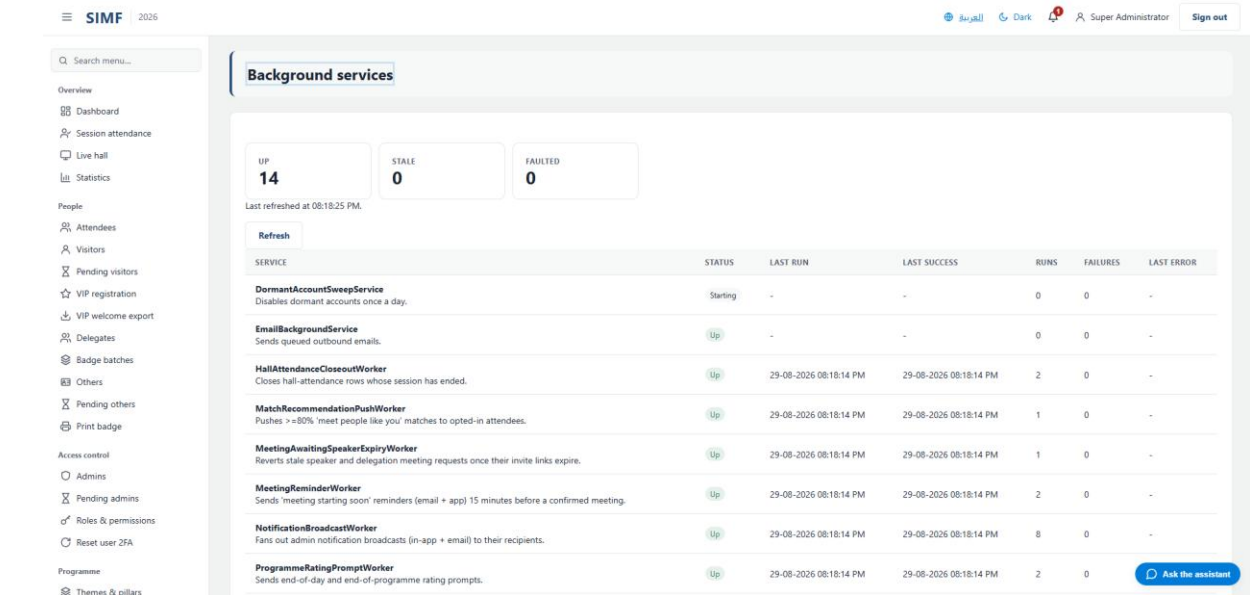


Figure 106 — Background services — /admin/ops/services

Operation log (/admin/operation-log)

Property	Value
Address	/admin/operation-log
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationLogViewer.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationLogViewer.razor.cs
Page permission	OperationLog.View
Menu permission	OperationLog.View

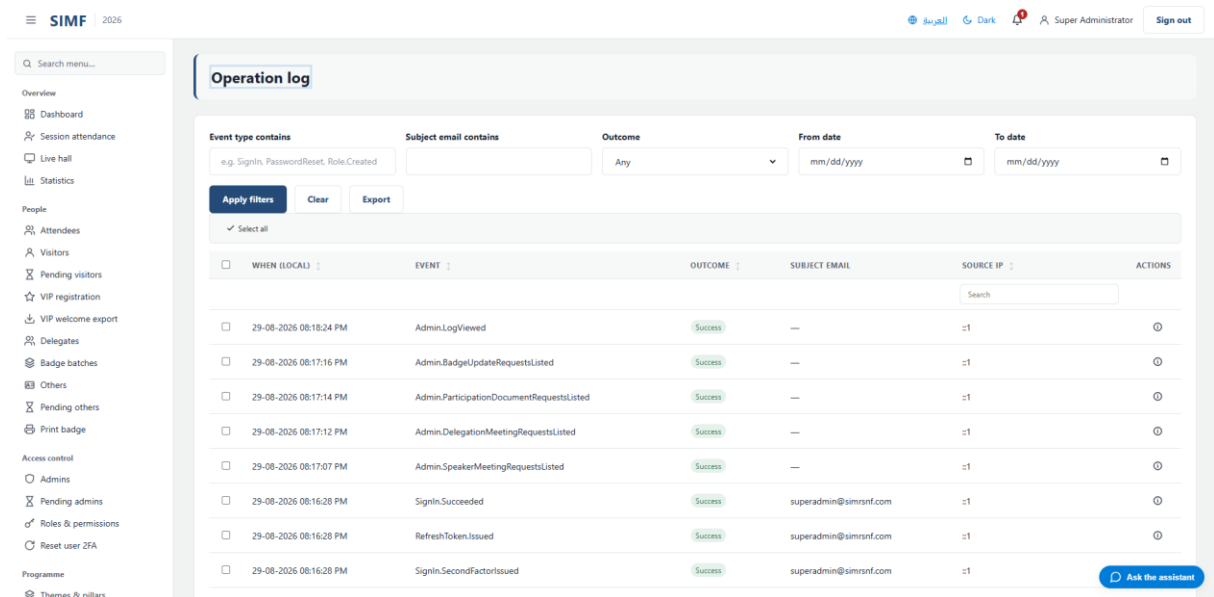


Figure 107 — Operation log — /admin/operation-log

Operations toggles (/admin/operations)

Property	Value
Address	/admin/operations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationsToggles.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/OperationsToggles.razor.cs
Page permission	Operations.View
Menu permission	Operations.View

Figure 108 — Operations toggles — /admin/operations

Event edition (/admin/editions)

Property	Value
Address	/admin/editions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EventEdition.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/EventEdition.razor.cs
Page permission	Editions.View
Menu permission	Editions.View

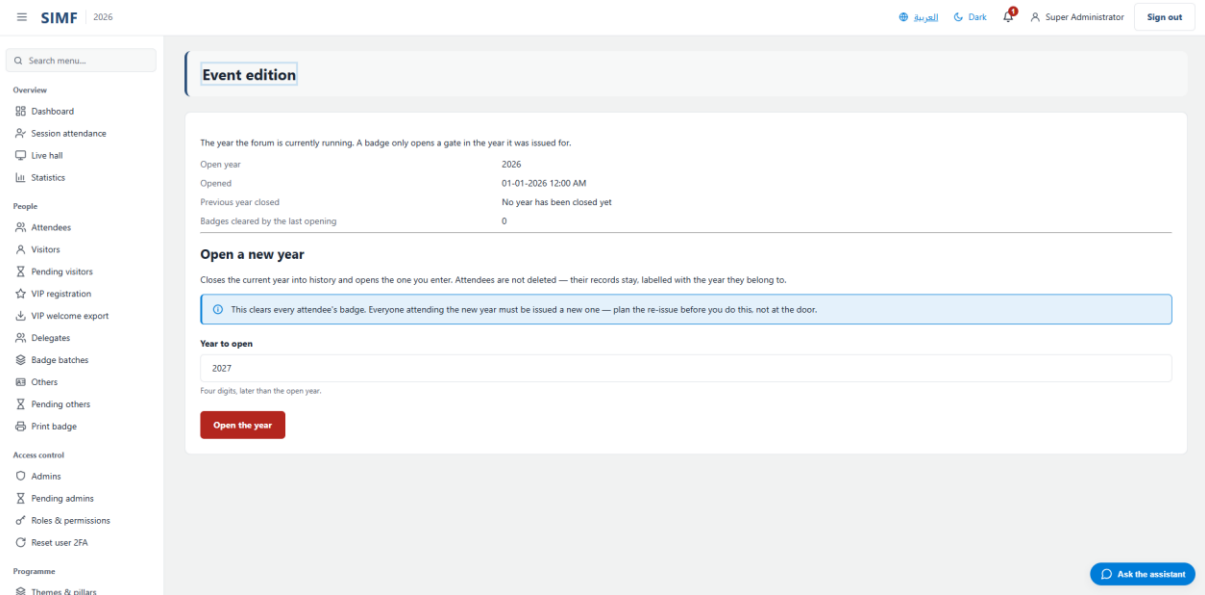


Figure 109 — Event edition — /admin/editions

Reports

All reports (/admin/reports)

Property	Value
Address	/admin/reports
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/ReportsHub.razor
Code-behind	-
Page permission	Reports.View
Menu permission	Reports.View

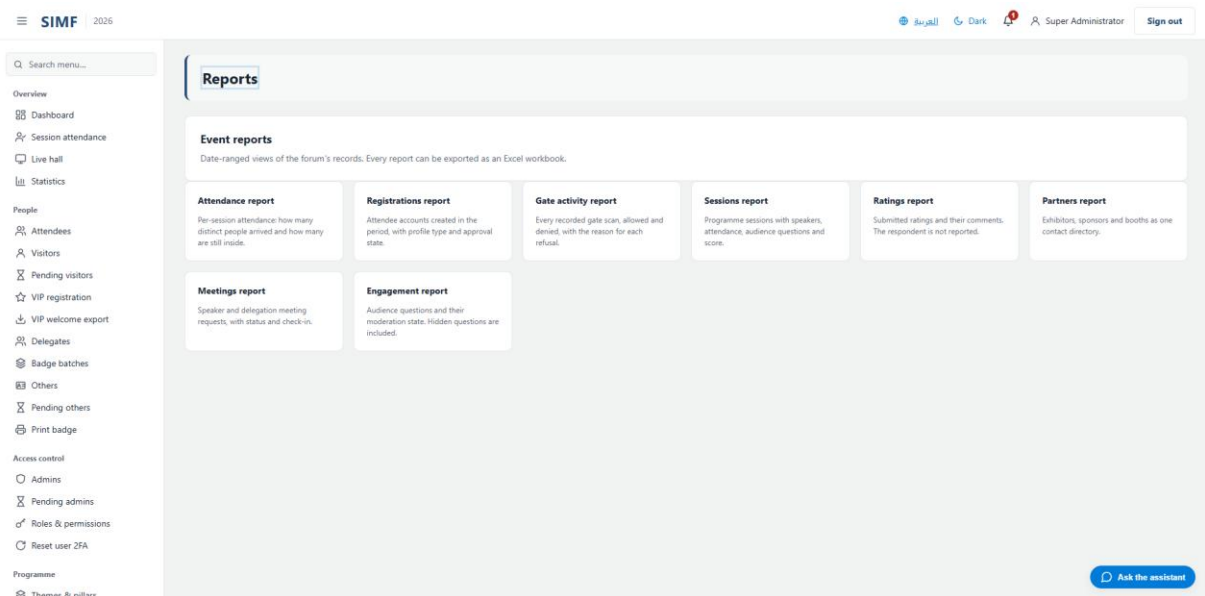


Figure 110 — All reports — /admin/reports

Attendance report (/admin/reports/attendance)

Property	Value
Address	/admin/reports/attendance
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/AttendanceReport.razor
Code-behind	-
Page permission	Reports.Attendance
Menu permission	Reports.Attendance

Attendance report

From: mm/dd/yyyy To: mm/dd/yyyy

Apply **Export to Excel**

SESSIONS: **59** DISTINCT ATTENDEES: **0** INSIDE NOW: **0**

CODE	SESSION	HALL	START	ATTENDEES	INSIDE NOW
D1-01	Reception & Registration	Main Hall	23-11-2026 07:00 AM	0	0
D1-02	Arrival of the Chief of General Staff & Forum Opening	Main Hall	23-11-2026 08:30 AM	0	0
D1-03	Holy Quran Recitation	Main Hall	23-11-2026 08:35 AM	0	0
D1-04	Patron Inaugurates the Forum	Main Hall	23-11-2026 08:38 AM	0	0
D1-05	Forum Visual Presentation	Main Hall	23-11-2026 08:40 AM	0	0
D1-06	Speech by the Chief of Naval Forces Staff	Main Hall	23-11-2026 08:50 AM	0	0
D1-07	Commemorative Photo with the Patron	Main Hall	23-11-2026 09:00 AM	0	0
D1-08	Opening of the Accompanying Exhibition	Main Hall	23-11-2026 09:05 AM	0	0
D1-09	Tour of the Accompanying Exhibition	Main Hall	23-11-2026 09:06 AM	0	0
D1-10	Departure of the Patron	Main Hall	23-11-2026 09:20 AM	0	0

Ask the assistant

Figure 111 — Attendance report — /admin/reports/attendance

Registrations report (/admin/reports/registrations)

Property	Value
Address	/admin/reports/registrations
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/RegistrationsReport.razor
Code-behind	-
Page permission	Reports.Registrations
Menu permission	Reports.Registrations

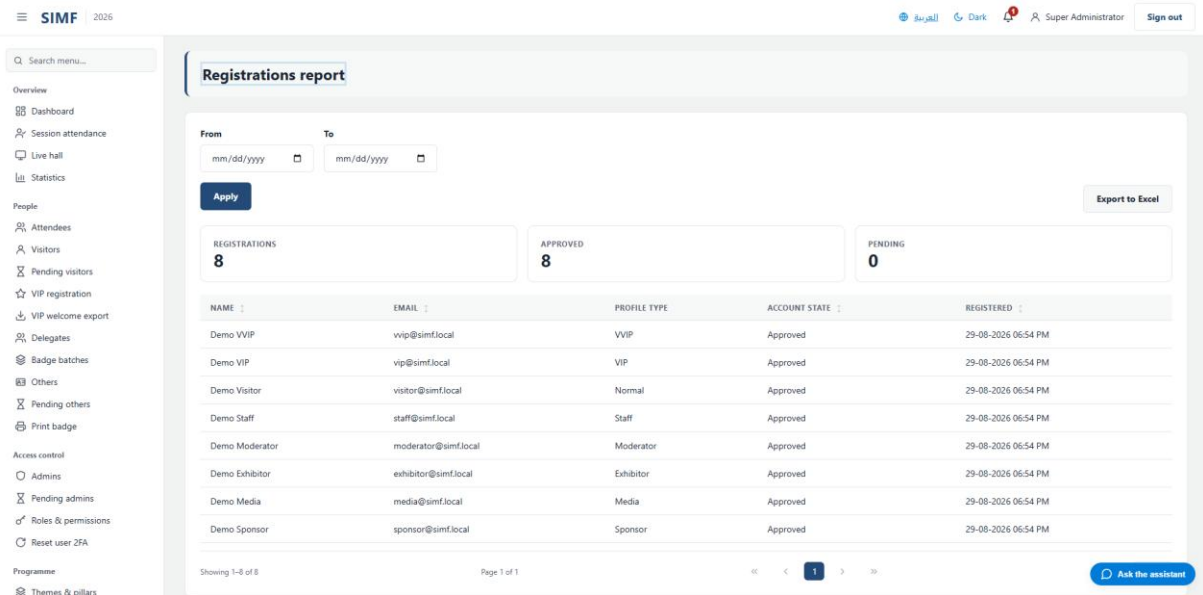


Figure 112 — Registrations report — /admin/reports/registrations

Gate activity report (/admin/reports/gates)

Property	Value
Address	/admin/reports/gates
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/GateActivityReport.razor
Code-behind	-
Page permission	Reports.Gates
Menu permission	Reports.Gates

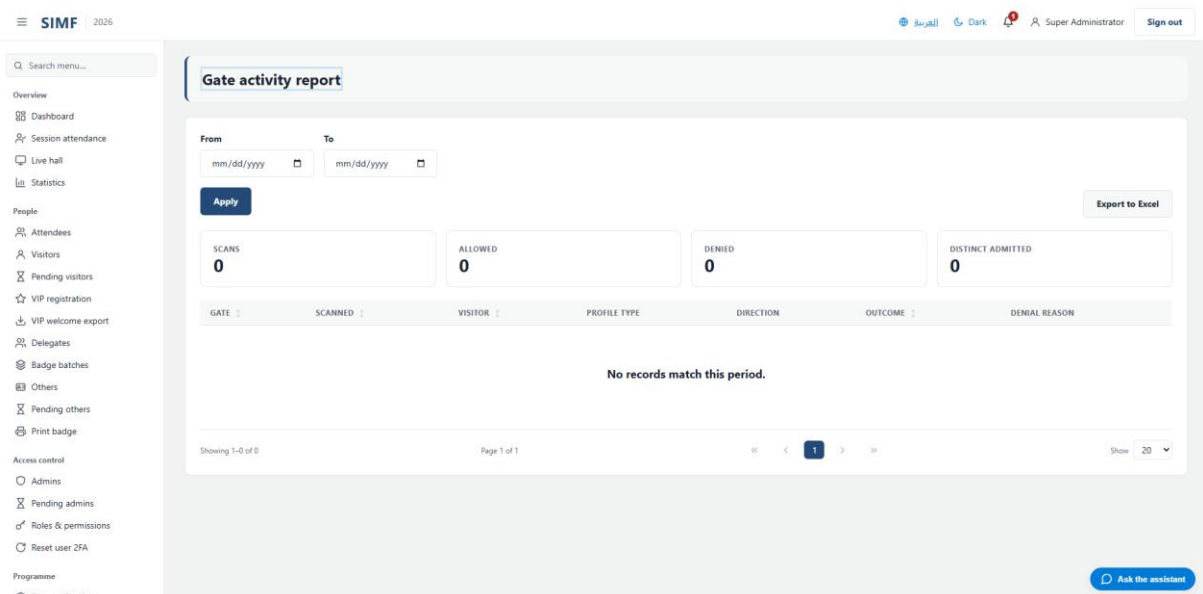


Figure 113 — Gate activity report — /admin/reports/gates

Sessions report (/admin/reports/sessions)

Property	Value
Address	/admin/reports/sessions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/SessionsReport.razor
Code-behind	-
Page permission	Reports.Sessions
Menu permission	Reports.Sessions

Sessions report

From: mm/dd/yyyy To: mm/dd/yyyy

Apply

Export to Excel

SESSIONS: 59 QUESTIONS: 0

CODE	SESSION	HALL	START	SPEAKERS	ATTENDEES	QUESTIONS	AVERAGE RATING
D1-01	Reception & Registration	Main Hall	23-11-2026 07:00 AM		0	0	
D1-02	Arrival of the Chief of General Staff & Forum Opening	Main Hall	23-11-2026 08:30 AM		0	0	
D1-03	Holy Quran Recitation	Main Hall	23-11-2026 08:35 AM		0	0	
D1-04	Patron Inaugurates the Forum	Main Hall	23-11-2026 08:38 AM		0	0	
D1-05	Forum Visual Presentation	Main Hall	23-11-2026 08:40 AM		0	0	
D1-06	Speech by the Chief of Naval Forces Staff	Main Hall	23-11-2026 08:50 AM		0	0	
D1-07	Commemorative Photo with the Patron	Main Hall	23-11-2026 09:00 AM		0	0	
D1-08	Opening of the Accompanying Exhibition	Main Hall	23-11-2026 09:05 AM		0	0	
D1-09	Tour of the Accompanying Exhibition	Main Hall	23-11-2026 09:06 AM		0	0	
D1-10	Departure of the Patron	Main Hall	23-11-2026 09:20 AM		0	0	

Ask the assistant

Figure 114 — Sessions report — /admin/reports/sessions

Ratings report (/admin/reports/ratings)

Property	Value
Address	/admin/reports/ratings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/RatingsReport.razor
Code-behind	-
Page permission	Reports.Ratings
Menu permission	Reports.Ratings

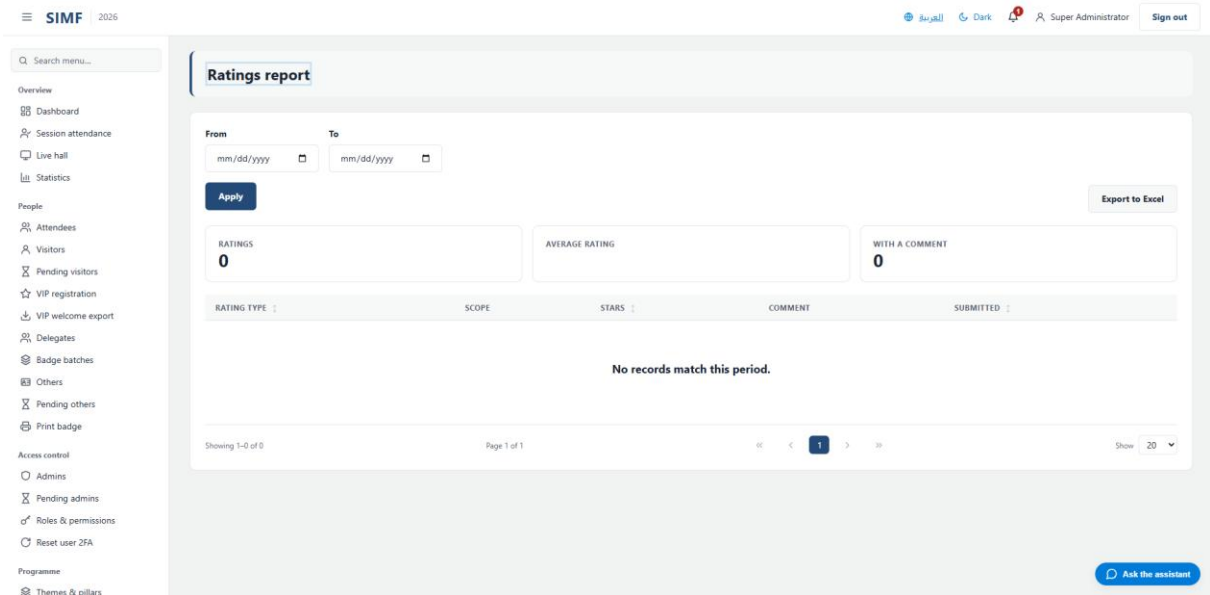


Figure 115 — Ratings report — /admin/reports/ratings

Partners report (/admin/reports/partners)

Property	Value
Address	/admin/reports/partners
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/PartnersReport.razor
Code-behind	-
Page permission	Reports.Partners
Menu permission	Reports.Partners

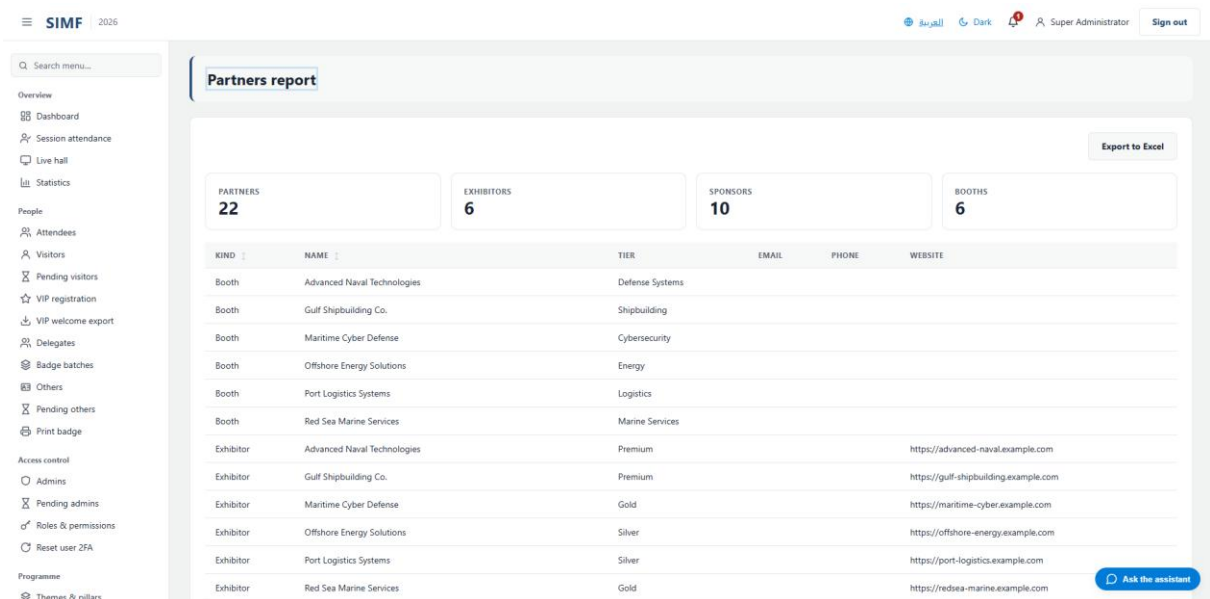


Figure 116 — Partners report — /admin/reports/partners

Meetings report (/admin/reports/meetings)

Property	Value
Address	/admin/reports/meetings
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/MeetingsReport.razor
Code-behind	-
Page permission	Reports.Meetings
Menu permission	Reports.Meetings

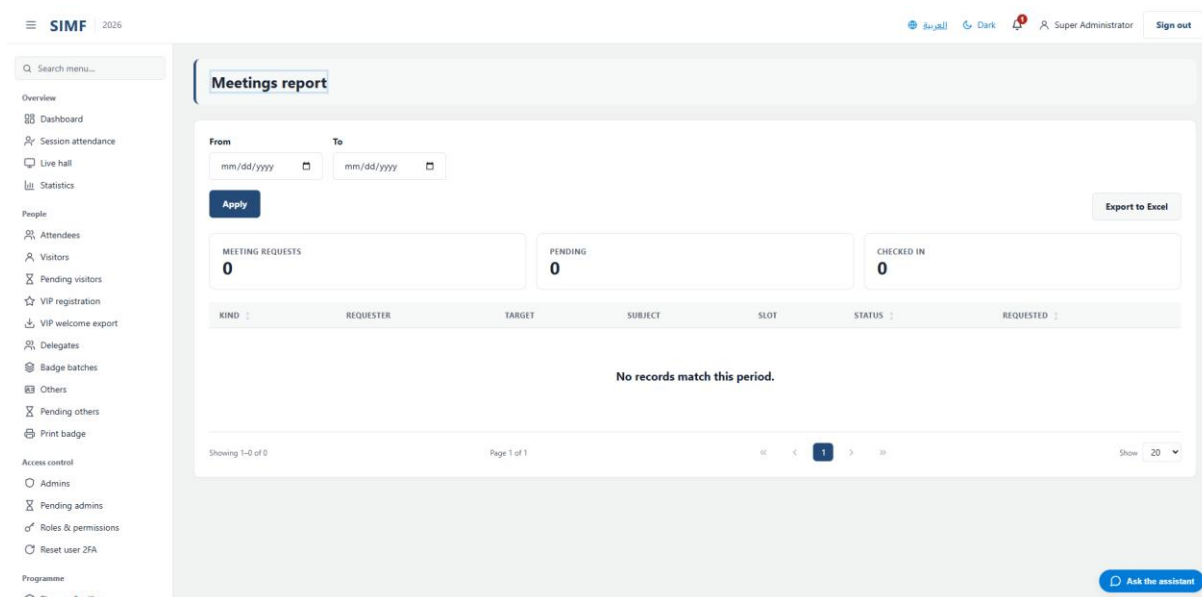


Figure 117 — Meetings report — /admin/reports/meetings

Engagement report (/admin/reports/engagement)

Property	Value
Address	/admin/reports/engagement
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/Reports/EngagementReport.razor
Code-behind	-
Page permission	Reports.Engagement
Menu permission	Reports.Engagement

SIMF

2026

المعرض

Dark

1

Super Administrator

Sign out

Q Search menu...

Overview

- Dashboard
- Session attendance
- Live hall
- Statistics

People

- Attendees
- Visitors
- Pending visitors
- VIP registration
- VIP welcome export
- Delegates
- Badge batches
- Others
- Pending others
- Print badge

Access control

- Admins
- Pending admins
- Roles & permissions
- Reset user 25A

Programme

- Themes & pillars

Engagement report

From

To

mm/dd/yyyy

mm/dd/yyyy

Apply

Export to Excel

QUESTIONS

HIDDEN

PUSHED TO SPEAKER

0

0

0

CODE	SESSION	QUESTION	RECIPIENT	STATUS	PHASE	ASKED
No records match this period.						

Showing 1-0 of 0

Page 1 of 1

<<

<

1

>

>>

Show 20

Ask the assistant

Figure 118 — Engagement report — /admin/reports/engagement

105

Pages reached from inside another page

These pages have an address but no menu entry. They open from a button or a row inside another page, or they belong to the sign-in flow.

Something went wrong (/Error)

Property	Value
Address	/Error
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Error.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Error.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

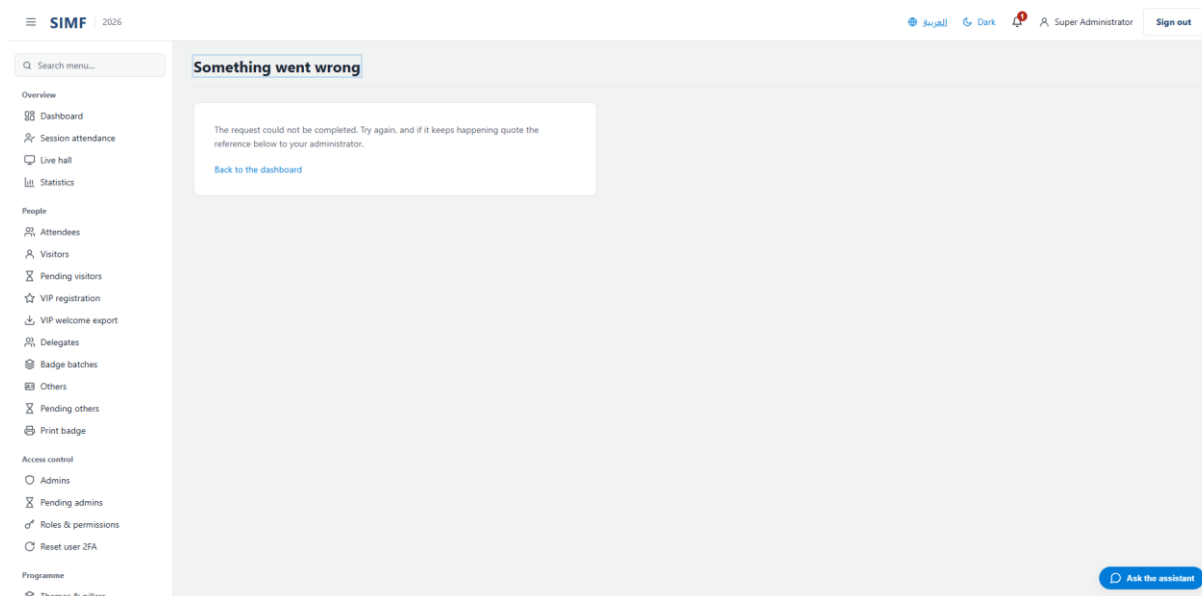


Figure 119 — /Error

Notifications (/account/notifications)

Property	Value
Address	/account/notifications
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Notifications.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Notifications.razor.cs
Page permission	Any signed-in user
Menu permission	-

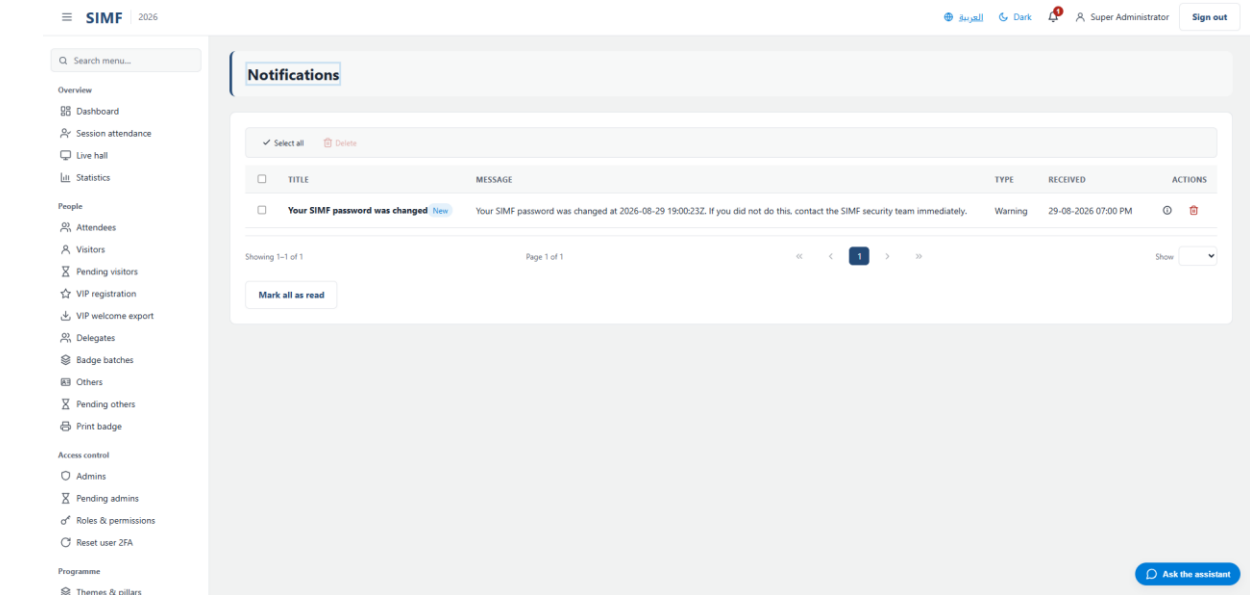


Figure 120 — /account/notifications

My profile (/account/profile)

Property	Value
Address	/account/profile
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Profile.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/Profile.razor.cs
Page permission	Any signed-in user
Menu permission	-

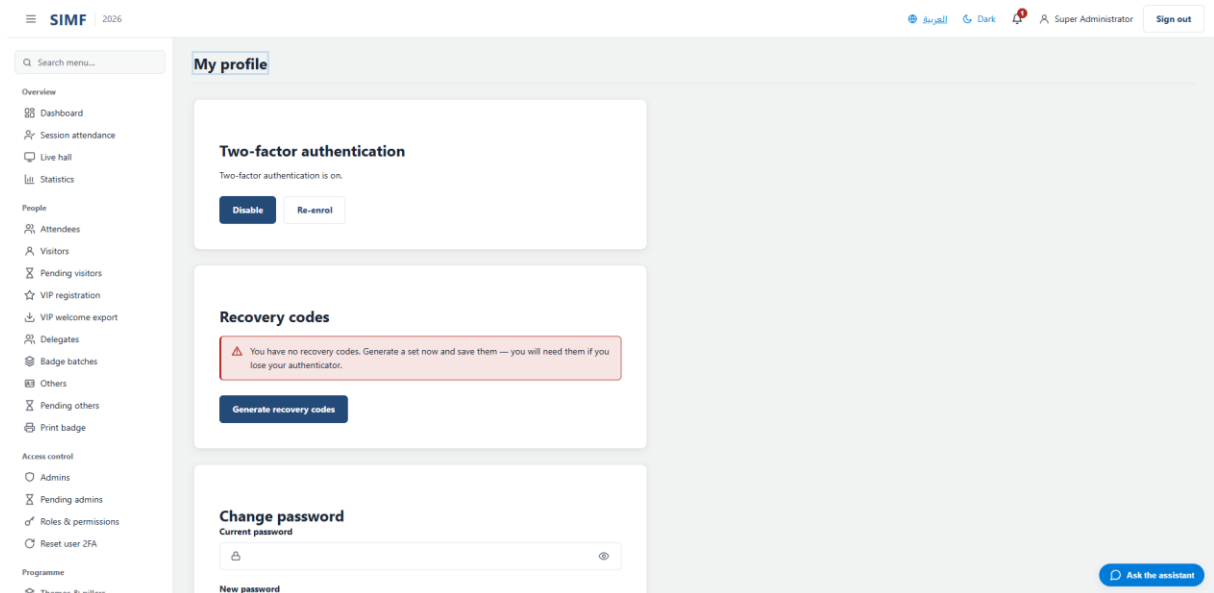


Figure 121 — /account/profile

Re-pair authenticator (/account/totp-pairing)

Property	Value
Address	/account/totp-pairing
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/TotpPairing.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Account/TotpPairing.razor.cs
Page permission	Any signed-in user
Menu permission	-

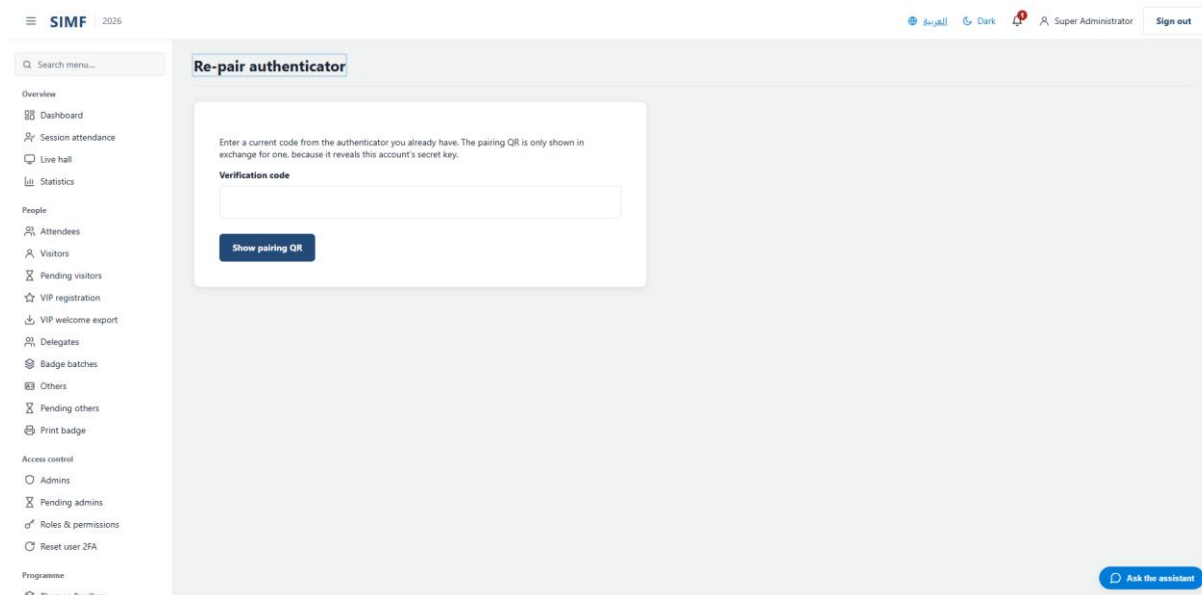


Figure 122 — /account/totp-pairing

Add a new user (/admin/admins/new)

Property	Value
Address	/admin/admins/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateUser.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateUser.razor.cs
Page permission	Admins.Create
Menu permission	-

Add a new user

The new user will receive an email invitation with a one-time code to set their password. The invitation is valid for 7 days.

Email address

Display name

Roles

- ☐ Administrator
- ☐ GateOperator
- ☐ PublicRelations
- ☐ ScientificCommittee
- ☐ SecurityTeam

Create user **Back to users**

Ask the assistant

Figure 123 — /admin/admins/new

AI service (/admin/ai/services/{Feature})

Property	Value
Address	/admin/ai/services/{Feature}
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AIServiceDetail.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/AIServiceDetail.razor.cs
Page permission	AiPrompts.View
Menu permission	-

AI service

Unknown AI service.

Ask the assistant

Figure 124 — /admin/ai/services/{Feature}

Add Other user (/admin/others/new)

Property	Value
Address	/admin/others/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateOther.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateOther.razor.cs
Page permission	Others.Create
Menu permission	-

Add Other user

Create a new Other-typed user. The user receives a 7-day password-set invitation by email.

1 Badge type
Pick the category that matches the person at the desk. The colour appears on their badge.

Exhibitor Media Moderator Sponsor Staff

2 Identity

Name on badge Date of birth
mm/dd/yyyy

Shown on the printed badge — usually first name + family name.
Full name (English)

Exactly as printed on the passport / ID.
Full name (Arabic)

Ask the assistant

Figure 125 — /admin/others/new

/admin/roles/{RoleId:guid}/permissions (/admin/roles/{RoleId:guid}/permissions)

Property	Value
Address	/admin/roles/{RoleId:guid}/permissions
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolePermissionsEditor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/RolePermissionsEditor.razor.cs
Page permission	Roles.AssignPermissions
Menu permission	-

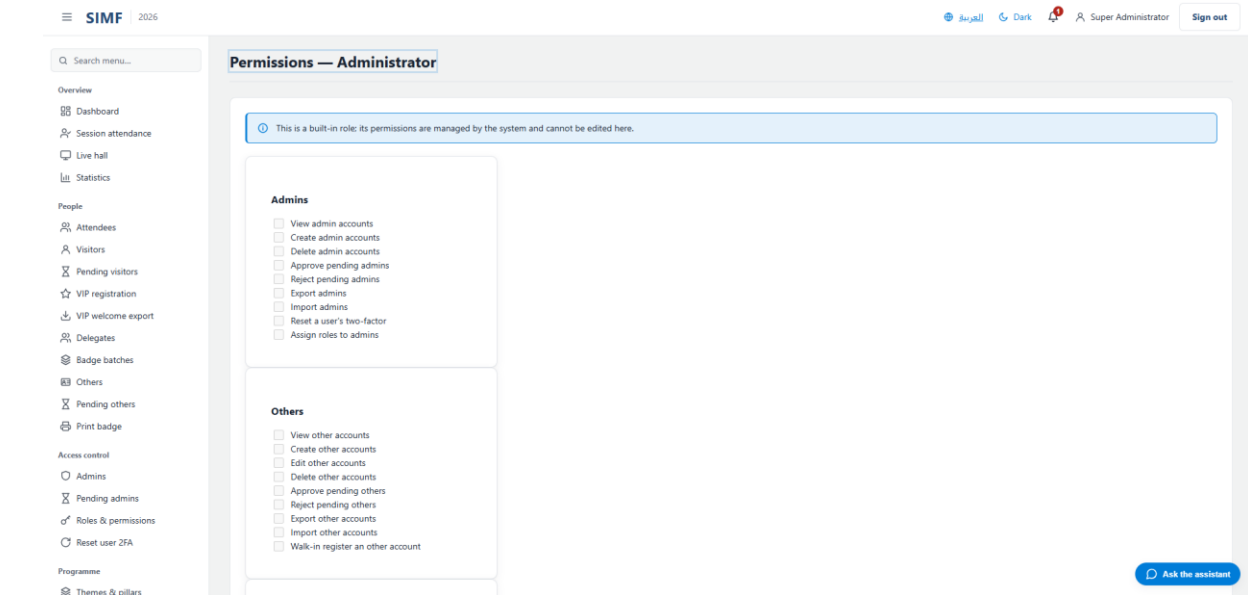


Figure 126 — /admin/roles/{RoleId:guid}/permissions

Add a new visitor (/admin/visitors/new)

Property	Value
Address	/admin/visitors/new
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateVisitor.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/CreateVisitor.razor.cs
Page permission	Visitors.Create
Menu permission	-

Figure 127 — /admin/visitors/new

Your account is waiting for approval (/auth/pending)

Property	Value
Address	/auth/pending
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/PendingApproval.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/PendingApproval.razor.cs
Page permission	Any signed-in user
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Your account was not approved (/auth/rejected)

Property	Value
Address	/auth/rejected
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/Rejected.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/Rejected.razor.cs
Page permission	Any signed-in user
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Forgot password · SIMF Control Panel (/forgot-password)

Property	Value
Address	/forgot-password
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ForgotPassword.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ForgotPassword.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

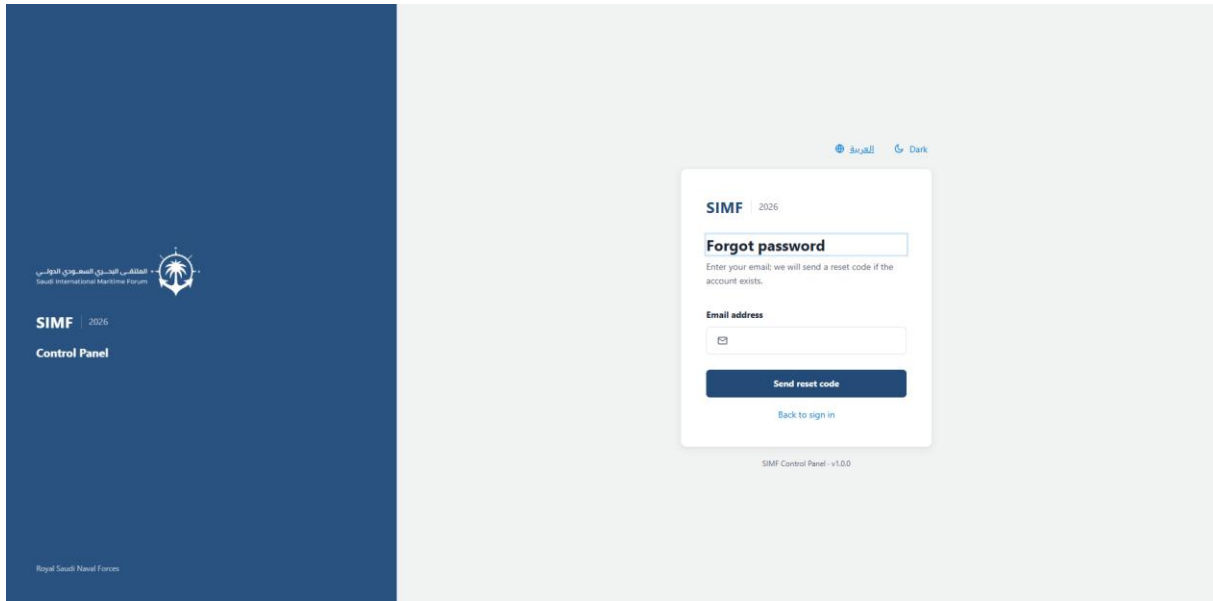


Figure 128 — /forgot-password

Sign in · SIMF Control Panel (/login)

Property	Value
Address	/login
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/SignIn.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/SignIn.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

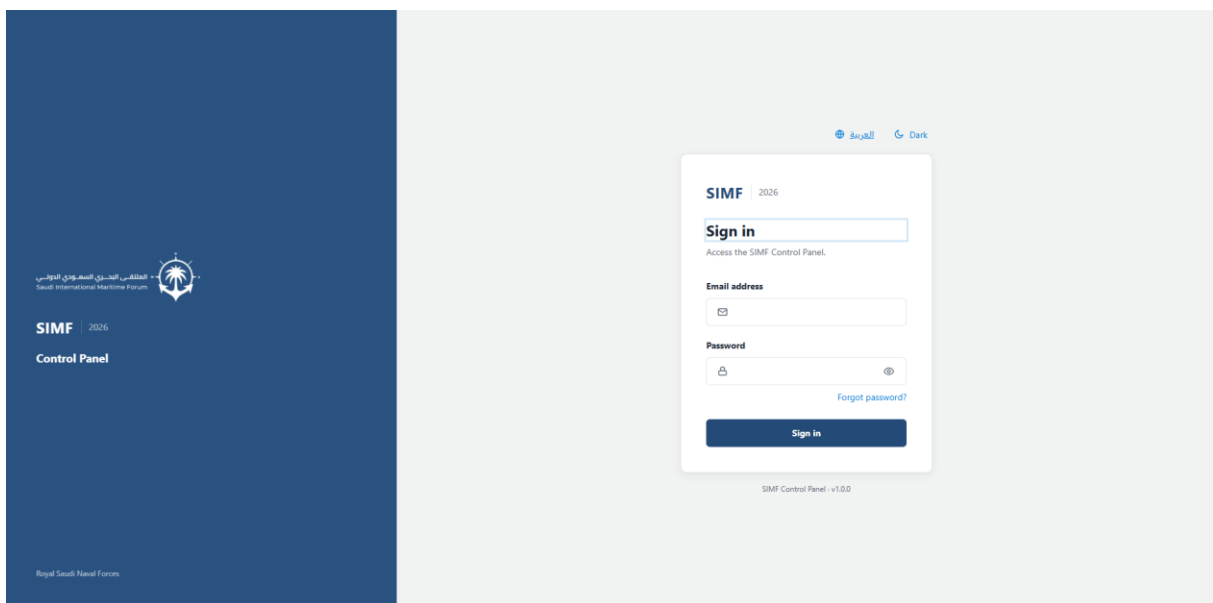


Figure 129 — /login

Set up two-factor authentication (/login/enrol-2fa)

Property	Value
Address	/login/enrol-2fa
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TwoFactorEnrolment.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TwoFactorEnrolment.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Recovery code · SIMF Control Panel (/login/recovery)

Property	Value
Address	/login/recovery
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/RecoveryCodeVerify.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/RecoveryCodeVerify.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

Verify · SIMF Control Panel (/login/totp)

Property	Value
Address	/login/totp
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TotpVerify.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/TotpVerify.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

No screenshot: this address cannot be opened directly by a signed-in reader. The two account-state pages redirect to the dashboard, and the three sign-in pages redirect back to the sign-in form, because each is reachable only at its own point in a flow.

/m/{Module} (/m/{Module})

Property	Value
Address	/m/{Module}
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/ModulePlaceholder.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/ModulePlaceholder.razor.cs
Page permission	Sessions.View

Menu permission	-
-----------------	---

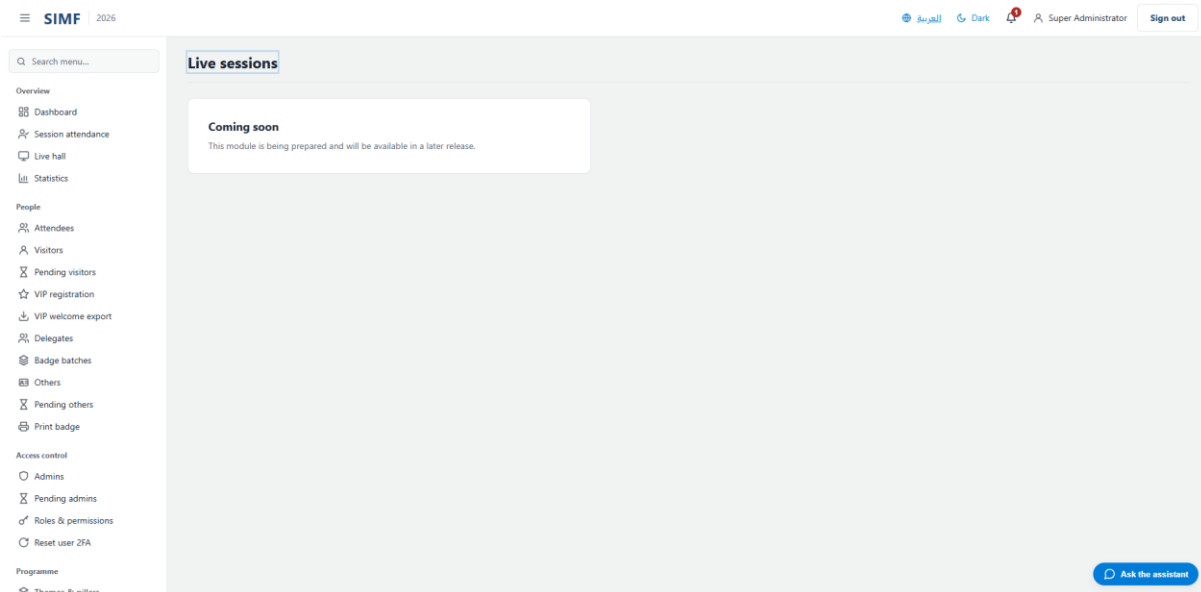


Figure 130 — /m/{Module}

Page not found (/not-found)

Property	Value
Address	/not-found
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/NotFound.razor
Code-behind	-
Page permission	Anyone, signed in or not
Menu permission	-

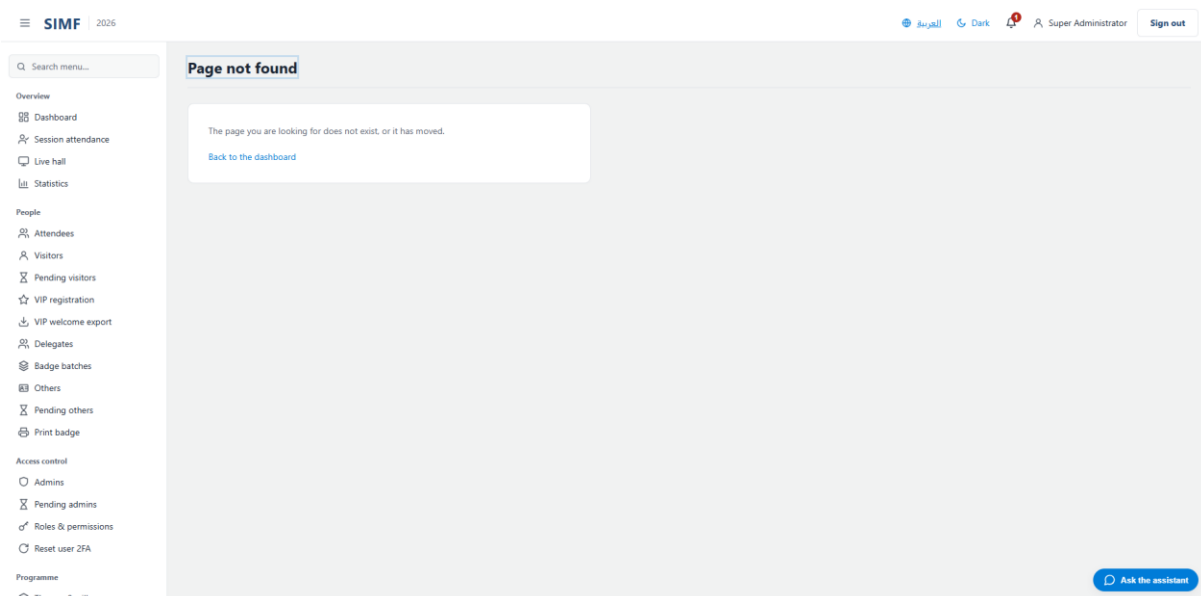


Figure 131 — /not-found

Not permitted (/not-permitted)

Property	Value
Address	/not-permitted
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/NotPermitted.razor
Code-behind	-
Page permission	Any signed-in user
Menu permission	-

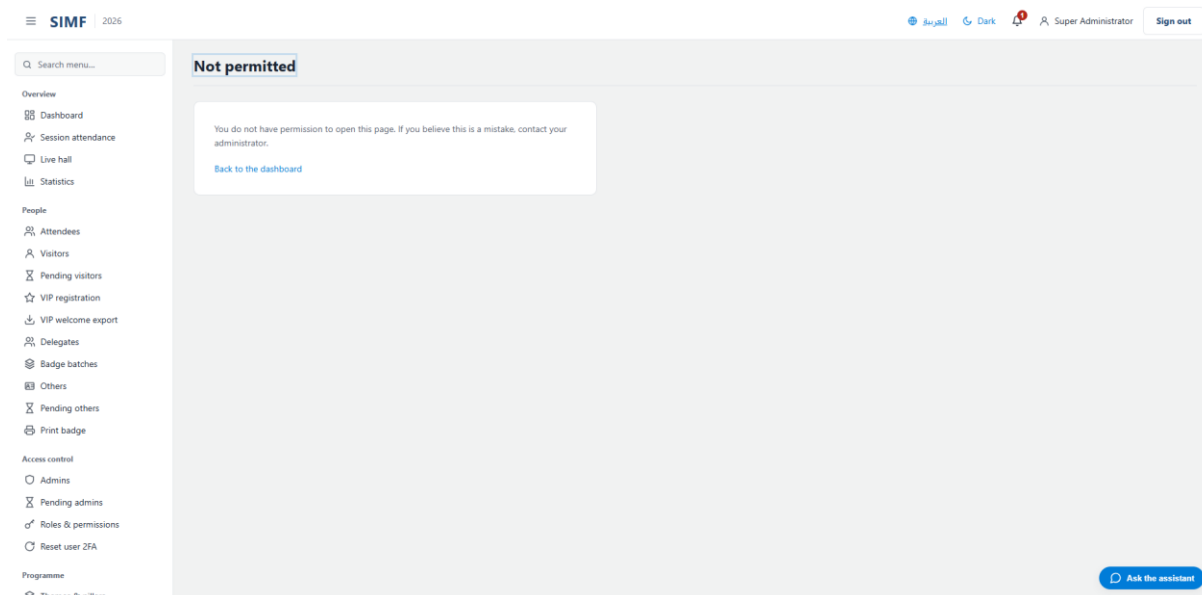


Figure 132 — /not-permitted

Reset password · SIMF Control Panel (/reset-password)

Property	Value
Address	/reset-password
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ResetPassword.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Auth/ResetPassword.razor.cs
Page permission	Anyone, signed in or not
Menu permission	-

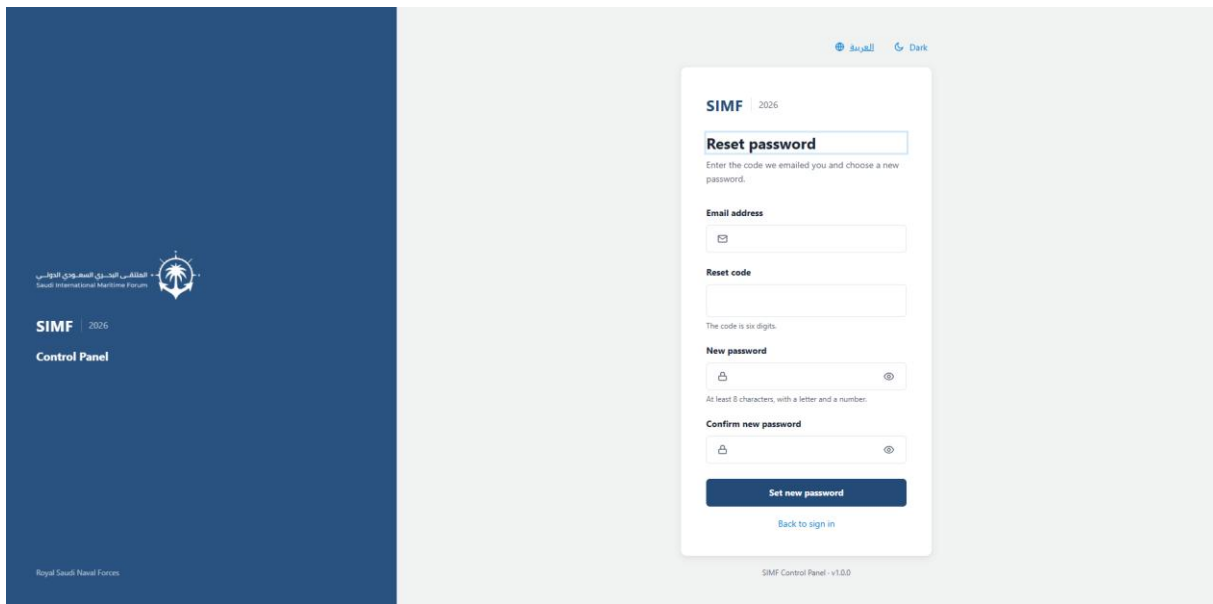


Figure 133 — /reset-password

Session Q&A moderation (/sessions/{SessionId:guid}/moderate)

Property	Value
Address	/sessions/{SessionId:guid}/moderate
Implemented by	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModerationDesk.razor
Code-behind	src/ControlPanel/SIMF.ControlPanel/Components/Pages/Admin/SessionModerationDesk.razor.cs
Page permission	Questions.Moderate
Menu permission	-

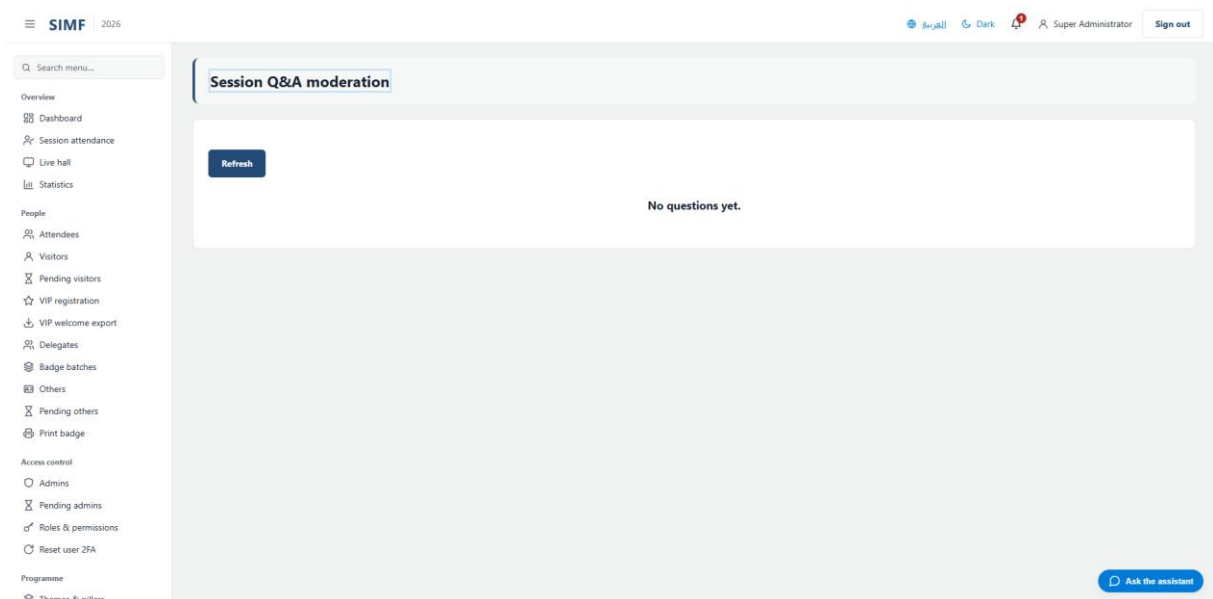


Figure 134 — /sessions/{SessionId:guid}/moderate