

Queue in Python

Difficulty Level : Easy • Last Updated : 13 Nov, 2020

Like stack, queue is a linear data structure that stores items in First In First Out (FIFO) manner. With a queue the least recently added item is removed first. A good example of queue is any queue of consumers for a resource where the consumer that came first is served first.

Queue



Related Articles

Enqueue

Rear

Front

Dequeue

First in, first out

Operations associated with queue are:


- **Enqueue:** Adds an item to the queue. If the queue is full, then it is said to be an Overflow condition – Time Complexity : $O(1)$
- **Dequeue:** Removes an item from the queue. The items are popped in the same order in which they are pushed. If the queue is empty, then it is said to be an Underflow condition – Time Complexity : $O(1)$

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Implementation

There are various ways to implement a queue in Python. This article covers the implementation of queue using data structures and modules from Python library. Queue in Python can be implemented by the following ways:

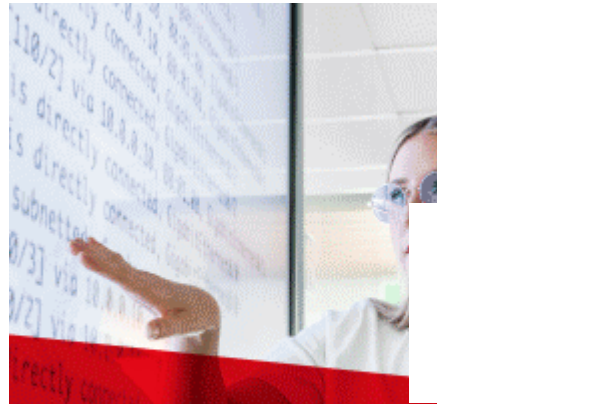

- list
- collections.deque
- queue.Queue

Implementation using list

List is a Python's built-in data structure that can be used as a queue. Instead of enqueue() and dequeue(), append() and pop() function is used. However, lists are quite slow for this purpose because inserting or deleting an element at the beginning requires shifting all of the other elements by one, requiring $O(n)$ time.

Python3

```
# Python program to  
# demonstrate queue implementation  
# using list
```

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

```
# Adding elements to the queue
queue.append('a')
queue.append('b')
queue.append('c')

print("Initial queue")
print(queue)

# Removing elements from the queue
print("\nElements dequeued from queue")
print(queue.pop(0))
print(queue.pop(0))
print(queue.pop(0))

print("\nQueue after removing elements")
print(queue)

# Uncommenting print(queue.pop(0))
# will raise and IndexError
# as the queue is now empty
```

Output:

```
Initial queue
['a', 'b', 'c']
```

```
Elements dequeued from queue
a
b
c
```

```
Queue after removing elements
[]
```

Traceback (most recent call last):

```
File "/home/ef51acf025182ccd69d906e58f17b6de.py", line 25, in  
    print(queue.pop(0))
```

IndexError: pop from empty list

Implementation using collections.deque

Queue in Python can be implemented using deque class from the collections module. Deque is preferred over list in the cases where we need quicker append and pop operations from both the ends of container, as deque provides an $O(1)$ time complexity for append and pop operations as compared to list which provides $O(n)$ time complexity. Instead of enqueue and deque, append() and popleft() functions are used.

Python3

```
# Python program to  
# demonstrate queue implementation  
# using collections.dequeue
```

```
from collections import deque
```

```
# Initializing a queue  
q = deque()
```

```
# Adding elements to a queue  
q.append('a')  
q.append('b')  
q.append('c')
```

```
print("Initial queue")  
print(q)
```

```
# Removing elements from a queue  
print("Elements dequeued from the queue")
```

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

```
print("\nQueue after removing elements")
print(q)

# Uncommenting q.popleft()
# will raise an IndexError
# as queue is now empty
```

Output:

Initial queue

```
deque(['a', 'b', 'c'])
```

Elements dequeued from the queue

a

b

c

Queue after removing elements

```
deque([])
```

Traceback (most recent call last):

```
File "/home/b2fa8ce438c2a9f82d6c3e5da587490f.py", line 23, in
    q.popleft()
```

IndexError: pop from an empty deque

Implementation using queue.Queue

Queue is built-in module of Python which is used to implement a queue.

queue.Queue(maxsize) initializes a variable to a maximum size of maxsize. A maxsize of zero '0' means a infinite queue. This Queue follows FIFO rule.

There are various functions available in this module:

- **maxsize** – Number of items allowed in the queue.
- **empty()** – Return True if the queue is empty, False otherwise.
- **full()** – Return True if there are maxsize items in the queue. If the queue was initialized with maxsize=0 (the default), then full() never returns True.
- **get()** – Remove and return an item from the queue. If queue is empty, wait until an item is available.
- **get_nowait()** – Return an item if one is immediately available, else raise QueueEmpty.
- **put(item)** – Put an item into the queue. If the queue is full, wait until a free slot is available before adding the item.
- **put_nowait(item)** – Put an item into the queue without blocking. If no free slot is immediately available, raise QueueFull.
- **qsize()** – Return the number of items in the queue.

Python3

```
# Python program to  
# demonstrate implementation of  
# queue using queue module
```

```
from queue import Queue
```

```
# Initializing a queue  
q = Queue(maxsize = 3)
```

```
# qsize() give the maxsize  
# of the Queue  
print(q.qsize())
```

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

```
q.put('b')
q.put('c')

# Return Boolean for Full
# Queue
print("\nFull: ", q.full())

# Removing element from queue
print("\nElements dequeued from the queue")
print(q.get())
print(q.get())
print(q.get())

# Return Boolean for Empty
# Queue
print("\nEmpty: ", q.empty())

q.put(1)
print("\nEmpty: ", q.empty())
print("Full: ", q.full())

# This would result into Infinite
# Loop as the Queue is empty.
# print(q.get())
```

Output:

0

Full: True

Elements dequeued from the queue

a

b

c

Empty: True

Empty: False

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Attention geek! Strengthen your foundations with the [Python Programming Foundation](#) Course and learn the basics.

To begin with, your interview preparations Enhance your Data Structures concepts with the [Python DS](#) Course.

**Like** 0

Next >

Stack in Python

RECOMMENDED ARTICLES

Page : 1 2 3

01 **Stack and Queue in Python using queue Module**
19, Jan 18

05 **Reversing a Queue using another Queue**
04, Sep 19

02 **Priority Queue using Queue and Heapdict module in Python**
13, Mar 20

06 **Difference between Circular Queue and Priority Queue**
27, Aug 20

03 **Difference between queue.queue vs collections.deque in Python**
20, Oct 20

07 **Difference Between Linear Queue and Circular Queue**
06, Jan 21

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

Article Contributed By :



nikhilaggarwal3

@nikhilaggarwal3

Vote for difficulty

Current difficulty : [Easy](#)

Easy

Normal

Medium

Hard

Expert

Improved By : [rajivm1991](#)

Article Tags : [Python](#) , [Queue](#)

Practice Tags : [Queue](#)

Improve Article

Report Issue

Writing code in comment? Please use ide.geeksforgeeks.org, generate link and share the link here.

Load Comments

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !

feedback@geeksforgeeks.org

Company

[About Us](#)

[Careers](#)

[Privacy Policy](#)

[Contact Us](#)

[Copyright Policy](#)

Practice

[Courses](#)

[Company-wise](#)

[Topic-wise](#)

[How to begin?](#)

Learn

[Algorithms](#)

[Data Structures](#)

[Languages](#)

[CS Subjects](#)

[Video Tutorials](#)

Contribute

[Write an Article](#)

[Write Interview Experience](#)

[Internships](#)

[Videos](#)

@geeksforgeeks , Some rights reserved

We use cookies to ensure you have the best browsing experience on our website. By using our site, you acknowledge that you have read and understood our [Cookie Policy](#) & [Privacy Policy](#).

Got It !