DAY 23 · THEORY HANDOUT

Choose a Path or Run Two Tasks

Build parallel results, route a request, and keep input values.

KGP Talkie

Scan to subscribe

The idea and its useful terms

Build parallel results, route a request, and keep input values.

Parallel chain

Independent tasks use the same input.

Router

A rule chooses which path runs next.

Passthrough

Keeps the input value instead of changing it.

Parallel branches are useful when neither result needs the other. A dictionary keeps the two results under different names.


Routing is useful when different inputs need different prompts. Check unknown labels rather than silently sending them down the wrong path.

> Parallel work can be slower on one busy local model. Two branches still need two generations.

Follow the work, one step at a time

Each step has a job. We can inspect its output before moving on.

Read the path from left to right.

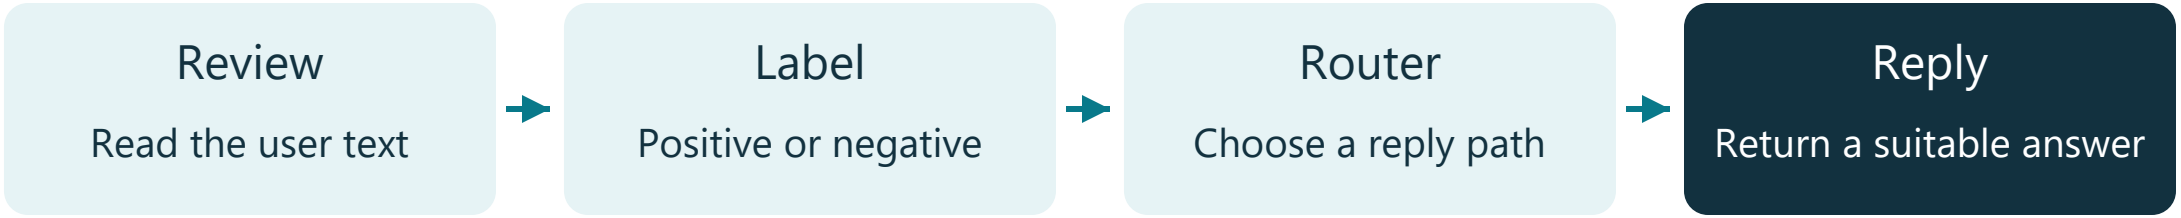

Each arrow means: pass the result to the next step.

RunnableParallel passes the input to each independent branch and returns named results. A router instead calls a function that selects one runnable. That selected runnable then receives the input.

RunnablePassthrough keeps a value unchanged. RunnableLambda wraps a Python function such as a word count or route choice. Preserve the original review alongside its label so the selected reply prompt has both.

> If the answer is wrong, inspect the input and the intermediate results. The last sentence alone cannot show which step failed.

A small example we can check

The values here are classroom examples. The notebook shows actual results.

Parallel

One topic enters.

Facts and a poem leave.

Router

A review gets a label.

The label chooses a path.

Custom runnable

A Python function counts words in the output.

Read the given input first. Point to the fact or value needed for the requested output.

Run the matching example, then try the fresh input at the end of the notebook. Compare both results with the known input.

> Parallel work can be slower on one busy local model. Two branches still need two generations.

Choose the setting or tool for its job

05 KGP Talkie

A different choice changes the work. These are the choices we compare.

RunnableParallel

Collect branch results.

May use more computer work.

RunnableLambda

Wrap a small function.

Explain its input first.

Unknown label

Keep a clear fallback.

Do not guess a route.

Run two short branches and read each dictionary key separately.

Route positive and negative reviews to different prompts.

> Try a mixed review. Inspect the label before accepting the routed reply.

Practice, check, and read the full lesson

Use the notebook to try the steps. Use the article when you need the longer explanation.

1. Build

Run the small example.

Inspect each step.

2. Change

Try the fresh input.

Keep the goal clear.

3. Check

Compare with the source.

Keep mistakes visible.

Try a mixed review. Inspect the label before accepting the routed reply.

Read the complete tutorial breakdown for this section in our KGP Talkie article.

> Parallel work can be slower on one busy local model. Two branches still need two generations.

DAY 23 · COMPLETE

Thank You

Follow KGP Talkie for new lessons, course updates and live sessions.

Scan to follow

Instagram
@kgptalkie

WhatsApp Channel
KGP Talkie