DAY 25 · THEORY HANDOUT

Keep a Conversation's History

Store chat turns and keep each session separate.

KGP Talkie

Scan to subscribe

Laxmi Kant Tiwari · kgptalkie.com

The idea and its useful terms

02 KGP Talkie

Store chat turns and keep each session separate.

History

Earlier user and assistant messages in this chat.

Session ID

A label used to find one conversation's history.

MessagesPlaceholder

A slot for a list of earlier role messages.

A model call does not automatically remember the previous call. The app must store earlier turns and send them again.


Session IDs stop two chats from sharing one history by accident. A new session should begin without the old name.

> History is stored text sent back as input. It does not update the model weights.

Follow the work, one step at a time

Each step has a job. We can inspect its output before moving on.

Read the path from left to right.

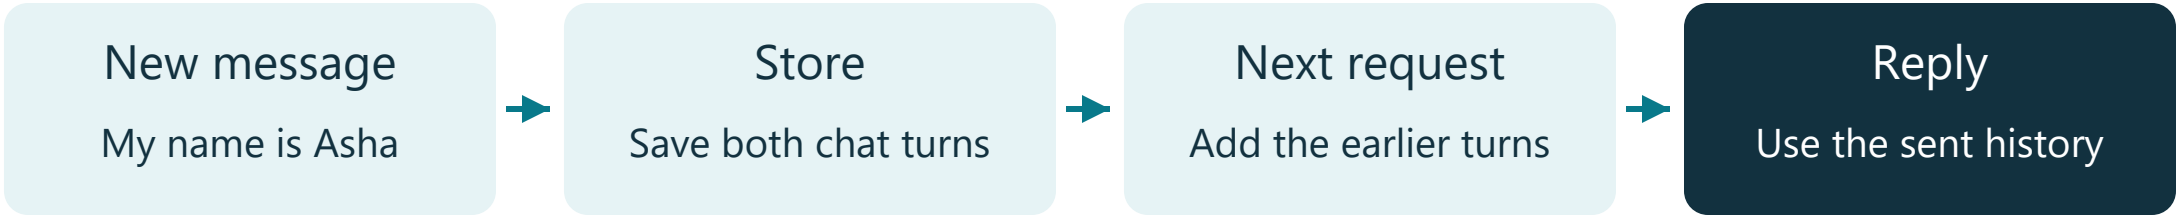

Each arrow means: pass the result to the next step.

The history wrapper asks for the session's earlier turns before calling the chain. The prompt places those turns in its history slot. After the call, the wrapper saves the new user and assistant messages.

The history callback uses the session ID to find one store. SQLite can retain it across restarts; a Python dictionary cannot. As chats grow, earlier text uses more context space and needs a planned trimming rule.

> If the answer is wrong, inspect the input and the intermediate results. The last sentence alone cannot show which step failed.

A small example we can check

The values here are classroom examples. The notebook shows actual results.

Session A

My name is Asha.

Ask: What is my name?

Session B

No name was provided.

It should not get Asha.

Storage

Memory lasts in this run.

SQLite can keep it on disk.

Read the given input first. Point to the fact or value needed for the requested output.

Run the matching example, then try the fresh input at the end of the notebook. Compare both results with the known input.

> History is stored text sent back as input. It does not update the model weights.

05 KGP Talkie

Choose the setting or tool for its job

A different choice changes the work. These are the choices we compare.

In-memory history

Small classroom example.

Lost after restart.

SQLite history

Keep turns on disk.

Use a local database.

Long chat

More history uses space.

Trim with care.

Wrap a chain with RunnableWithMessageHistory. Send two turns in one session.

Use a new session ID and inspect the stored turns.

> Try a SQLite history store and clear only the classroom session you created.

Practice, check, and read the full lesson

Use the notebook to try the steps. Use the article when you need the longer explanation.

1. Build

Run the small example.

Inspect each step.

2. Change

Try the fresh input.

Keep the goal clear.

3. Check

Compare with the source.

Keep mistakes visible.

Try a SQLite history store and clear only the classroom session you created.

Read the complete tutorial breakdown for this section in our KGP Talkie article.

> History is stored text sent back as input. It does not update the model weights.

DAY 25 · COMPLETE

Thank You

Follow KGP Talkie for new lessons, course updates and live sessions.

Scan to follow

Instagram
@kgptalkie

WhatsApp Channel
KGP Talkie