DAY 44 · THEORY HANDOUT

Prepare a Local LLM App for Deployment

Map the app, model server, files, settings, and project checks.

KGP Talkie

Scan to subscribe

Laxmi Kant Tiwari · kgptalkie.com

The idea and its useful terms

Map the app, model server, files, settings, and project checks.

Deployment

Running an app where other users can reach it.

Host

The computer or service running one part of the app.

Configuration

Settings such as model tag and server address.

localhost means the machine running the app. An app on a cloud server cannot reach a model on our laptop by using localhost.


The course ends with deployment notes. First make the local app repeatable, then decide where the app and model will run and how they connect.

> Local testing proves the local path. Public access, authentication, network rules, and remote model speed need separate deployment checks.

Follow the work, one step at a time

Each step has a job. We can inspect its output before moving on.

Read the path from left to right.

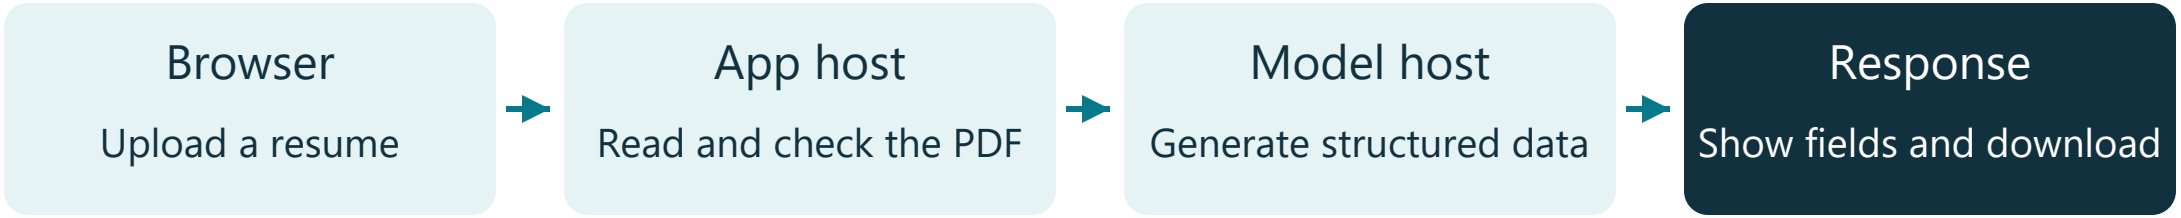

Each arrow means: pass the result to the next step.

The browser talks to the app host. The app host talks to a model server at a reachable address. If both run together, localhost can work. If they are separate, the app needs the other host's model URL.

Keep package versions, model tag, and settings recorded. Test the local path before hosting. A real deployment also needs private access rules, a protected model connection, resource checks, and failure handling.

> If the answer is wrong, inspect the input and the intermediate results. The last sentence alone cannot show which step failed.

A small example we can check

The values here are classroom examples. The notebook shows actual results.

Same host

App and Ollama together.
Need enough RAM.

Separate hosts

Use a reachable model URL.
Protect that connection.

Project checks

New file, missing field,
bad PDF, repeated request.

Read the given input first. Point to the fact or value needed for the requested output.

Run the matching example, then try the fresh input at the end of the notebook. Compare both results with the known input.

> Local testing proves the local path. Public access, authentication, network rules, and remote model speed need separate deployment checks.

Choose the setting or tool for its job

A different choice changes the work. These are the choices we compare.

Dependencies

Install tested versions.

Use the same Python env.

Secrets

Read from env settings.

Keep them out of Git.

Failure message

Say which step failed.

Never show a fake success.

Run the local health check and app smoke test before considering a remote host.

Check the saved environment file example without adding real secrets to it.

> Review the project with two fresh resumes and an empty input. Record what passed and what still needs a real deployment test.

Practice, check, and read the full lesson

Use the notebook to try the steps. Use the article when you need the longer explanation.

1. Build

Run the small example.

Inspect each step.

2. Change

Try the fresh input.

Keep the goal clear.

3. Check

Compare with the source.

Keep mistakes visible.

Review the project with two fresh resumes and an empty input. Record what passed and what still needs a real deployment test.

Read the complete tutorial breakdown for this section in our KGP Talkie article.

> Local testing proves the local path. Public access, authentication, network rules, and remote model speed need separate deployment checks.

DAY 44 · COMPLETE

Thank You

Follow KGP Talkie for new lessons, course updates and live sessions.

Scan to follow

Instagram
@kgptalkie

WhatsApp Channel
KGP Talkie