
Start with what needs attention

The default view is a short review queue, with the change itself visible before opening a trial.

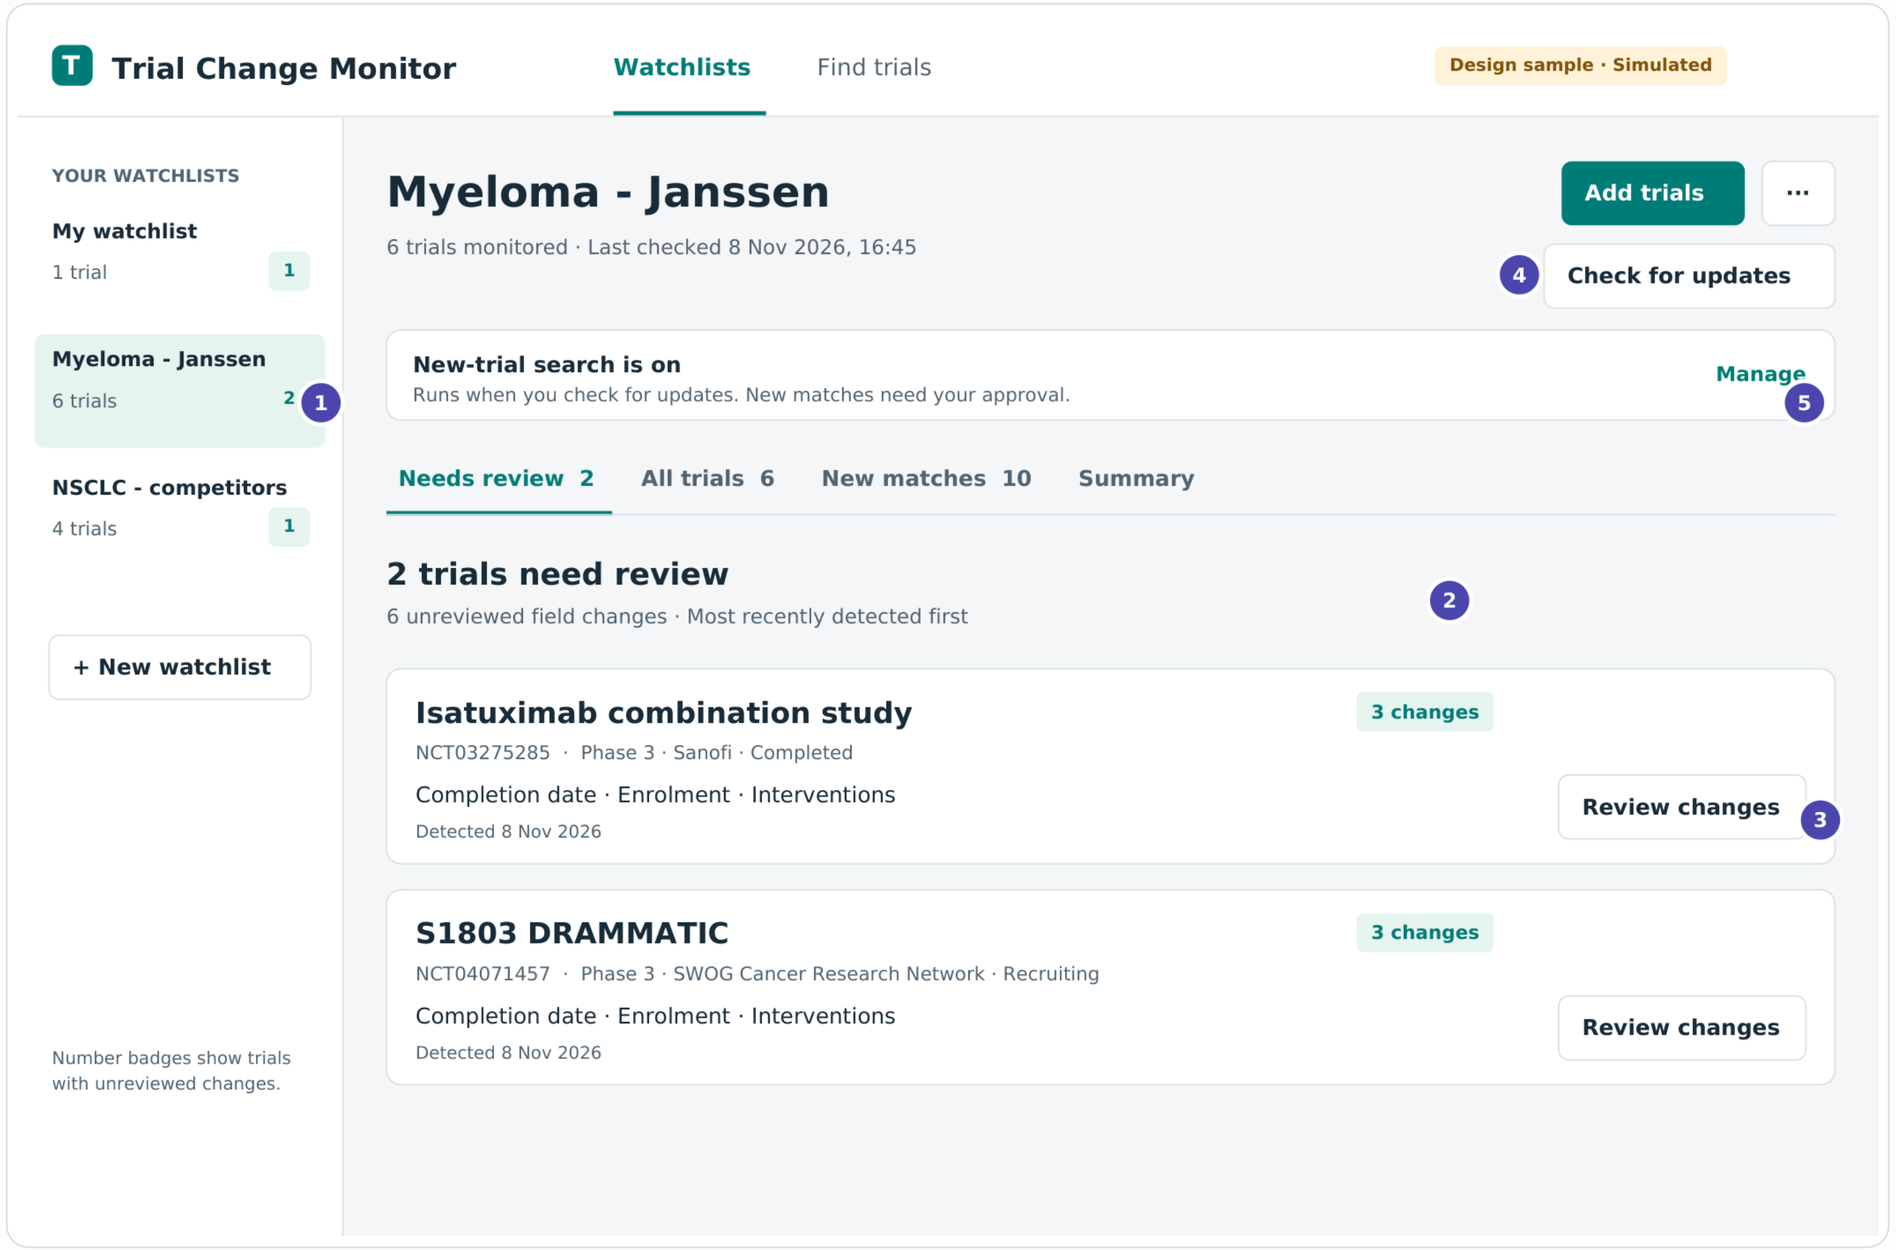

DESIGN NOTES

1 A useful list switcher

Show both trial totals and trials needing review. Keep list names visible; long names wrap.

2 Count the right things

Two trials, six field changes. Keep these units explicit and order by detection time, not an inferred importance score.

3 Open, don’t select

The trial title and Review changes link open the same page. Checkboxes are reserved for bulk selection elsewhere.

4 An honest refresh action

Checking is manual in this design. Show last checked and a clear action; never imply live or scheduled monitoring.


5 Discovery stays secondary

A saved search is visible, but new matches have their own tab. They never push the review queue down.

Keep the queue narrow: trial identity, what changed, when detected, one action. Full metadata belongs in the trial.

Keep the whole watchlist easy to scan

A compact table works for the inventory; the review queue remains a separate view.

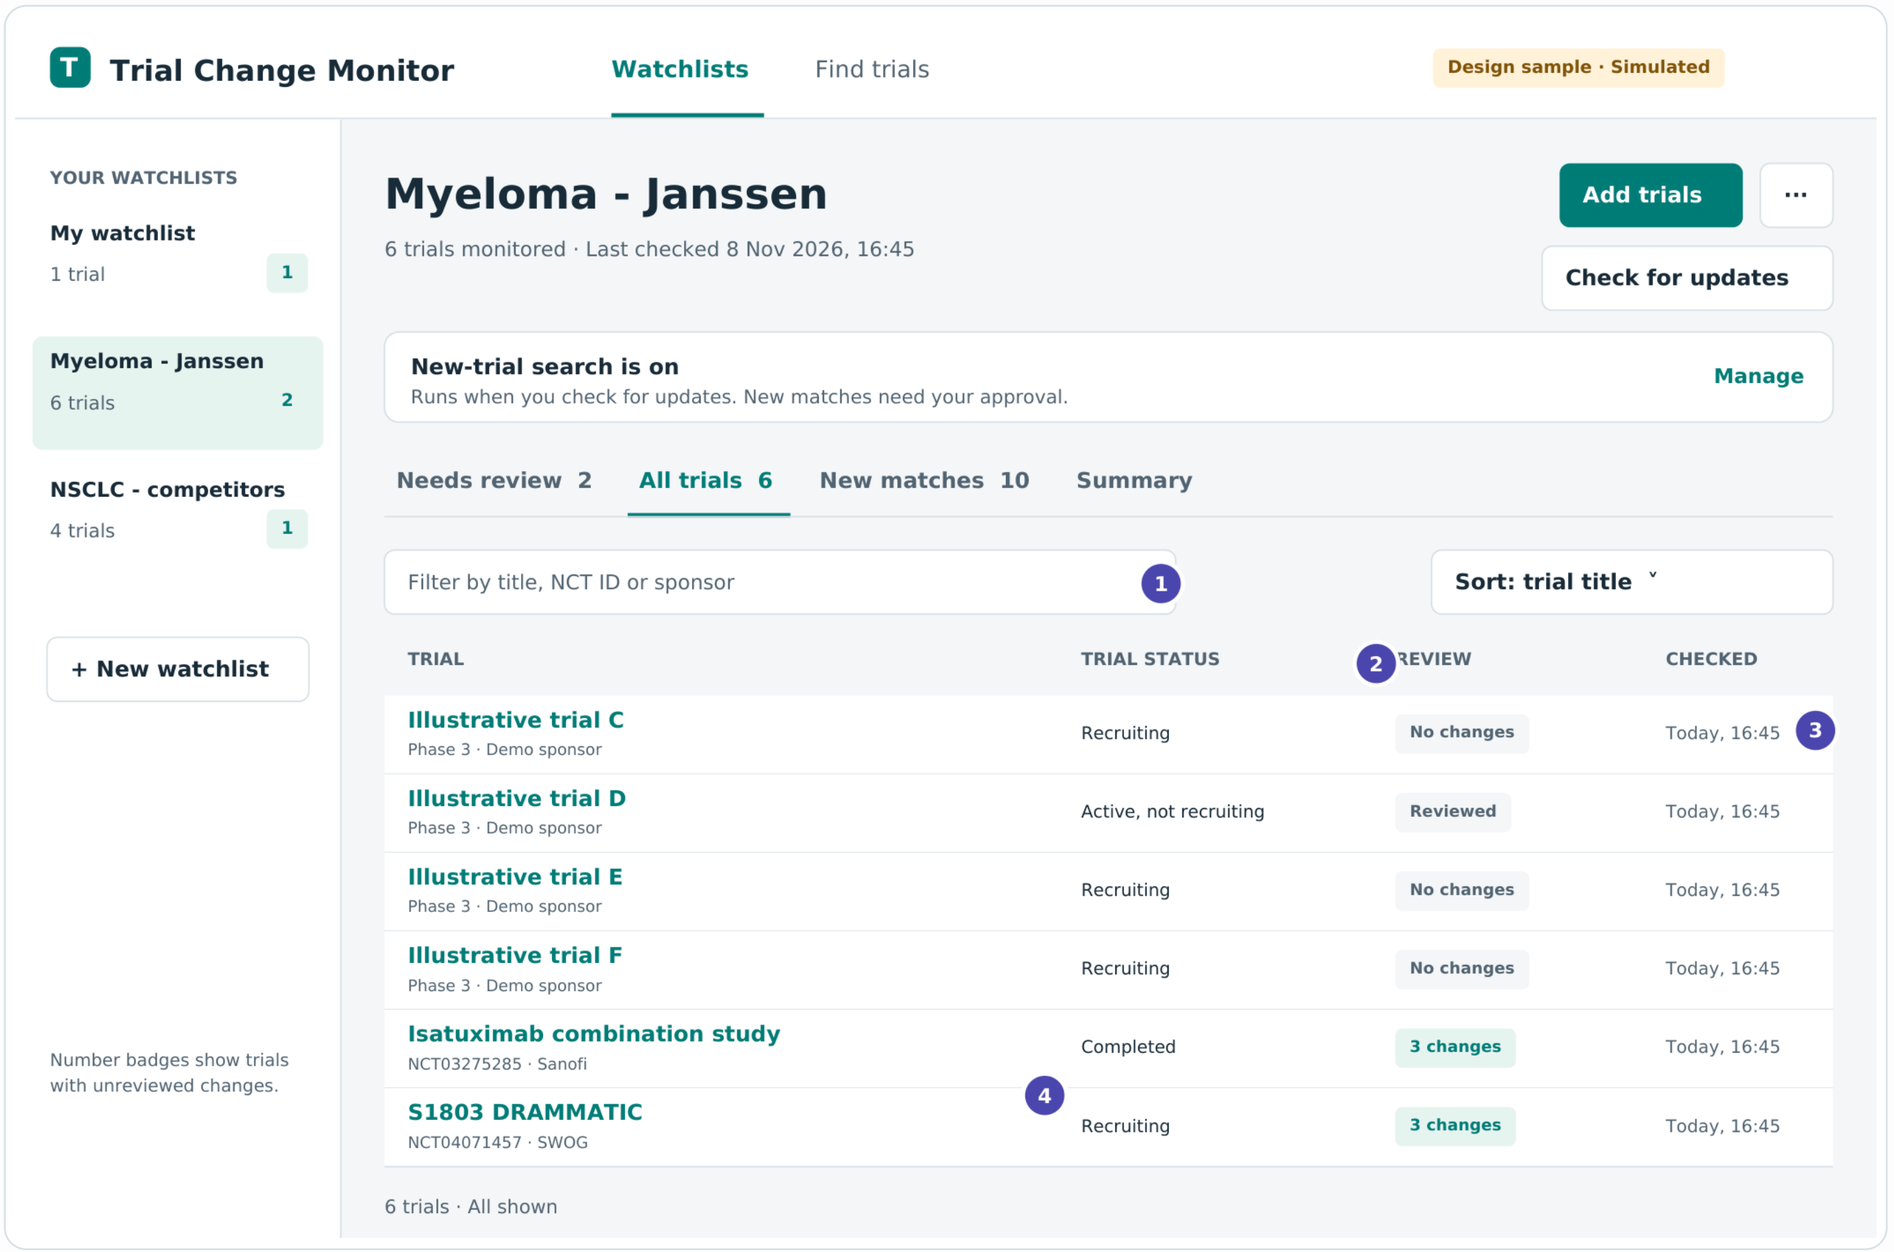

DESIGN NOTES

1 Find a known trial quickly

Filter only this watchlist by title, ID or sponsor. This local filter is separate from searching ClinicalTrials.gov.

2 Two independent states

Trial status is the registry status. Review shows unreviewed changes, reviewed history, or no observed changes since monitoring began.

3 Freshness belongs to each trial

Show each trial’s last successful check. A failed check adds a labelled warning here and preserves the earlier success time.


4 A title is a real link

Open Trial details from this inventory; the Changes tab is available immediately. Wrap long titles, expand row height and keep headers visible.

The default entry is Needs review. Remember an explicitly chosen view; do not switch views automatically when a check or review changes the counts.

Read the change, then review it

A full-width detail page replaces the dossier hidden beneath the table.

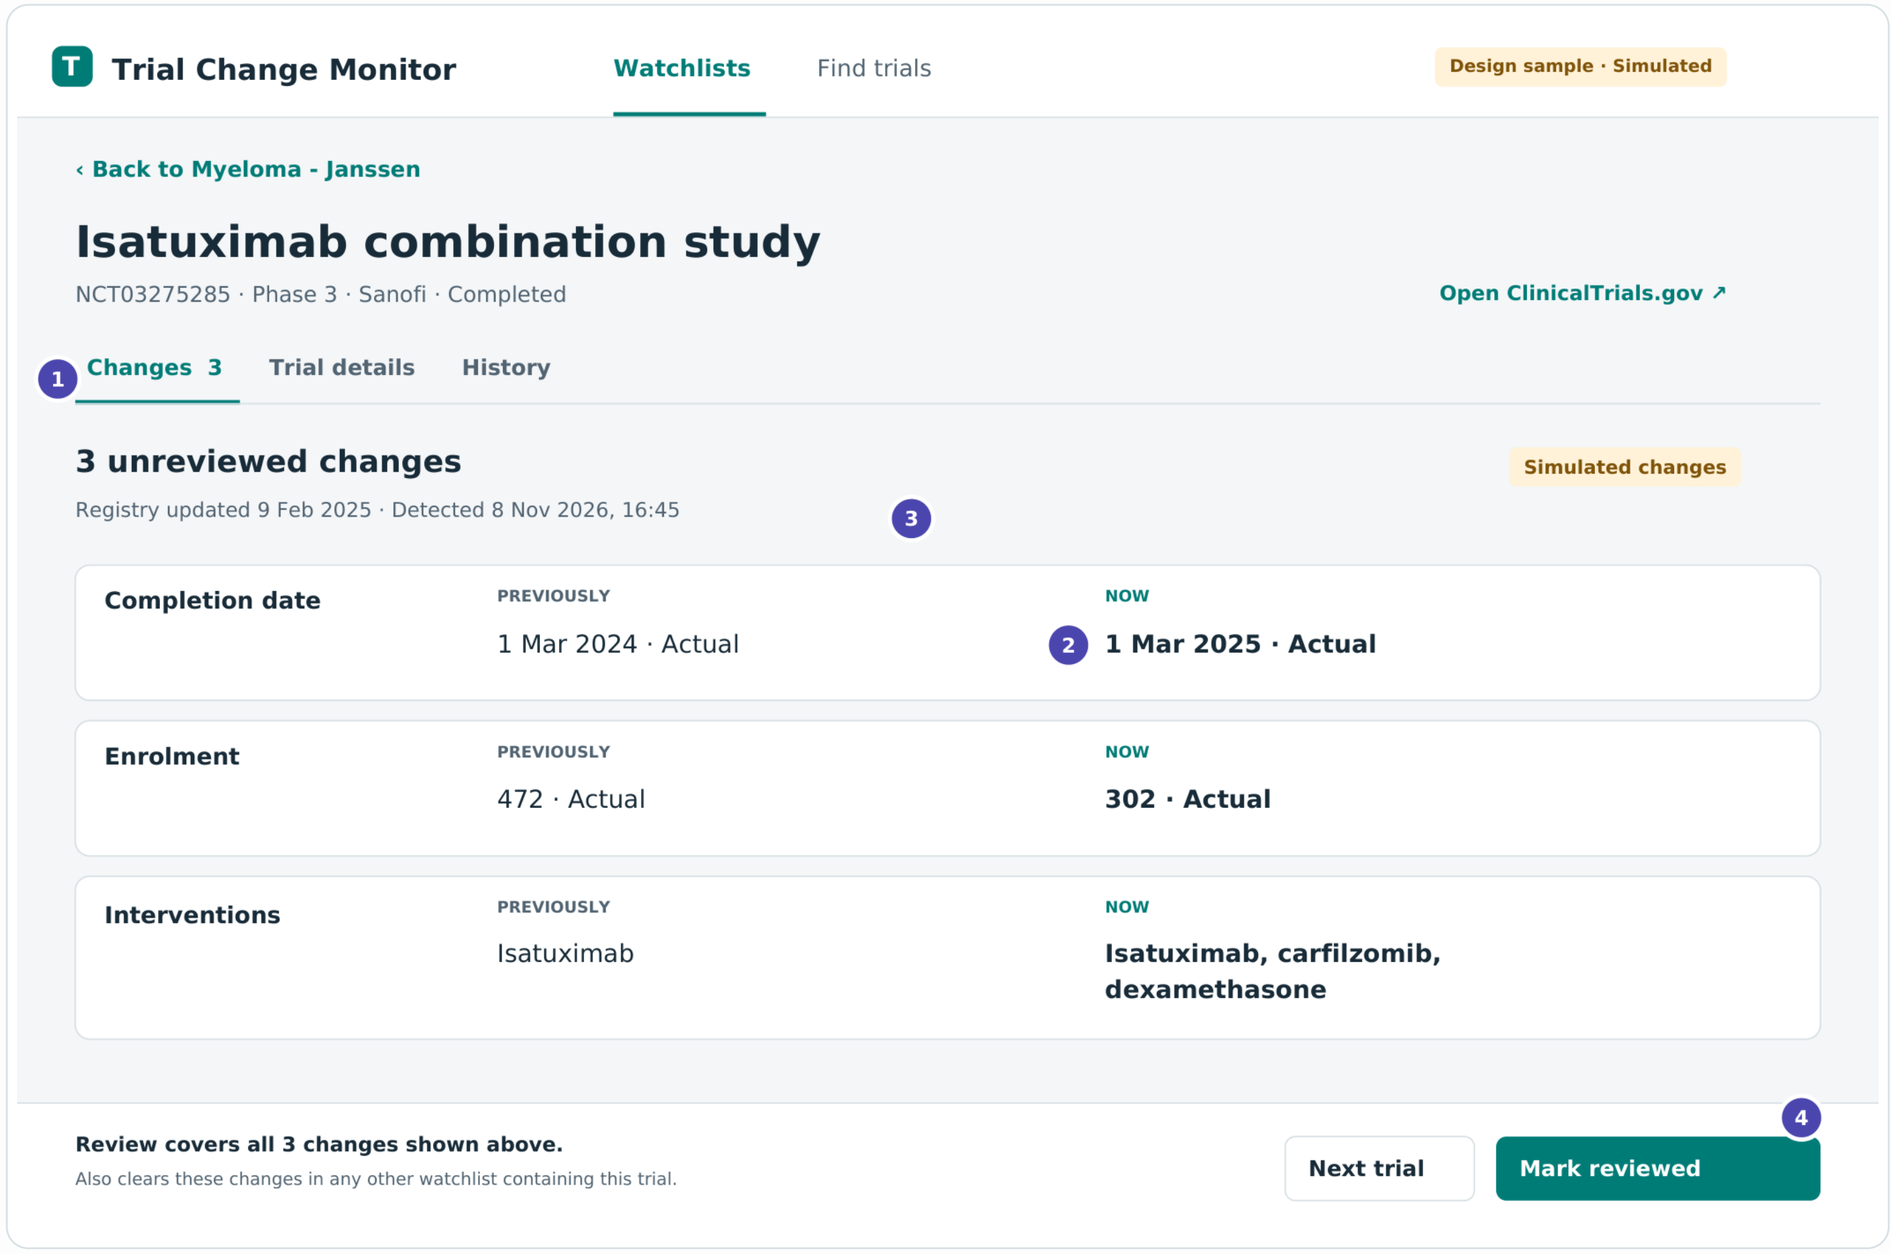

DESIGN NOTES

1 One focused destination

Changes opens first from the review queue. Trial details and History remain one click away; Back restores the list position.

2 Compare values directly

Use labelled Previous / Now columns. For long endpoints or eligibility, stack the two values and wrap all text.

3 Two dates, two meanings

Registry updated is the source date; Detected is when this app observed it. Group changes by check, retaining intermediate events.


4 A deliberate review action

Review all changes shown for this trial. Keep the action bar visible without covering content. Next trial is separate and never marks reviewed.

Proposed review rule: clear only the displayed change IDs. If another check finds new changes during review, those stay unreviewed.

Review without losing your place

The success state preserves the trial, its comparisons and the path back to the queue.

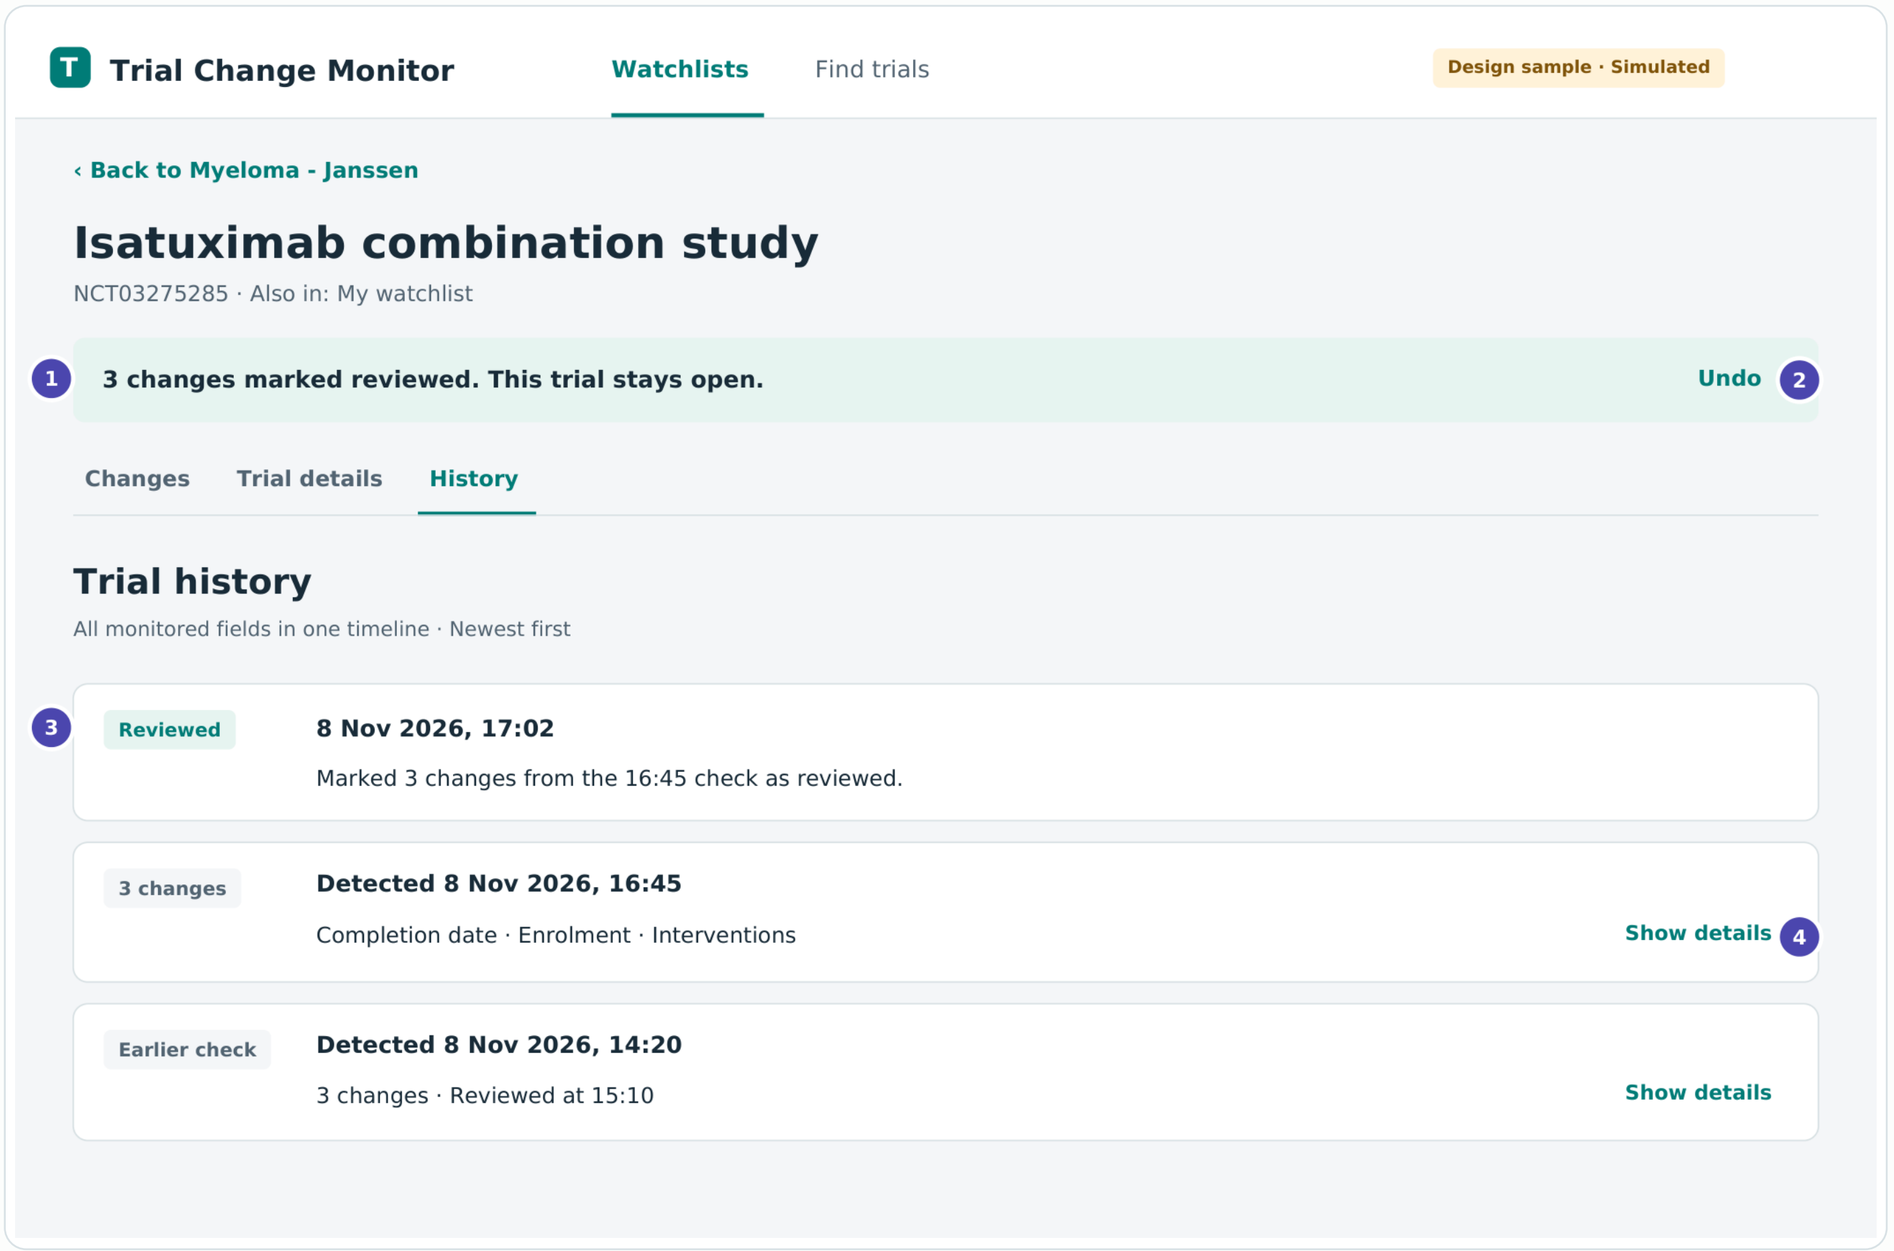

DESIGN NOTES

1 Stay where the user is

After review, remain on Changes with a Reviewed label. This image shows the user subsequently opening History; do not navigate there automatically.

2 Make recovery easy

Offer Undo for the review just performed. The queue count updates, but the page and scroll position do not jump.

3 One chronological record

Combine field changes, monitoring events and review events. Persisting review timestamps is a proposed addition to the prototype.


4 Keep evidence accessible

Expand a check to see every old-to-new transition. Reviewing does not remove comparison values or erase history.

A trial reviewed in one watchlist is reviewed everywhere it appears. Make that scope explicit before the action, not only afterwards.

Keep the dossier available, not dominant

Use a readable document structure instead of uneven, multi-column cards.

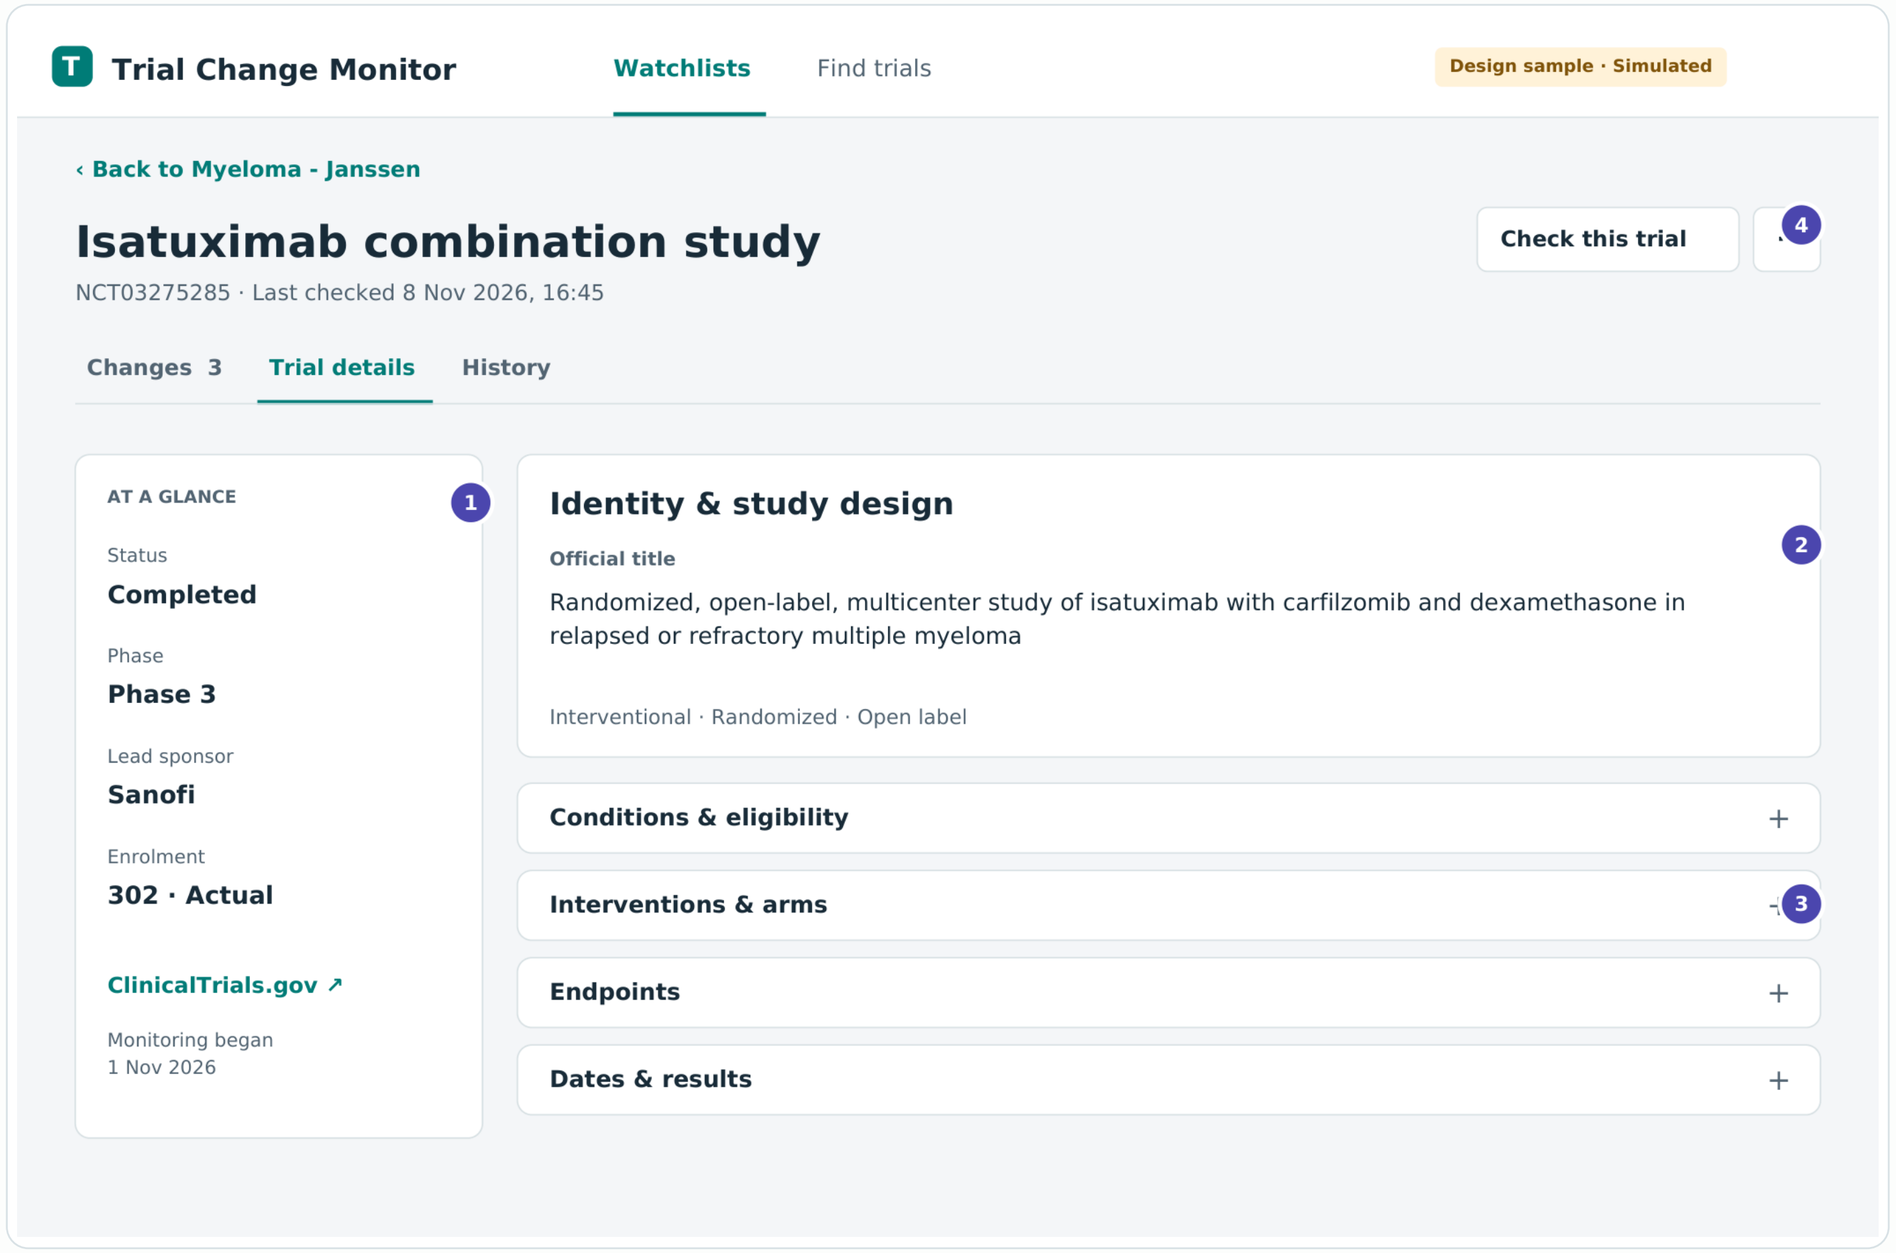

DESIGN NOTES

1 A small facts panel

Keep status, phase, lead sponsor and enrolment in view. On phones this panel becomes a compact section above the details.

2 A full, readable title

The header uses the registry short title or acronym. Show the full official title and all identifiers in Identity; no silent truncation.

3 Predictable sections

Keep the eight original information groups, merged into five readable sections. Expand long sections on demand; never hide unreviewed changes here.


4 Secondary actions stay secondary

The menu contains list membership and Remove from this list. Check this trial is an optional addition; list checking remains the baseline action.

Static design data are illustrative. In the build, render exact registry values and explicit “Not reported” states; never infer a missing value.

Search, select, add

Results get the screen space. The selected query stays visible and easy to edit.

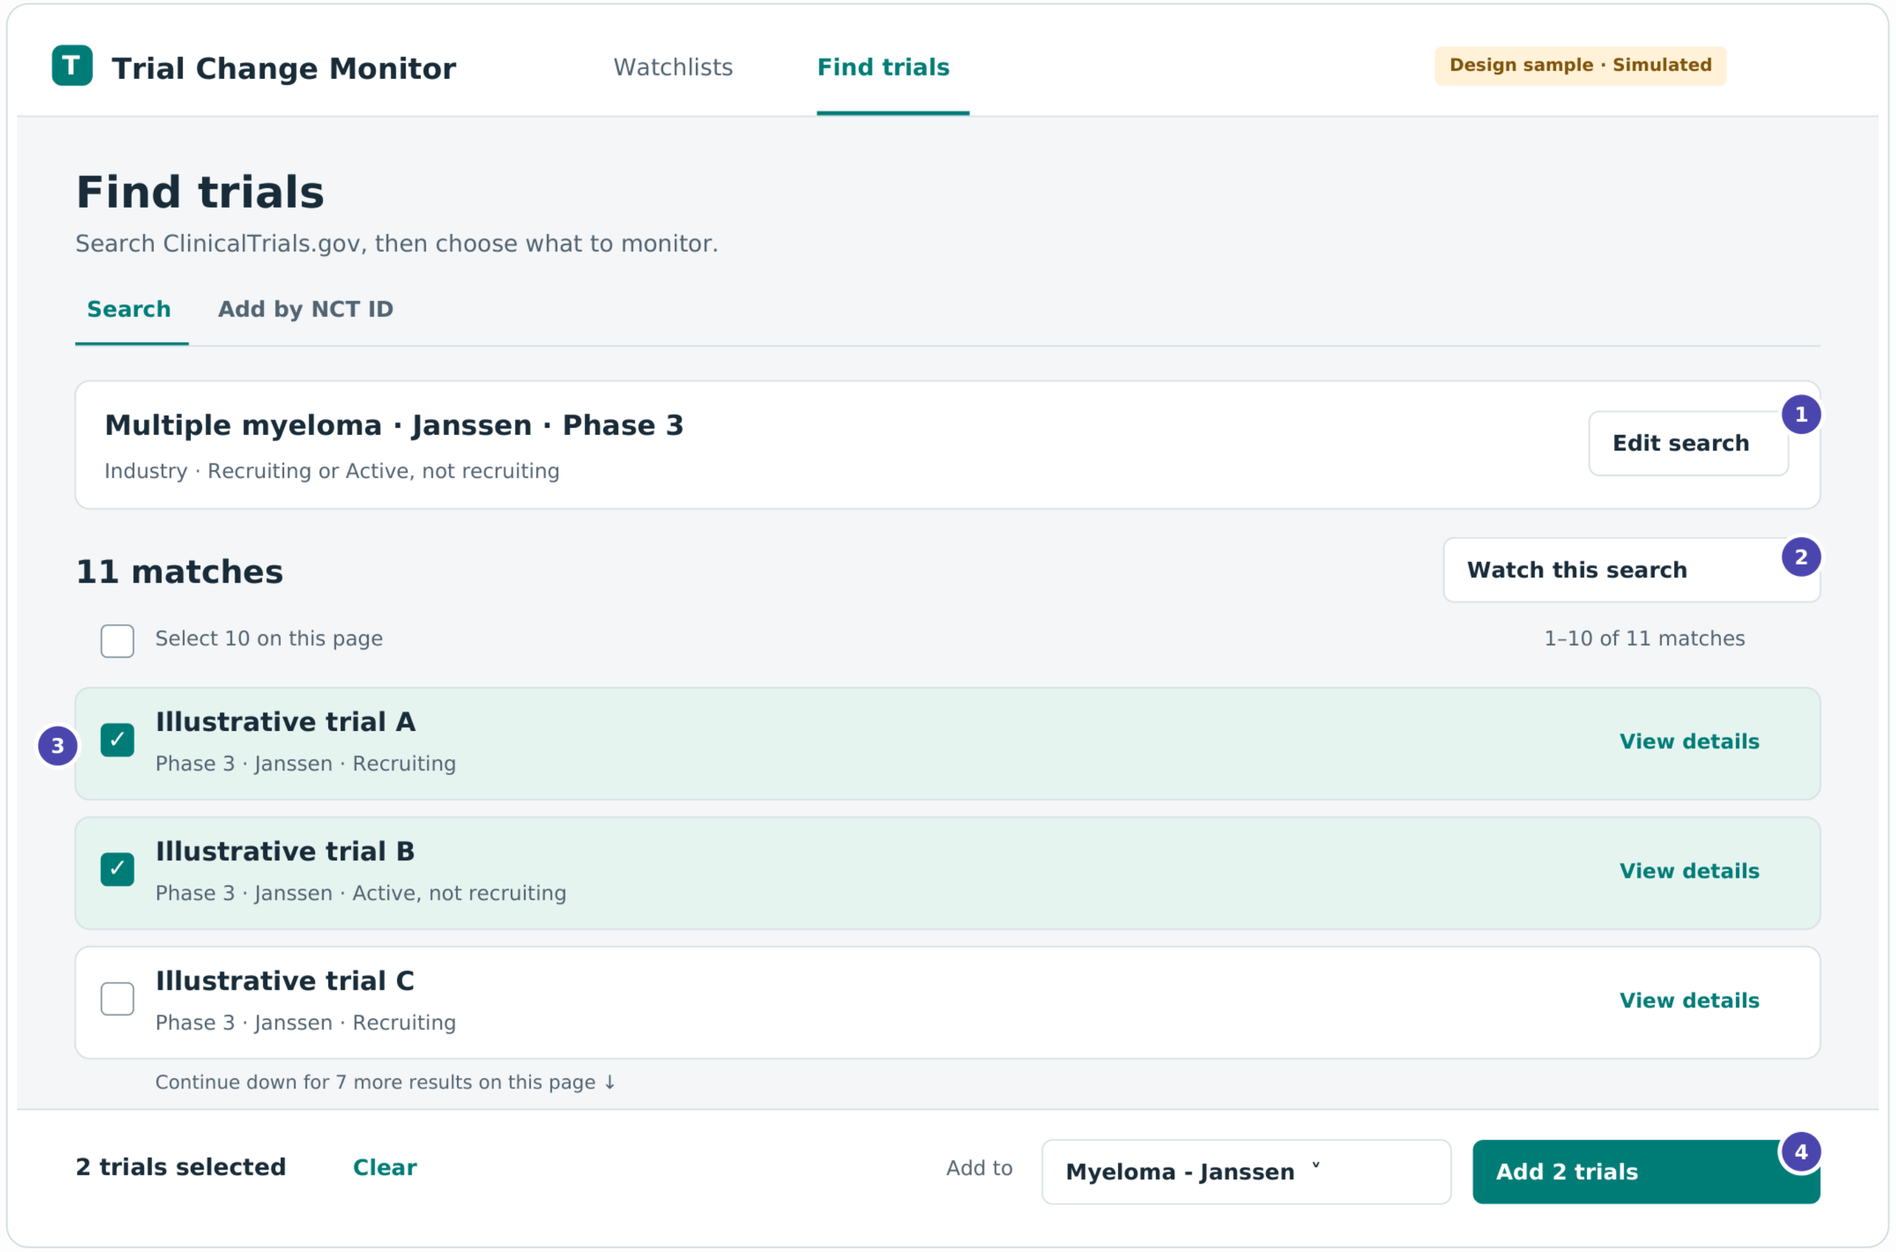

DESIGN NOTES

1 Collapse only after searching

The initial form is expanded. After results arrive, replace it with a plain-language query summary and Edit search.

2 One way to save a search

Watch this search opens a dedicated dialog. It works with zero trials selected and does not add search results automatically.

3 Separate open from select

Real checkboxes select; title links open details. Long titles wrap. Keep selection when viewing a trial, paging or returning.


4 Keep the destination in reach

The action bar appears on selection and reserves space below results. It states the exact count and destination; success links to that list.

Results continue vertically and use pagination, never a nested grid scroll. Select-all means this page; preserve selections across pages and state the total.

Make the first search easy

The four query fields are visible. Additional filters start collapsed; shown expanded here.

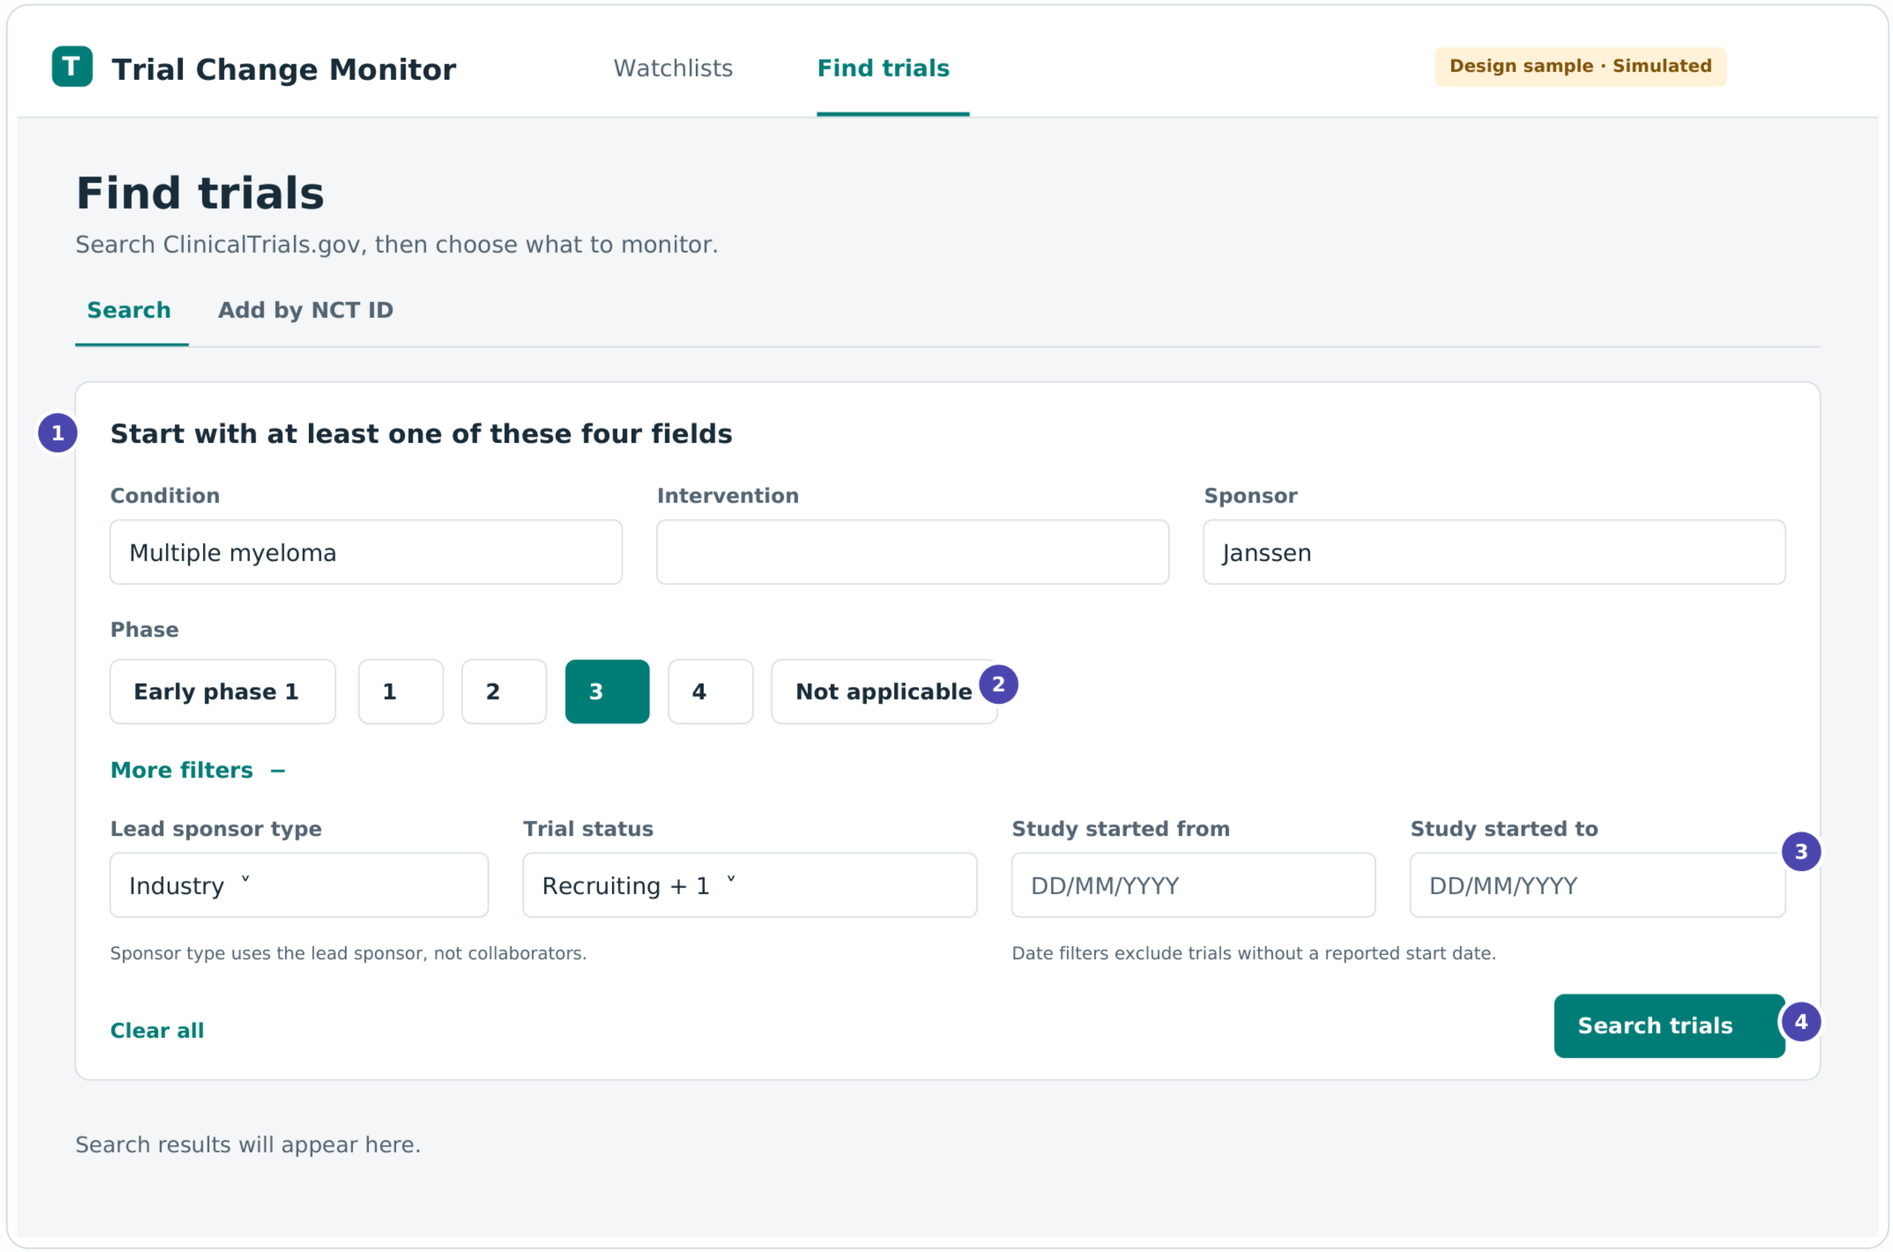

DESIGN NOTES

1 Explain the rule before failure

Condition, intervention, sponsor or phase is needed. Put validation next to this group and retain every value after an error.

2 Use simple choices

Phase is a multi-select set of labelled controls, with a selected state beyond colour. Allow multiple phases and provide a clear-all action.

3 Reveal detail on demand

Sponsor type, status and start dates live under More filters. Show selected statuses in full when opened; never hide essential help in hover tooltips.


4 Keep Search reachable

Enter submits. On a phone, the Search action stays at the bottom of the viewport; the form scrolls behind it with padding.

For zero matches, retain the query and offer Edit search / Clear optional filters. For a network error, retain the form and offer Retry, not a blank results area.

Give each action one clear meaning

Dialog studies: saving a search and creating a list are explicit, bounded tasks.

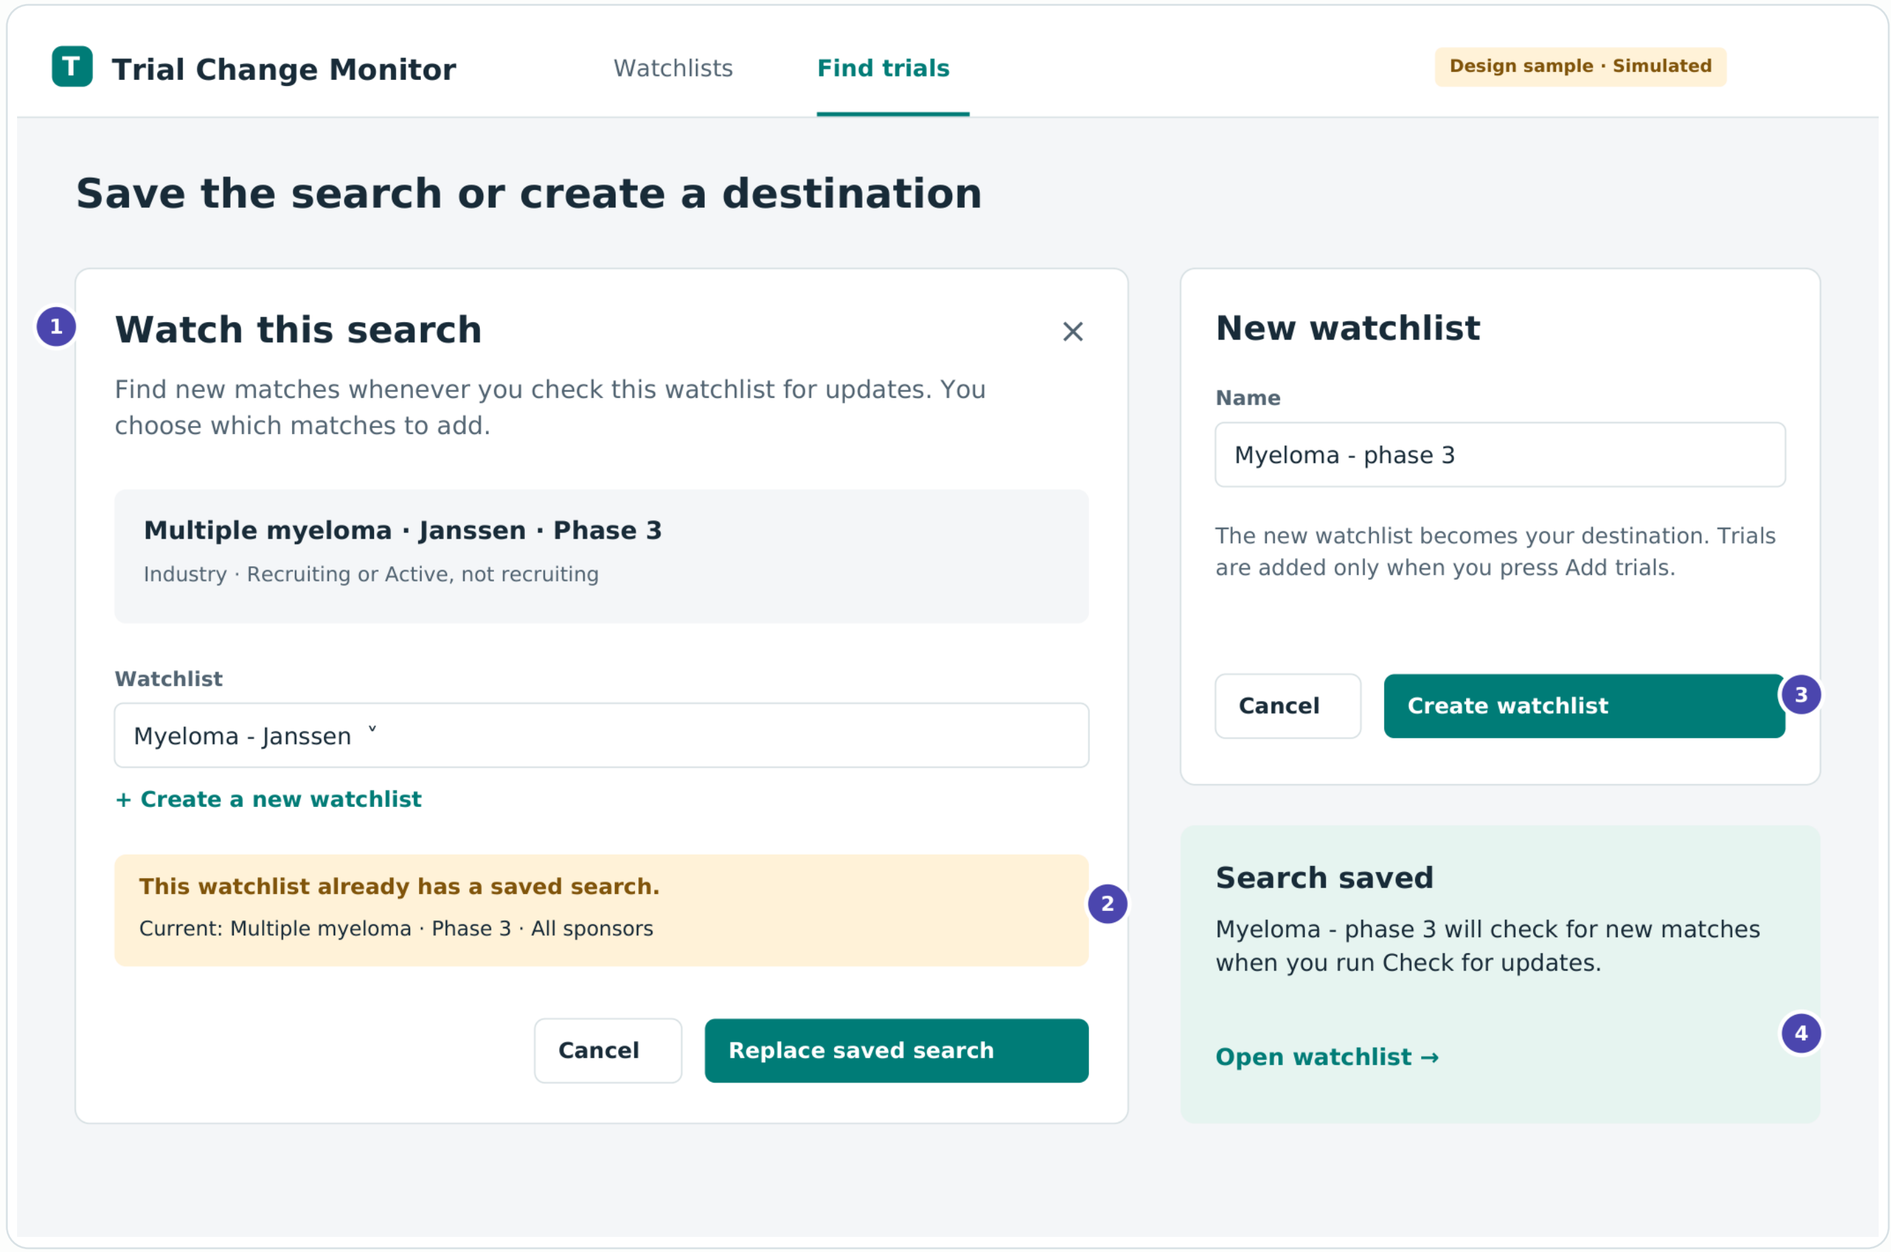

DESIGN NOTES

1 No selection required

Watch this search saves the submitted query only. It can target an empty list and does not depend on selected result rows.

2 Replace with informed consent

Keep one saved search per watchlist. If one exists, show the old query and label the button Replace saved search; Cancel changes nothing.

3 Create a destination in context

Expose New watchlist inside both destination pickers. Validate empty or duplicate names inline, and return to the original task with the new list selected.


4 Close the loop

Success names the affected list and offers Open watchlist. Adding trials has its own confirmation: “2 added; 1 already in this list.” Clear completed selections.

These are separate dialog states, not simultaneous panels in the product. Opening a dialog traps focus; Escape cancels and returns focus to its trigger.

New matches are an invitation, not a change

Keep candidate trials distinct from trials the user has already chosen to monitor.

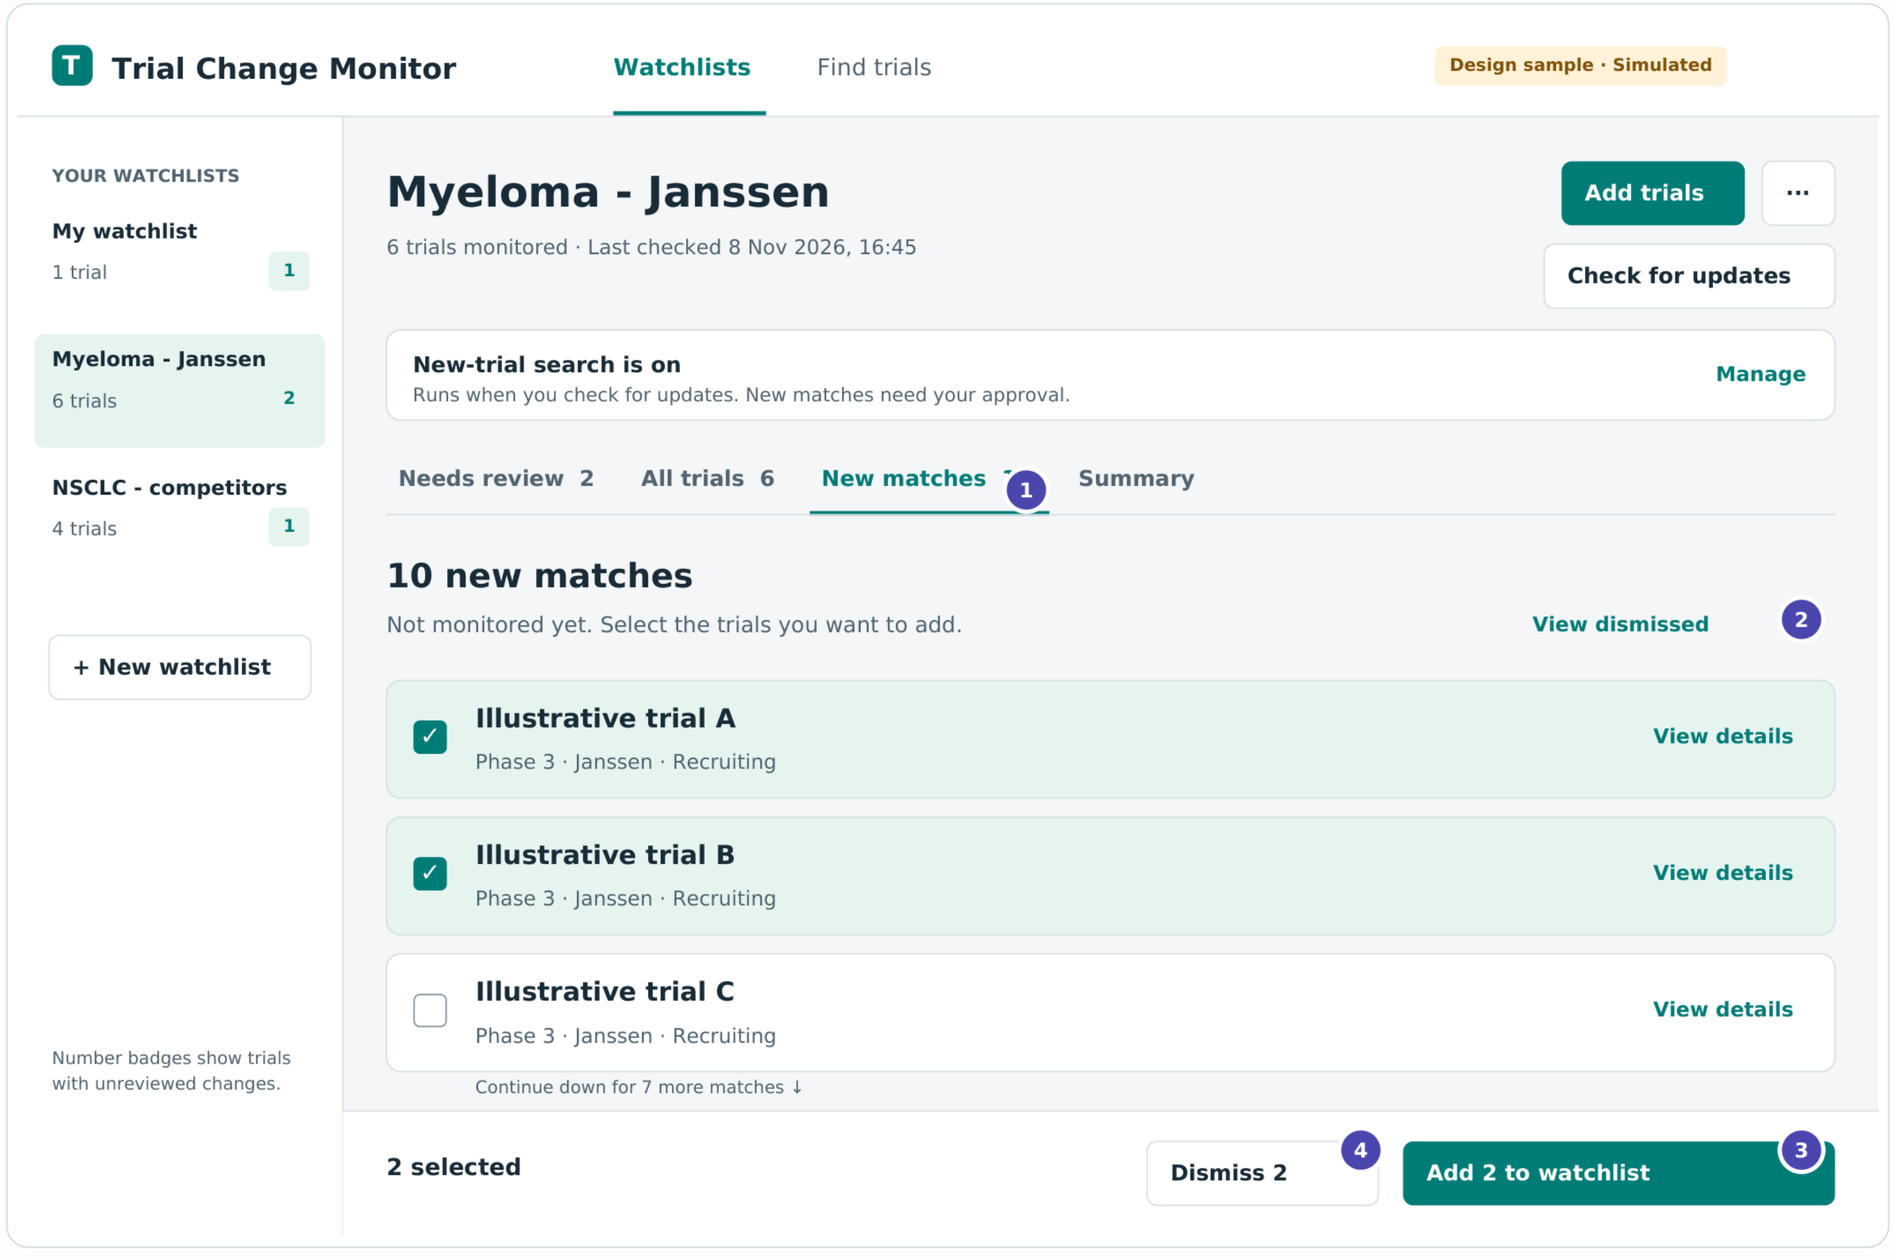

DESIGN NOTES

1 A separate queue

New matches are results of the saved search, not recently registered studies and not changes to monitored trials. Keep the label precise.

2 Dismissal can be reversed

View dismissed opens the excluded matches with Restore actions. Do not re-offer dismissed IDs for this list unless restored.

3 Use familiar language

Replace Adopt with Add to watchlist. Start monitoring and establish a baseline, then show “2 added” with a link to All trials.


4 Explain dismissal inline

Before committing, state “These trials will not be suggested again for this list.” Offer Undo after dismissal; nothing is deleted from another list.

A check runs the saved search even when the watchlist has zero monitored trials. Failure of discovery must be reported separately from trial-check success.

Make the briefing useful on screen and off

A readable, grouped summary replaces the horizontally scrolling code block.

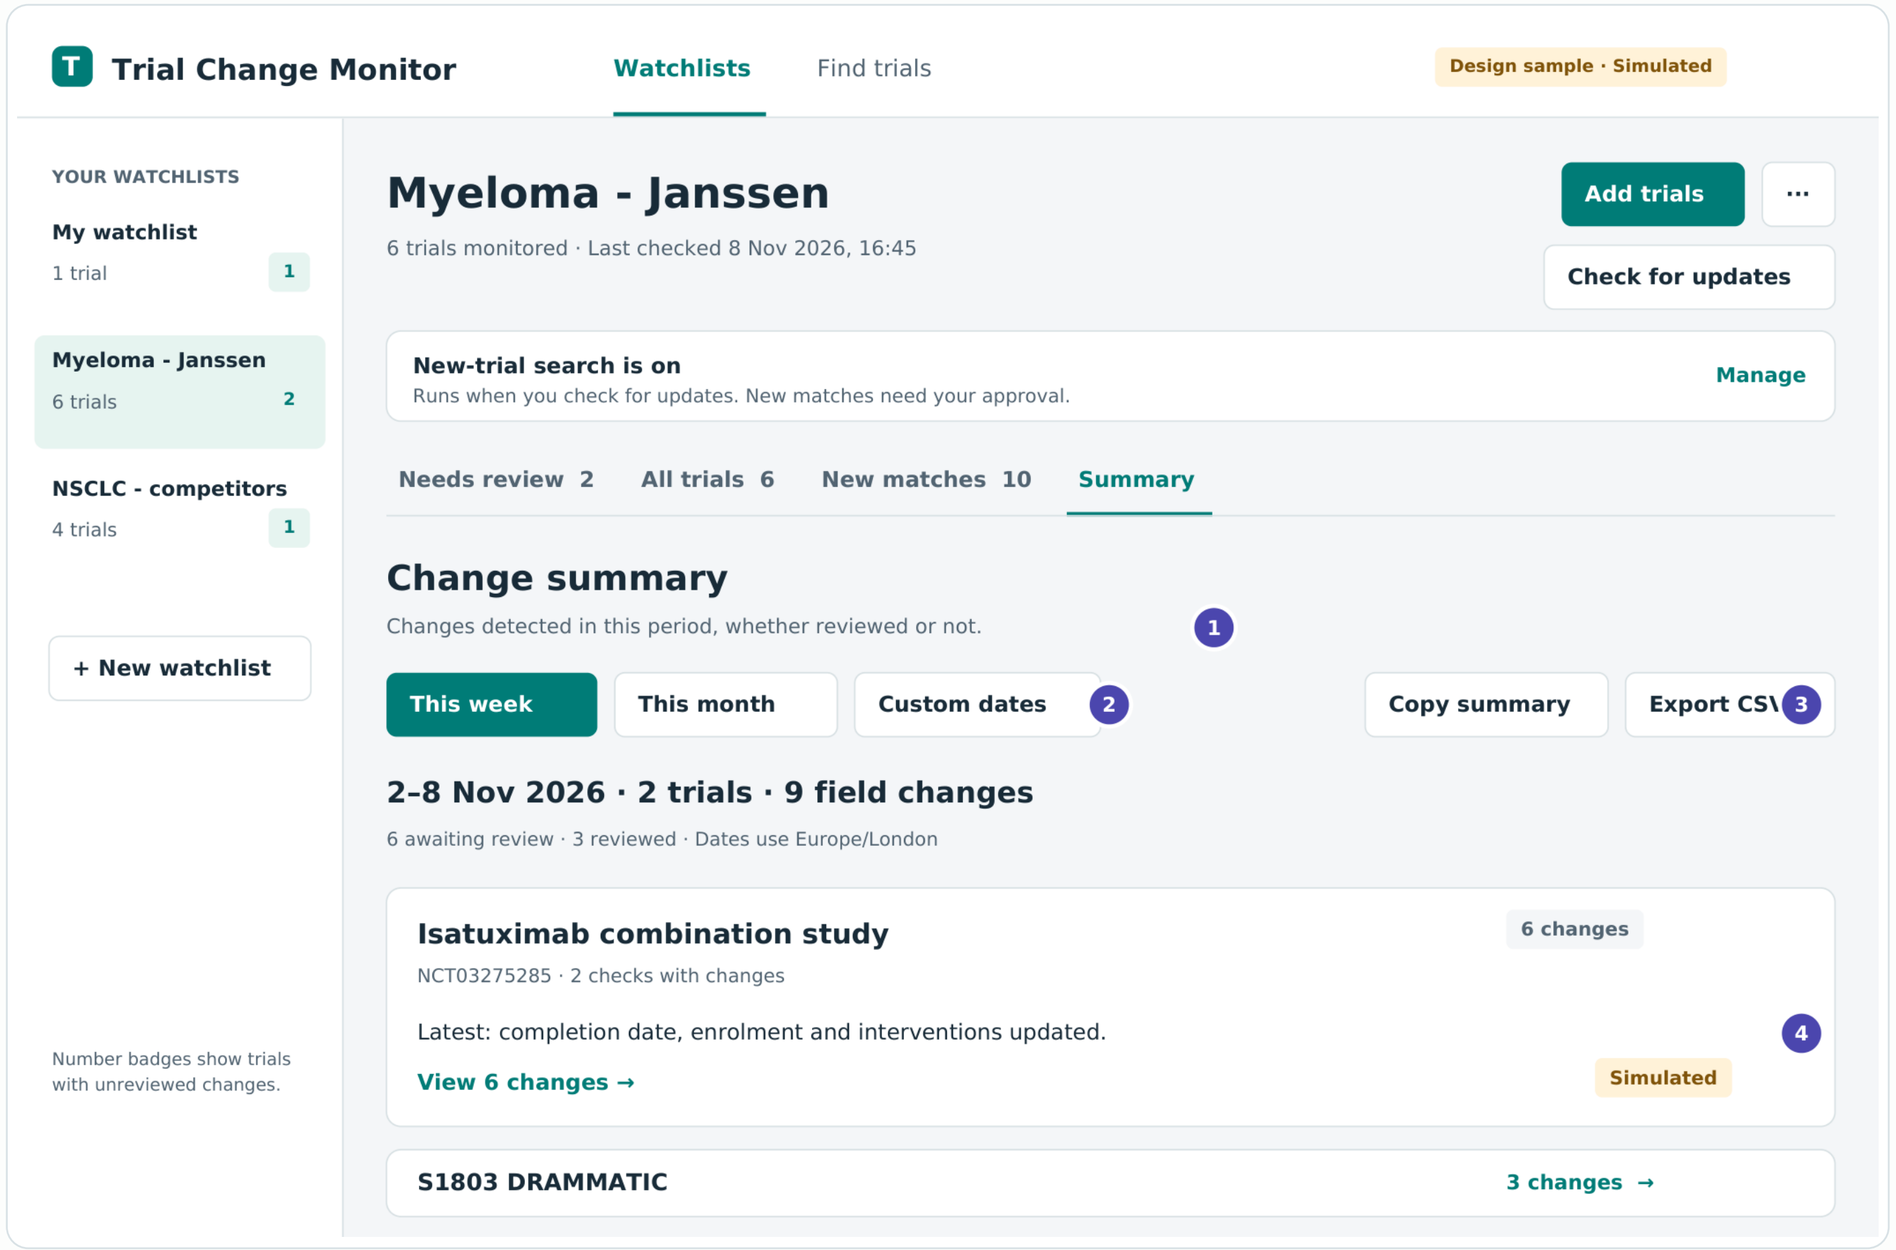

DESIGN NOTES

1 Keep reporting separate from review

The date range filters detection time, not registry date or review time. Reviewed changes remain in the summary and in exports.

2 Apply complete date ranges

Custom dates opens labelled From / To fields and Apply. Keep the old summary until both dates are valid; Cancel leaves it unchanged.

3 Visible, predictable outputs

Copy produces plain text with trial links. CSV contains exact old/new values, field, registry date, detection time, review status and simulated flag.


4 Summarise without losing transitions

Group by trial, then check. Expanding shows all nine field-change events; do not flatten repeat changes into a single latest value.

For an empty period, state “No changes detected in this period.” Keep the controls; disable export with an explanation and offer a wider date range.

Give first-time users one useful next step

An empty watchlist explains the outcome and offers two clear ways to begin.

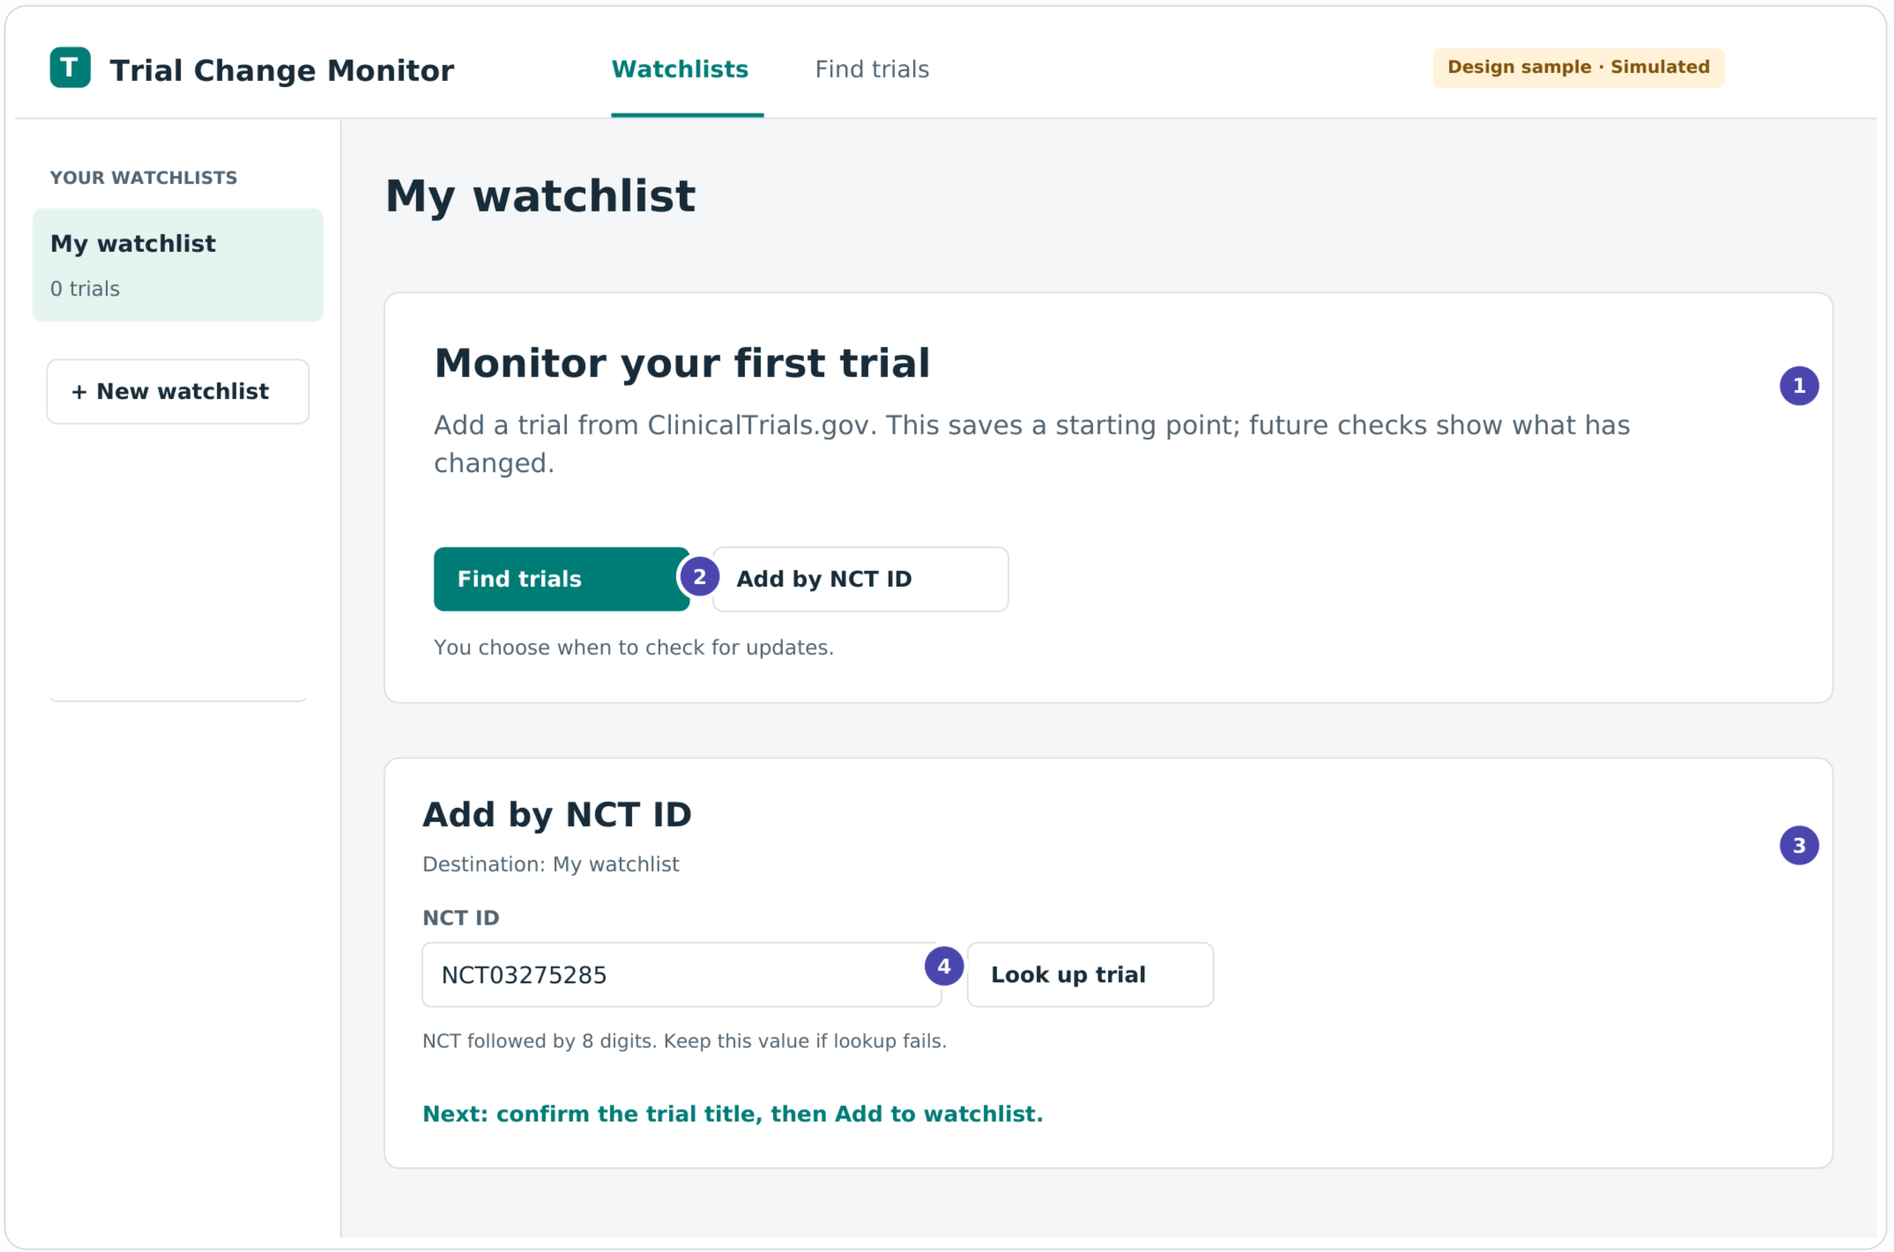

DESIGN NOTES

1 Teach only what is needed

No empty summary, activity feed or checking controls before the first trial. Explain the baseline so users do not expect historical monitoring.

2 Two routes, shared destination

Find trials opens Search. Add by NCT ID opens the second tab. Carry the originating watchlist into both flows.

3 Confirm before adding

The lower panel is the separate ID-entry state. Successful lookup shows ID, title, sponsor and status with Add to watchlist; do not add unseen records.

4 Correct errors in place

Retain invalid IDs, explain “NCT + 8 digits”, and focus the input. Distinguish invalid format, ID not found, already monitored and service unavailable.

The first trial creates a baseline, not a new-change alert. A watchlist with a saved search but no trials instead offers Check for new matches.

Never confuse no changes with no data

Checking status and review status answer different questions.

T Trial Change Monitor Watchlists Find trials Design sample · Simulated

Checking states that preserve trust

These panels occupy the same status area above the watchlist; shown together for specification.

1 **Checking for updates…**

4 of 6 trials checked · Searching for new matches next

Stop check

2 **Check incomplete**

5 of 6 trials checked · 1 trial could not be checked

New-trial search succeeded: 10 matches. Previous data for the failed trial are retained.

Retry failed

Show details

3 **Check complete · No new changes detected**

6 of 6 checked at 17:10 · 2 trials still need review from earlier checks

4 **All caught up**

No changes awaiting review. Last checked 8 Nov 2026, 17:10.

View all trials

DESIGN NOTES

1 A non-blocking check

Keep the current list and open trial readable. Prevent duplicate checks; Stop retains completed results and labels the remaining trials not checked.

2 Partial success is explicit

Separate trial-check failures from discovery failures. Do not show an all-clear message or advance a failed trial’s last-successful-check time.

3 No new changes is not reviewed

A successful check with no changes does not clear the review queue. Keep its existing count and state the distinction in the result.


4 A calm completed state

The empty review queue offers View all trials. Do not automatically switch tabs or imply the records are current beyond their last successful check.

Normal checks use the existing date-based optimisation. “Recheck all monitored fields” is a one-off advanced action with its own completion label, not a sticky checkbox.

Keep administration out of the daily path

Small menus and focused dialogs replace the tall Manage lists expander.

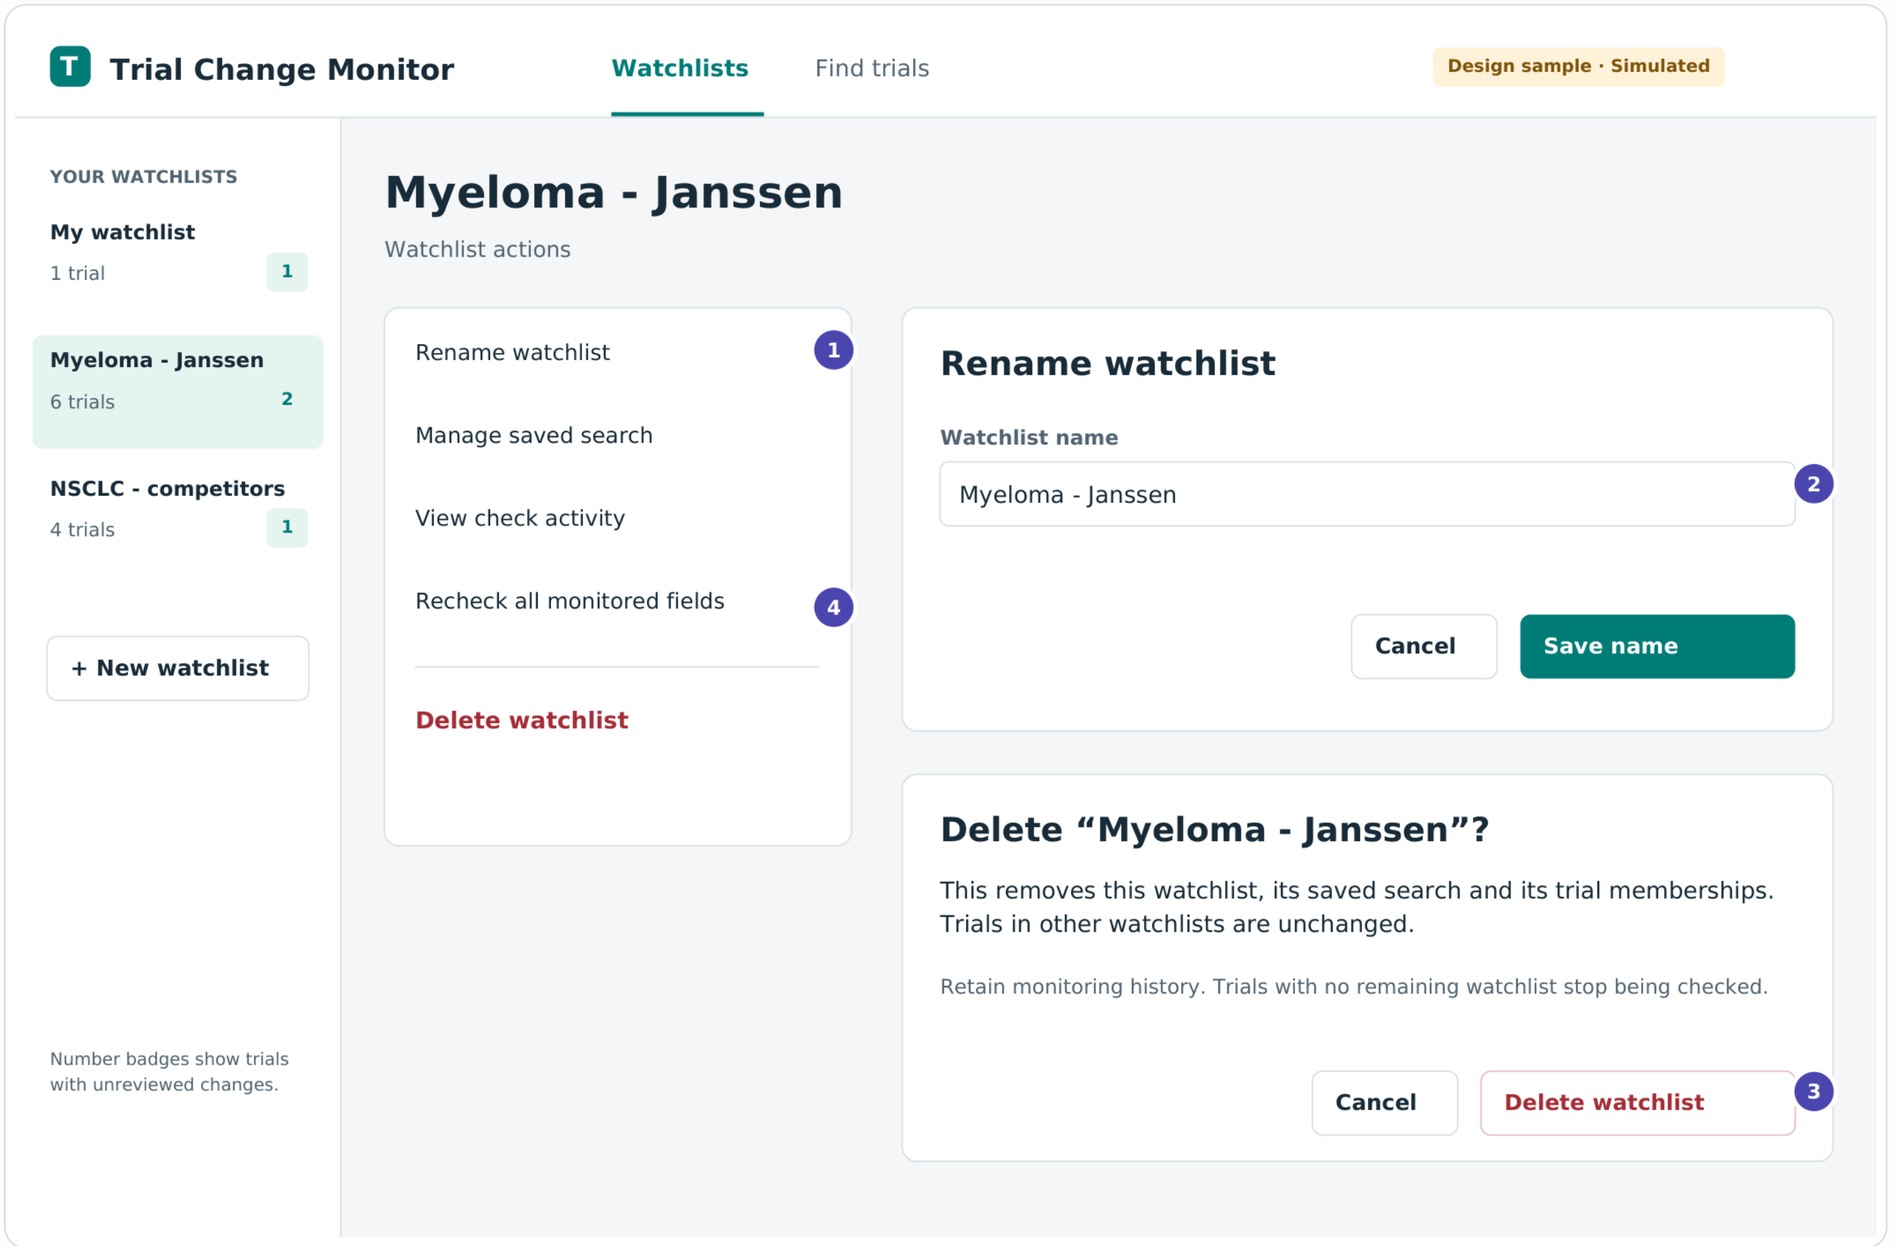

DESIGN NOTES

1 One task per dialog

The menu opens Rename, Manage saved search or check activity. Never place creation, renaming and deletion in the same expanded form.

2 Name the target

Use the current list name in the dialog. Check duplicate names inline. Saving or cancelling returns to the same view and scroll position.

3 Explain the exact scope

The deletion dialog shown is a proposed retention policy: remove the list, keep history. Remove trial acts only on this list and offers Undo.


4 Hide technical maintenance

Full recheck is a one-off menu action with a short explanation that it ignores the registry update date. Keep it out of the normal workflow.

Manage saved search shows its query, Edit search and Turn off. Turning off preserves current trials; editing uses Find trials, then explicitly replaces the saved query.

Adapt the task, not just the width

Three 390 px-wide studies: review queue, change comparison and search.

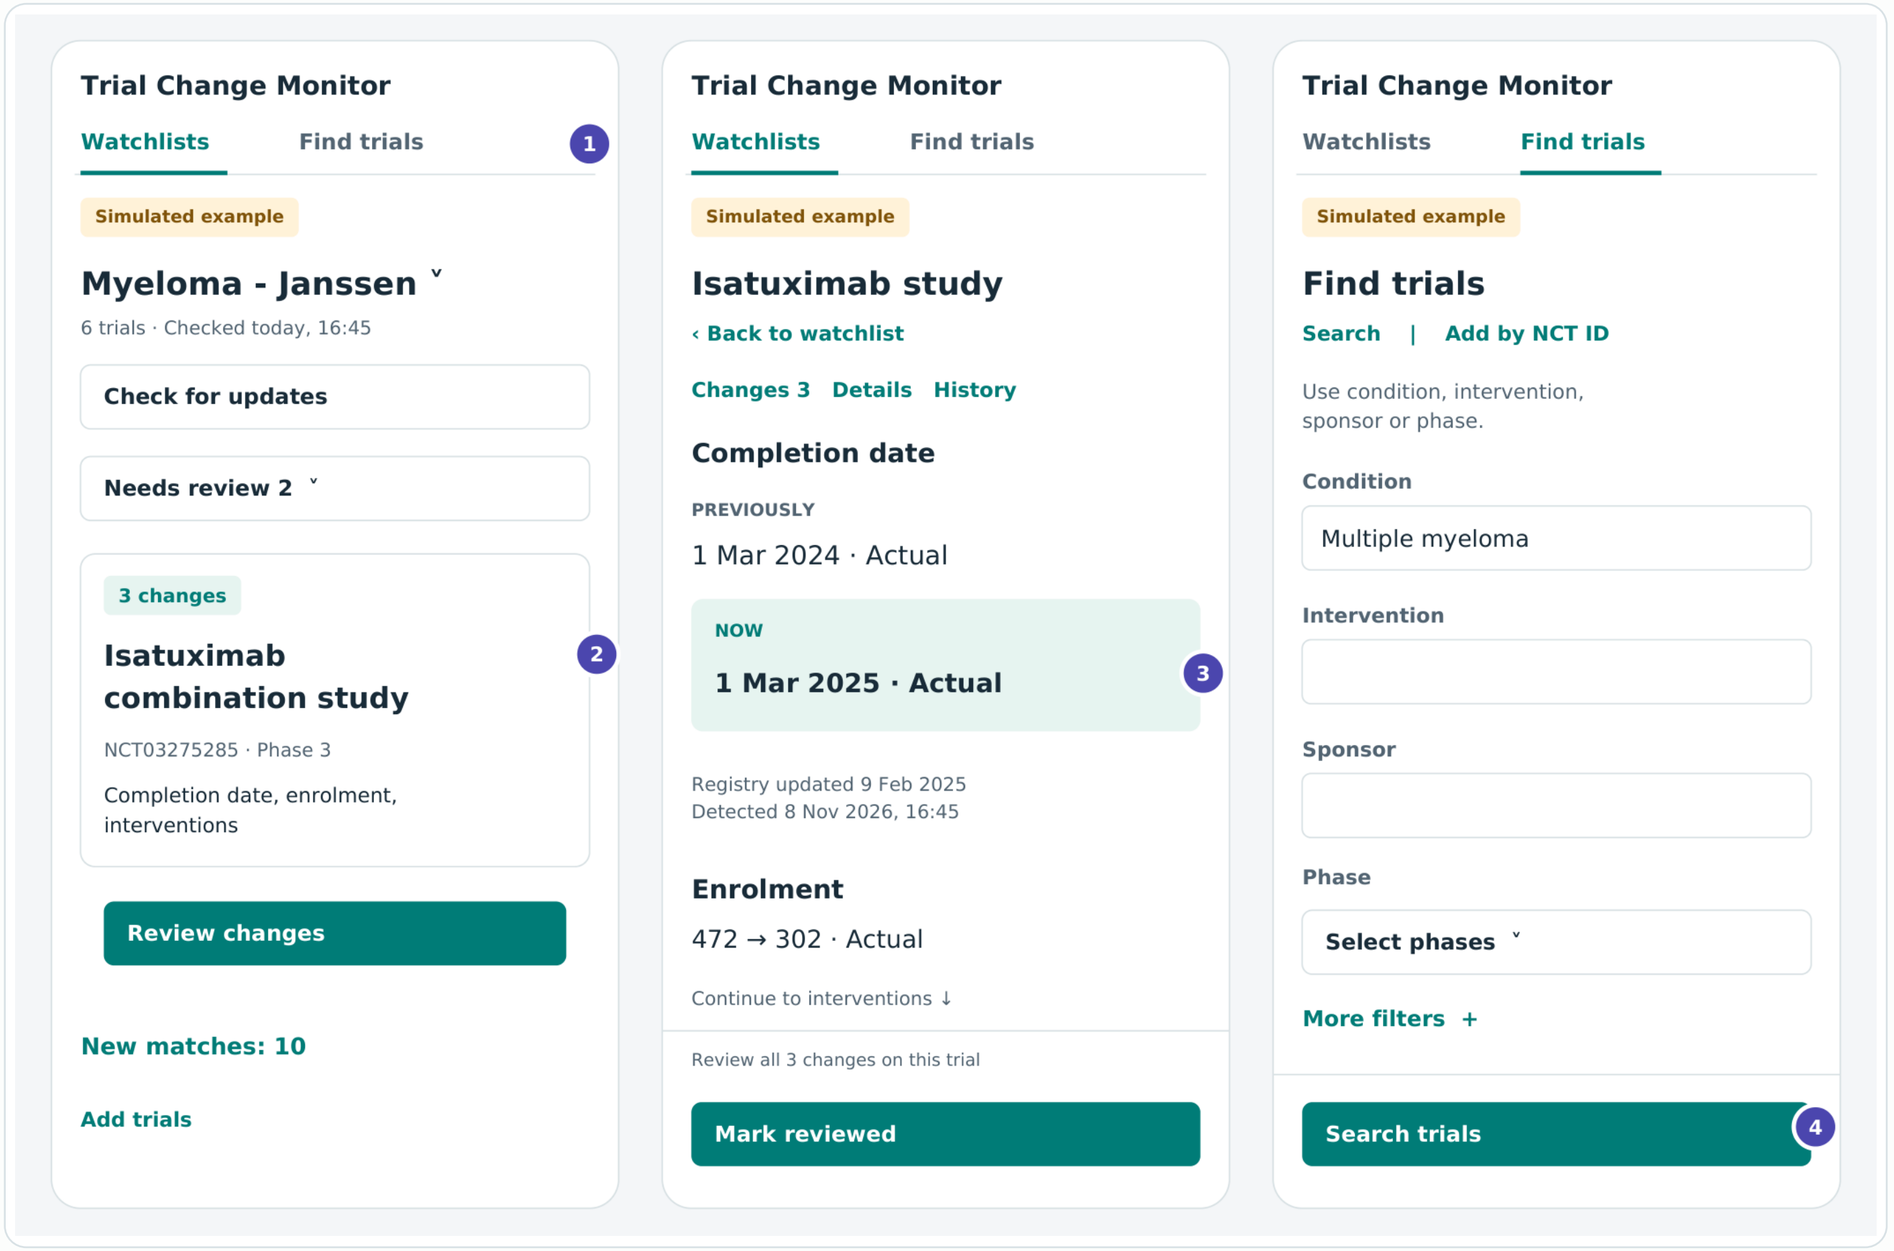

DESIGN NOTES

1 Keep navigation visible

Two top-level destinations fit without a hamburger menu. Use the list title as a labelled picker to change watchlists; show counts in its options.

2 Cards replace table columns

Keep title, ID and what changed visible. A labelled view selector replaces crowded watchlist tabs; counts remain explicit.

3 Stack comparisons in reading order

Previous first, Now second. Long text wraps. This is a scrollable page: interventions continue below the visible enrolment section.

4 Keep the main action reachable

Sticky footer, safe-area inset and enough bottom padding. Aim for 44 px targets; use real controls, clear focus and text labels, not colour alone.

Phone layouts show the same data and actions as desktop. Use fluid layouts at intermediate widths; no horizontal scrolling for titles, changes or summaries.