

Procédure d'installation

OCS Inventory

Réalisé par FELLAH Zakariya — étudiant en BTS SIO

Avril 2026

Table des matières

1	Introduction	2
2	Pré-requis	2
3	Mise à jour du système	3
4	Installation des dépendances	3
5	Configuration de la base de données	4
6	Installation d'OCS Inventory	5
7	Configuration d'OCS Inventory	5
8	Configuration d'Apache et PHP	6
9	Mise à jour de fichiers	6
10	Accès à la page web	8
11	Sécurité informatique	10
12	Sources	10



1 Introduction

Cette procédure décrit l'installation complète d'**OCS Inventory**, une solution libre permettant l'inventaire matériel et logiciel ainsi que le télé-déploiement d'applications sur un parc informatique. L'objectif est de fournir une documentation claire, structurée et efficace, permettant une installation fiable sur un système Debian.

2 Pré-requis

Avant de commencer, assurez-vous que les conditions suivantes sont remplies :

- Debian 12 ou version supérieure.
- Accès administrateur (`sudo`).
- Connexion Internet fonctionnelle.
- 5 à 10 Go d'espace disque disponible.
- Accès Internet fonctionnel.
- Accès SSH ou physique au serveur.
- Sauvegarde récente du système.

Important : Sauvegardez vos données avant toute manipulation système.

3 Mise à jour du système

```
sudo apt -y update && sudo apt upgrade
```

```
Summary:
  Upgrading: 11, Installing: 0, Removing: 0, Not Upgrading: 0
  Download size: 0 B / 78.7 MB
  Freed space: 82.9 kB

Continue? [Y/n] y
Reading changelogs... Done
(Reading database ... 135265 files and directories currently installed.)
Preparing to unpack .../00-bind9-host_1%3a9.20.21-1-deb13u1_amd64.deb ...
Unpacking bind9-host (1:9.20.21-1-deb13u1) over (1:9.20.18-1-deb13u1) ...
Preparing to unpack .../01-bind9-dnsutils_1%3a9.20.21-1-deb13u1_amd64.deb ...
Unpacking bind9-dnsutils (1:9.20.21-1-deb13u1) over (1:9.20.18-1-deb13u1) ...
Preparing to unpack .../02-bind9-libs_1%3a9.20.21-1-deb13u1_amd64.deb ...
Unpacking bind9-libs:amd64 (1:9.20.21-1-deb13u1) over (1:9.20.18-1-deb13u1) ...
Preparing to unpack .../03-inetutils-telnet_2%3a2.6-3+deb13u3_amd64.deb ...
Unpacking inetutils-telnet (2:2.6-3+deb13u3) over (2:2.6-3+deb13u2) ...
Preparing to unpack .../04-firefox-esr_140.9.0esr-1-deb13u1_amd64.deb ...
Leaving 'diversion of /usr/bin/firefox to /usr/bin/firefox.real by firefox-esr'
Unpacking firefox-esr (140.9.0esr-1-deb13u1) over (140.8.0esr-1-deb13u1) ...
Preparing to unpack .../05-gstreamer1.0-plugins-bad_1.26.2-3+deb13u1_amd64.deb ...
Unpacking gstreamer1.0-plugins-bad:amd64 (1.26.2-3+deb13u1) over (1.26.2-3) ...

Progress: [ 24% ]
```

4 Installation des dépendances

```
sudo apt install -y mariadb-server apache2 libapache2-mod-  
perl2 make gcc \  
php php-mysql php-gd php-xml php-mbstring php-curl libxml-  
simple-perl \  
libdbi-perl libdbd-mysql-perl libapache-dbi-perl libnet-ip-  
perl \  
libarchive-zip-perl libmojolicious-perl libswitch-perl  
libplack-perl
```


```
Preparing to unpack .../10-liburing2_2.9-1_amd64.deb ...
Unpacking liburing2:amd64 (2.9-1) ...
Selecting previously unselected package mariadb-server-core.
Preparing to unpack .../11-mariadb-server-core_1%3a11.8.6-0+deb13u1_amd64.deb ...
Unpacking mariadb-server-core (1:11.8.6-0+deb13u1) ...
Selecting previously unselected package rsync.
Preparing to unpack .../12-rsync_3.4.1+ds1-5+deb13u1_amd64.deb ...
Unpacking rsync (3.4.1+ds1-5+deb13u1) ...
Selecting previously unselected package socat.
Preparing to unpack .../13-socat_1.8.0.3-1_amd64.deb ...
Unpacking socat (1.8.0.3-1) ...
Setting up mysql-common (5.8+1.1.1) ...
update-alternatives: using /etc/mysql/my.cnf.fallback to provide /etc/mysql/my.cnf (my.cnf) in auto mode
Setting up mariadb-common (1:11.8.6-0+deb13u1) ...
update-alternatives: using /etc/mysql/mariadb.cnf to provide /etc/mysql/my.cnf (my.cnf) in auto mode
Selecting previously unselected package mariadb-server.
(Reading database ... 136581 files and directories currently installed.)
Preparing to unpack .../000-mariadb-server_1%3a11.8.6-0+deb13u1_amd64.deb ...
Unpacking mariadb-server (1:11.8.6-0+deb13u1) ...

Progress: [ 5% ]
```

5 Configuration de la base de données

Connexion à MariaDB


```
sudo mysql -u root -p
```

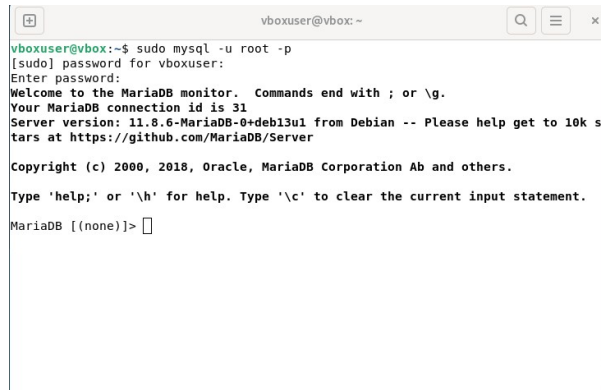

```
vboxuser@vbox: ~  
vboxuser@vbox:~$ sudo mysql -u root -p  
[sudo] password for vboxuser:  
Enter password:  
Welcome to the MariaDB monitor.  Commands end with ; or \g.  
Your MariaDB connection id is 31  
Server version: 11.8.6-MariaDB-0+deb13u1 from Debian -- Please help get to 10k s  
tars at https://github.com/MariaDB/Server  
  
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.  
  
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.  
  
MariaDB [(none)]>
```

Création de la base et de l'utilisateur

```
CREATE DATABASE ocsdatabase;  
CREATE USER 'ocs-user'@'localhost' IDENTIFIED BY 'ocs-mdp';  
GRANT ALL PRIVILEGES ON ocsdatabase.* TO 'ocs-user'@'  
localhost';  
FLUSH PRIVILEGES;  
EXIT;
```

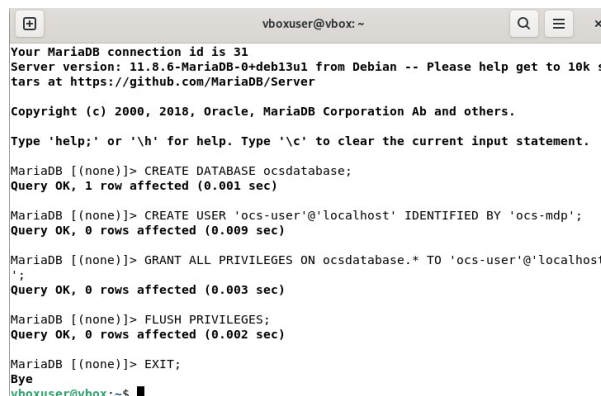

```
vboxuser@vbox: ~  
Your MariaDB connection id is 31  
Server version: 11.8.6-MariaDB-0+deb13u1 from Debian -- Please help get to 10k s  
tars at https://github.com/MariaDB/Server  
  
Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.  
  
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.  
  
MariaDB [(none)]> CREATE DATABASE ocsdatabase;  
Query OK, 1 row affected (0.001 sec)  
  
MariaDB [(none)]> CREATE USER 'ocs-user'@'localhost' IDENTIFIED BY 'ocs-mdp';  
Query OK, 0 rows affected (0.009 sec)  
  
MariaDB [(none)]> GRANT ALL PRIVILEGES ON ocsdatabase.* TO 'ocs-user'@'localhost'  
';  
Query OK, 0 rows affected (0.003 sec)  
  
MariaDB [(none)]> FLUSH PRIVILEGES;  
Query OK, 0 rows affected (0.002 sec)  
  
MariaDB [(none)]> EXIT;  
Bye  
vboxuser@vbox:~$
```

6 Installation d'OCS Inventory

SUPPRIMEZ LES RETOURS À LA LIGNE AUTOMATIQUES AVANT D'EXÉCUTER LA COMMANDE CI-DESSOUS :

```
wget https://github.com/PassAndSecure/OCS_inventory/releases/download/OCSNG_UNIX_SERVER-2.12.1/OCSNG_UNIX_SERVER-2.12.1.tar.gz
```

Extraction :


```
tar -xvzf OCSNG_UNIX_SERVER-2.12.1.tar.gz  
cd OCSNG_UNIX_SERVER-2.12.1
```

7 Configuration d'OCS Inventory

```
sudo ./setup.sh
```

S'ils vous indiquent une mauvaise version de MySQL, entrez "y" puis Entrée.

Durant l'installation, validez les choix par défaut en appuyant sur **Entrée**.

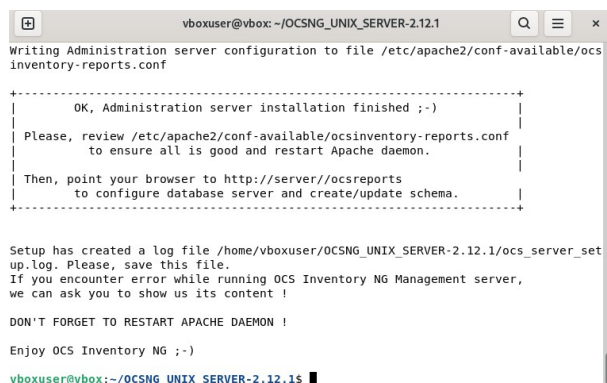

```
vboxuser@vbox: ~/OCSNG_UNIX_SERVER-2.12.1
Writing Administration server configuration to file /etc/apache2/conf-available/ocsinventory-reports.conf

-----
OK, Administration server installation finished ;-)
Please, review /etc/apache2/conf-available/ocsinventory-reports.conf
to ensure all is good and restart Apache daemon.
Then, point your browser to http://server/ocsreports
to configure database server and create/update schema.
-----

Setup has created a log file /home/vboxuser/OCSNG_UNIX_SERVER-2.12.1/ocs_server_set
up.log. Please, save this file.
If you encounter error while running OCS Inventory NG Management server,
we can ask you to show us its content !

DON'T FORGET TO RESTART APACHE DAEMON !

Enjoy OCS Inventory NG ;-)

vboxuser@vbox:~/OCSNG_UNIX_SERVER-2.12.1$
```

8 Configuration d'Apache et PHP

```
sudo systemctl restart apache2
sudo a2enconf ocsinventory-reports
sudo systemctl reload apache2

sudo chown -R www-data:www-data /usr/share/ocsinventory-reports
sudo chmod -R 755 /usr/share/ocsinventory-reports

sudo chown -R www-data:www-data /var/lib/ocsinventory-reports
sudo chmod -R 755 /var/lib/ocsinventory-reports

sudo systemctl restart apache2
```

Modification des limites PHP

```
sudo nano /etc/php/8.2/apache2/php.ini
```

Dans nano, modifier :

```
post_max_size = 30M
upload_max_filesize = 30M
```


9 Mise à jour de fichiers

Fichier z-ocsinventory-server.conf

```
sudo nano /etc/apache2/conf-available/z-ocsinventory-server.conf
```

Modifier :

```
PerlSetEnv OCS_DB_NAME ocsdatabase
PerlSetEnv OCS_DB_LOCAL ocsdatabase
PerlSetEnv OCS_DB_USER ocs-user
PerlSetVar OCS_DB_PWD ocs-mdp
```

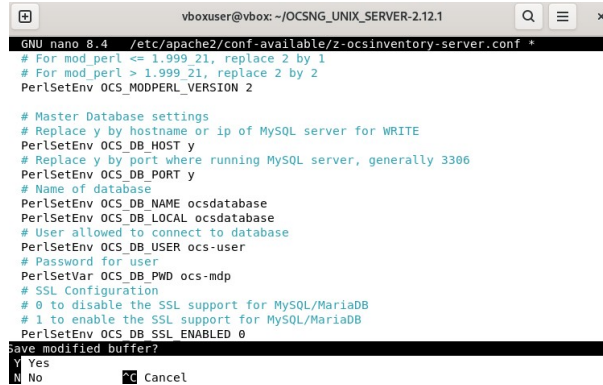

```
vboxuser@vbox: ~/OCSNG_UNIX_SERVER-2.12.1
GNU nano 8.4 /etc/apache2/conf-available/z-ocsinventory-server.conf *
# For mod_perl <= 1.999.21, replace 2 by 1
# For mod_perl > 1.999.21, replace 2 by 2
PerlSetEnv OCS_MODPERL_VERSION 2

# Master Database settings
# Replace y by hostname or ip of MySQL server for WRITE
PerlSetEnv OCS_DB_HOST y
# Replace y by port where running MySQL server, generally 3306
PerlSetEnv OCS_DB_PORT y
# Name of database
PerlSetEnv OCS_DB_NAME ocsdatabase
PerlSetEnv OCS_DB_LOCAL ocsdatabase
# User allowed to connect to database
PerlSetEnv OCS_DB_USER ocs-user
# Password for user
PerlSetVar OCS_DB_PWD ocs-mdp
# SSL Configuration
# 0 to disable the SSL support for MySQL/MariaDB
# 1 to enable the SSL support for MySQL/MariaDB
PerlSetEnv OCS_DB_SSL_ENABLED 0
save modified buffer?
Y Yes
N No      ^C Cancel
```

Fichier dbconfig.inc.php

```
sudo nano /usr/share/ocsinventory-reports/ocsreports/dbconfig
.inc.php
```

Ajouter :

```
define("DB_NAME", "ocsdatabase");
define("SERVER_READ", "localhost");
define("SERVER_WRITE", "localhost");
define("SERVER_PORT", "3306");
define("COMPTE_BASE", "ocs-user");
define("PSWD_BASE", "ocs-mdp");
define("ENABLE_SSL", "");
define("SSL_MODE", "");
define("SSL_KEY", "");
define("SSL_CERT", "");
define("CA_CERT", "");
```

```
vboxuser@vbox: ~/OCSNG_UNIX_SERVER-2.12.1
/usr/share/ocsinventory-reports/ocsreports/dbconfig.inc.php *
<?php
$SESSION["SERVEUR_SQL"]="y";
$SESSION["COMPTES_BASE"]="ocs";
$SESSION["PSWD_BASE"]="ocs";
define("DB_NAME", "ocsdatabase");
define("SERVER_READ", "localhost");
define("SERVER_WRITE", "localhost");
define("SERVER_PORT", "3306");
define("COMPTES_BASE", "ocs-user");
define("PSWD_BASE", "ocs-mdp");
define("ENABLE_SSL", "");
define("SSL_MODE", "");
define("SSL_KEY", "");
define("SSL_CERT", "");
define("CA_CERT", "");
?>
```

Redémarrer Apache :


```
sudo systemctl restart apache2
```

10 Accès à la page web

<http://localhost/ocsreports>

Étapes :


- Cliquer sur **Send**

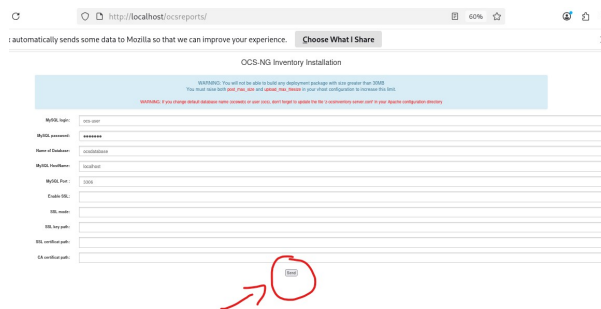


- Cliquer sur **Click here to enter OCS-NG GUI**



- Cliquer sur **Perform the update**



- Re-cliquer sur **Click here to enter OCS-NG GUI**

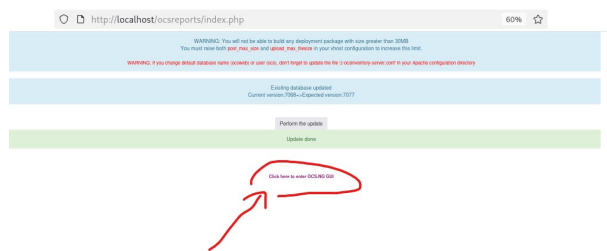

Identifiants par défaut :

```
login      : admin
password   : admin
```

A screenshot of the OCS-NG login form. At the top, there is a decorative header with a cluster of purple and black icons. Below the header, there is a 'LANGUAGE' dropdown menu set to 'English'. Underneath, there are two input fields labeled 'User' and 'Password'. At the bottom, there is a purple button labeled 'Send'.

11 Sécurité informatique

```
sudo rm /usr/share/ocsinventory-reports/ocsreports/install.php
```

Changez ensuite le mot de passe administrateur dans : **Paramètres** → **Mon compte**

12 Sources

- Site officiel OCS Inventory
- Installation OCS Inventory sur Debian 12