


/home/stud/laba4/modAlpha
Cipher.h

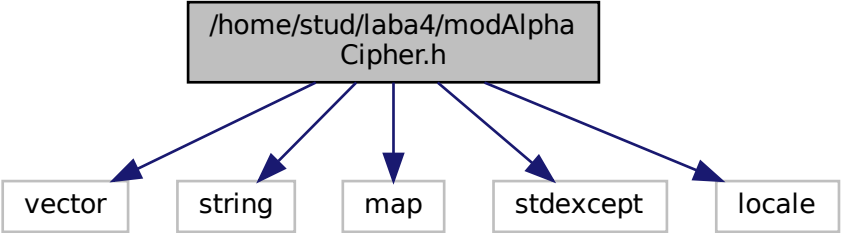

```
graph TD; A["/home/stud/laba4/modAlphaCipher.h"] --> B["vector"]; A --> C["string"]; A --> D["map"]; A --> E["stdexcept"]; A --> F["locale"];
```

The diagram illustrates the dependencies of the header file `/home/stud/laba4/modAlphaCipher.h`. It is represented as a central gray box at the top, with five blue arrows pointing downwards to five separate white boxes. These boxes represent the standard C++ headers that the main header file includes: `vector`, `string`, `map`, `stdexcept`, and `locale`.

vector

string

map

stdexcept

locale