


CDS 101 Final Project: Creating your GitHub Repository

1. Go to www.github.com
2. In the upper right-hand corner of the page, click “+” and then “New repository”

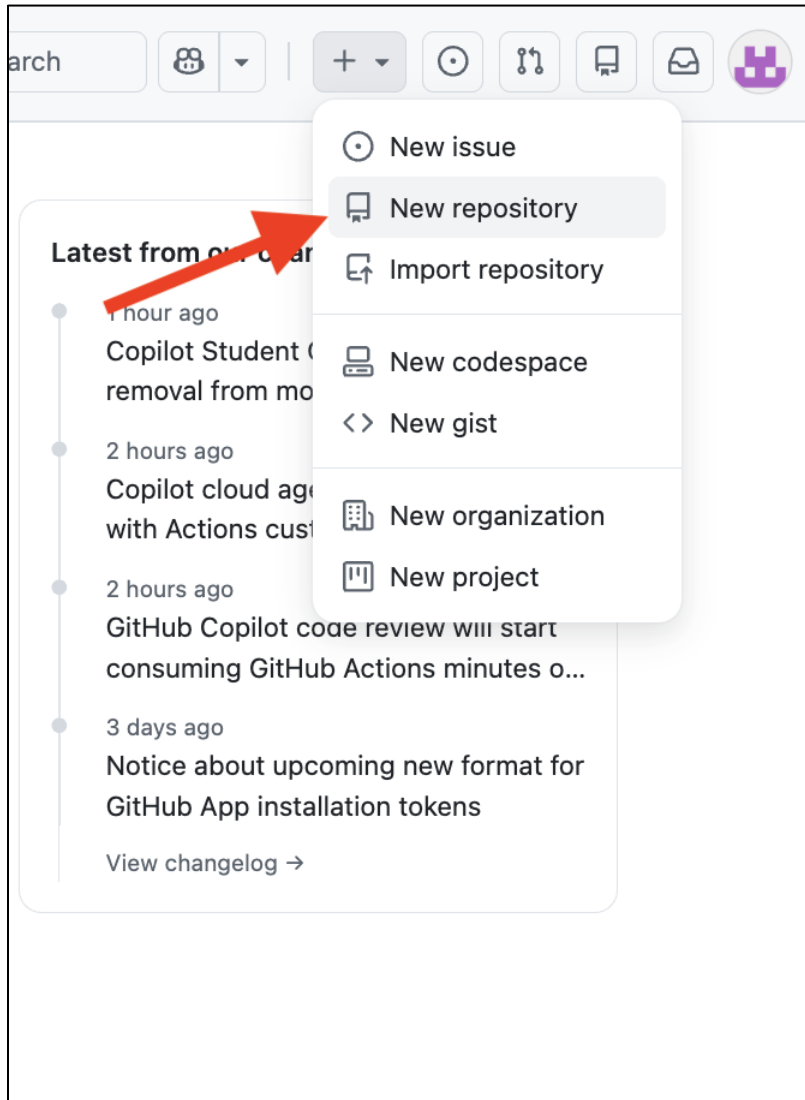

3. Create a new repository as follows, making sure that it is **public**

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1

General

Owner *

 cdb00th

Repository name *

cds101-finalproject-teamname

←

✓ cds101-finalproject-teamname is available.

Great repository names are short and memorable. How about [literate-happiness](#)?

Description

0 / 350 characters

2

Configuration

Choose visibility *

Choose who can see and commit to this repository

 Public

Start with a template

Templates pre-configure your repository with files.

No template

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Off ☐

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

No .gitignore

Add license

Licenses explain how others can use your code. [About licenses](#)


No license

Create repository


Replace "teamname" with your team's name

Make repository public so that Vrinda can view and grade it


4. On the page that appears after creating your repository, click **“Invite collaborators”**

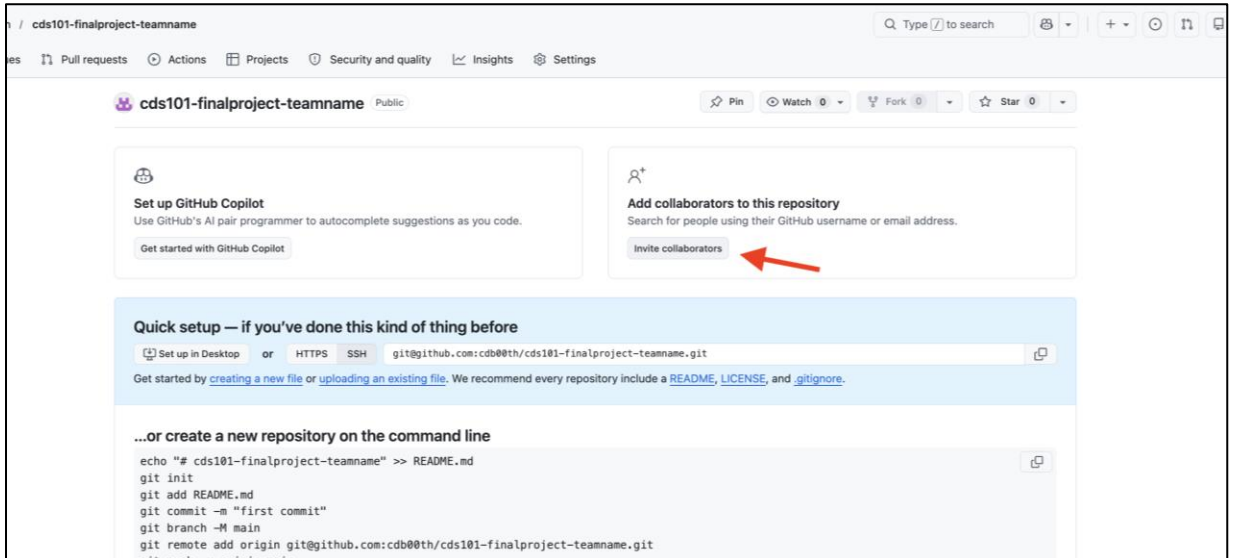


5. On the page that appears, click **“Add people”**

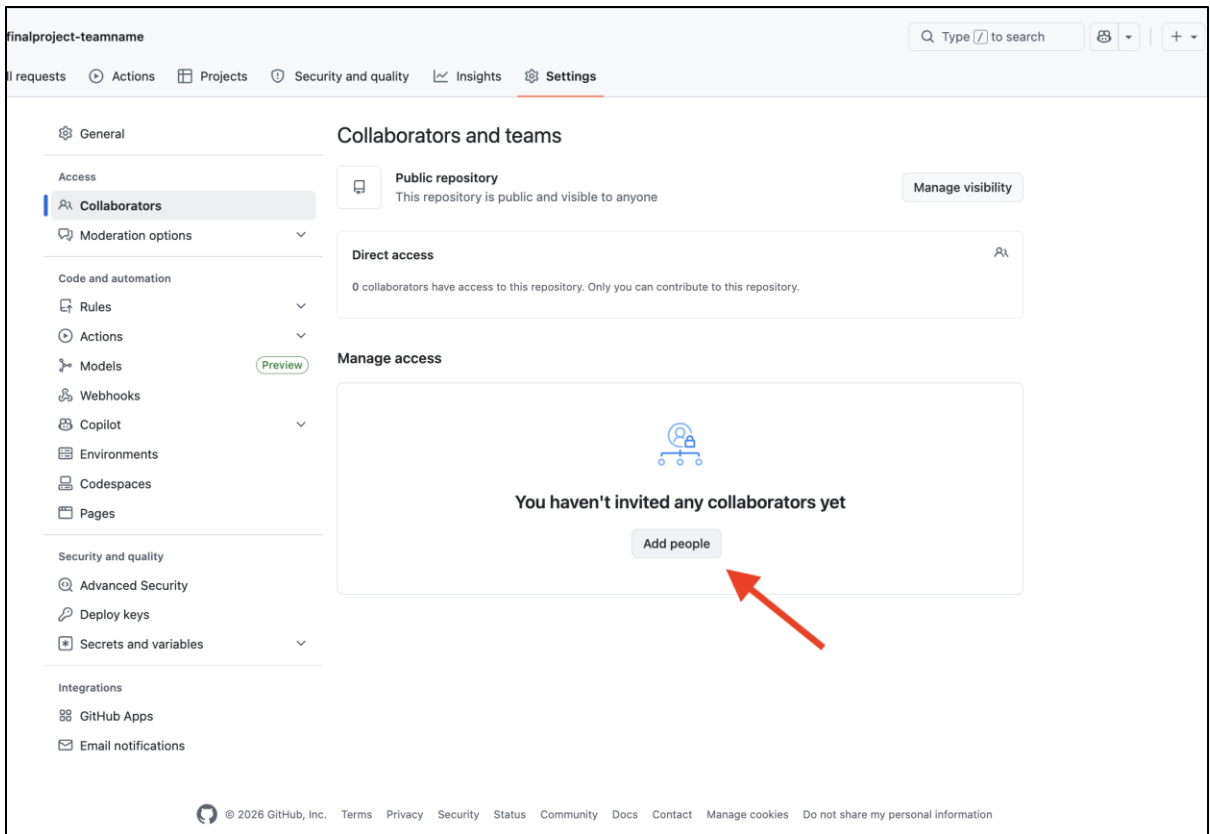


6. For each of your teammate: In the search bar, find their GitHub username and click **“Add to repository”**

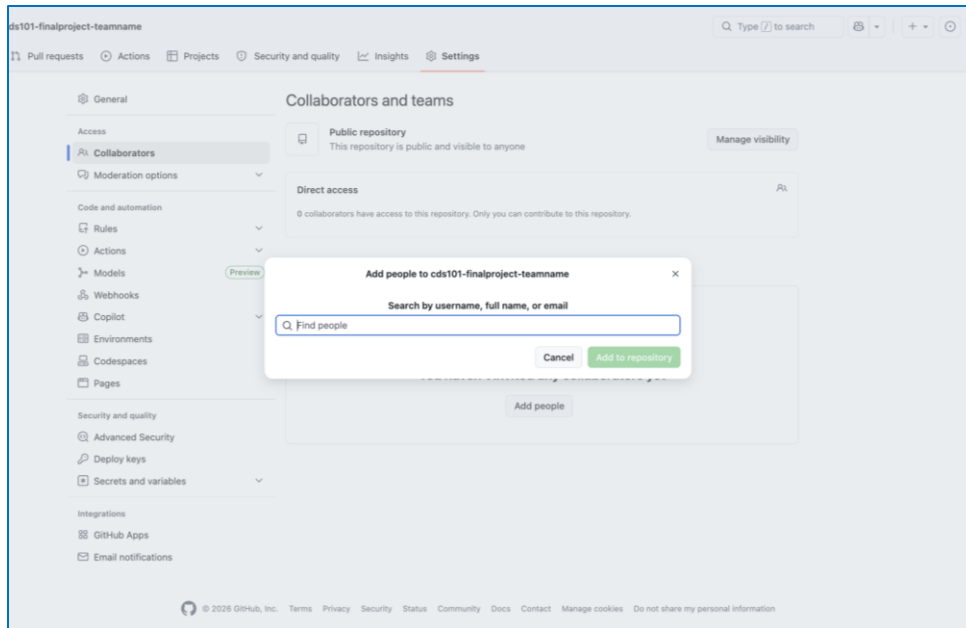


7. Download the “**cds101_starter_kit.zip**” file from the “**Final Project**” announcement on Canvas or from [here](#).

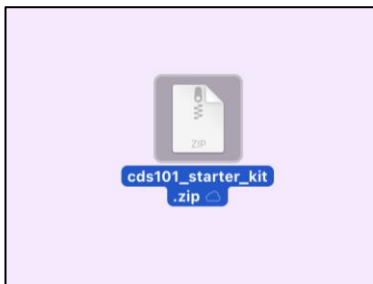


8. Unzip the file into a new folder, and rename the folder the same as your repository

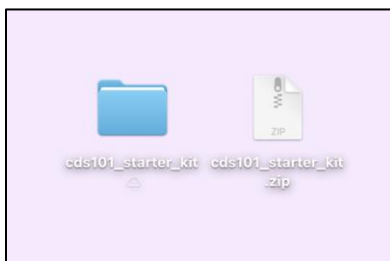

9. In RStudio, go to **File > New Project**
10. Click “**Existing Directory**”

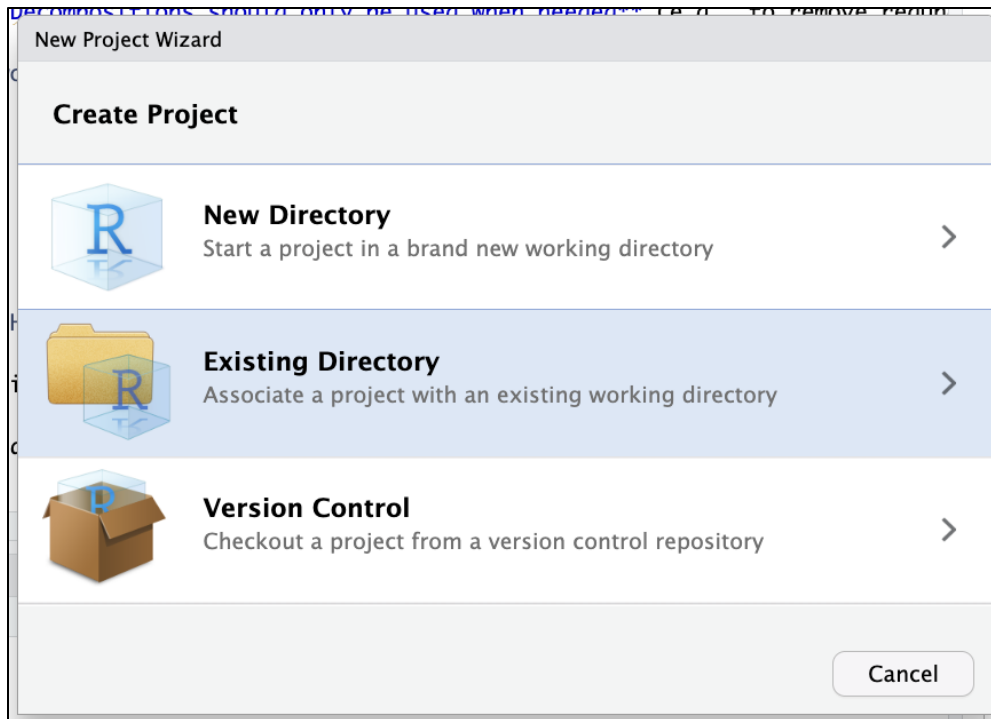

11. On the screen that appears, select the **folder you created in Step 8** as the Project working directory

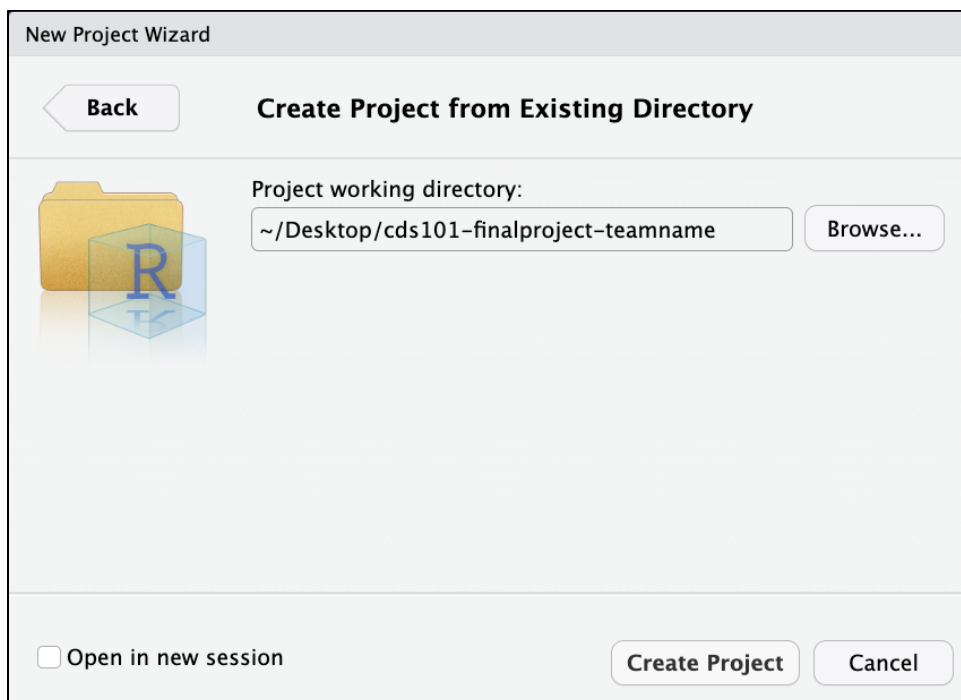

12. On your GitHub repository page, copy the code chunk under **“or create a new repository on the command line”**

The screenshot shows the GitHub repository page for 'cds101-finalproject-teamname'. The page includes navigation tabs for Code, Issues, Pull requests, Actions, Projects, Security and quality, Insights, and Settings. Below the repository name, there are buttons for Pin, Watch, Fork, and Star. The main content area features two cards: 'Set up GitHub Copilot' and 'Add collaborators to this repository'. A 'Quick setup' section provides instructions for setting up the repository on a desktop or via HTTPS/SSH. Below this, there are two sections for creating a new repository or pushing an existing one from the command line. A red arrow points to a copy icon next to the command line code chunk for creating a new repository.

cds101-finalproject-teamname

Set up GitHub Copilot

Add collaborators to this repository

Quick setup — if you've done this kind of thing before

Set up in Desktop or HTTPS SSH `https://github.com/cdb00th/cds101-finalproject-teamname.git`

Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

...or create a new repository on the command line

```
echo "# cds101-finalproject-teamname" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/cdb00th/cds101-finalproject-teamname.git
git push -u origin main
```


Click to copy the code chunk

...or push an existing repository from the command line

```
git remote add origin https://github.com/cdb00th/cds101-finalproject-teamname.git
git branch -M main
git push -u origin main
```

ProTip! Use the URL for this page when adding GitHub as a remote.


13. In your RStudio **Terminal** (**NOT** console), paste the code chunk the you just copied.
14. Something like the following should appear:

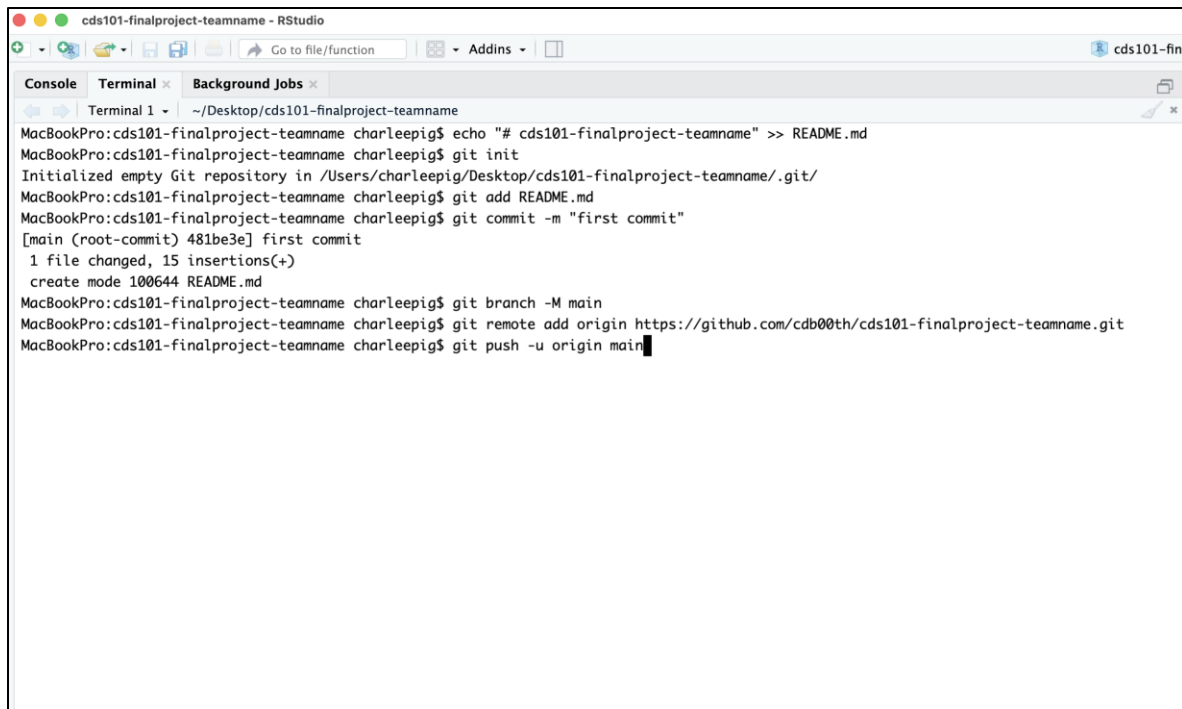

```
cds101-finalproject-teamname - RStudio
Terminal 1 ~ /Desktop/cds101-finalproject-teamname
MacBookPro:cds101-finalproject-teamname charleepig$ echo "# cds101-finalproject-teamname" >> README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git init
Initialized empty Git repository in /Users/charleepig/Desktop/cds101-finalproject-teamname/.git/
MacBookPro:cds101-finalproject-teamname charleepig$ git add README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git commit -m "first commit"
[main (root-commit) 481be3e] first commit
1 file changed, 15 insertions(+)
create mode 100644 README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git branch -M main
MacBookPro:cds101-finalproject-teamname charleepig$ git remote add origin https://github.com/cdb00th/cds101-finalproject-teamname.git
MacBookPro:cds101-finalproject-teamname charleepig$ git push -u origin main
```

15. Hit **Enter** to push to GitHub

16. Your terminal should look something like this after:

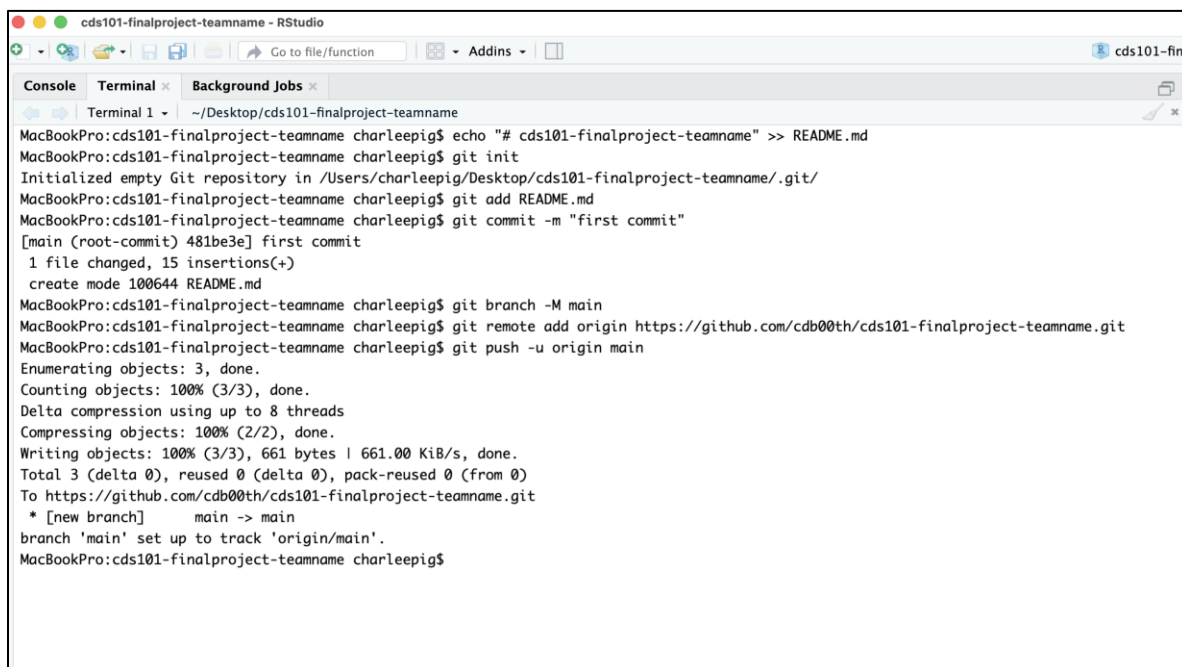


```
cds101-finalproject-teamname - RStudio
Terminal 1 ~ /Desktop/cds101-finalproject-teamname
MacBookPro:cds101-finalproject-teamname charleepig$ echo "# cds101-finalproject-teamname" >> README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git init
Initialized empty Git repository in /Users/charleepig/Desktop/cds101-finalproject-teamname/.git/
MacBookPro:cds101-finalproject-teamname charleepig$ git add README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git commit -m "first commit"
[main (root-commit) 481be3e] first commit
1 file changed, 15 insertions(+)
create mode 100644 README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git branch -M main
MacBookPro:cds101-finalproject-teamname charleepig$ git remote add origin https://github.com/cdb00th/cds101-finalproject-teamname.git
MacBookPro:cds101-finalproject-teamname charleepig$ git push -u origin main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Delta compression using up to 8 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 661 bytes | 661.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/cdb00th/cds101-finalproject-teamname.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
MacBookPro:cds101-finalproject-teamname charleepig$
```

17. Next, copy and paste, then run the following code chunk in your terminal:

git add .

git commit -m “add all files”

18. Your terminal should look something like this after:

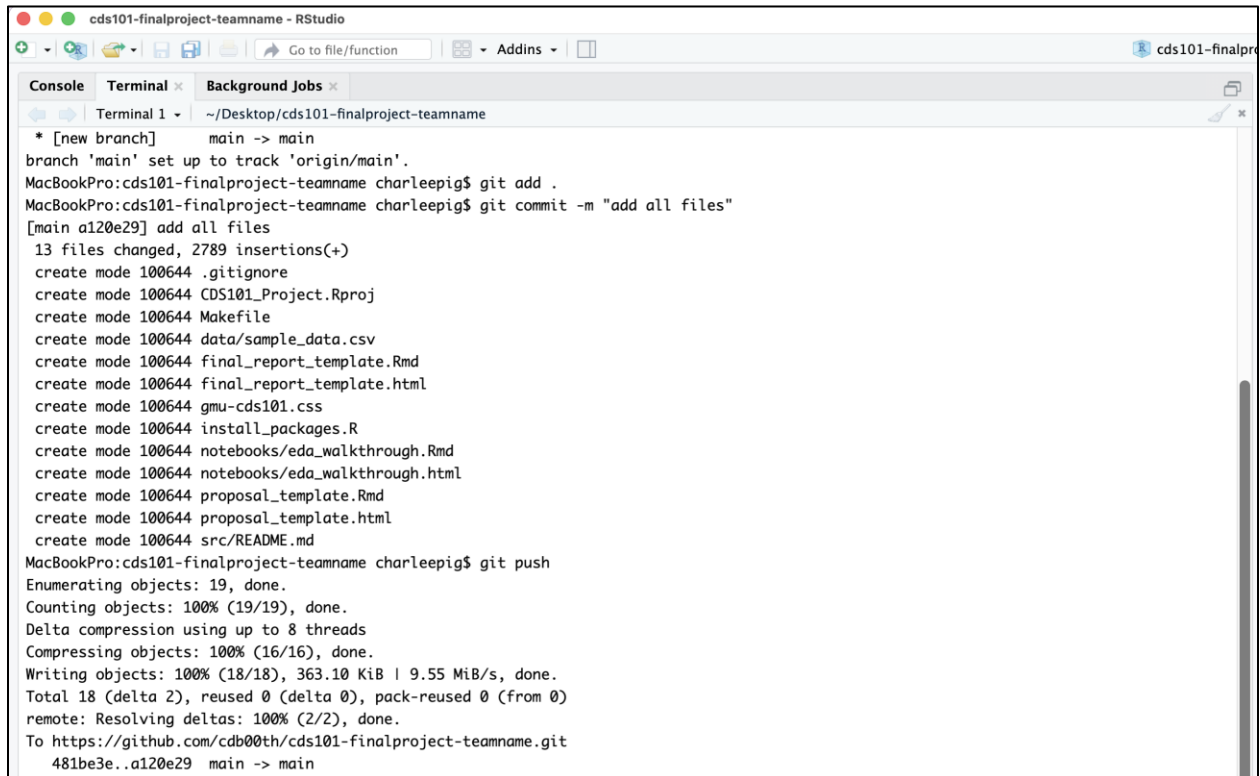

The screenshot shows an RStudio window with a terminal pane. The terminal output shows the following sequence of commands and their results:

```
* [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
MacBookPro:cds101-finalproject-teamname charleepig$ git add .
MacBookPro:cds101-finalproject-teamname charleepig$ git commit -m "add all files"
[main a120e29] add all files
13 files changed, 2789 insertions(+)
create mode 100644 .gitignore
create mode 100644 CDS101_Project.Rproj
create mode 100644 Makefile
create mode 100644 data/sample_data.csv
create mode 100644 final_report_template.Rmd
create mode 100644 final_report_template.html
create mode 100644 gmu-cds101.css
create mode 100644 install_packages.R
create mode 100644 notebooks/eda_walkthrough.Rmd
create mode 100644 notebooks/eda_walkthrough.html
create mode 100644 proposal_template.Rmd
create mode 100644 proposal_template.html
create mode 100644 src/README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git push
Enumerating objects: 19, done.
Counting objects: 100% (19/19), done.
Delta compression using up to 8 threads
Compressing objects: 100% (16/16), done.
Writing objects: 100% (18/18), 363.10 KiB | 9.55 MiB/s, done.
Total 18 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), done.
To https://github.com/cdb00th/cds101-finalproject-teamname.git
 481be3e..a120e29  main -> main
```

19. Finally, copy and paste, then run the following line of code in your terminal:

git push

20. Your terminal should look something like this after:


```
cds101-finalproject-teamname - RStudio
Go to file/function
Addins
Terminal 1 ~ /Desktop/cds101-finalproject-teamname
* [new branch] main -> main
branch 'main' set up to track 'origin/main'.
MacBookPro:cds101-finalproject-teamname charleepig$ git add .
MacBookPro:cds101-finalproject-teamname charleepig$ git commit -m "add all files"
[main a120e29] add all files
13 files changed, 2789 insertions(+)
create mode 100644 .gitignore
create mode 100644 CDS101_Project.Rproj
create mode 100644 Makefile
create mode 100644 data/sample_data.csv
create mode 100644 final_report_template.Rmd
create mode 100644 final_report_template.html
create mode 100644 gmu-cds101.css
create mode 100644 install_packages.R
create mode 100644 notebooks/eda_walkthrough.Rmd
create mode 100644 notebooks/eda_walkthrough.html
create mode 100644 proposal_template.Rmd
create mode 100644 proposal_template.html
create mode 100644 src/README.md
MacBookPro:cds101-finalproject-teamname charleepig$ git push
Enumerating objects: 19, done.
Counting objects: 100% (19/19), done.
Delta compression using up to 8 threads
Compressing objects: 100% (16/16), done.
Writing objects: 100% (18/18), 363.10 KiB | 9.55 MiB/s, done.
Total 18 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), done.
To https://github.com/cdb00th/cds101-finalproject-teamname.git
481be3e..a120e29 main -> main
```

21. When you go back to your GitHub page (be sure to refresh your browser), all files should appear in your repository

