

NAMA : Teguh Tegar Aulia
NIM : 20230801124

---

1. Database order_entry:

```
Microsoft Windows [Version 10.0.22631.4169]
(c) Microsoft Corporation. All rights reserved.

C:\Users\HP>cd\xampp\mysql\bin

C:\xampp\mysql\bin>mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 8
Server version: 10.4.32-MariaDB mariadb.org binary distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input
statement.

MariaDB [(none)]> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| phpmyadmin         |
| praktikum          |
| test               |
+--------------------+
```

```
6 rows in set (0.025 sec)

MariaDB [(none)]> use praktikum;
Database changed
MariaDB [praktikum]> create database OrderEntry;
Query OK, 1 row affected (0.001 sec)

MariaDB [praktikum]> use OrderEntry;
Database changed
MariaDB [OrderEntry]> CREATE TABLE vendors(
    -> vend_id char(4) not null primary key,
    -> vend_name varchar(25) not null,
    -> vend_address varchar(30),
    -> vend_city varchar(20),
    -> vend_state varchar(5),
    -> vend_zip varchar(7),
    -> vend_country varchar(15);
ERROR 1064 (42000): You have an error in your SQL syntax; check the
manual that corresponds to your MariaDB server version for the right
syntax to use near '' at line 8
MariaDB [OrderEntry]> create table vendors(
    -> vend_id char(4) not null primary key,
    -> vend_name varchar(25) not null,
    -> vend_address varchar(30),
    -> vend_city varchar(20),
    -> vend_state varchar(5),
    -> vend_zip varchar(7),
    -> vend_country varchar(15));
Query OK, 0 rows affected (0.043 sec)

MariaDB [OrderEntry]> create table customers(
    -> cust_id char(5) not null primary key,
    -> cust_name varchar(25) not null,
    -> cust_address varchar(30) null,
    -> cust_city varchar(25) null,
    -> cust_state varchar(5) null,
    -> cust_zip varchar(5) null,
    -> cust_country varchar(20) null,
    -> cust_contact varchar(25) null,
    -> cust_email varchar(30) null);
Query OK, 0 rows affected (0.015 sec)

MariaDB [OrderEntry]> show tables;
+----------------------+
| Tables_in_orderentry |
+----------------------+
| customers            |
| vendors              |
+----------------------+
2 rows in set (0.000 sec)

MariaDB [OrderEntry]> create table products(
    -> prod_id varchar(10) not null primary key,
    -> vend_id char(4) not null,
```

```
    -> prod_name varchar(25) not null,
    -> prod_price int not null,
    -> prod_desc varchar(255) null);
Query OK, 0 rows affected (0.016 sec)


MariaDB [OrderEntry]> create table orders(
    -> order_num int not null,
    -> order_date date not null,
    -> cust_id char(5) not null,
    -> primary key(order_num));
Query OK, 0 rows affected (0.006 sec)

MariaDB [OrderEntry]> create table productnotes(
    -> note_id char(3) not null,
    -> prod_id varchar(10) not null,
    -> note_date date not null,
    -> note_text varchar(200) null,
    -> primary key (note_id),
    -> foreign key (prod_id) references products (prod_id));
Query OK, 0 rows affected (0.025 sec)

MariaDB [OrderEntry]> create table orderitems(
    -> oreder_num int not null,
    -> order_item int not null,
    -> prod_id varchar(10) not null,
    -> quantity int not null,
    -> primary_key (order_num, order_item));
ERROR 1064 (42000): You have an error in your SQL syntax; check the
manual that corresponds to your MariaDB server version for the right
syntax to use near '(order_num, order_item))' at line 6
MariaDB [OrderEntry]> create table orderitems(
    -> order_num int not null,
    -> order_item int not null,
    -> prod_id varchar(10) not null,
    -> quantity int not null,
    -> primary key (order_num, order_item));
Query OK, 0 rows affected (0.015 sec)

MariaDB [OrderEntry]> show tables;
+----------------------+
| Tables_in_orderentry |
+----------------------+
| customers            |
| orderitems           |
| orders               |
| productnotes         |
| products             |
| vendors              |
+----------------------+
6 rows in set (0.000 sec)

MariaDB [OrderEntry]>
```

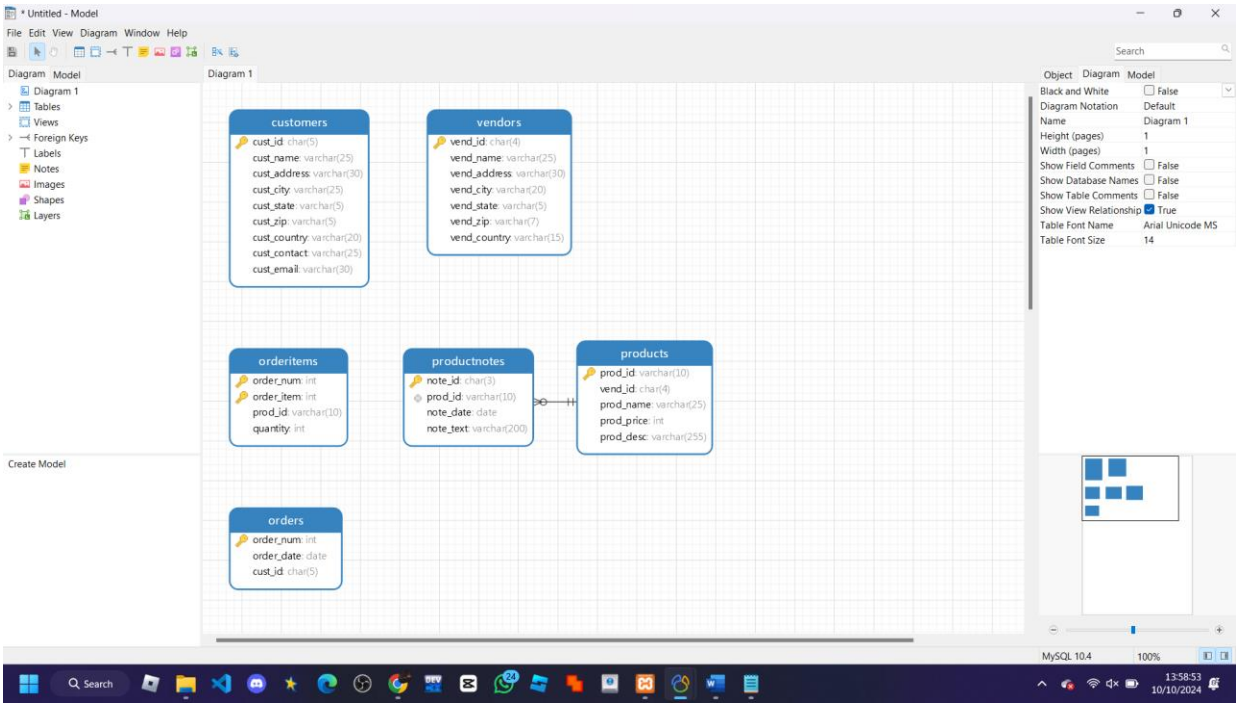

2. Database penjaulan_barang:

```
Microsoft Windows [Version 10.0.22631.4169]
(c) Microsoft Corporation. All rights reserved.

C:\Users\HP>cd\xampp\mysql\bin

C:\xampp\mysql\bin>mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 11
Server version: 10.4.32-MariaDB mariadb.org binary distribution

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input
statement.

MariaDB [(none)]> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| orderentry         |
| performance_schema |
| phpmyadmin         |
```

```
| praktikum          |
| test               |
+--------------------+
7 rows in set (0.001 sec)

MariaDB [(none)]> create database penjualan_barang;
Query OK, 1 row affected (0.001 sec)

MariaDB [(none)]> use penjualan_barang;
Database changed
MariaDB [penjualan_barang]> create table pelanggan(
    -> id_pelanggan varchar(20) primary key,
    -> nama varchar(30),
    -> alamat varchar(50),
    -> pekerjaan varchar(50),
    -> no_ktp varchar(20),
    -> no_telp varchar(15));
Query OK, 0 rows affected (0.016 sec)

MariaDB [penjualan_barang]> create table nota_penjualan(
    -> id_nota varchar(20) primary key,
    -> tgl_nota date,
    -> total int,
    -> id_pelanggan varchar(20),
    -> foreign key (id_pelanggan) references pelanggan(id_pelanggan));
Query OK, 0 rows affected (0.024 sec)

MariaDB [penjualan_barang]> create table barang(
    -> id_barang varchar(20) primary key,
    -> nama_barang varchar(30),
    -> harga int,
    -> stok int);
Query OK, 0 rows affected (0.007 sec)

MariaDB [penjualan_barang]> create table detail_jual(
    -> id_nota varchar(20),
    -> id_barang varchar(20),
    -> jumlah int,
    -> harga int,
    -> primary key(id_nota, id_barang),
    -> foreign key(id_nota) references nota_penjualan(id_nota),
    -> foreign key(id_barang) references barang(id_barang));
Query OK, 0 rows affected (0.027 sec)

MariaDB [penjualan_barang]> show tables;
+----------------------------+
| Tables_in_penjualan_barang |
+----------------------------+
| barang                     |
| detail_jual                |
| nota_penjualan             |
| pelanggan                  |
+----------------------------+
4 rows in set (0.001 sec)
```

```
MariaDB [penjualan_barang]> desc barang;
+-------------+-------------+------+-----+---------+-------+
| Field       | Type        | Null | Key | Default | Extra |
+-------------+-------------+------+-----+---------+-------+
| id_barang   | varchar(20) | NO   | PRI | NULL    |       |
| nama_barang | varchar(30) | YES  |     | NULL    |       |
| harga       | int(11)     | YES  |     | NULL    |       |
| stok        | int(11)     | YES  |     | NULL    |       |
+-------------+-------------+------+-----+---------+-------+
4 rows in set (0.011 sec)


MariaDB [penjualan_barang]> desc detail_jual;
+-----------+-------------+------+-----+---------+-------+
| Field     | Type        | Null | Key | Default | Extra |
+-----------+-------------+------+-----+---------+-------+
| id_nota   | varchar(20) | NO   | PRI | NULL    |       |
| id_barang | varchar(20) | NO   | PRI | NULL    |       |
| jumlah    | int(11)     | YES  |     | NULL    |       |
| harga     | int(11)     | YES  |     | NULL    |       |
+-----------+-------------+------+-----+---------+-------+
4 rows in set (0.018 sec)




MariaDB [penjualan_barang]> desc nota_penjualan;
+--------------+-------------+------+-----+---------+-------+
| Field        | Type        | Null | Key | Default | Extra |
+--------------+-------------+------+-----+---------+-------+
| id_nota      | varchar(20) | NO   | PRI | NULL    |       |
| tgl_nota     | date        | YES  |     | NULL    |       |
| total        | int(11)     | YES  |     | NULL    |       |
| id_pelanggan | varchar(20) | YES  | MUL | NULL    |       |
+--------------+-------------+------+-----+---------+-------+
4 rows in set (0.009 sec)

MariaDB [penjualan_barang]> desc pelanggan;
+--------------+-------------+------+-----+---------+-------+
| Field        | Type        | Null | Key | Default | Extra |
+--------------+-------------+------+-----+---------+-------+
| id_pelanggan | varchar(20) | NO   | PRI | NULL    |       |
| nama         | varchar(30) | YES  |     | NULL    |       |
| alamat       | varchar(50) | YES  |     | NULL    |       |
| pekerjaan    | varchar(50) | YES  |     | NULL    |       |
| no_ktp       | varchar(20) | YES  |     | NULL    |       |
| no_telp      | varchar(15) | YES  |     | NULL    |       |
+--------------+-------------+------+-----+---------+-------+
6 rows in set (0.018 sec)

MariaDB [penjualan_barang]>
```

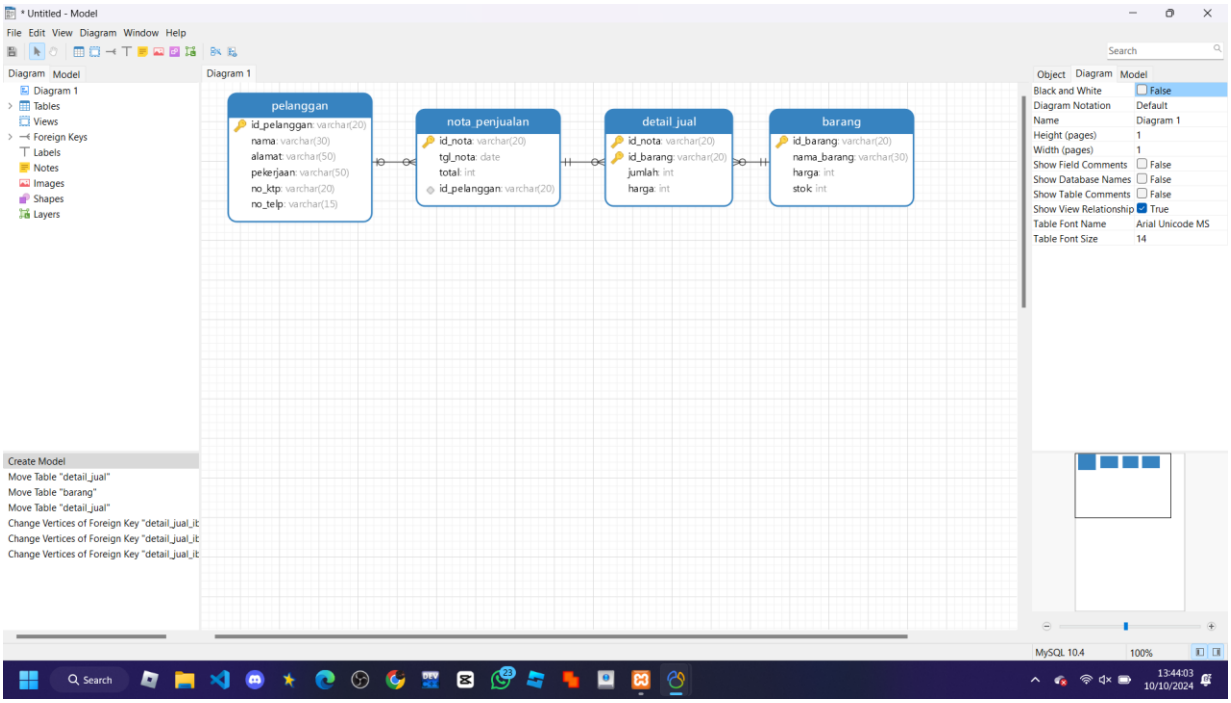
* Untitled - Model
File Edit View Diagram Window Help
Diagram Model
Diagram 1
Tables
Views
Foreign Keys
Labels
Notes
Images
Shapes
Layers
Diagram 1
pelanggan
id_pelanggan: varchar(20)
nama: varchar(30)
alamat: varchar(50)
pekerjaan: varchar(50)
no_ktp: varchar(20)
no_telp: varchar(15)
nota_penjualan
id_nota: varchar(20)
tgl_nota: date
total: int
id_pelanggan: varchar(20)
detail_jual
id_nota: varchar(20)
id_barang: varchar(20)
jumlah: int
harga: int
barang
id_barang: varchar(20)
nama_barang: varchar(30)
harga: int
stok: int
Object Diagram Model
Black and White False
Diagram Notation Default
Name Diagram 1
Height (pages) 1
Width (pages) 1
Show Field Comments False
Show Database Names False
Show Table Comments False
Show View Relationship True
Table Font Name Arial Unicode MS
Table Font Size 14
Create Model
Move Table "detail_jual"
Move Table "barang"
Move Table "detail_jual"
Change Vertices of Foreign Key "detail_jual_ib
Change Vertices of Foreign Key "detail_jual_ib
Change Vertices of Foreign Key "detail_jual_ib
MySQL 10.4
100%
Search
13:44:03
10/10/2024