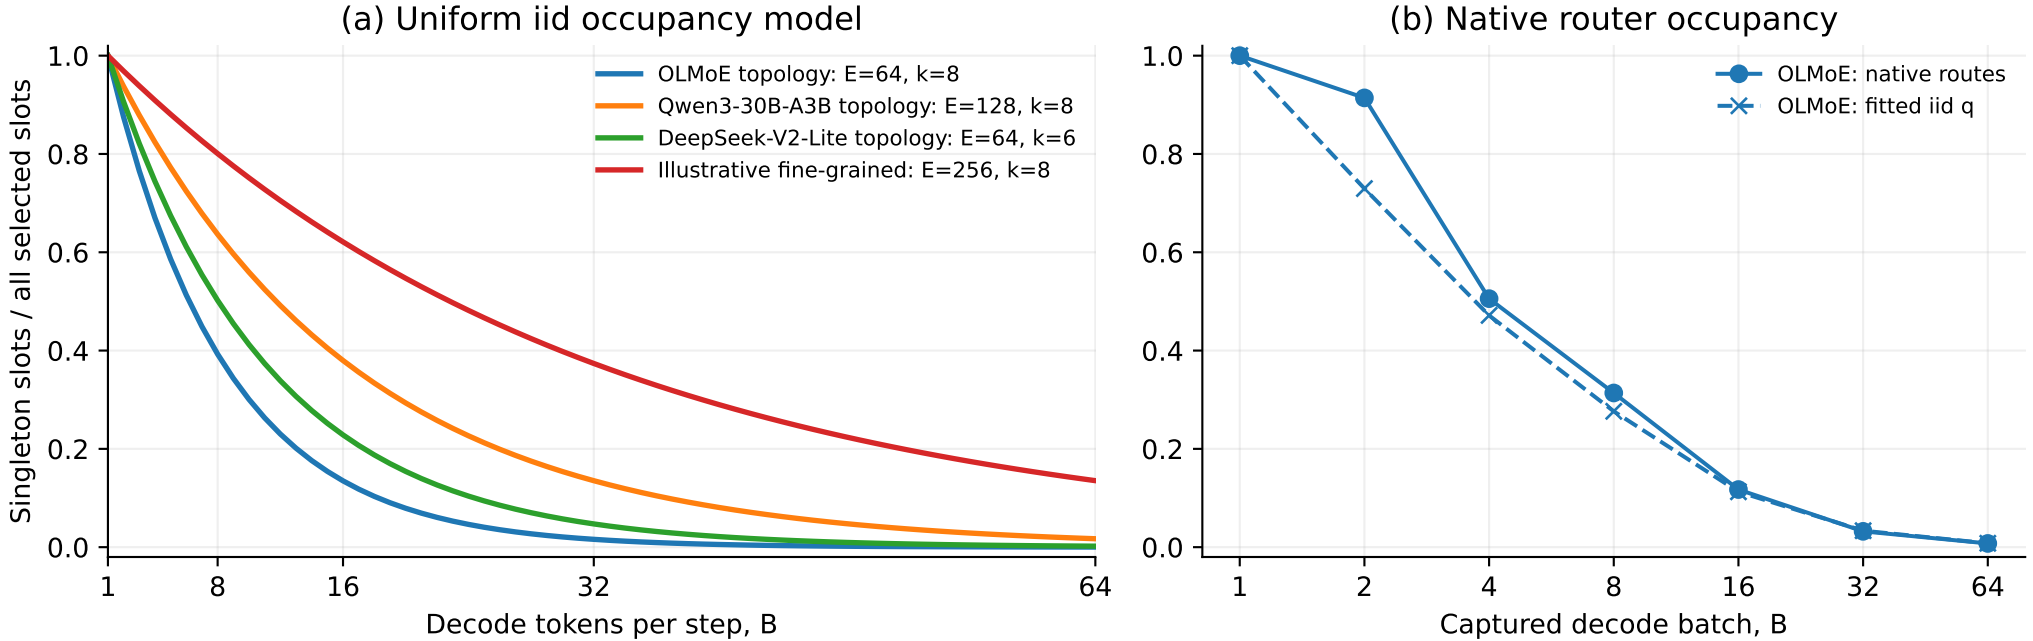

r05 short diagnostic: native OLMoE BF16 eager; one fixed cohort/B, 8 decode steps, 16 layers.
32-token prefixes; B=64 uses 64 distinct WikiText windows from 60 articles; no independent-run inference.
Native router counts measure occupancy; fitted q is in-sample and assumes iid tokens.
Occupancy alone does not measure DRAM bytes or serving latency.