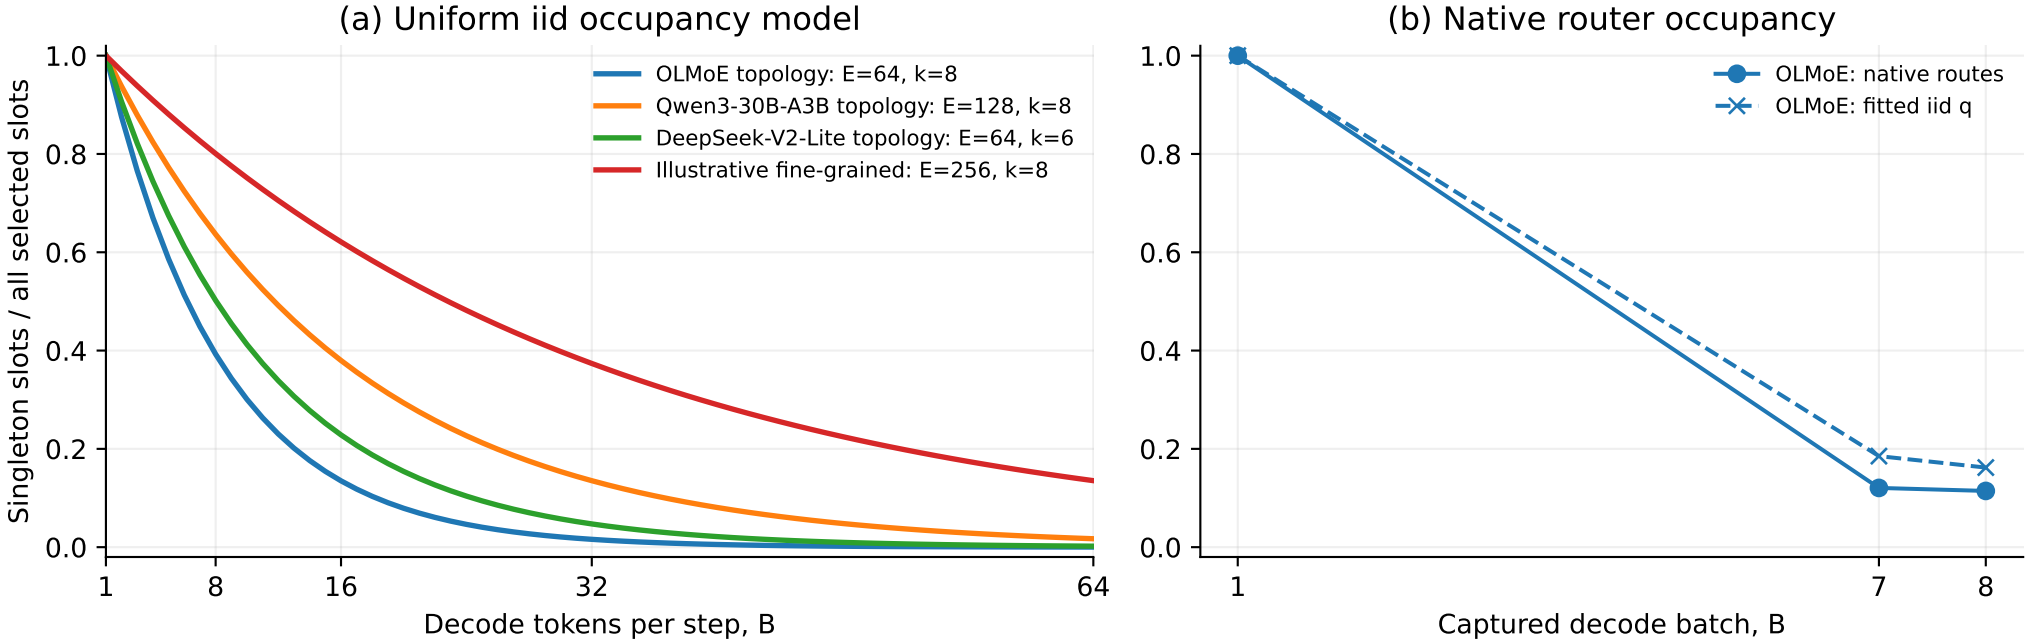

Single short synthetic-prompt run (7 decode steps); B=8 prompts are similar. Descriptive diagnostic only.
Native router counts measure occupancy; fitted q is in-sample and assumes iid tokens.
Occupancy alone does not measure DRAM bytes or serving latency.