T1 | model | bfloat16 | quant=none | B=8

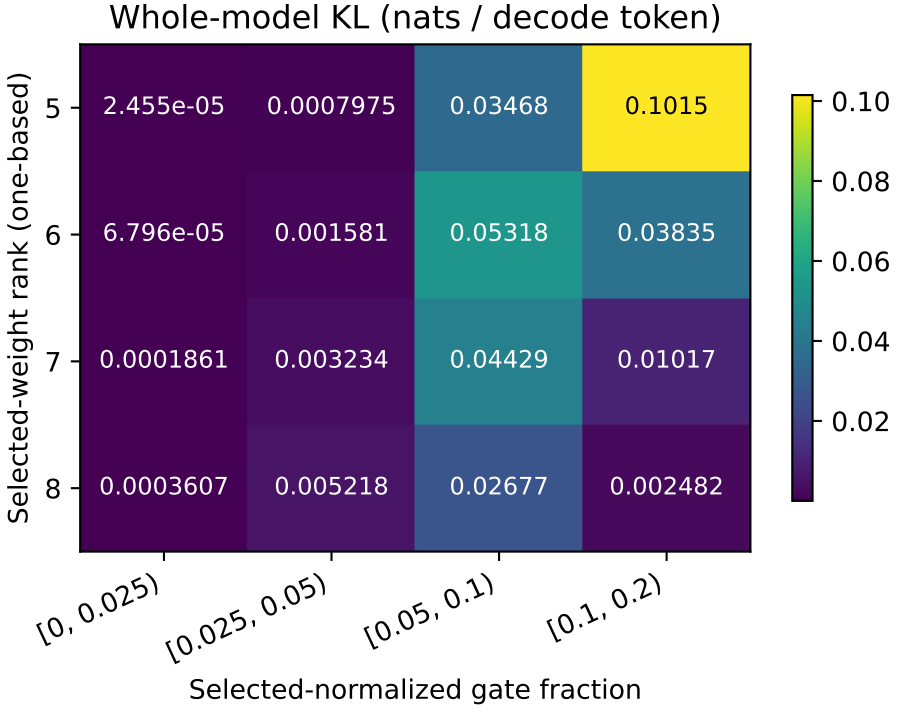

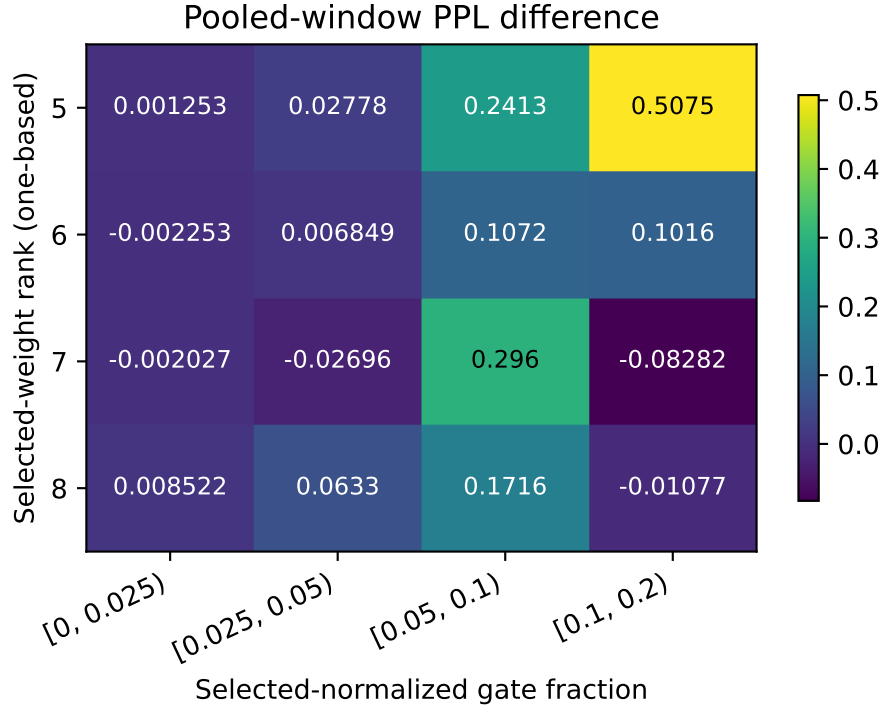

Each cell repeatedly drops one bin across all routed decode layers; not an additive event/layer cost. Quality is averaged across measured runs; raw run and paired-document values are in CSV. NA with 0 skips means no selected events, not evidence of safe skipping. Missing cells remain unmeasured. No confidence intervals; tokens and documents are not system-run repetitions.