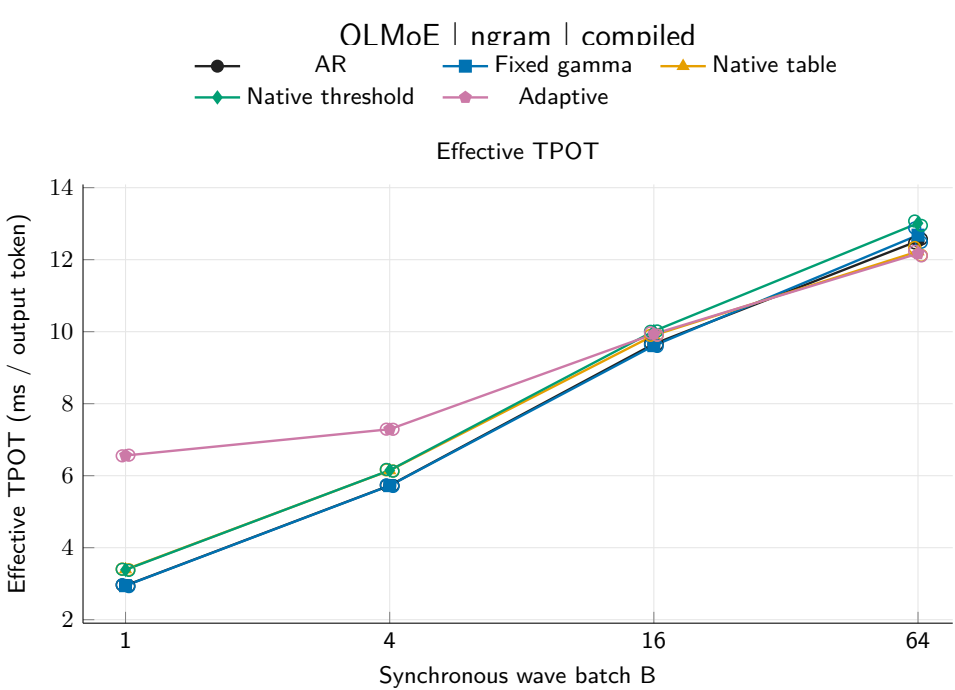


Open dots: every run value (small x offsets). Lines: complete run medians; missing repeats break lines.
No confidence intervals; shared engines and online state are not independent engine repeats.
TPOT: per-run mean across complete requests, from first to last output receipt divided by output tokens minus one.
Whole policies: native tables and fixed-budget engines can use different graph modes.