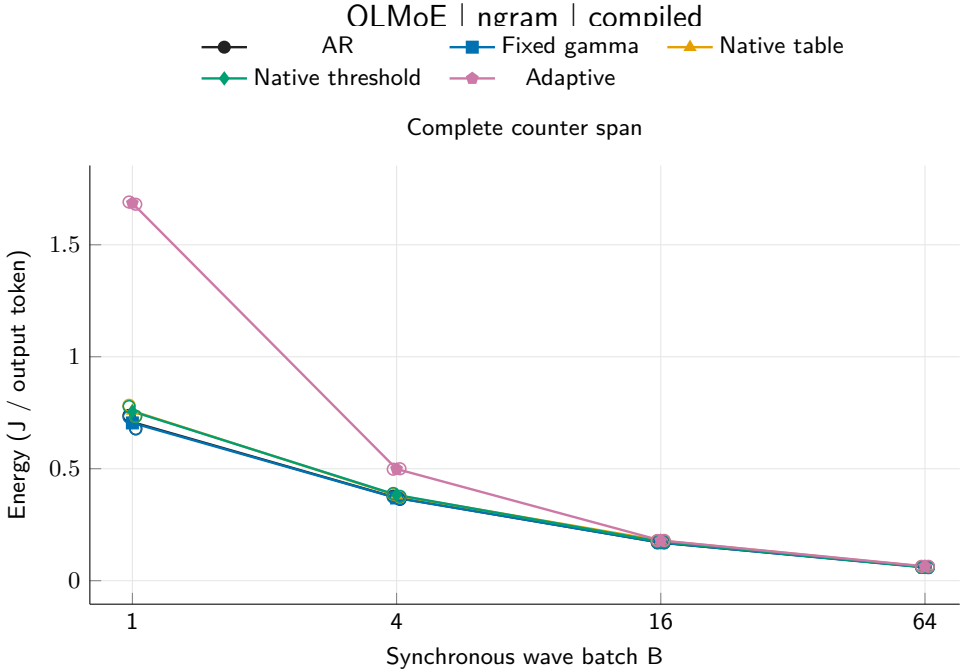


Open dots: every run value (small x offsets). Lines: complete run medians; missing repeats break lines.
No confidence intervals; shared engines and online state are not independent engine repeats.
Whole-device first-start to last-end counter span includes gaps; counter endpoints differ from runner wall endpoints.
Whole policies: native tables and fixed-budget engines can use different graph modes.