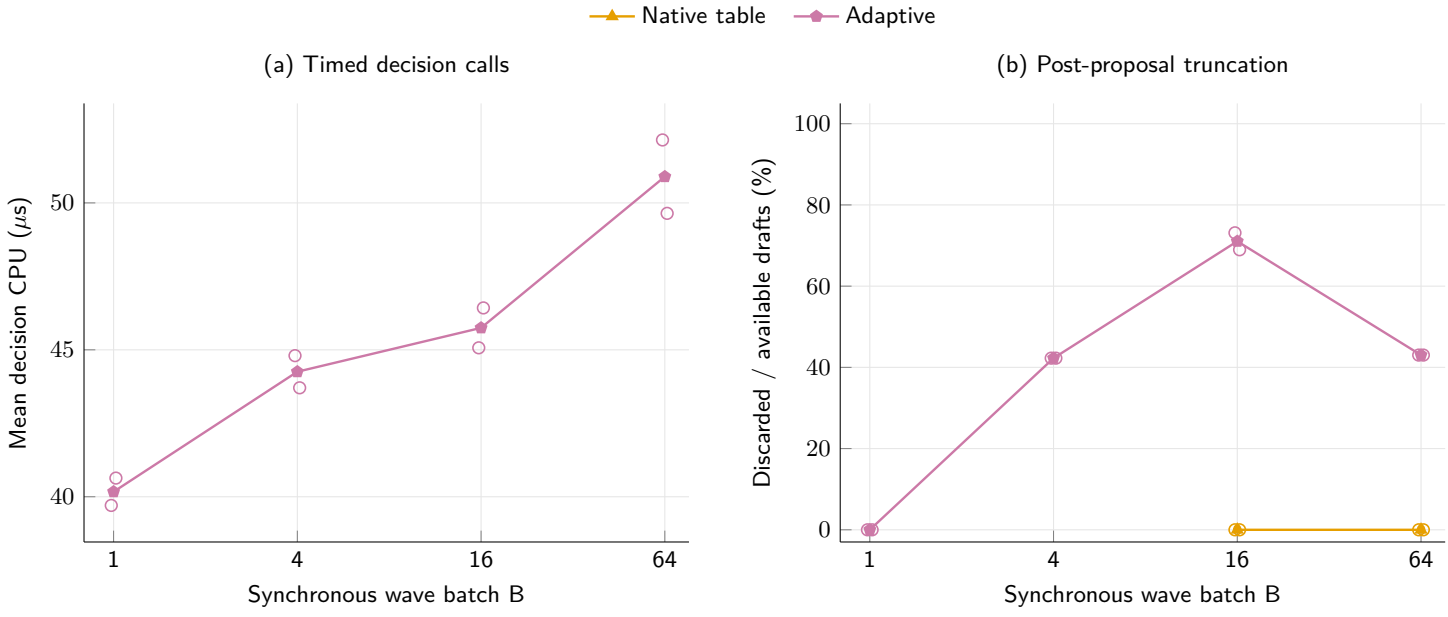


Open dots: every run value (small x offsets). Lines: complete run medians; missing repeats break lines.
No confidence intervals; shared engines and online state are not independent engine repeats.
Scheduled decode steps include terminal/drain. CPU uses timed calls only; unrecorded values are absent.
Discarded counts are not measured GPU time or energy.
Whole policies: native tables and fixed-budget engines can use different graph modes.