




### Boss-View

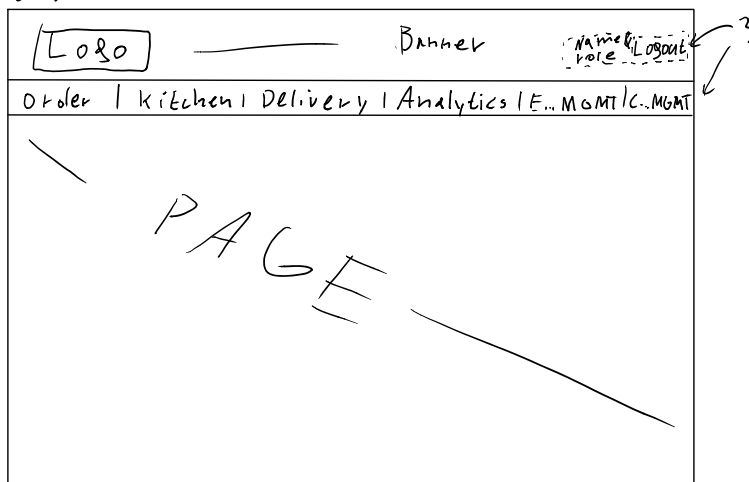

### Employee-view

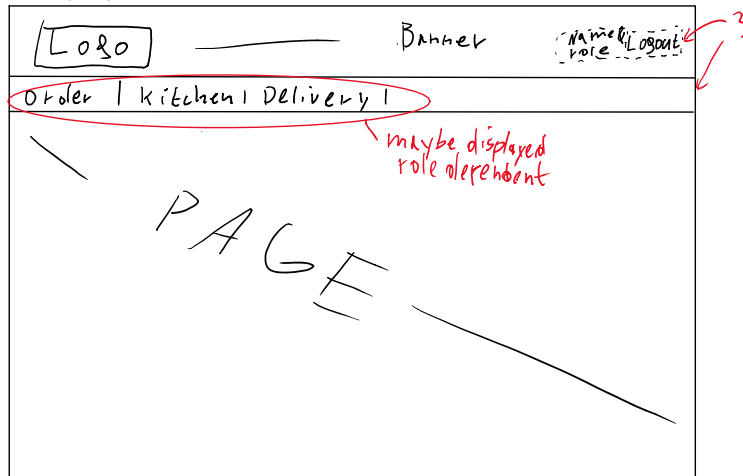

### /order

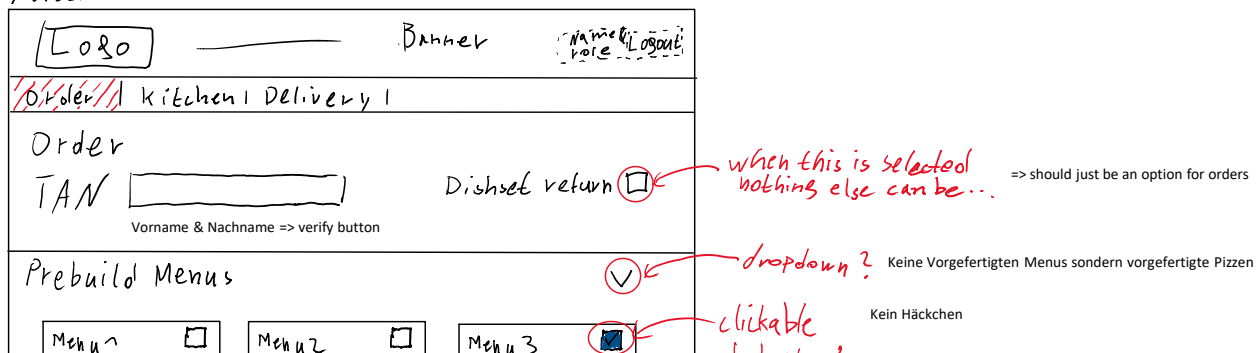

## Prebuild Menus

Menu 1	Menu 2	Menu 3
- Grocery 1	- Grocery 1	- Grocery 1
- Grocery 2	- Grocery 2	- Grocery 2
Price: €	Price: €	Price: €



dropdown: Keine Vorgefertigten Menus sondern vorgefertigte Pizzen

Kein Häkchen

clickable

↳ dropdown?

do we want/need images?

## Menu Configurator

Pizza configurator:

Topping 1	Topping 2	Topping 3
Topping 4	Topping 5	Topping 6

Salads & more:

Salad 1	grocery 1	other 1
- Ingredient 1	- Ingredient 1	- content
- Ingredient 2	- Ingredient 2	
Price: €	Price: €	Price: €

Drinks:

Drink 1	Drink 2	Drink 3
---------	---------	---------

Reset Apply

Topping price?

click & dropdown?

alternatives: - click only  
- dropdown only

Order Contents:

Menu 1	Menu 2
- Grocery 1	- Grocery 1
- Grocery 2	- Grocery 2
Price: €	Price: €

Dish set: ☐ can't be selected if customer has one...

clear orders bootstrap modal to proceed

Total: - , - € confirm Order

move underneath the TAN maybe?

## Kitchen

Logo	Banner	Name	Logout
Order <del>Kitchen</del> Delivery 1			
Ovens:			
to put in:			
Pizza 1	Pizza 2	Pizza 3	
- Topping 1	- Topping 1	- Topping 1	
- Topping 2	- Topping 2	- Topping 2	
customer 1	customer 1	customer 2	
to remove:			
Pizza 1 00:00	Pizza 1 00:00	Pizza 1 00:00	
- Topping 1	- Topping 1	- Topping 1	
- Topping 2	- Topping 2	- Topping 2	
customer 3	customer 4	customer 5	
cooking:			
Pizza 1 00:35	Pizza 2 02:46	Pizza 3 03:30	
- Topping 1	- Topping 1	- Topping 1	
- Topping 2	- Topping 2	- Topping 2	
customer 6	customer 6	customer 6	

putting them in & removing them by just clicking on them?

time in min

customer 6	customer 6	customer 6
------------	------------	------------

/ Delivery -> Boss ?

Logo

Banner

name

role

Logout

Order | kitchen | ~~Delivery~~

Delivery

Driver	Order 1	Status	Order 1	Status	Order 1	Status	Price
Driver 1	Customer 1	delivered	Customer 1	delivered	Customer 3	pending	
Driver 2	Customer 1	delivered	Customer 1	delivered	Customer 3	delivered	X
...							

Driver 1 :

customer 1 ☐

- Menu 1

- Menu 2

:

Price: €

customer 2 ☐

- Menu 1

- Menu 2

:

Price: €

customer 3 ☐

- Menu 1

- Menu 2

:

Price: €

Driver 2 :

:

:

-> implement Address?

-> automatically assign driver?