

EOD Document – AWS S3

Date: 04-Sep-2026

Topic: AWS S3 – Storage, Static Website, Replication, Policies, Lifecycle & CLI

1. Create S3 Bucket and Upload Objects

Steps

1. Open **AWS Console** → **S3**.
2. Click **Create bucket**.
3. Enter a unique bucket name.
4. Select the required AWS Region.
5. Keep the default settings and create the bucket.
6. Open the bucket.
7. Click **Upload**.
8. Select files/folders.
9. Click **Upload**.

Result

Objects (4)

  Copy S3 URI  Copy URL  Download  Open  Delete  Actions  Create folder

 Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

☐ Show versions < 1 > 

☐	Name	Type	Last modified	Size	Storage class
☐	 file1.txt	txt	July 22, 2026, 14:45:54 (UTC+05:30)	0 B	Standard
☐	 job-2aade3e-a7fc-439d-8d88-37b23bebbbee7/	Folder	-	-	-
☐	 Screenshot (10).png	png	July 23, 2026, 15:55:33 (UTC+05:30)	162.2 KB	Standard

2. Deploy a Static Website in S3

S3 can host static websites containing files such as:

- HTML
- CSS
- JavaScript
- Images

Steps

1. Create an S3 bucket.
2. Upload the website files.
3. Go to **Properties**.
4. Find **Static website hosting**.
5. Enable static website hosting.
6. Select **Host a static website**.
7. Enter:

Index document: index.html

8. Save the changes.
9. Configure the required bucket permissions.
10. Open the S3 website endpoint.

Example


index.html

style.css

script.js

images/

Result

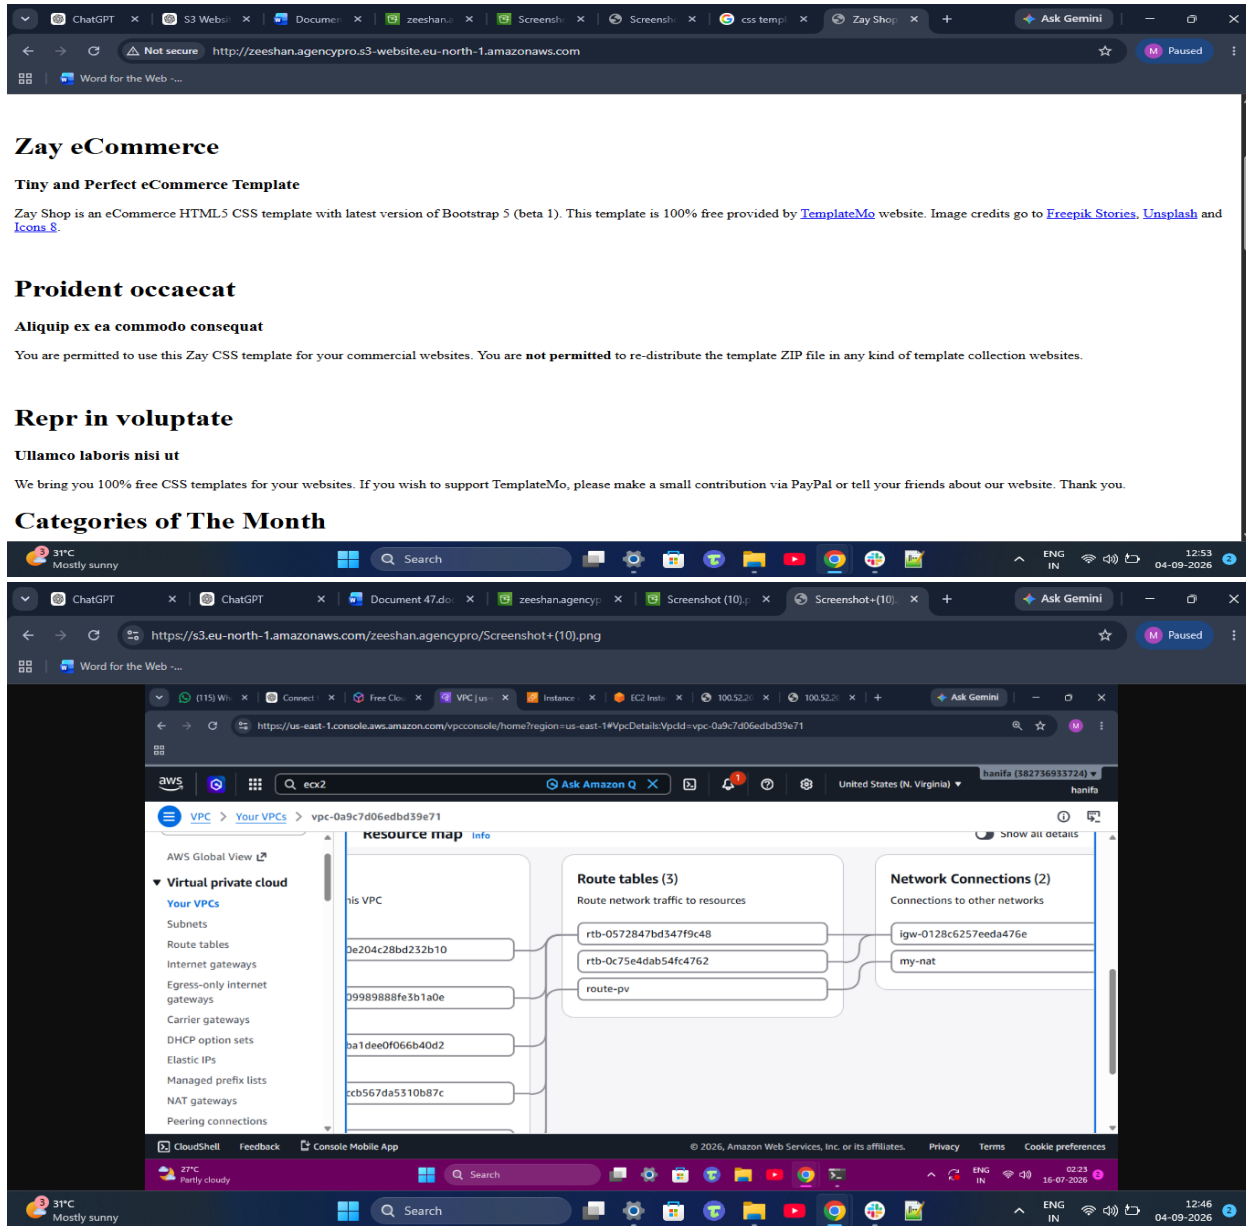

3. Enable Cross-Region Replication

Cross-Region Replication (**CRR**) automatically copies objects from one S3 bucket to another S3 bucket in a different AWS Region.

Example

Source Bucket

us-east-1

|

| Replication

↓

Destination Bucket

ap-south-1

Steps

1. Create the source S3 bucket.
2. Create another S3 bucket in a different AWS Region.
3. Enable **Versioning** on both buckets.
4. Open the source bucket.
5. Go to **Management → Replication rules**.
6. Create a replication rule.
7. Select the destination bucket.
8. Configure the required IAM role.
9. Save the replication rule.
10. Upload a new object to the source bucket.
11. Verify that the object is replicated to the destination bucket.

Result


The screenshot shows the Amazon S3 console interface. The browser address bar indicates the URL: `https://us-east-1.console.aws.amazon.com/s3/buckets/zeeshancloudtech.online?region=us-east-1`. The console header shows the AWS logo, a search bar, and the current region: United States (N. Virginia). The breadcrumb navigation shows: Amazon S3 > Buckets > zeeshancloudtech.online.

The main content area is titled "Objects (1/10)". It features a toolbar with buttons: Copy S3 URI, Copy URL, Download, Open, Delete, Actions, Create folder, and Upload. Below the toolbar, a message states: "Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)".

A search bar labeled "Find objects by prefix" and a toggle for "Show versions" are present. Below this is a table of objects:

	Name	Type	Last modified	Size	Storage class
☐	contact.html	html	September 4, 2026, 12:49:00 (UTC+05:30)	15.2 KB	Standard
☐	file1.txt	txt	July 22, 2026, 14:45:54 (UTC+05:30)	0 B	Standard
☐	index.html	html	September 4, 2026, 12:49:00 (UTC+05:30)	23.0 KB	Standard

The footer of the console shows the date and time: 13:00, 04-09-2026, and the language: ENG IN.

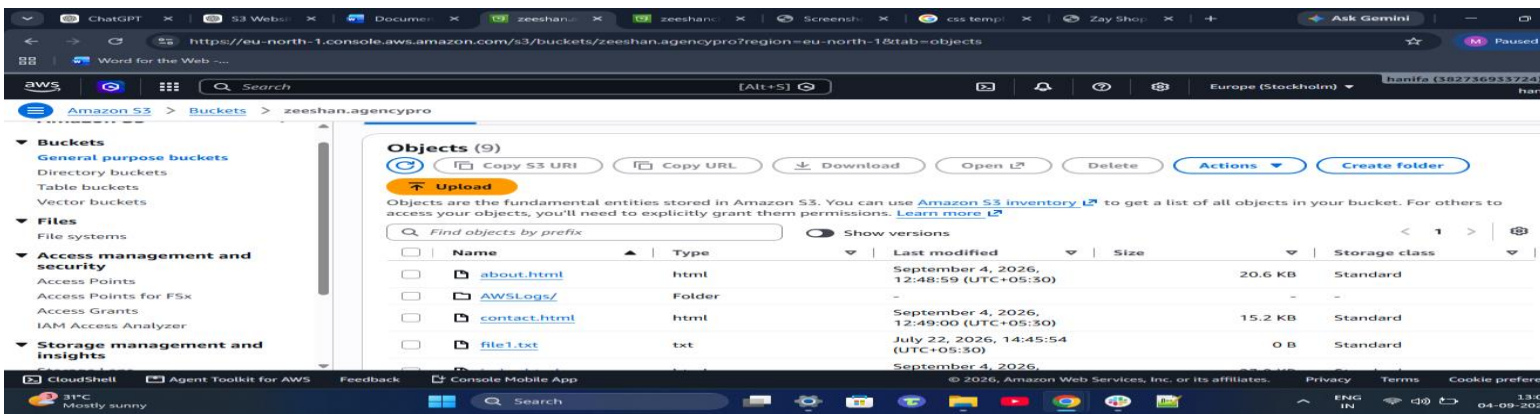

4. Bucket Policy – Only Admin User Can Access Objects

The objective is to allow only the **Admin IAM user** to access objects in the bucket.

Example Bucket Policy

Replace the account ID, username, and bucket name with your own values.

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Effect": "Allow",
      "Principal": {
        "AWS": "arn:aws:iam::382736933724:user/admin"
      },
      "Action": "s3:GetObject",
      "Resource": "arn:aws:s3:::zeeshan.agencypro/*"
    }
  ]
}
```

Steps

1. Create an IAM user named Admin.
2. Open the S3 bucket.
3. Go to **Permissions**.
4. Open **Bucket policy**.
5. Add the policy.
6. Replace the placeholders with your account ID and bucket name.
7. Save the policy.
8. Test access using the Admin user.

5. Configure S3 Lifecycle Policy


S3 Lifecycle policies automatically move or delete objects based on rules.

Steps

1. Open the S3 bucket.
2. Go to **Management**.

3. Click **Create lifecycle rule**.
4. Enter a rule name.
5. Select the objects to which the rule applies.
6. Configure transition actions.
7. Configure expiration/delete actions.
8. Review and create the rule.

Result

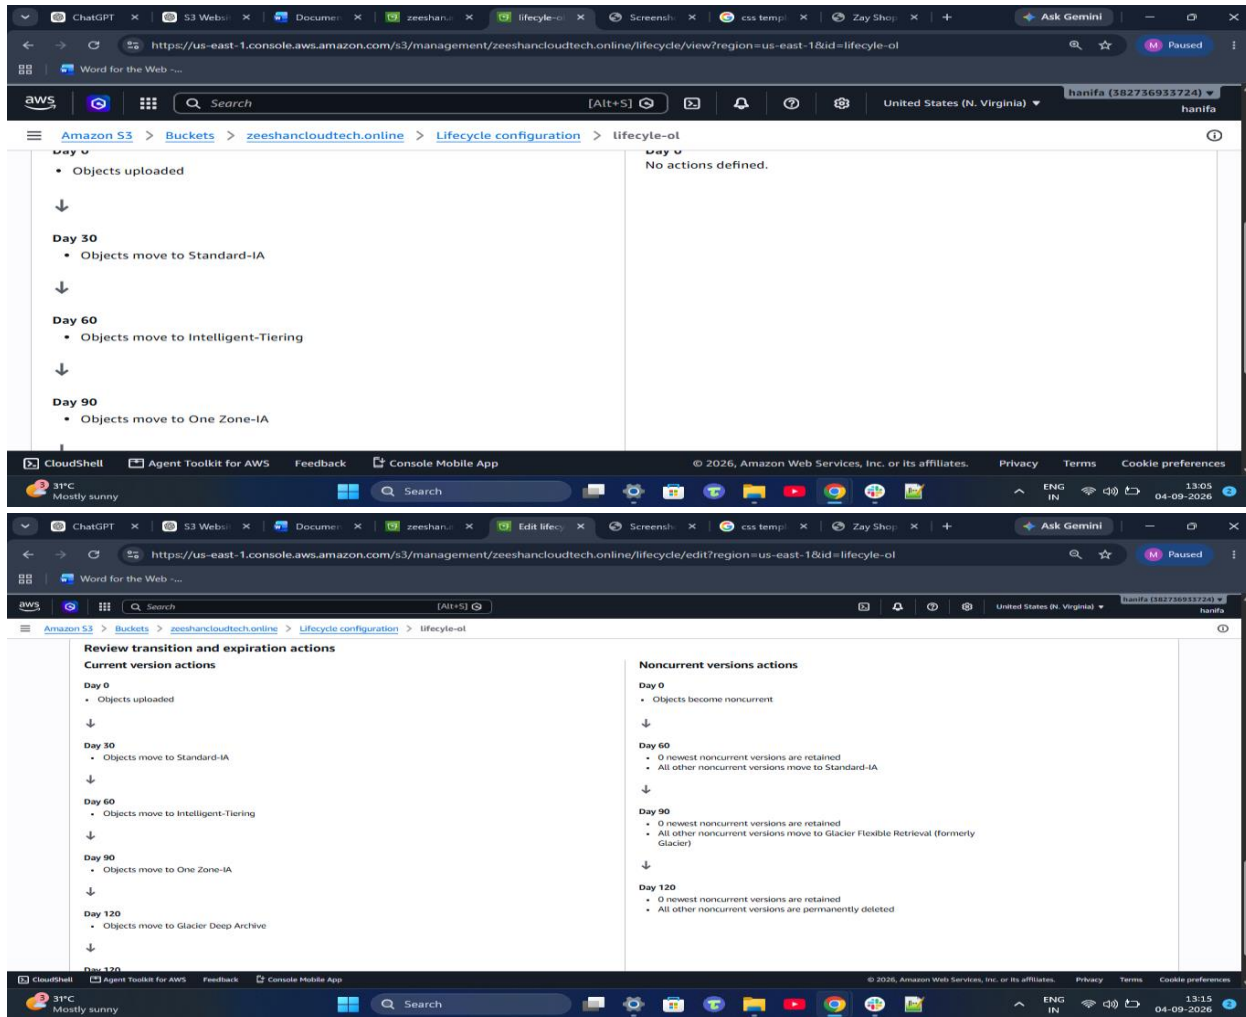

6. Push Objects to S3 Using AWS CLI

Create an object

echo "Hello S3" > test.txt

Upload the file

aws s3 cp test.txt s3:// zeeshan.agencypro/

Result

```
[root@ip-172-31-8-16 ~]# vi text.txt
[root@ip-172-31-8-16 ~]# aws s3 cp s3://zeeshan.agencypro/

aws: [ERROR]: the following arguments are required: paths

usage: aws [options] <command> [<subcommand> [<subcommand> ...] [parameters]
To see help text, you can run:

    aws help
    aws <command> help
    aws <command> <subcommand> help

[root@ip-172-31-8-16 ~]# aws s3 cp text.txt s3://zeeshan.agencypro/
upload: ./text.txt to s3://zeeshan.agencypro/text.txt
[root@ip-172-31-8-16 ~]#
```

i-0ab13f9596bf87875 (public-ec2)

PublicIPs: 100.59.17.228 PrivateIPs: 172.31.8.16

The screenshot shows the AWS S3 console interface. The left sidebar displays the navigation menu with categories like Buckets, Files, Access management and security, and Storage management and security. The main content area shows the 'zeeshan.agencypro' bucket with a list of objects. The objects listed are 'shop-single.html' (57.3 KB), 'shop.html' (48.1 KB), and 'text.txt' (25.0 B). The 'text.txt' object is selected, and its details are shown in the right pane. The console also displays the 'Upload' button and a search bar for finding objects by prefix.

Name	Type	Last modified	Size	Storage class
shop-single.html	html	September 4, 2026, 12:49:02 (UTC+05:30)	57.3 KB	Standard
shop.html	html	September 4, 2026, 12:49:01 (UTC+05:30)	48.1 KB	Standard
text.txt	txt	September 4, 2026, 15:06:30 (UTC+05:30)	25.0 B	Standard

7. Bash Script to Create an S3 Bucket

1. Create a file: s3-created.sh
2. write bash script then give execute permission
3. bucket successfully created then cp to s3 bucket

Result:

The image shows two screenshots of the AWS console. The top screenshot displays the 'Amazon S3' console in the 'Europe (Stockholm)' region. It shows a list of 'General purpose buckets' with the following details:

Name	AWS Region	Creation date
☒ zeeshan-agencypro-test	Europe (Stockholm) eu-north-1	September 4, 2026, 15:09:37 (UTC+05:30)
☐ zeeshan.agencypro	Europe (Stockholm) eu-north-1	April 19, 2026, 15:55:14 (UTC+05:30)
☐ zeeshanagency	Europe (Stockholm) eu-north-1	May 16, 2026, 15:43:42 (UTC+05:30)
☐ zeeshancloudtech.online	US East (N. Virginia) us-east-1	July 25, 2026, 16:05:50 (UTC+05:30)

The bottom screenshot shows a terminal window with the following commands and output:

```
aws help
aws <command> help
aws <command> <subcommand> help

[root@ip-172-31-8-16 ~]# aws s3 cp text.txt s3://zeeshan.agencypro/
upload: ./text.txt to s3://zeeshan.agencypro/text.txt
[root@ip-172-31-8-16 ~]# vi s3-created.sh
[root@ip-172-31-8-16 ~]# chmod +x s3-created.sh
[root@ip-172-31-8-16 ~]# ll
total 12
-rw-r--r-- 1 root root 1676 Sep  1 09:03 pem.key
-rwxr-xr-x 1 root root 261 Sep  4 09:38 s3-created.sh
-rw-r--r-- 1 root root 25 Sep  4 09:35 text.txt
[root@ip-172-31-8-16 ~]# ./s3-created.sh
{
  "Location": "http://zeeshan-agencypro-test.s3.amazonaws.com/",
  "BucketArn": "arn:aws:s3:::zeeshan-agencypro-test"
}
S3 bucket zeeshan-agencypro-test created successfully
[root@ip-172-31-8-16 ~]#
```

Below the terminal output, the instance ID **i-0ab13f9596bf87875 (public-ec2)** is shown, along with its Public IP (100.59.17.228) and Private IP (172.31.8.16).

8. Upload a 1 GB File to S3 Using CLI

First create or obtain a 1 GB file.

For Linux, for example: `fallocate -l 1G test-1gb.bin`

Result

```
aws
Search [Alt+S]
United States (N. Virginia) hanifa (382736933724) hanifa

-rwxr-xr-x. 1 root root 261 Sep 4 09:38 s3-created.sh
-rw-r--r--. 1 root root 25 Sep 4 09:35 text.txt
[root@ip-172-31-8-16 ~]# ./s3-created.sh
{
  "Location": "http://zeeshan-agencypro-test.s3.amazonaws.com/",
  "BucketArn": "arn:aws:s3:::zeeshan-agencypro-test"
}
S3 bucket zeeshan-agencypro-test created successfully
[root@ip-172-31-8-16 ~]# aws s3 cp s3-created.sh s3://zeeshan.agencypro/
upload: ./s3-created.sh to s3://zeeshan.agencypro/s3-created.sh
[root@ip-172-31-8-16 ~]# fallocation -l 1G test-1gb.bin
[root@ip-172-31-8-16 ~]# ls
pem.key s3-created.sh test-1gb.bin text.txt
[root@ip-172-31-8-16 ~]# ll
total 1048588
-r----- 1 root root 1676 Sep 1 09:03 pem.key
-rwxr-xr-x 1 root root 261 Sep 4 09:38 s3-created.sh
-rw-r--r-- 1 root root 1073741824 Sep 4 09:46 test-1gb.bin
-rw-r--r-- 1 root root 25 Sep 4 09:35 text.txt
[root@ip-172-31-8-16 ~]# aws s3 cp test-1gb.bin s3://zeeshan.agencypro/
upload: ./test-1gb.bin to s3://zeeshan.agencypro/test-1gb.bin
[root@ip-172-31-8-16 ~]#
```

i-0ab13f9596bf87875 (public-ec2)

PublicIPs: 100.59.17.228 PrivateIPs: 172.31.8.16

CloudShell Agent Toolkit for AWS Feedback Console Mobile App

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

33°C Partly sunny

Search

ENG IN 15:18 04-09-2026

Create x S3 Web x Docu x zeesh x Instan x EC2 In x Screen x CSS ten x Zay Sh x + Ask Gemini

https://us-east-1.console.aws.amazon.com/ec2-instance-connect/ssh/home?addressFamily=ipv4&connType=standard&instanceId=i-0ab13f9596bf87875...

Word for the Web ...

aws Search [Alt+S]

United States (N. Virginia) hanifa (382736933724) hanifa

Amazon S3 Buckets zeeshan.agencypro

zeeshan.agencypro info

Objects

Metadata Properties Permissions Metrics Management File systems - new Access Points

Objects (1/2)

Copy S3 URI Copy URL Download Open L Delete Actions Create folder Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix Show versions 1

	Name	Type	Last modified	Size	Storage class
☐	s3-created.sh	sh	September 4, 2026, 15:14:28 (UTC+05:30)	261.0 B	Standard
☒	test-1gb.bin	bin	September 4, 2026, 15:18:27 (UTC+05:30)	1.0 GB	Standard

EOD Summary

Today I worked on **Amazon S3** and completed hands-on tasks related to storage and data management. I created S3 buckets, uploaded objects, configured static website hosting, and implemented Cross-Region Replication. I also configured bucket access using IAM and bucket policies, created Lifecycle rules for automatic object transition and deletion, and used AWS CLI to upload files. Finally, I created a Bash script for S3 bucket creation and uploaded a 1 GB file using the CLI.