


Лабораторная №10
Молчанов Сергей

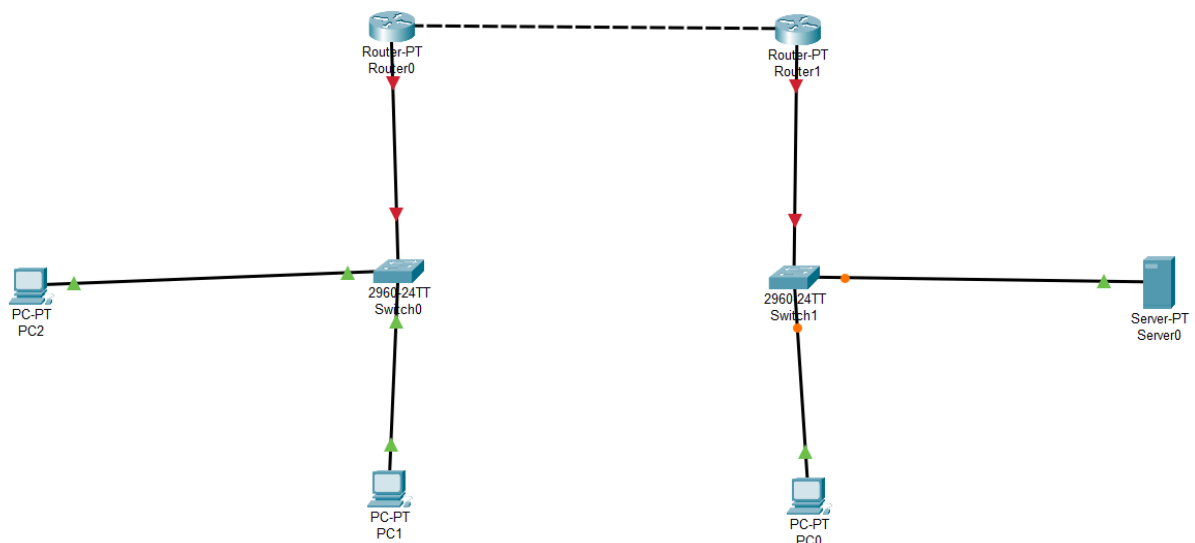

```
Router(config)#int fa0/0
Router(config-if)#ip address 192.168.0.3 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router(config-if)#exit
Router(config)#int fa0/1
Router(config-if)#ip address 192.168.3.1 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

Router(config-if)#exit
```

```
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# int fa0/1
Router(config-if)#ip address 192.168.1.3 255.255.255.0
Router(config-if)#no sh

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
```

Gateway/DNS IPv4

☐ DHCP

☒ Static

Default Gateway 192.168.0.3

```
C:\>ping 192.168.1.1
```

```
Pinging 192.168.1.1 with 32 bytes of data:
```

```
Reply from 192.168.0.3: Destination host unreachable.  
Request timed out.
```

```
Reply from 192.168.0.3: Destination host unreachable.
```

```
Reply from 192.168.0.3: Destination host unreachable.
```

```
Ping statistics for 192.168.1.1:
```

```
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
```