

General Guidance

Hung-yi Lee 李宏毅

Framework of ML

Training data: $\{(\mathbf{x}^1, \hat{y}^1), (\mathbf{x}^2, \hat{y}^2), \dots, (\mathbf{x}^N, \hat{y}^N)\}$

Testing data: $\{\mathbf{x}^{N+1}, \mathbf{x}^{N+2}, \dots, \mathbf{x}^{N+M}\}$

Speech Recognition



\mathbf{x} :  \hat{y} : phoneme

Image Recognition

\mathbf{x} :  \hat{y} : soup

Speaker Recognition

\mathbf{x} :  \hat{y} : John
(speaker)


Machine Translation

\mathbf{x} : 痛みを知れ
 \hat{y} : 了解痛苦吧

Framework of ML

Training data: $\{(\mathbf{x}^1, \hat{y}^1), (\mathbf{x}^2, \hat{y}^2), \dots, (\mathbf{x}^N, \hat{y}^N)\}$

Training:

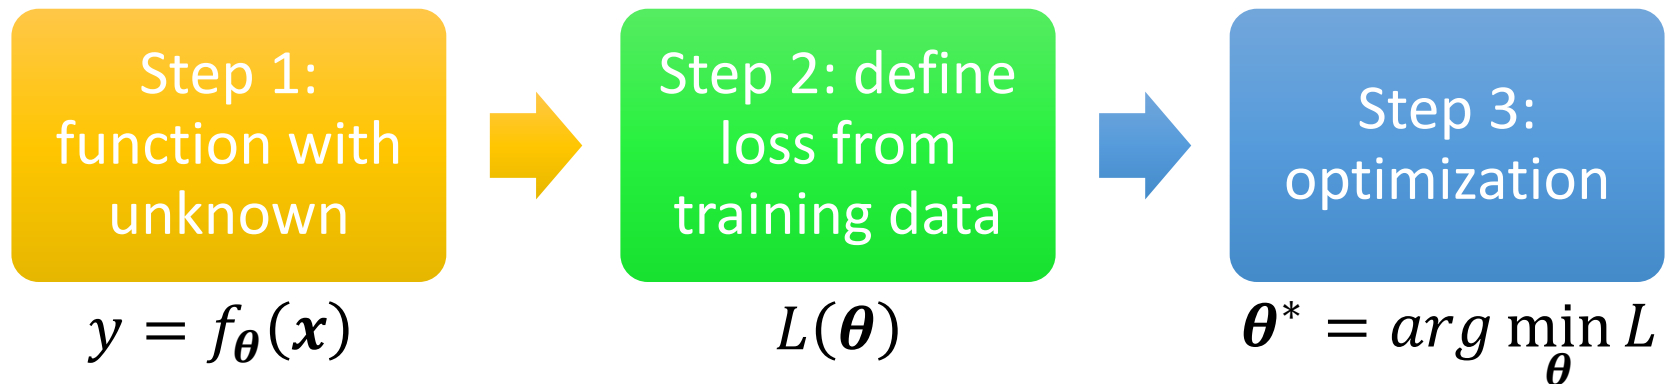


Testing data: $\{\mathbf{x}^{N+1}, \mathbf{x}^{N+2}, \dots, \mathbf{x}^{N+M}\}$

Use $y = f_{\theta^*}(\mathbf{x})$ to label the testing data

$\{y^{N+1}, y^{N+2}, \dots, y^{N+M}\}$ **➡** Upload to Kaggle


General Guide

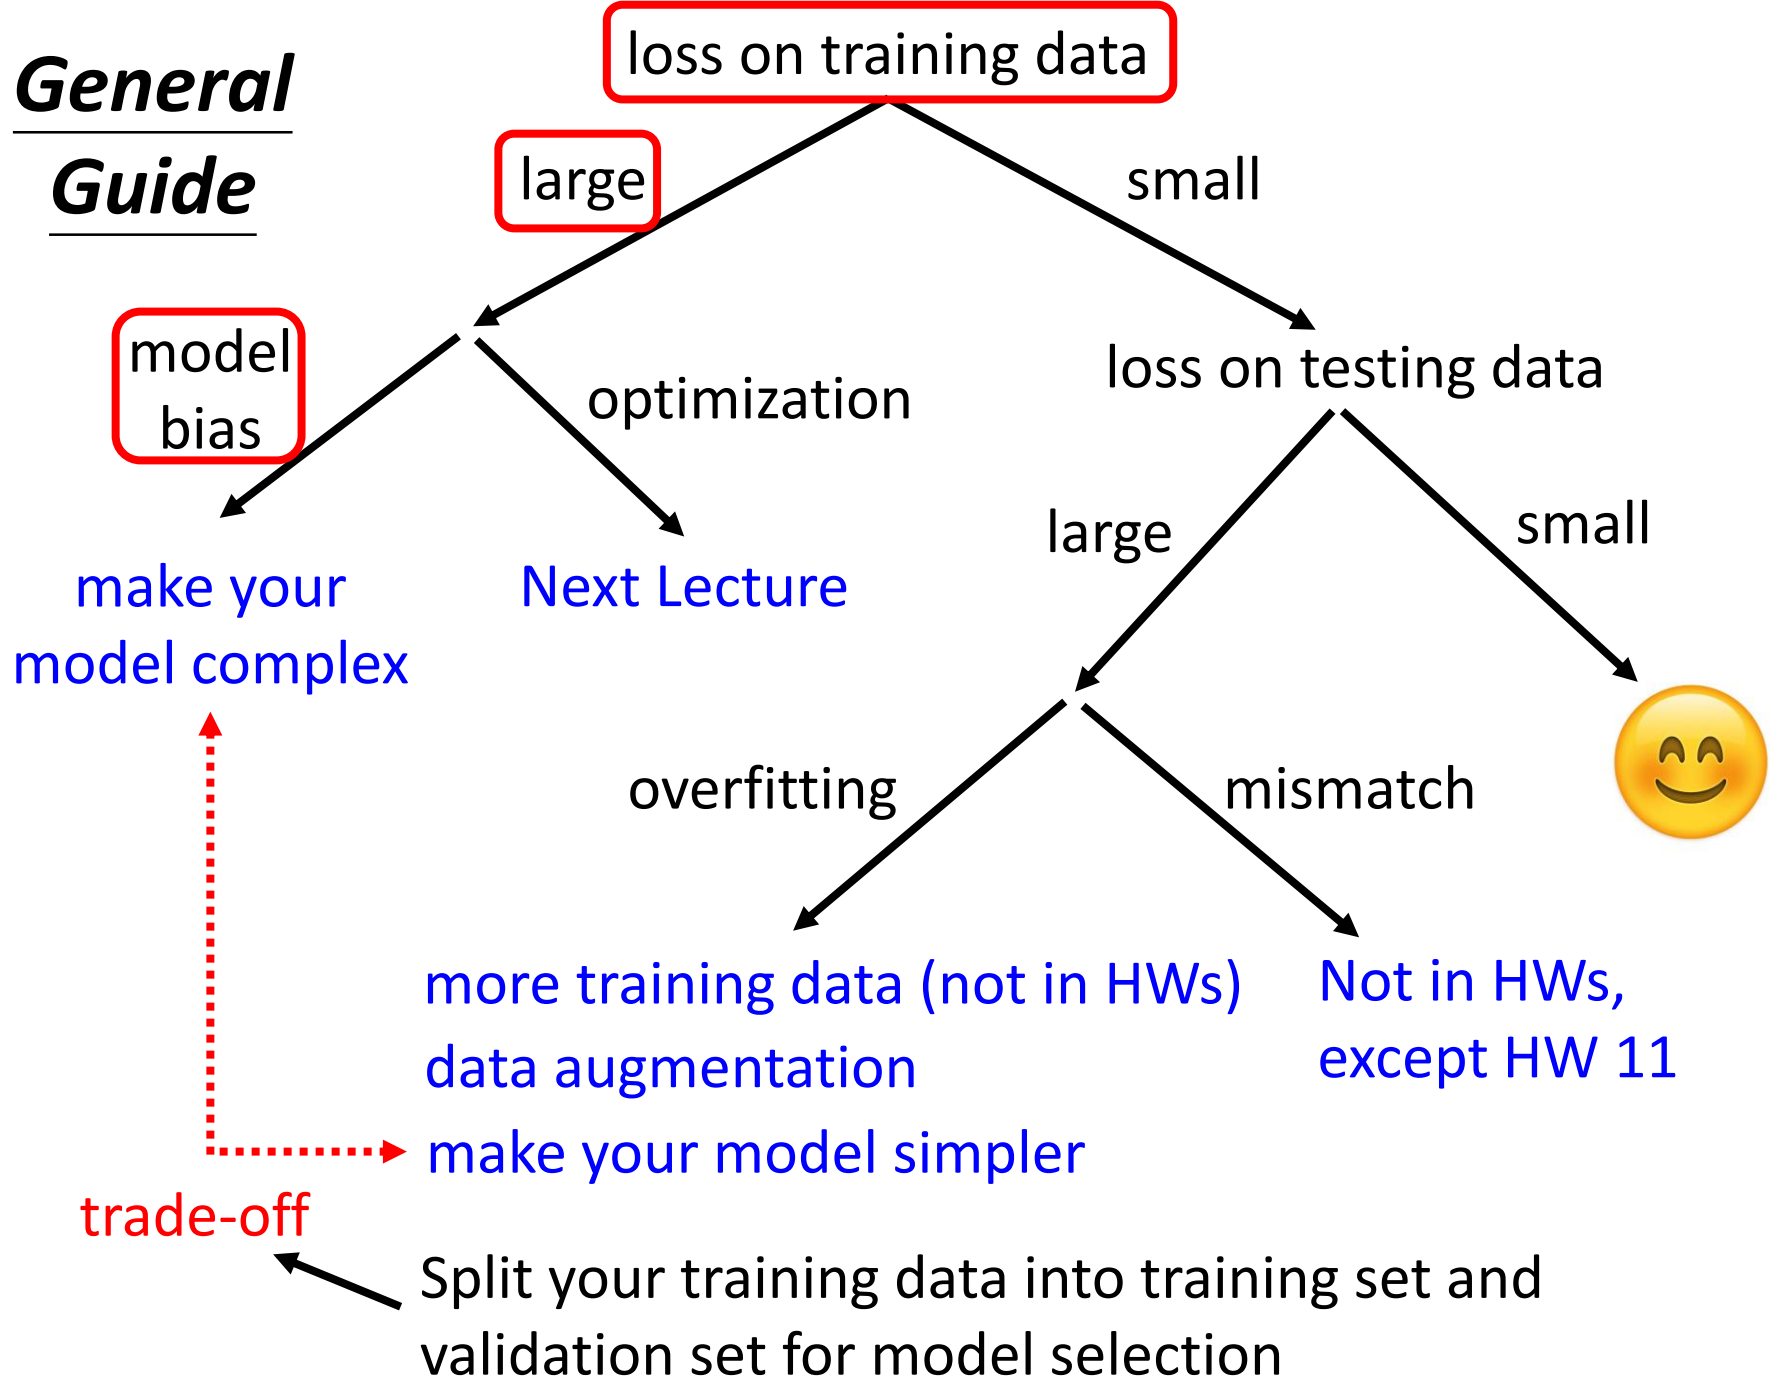

Model Bias

- The model is too simple.

find a needle in a haystack ...
... but there is no needle

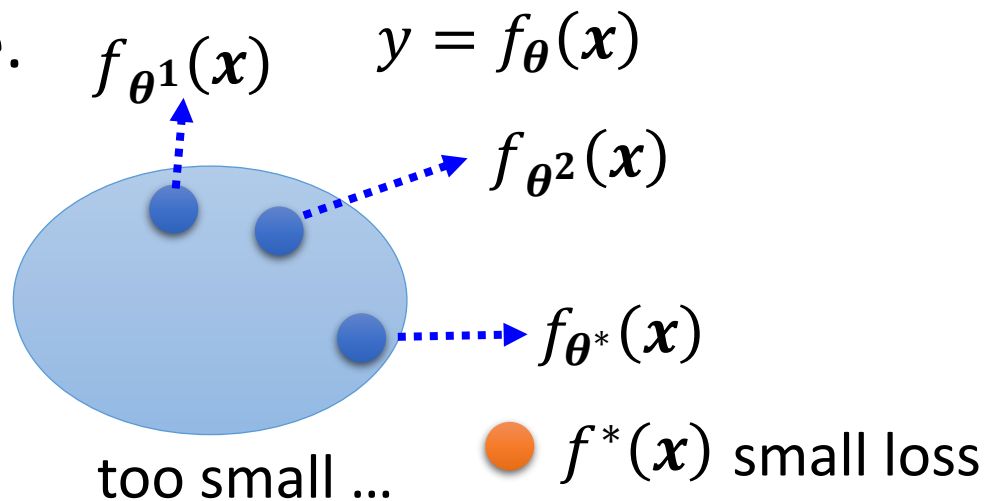


- Solution: redesign your model to make it more flexible

$$y = b + wx_1 \xrightarrow{\text{More features}} y = b + \sum_{j=1}^{56} w_j x_j$$

Deep Learning
(more neurons, layers)



$$y = b + \sum_i c_i \operatorname{sigmoid} \left(b_i + \sum_j w_{ij} x_j \right)$$

General Guide

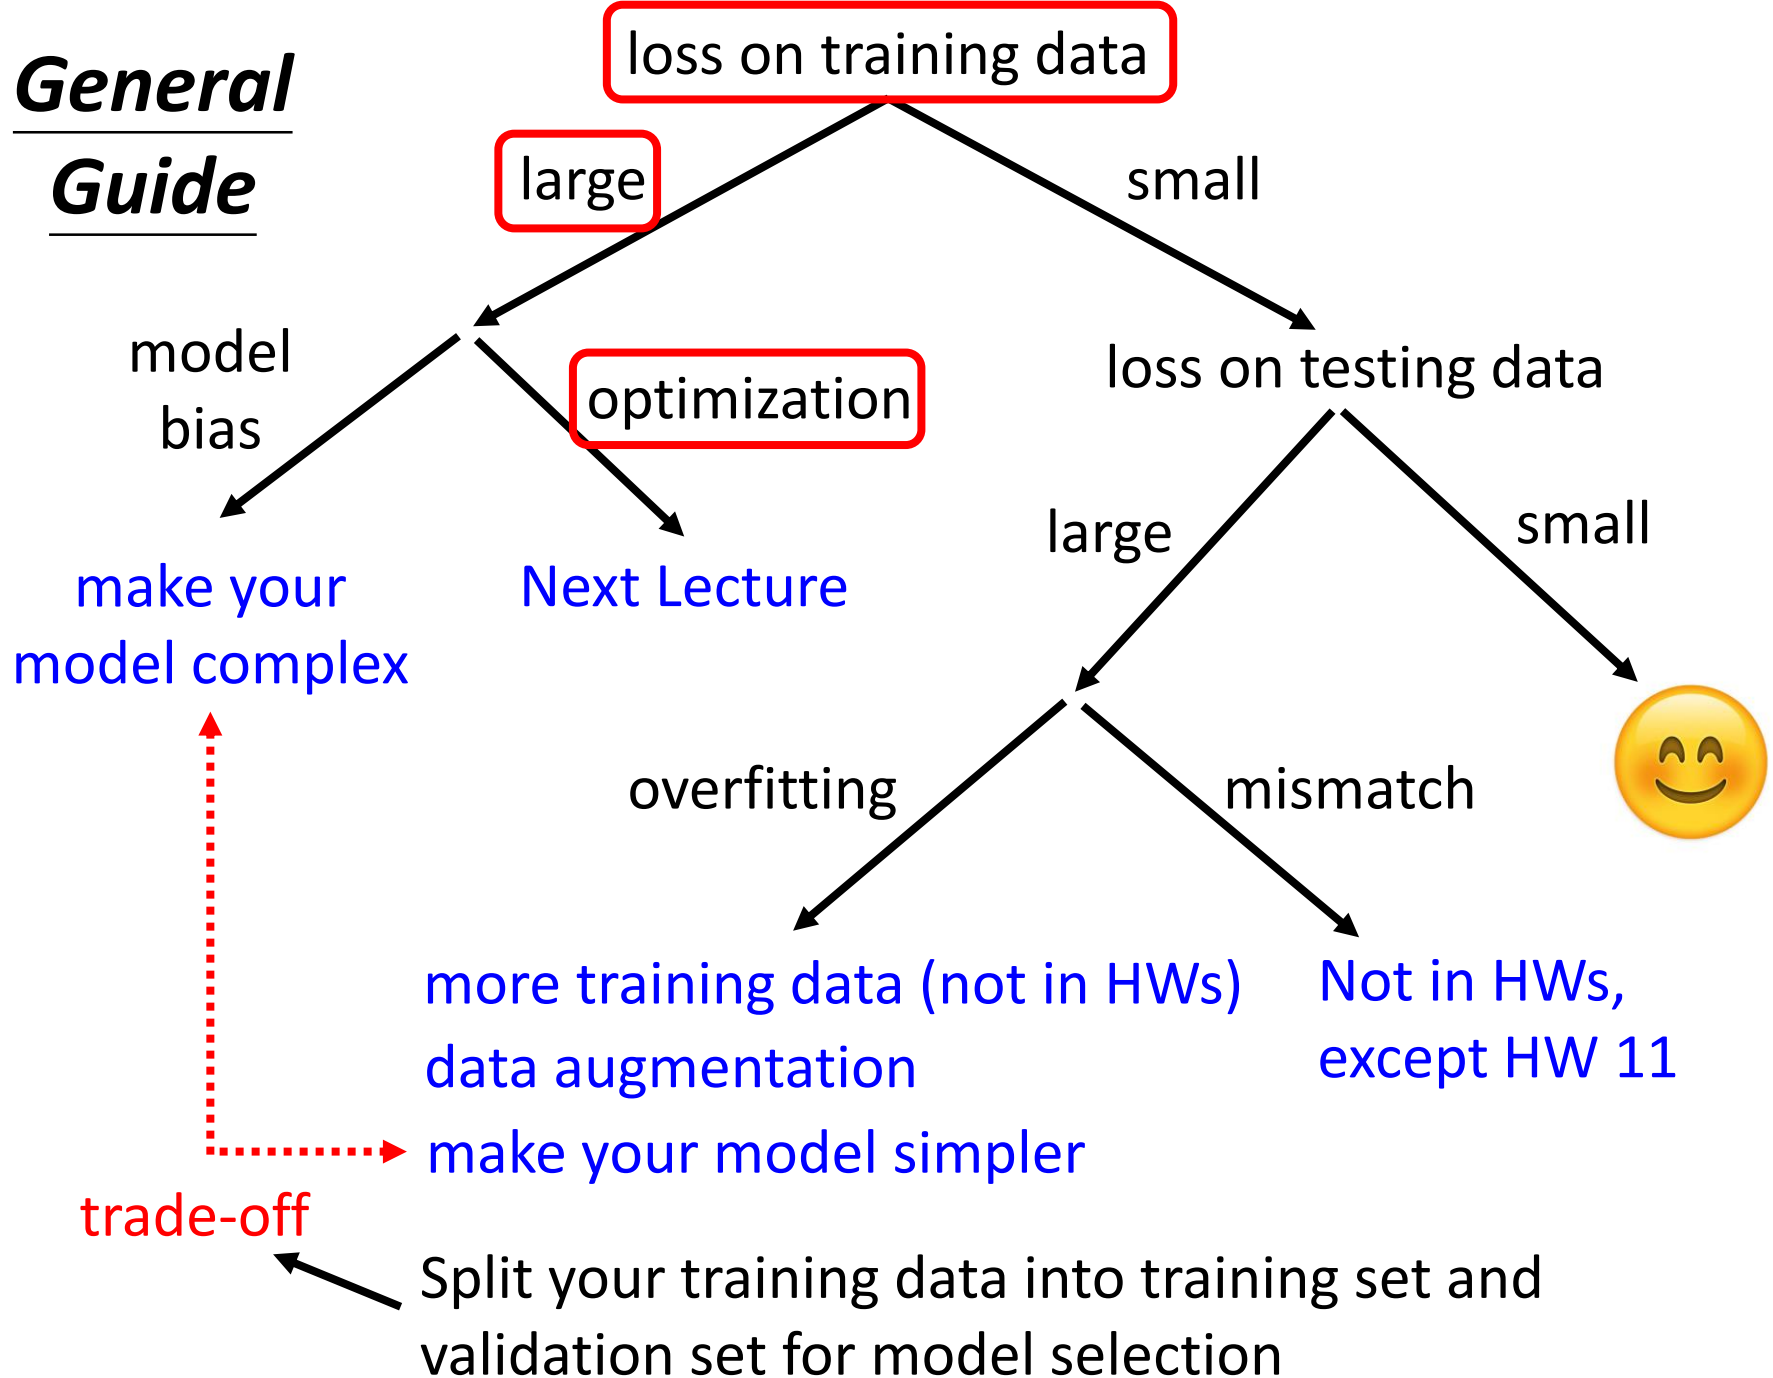

Optimization Issue

- Large loss not always imply model bias. There is another possibility ...

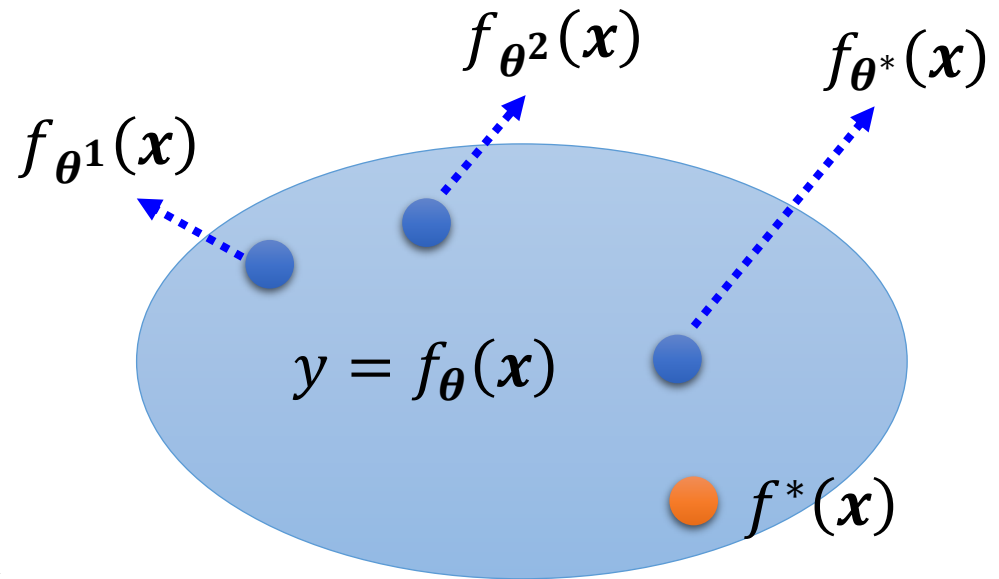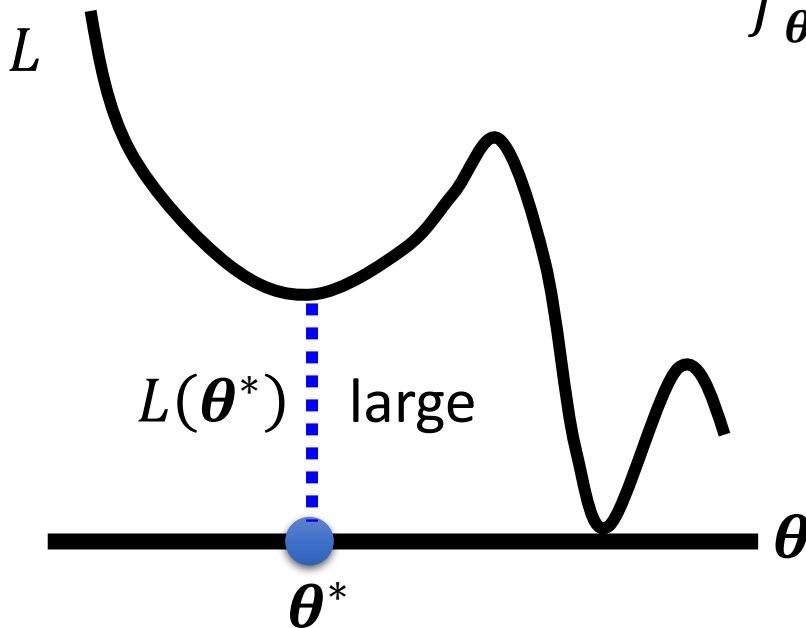


A needle is in a haystack ...

... Just cannot find it.

Model Bias


find a needle in a haystack ...
... but there is no needle

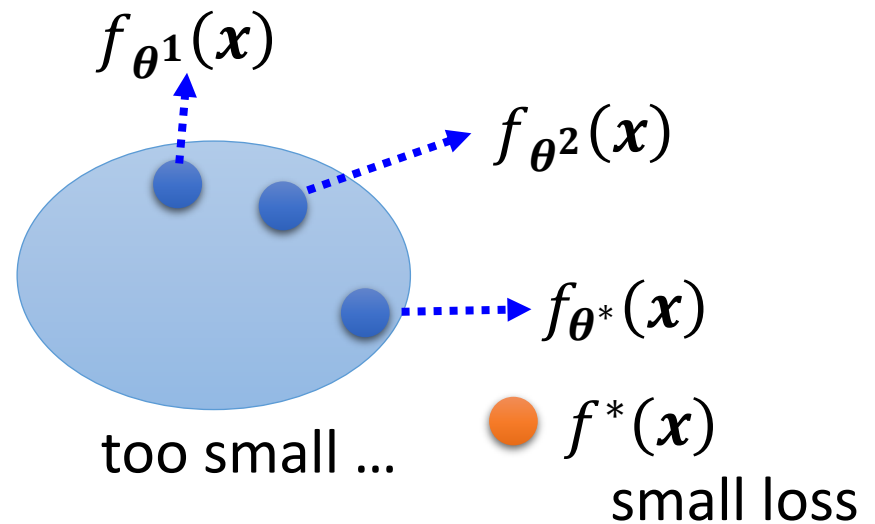

Which one???


Optimization Issue

A needle is in a haystack ...
... Just cannot find it.

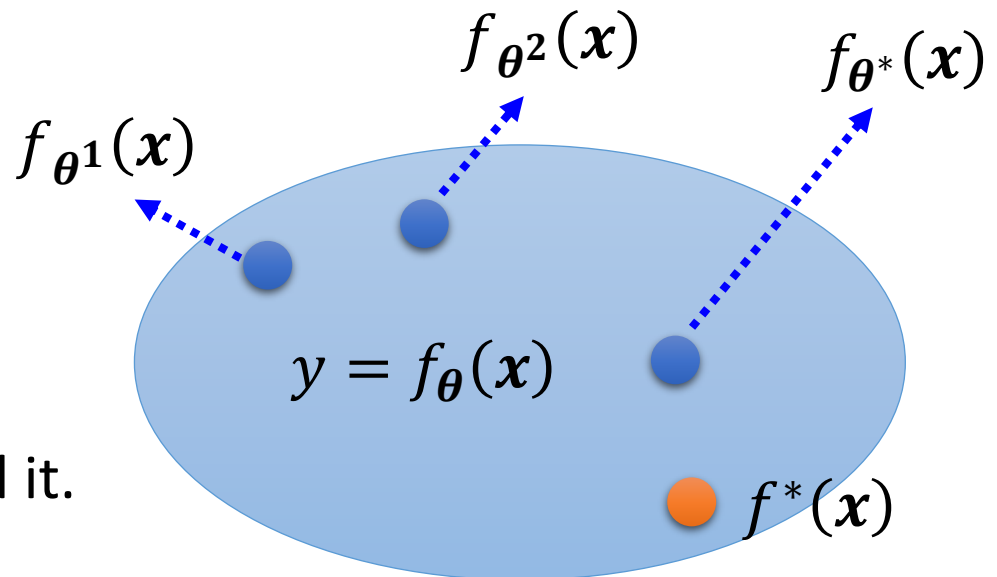

Model Bias v.s. Optimization Issue

- Gaining the insights from comparison

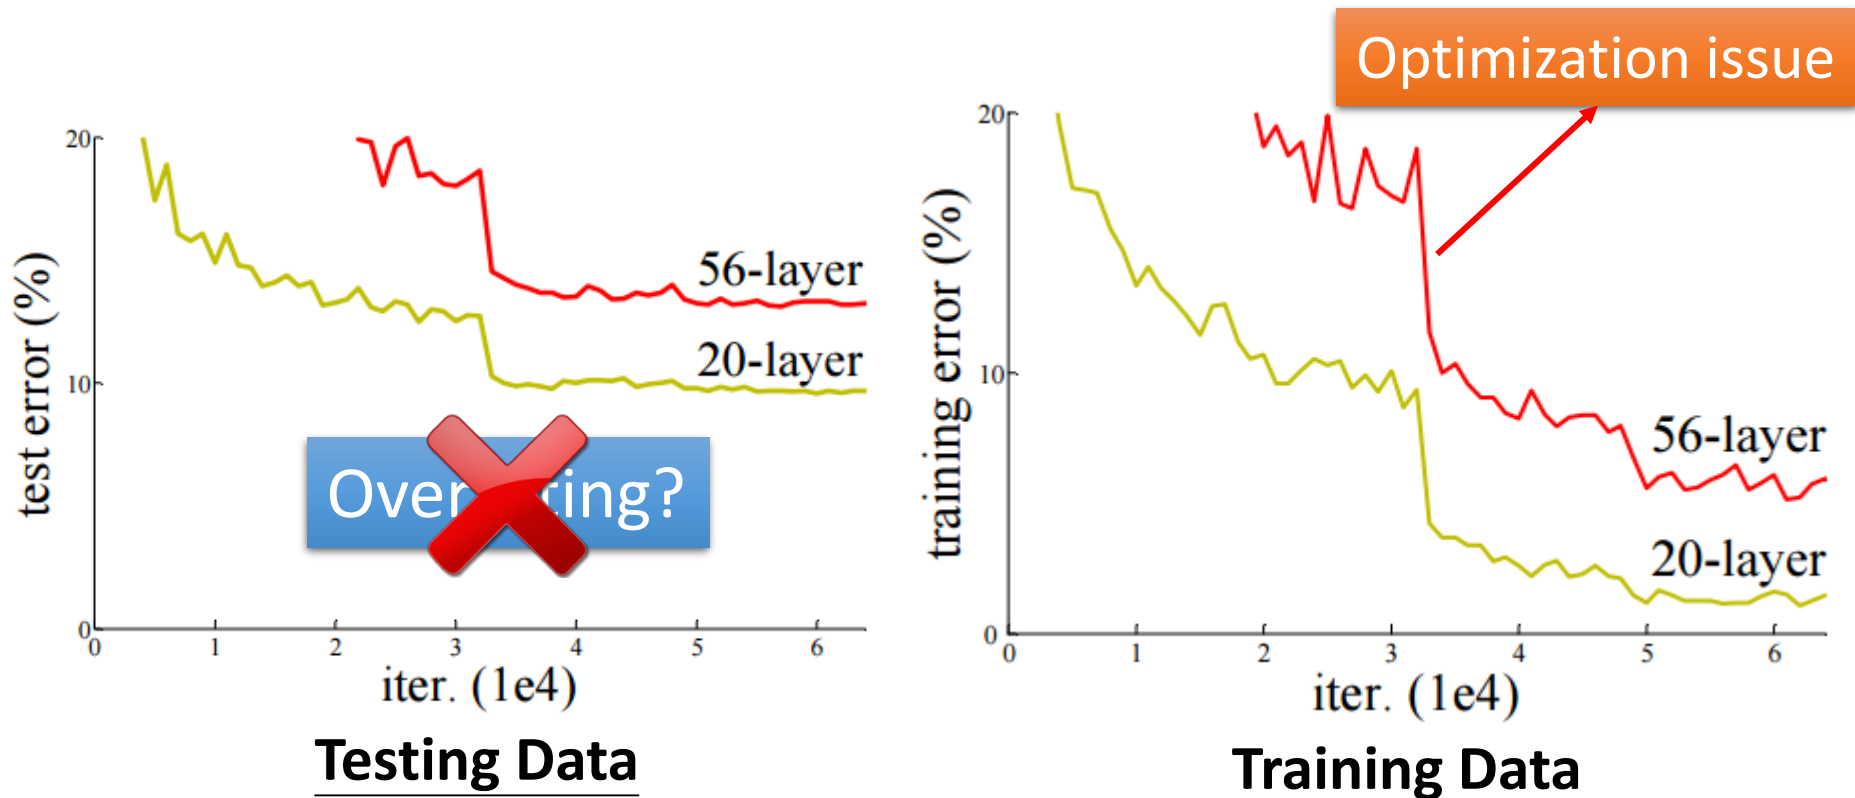


Optimization Issue

- Gaining the insights from comparison
- Start from shallower networks (or other models), which are easier to optimize.
- If deeper networks do not obtain smaller loss on **training data**, then there is optimization issue.


	1 layer	2 layer	3 layer	4 layer	5 layer
2017 – 2020	0.28k	0.18k	0.14k	0.10k	0.34k

- Solution: More powerful optimization technology (next lecture)

General Guide

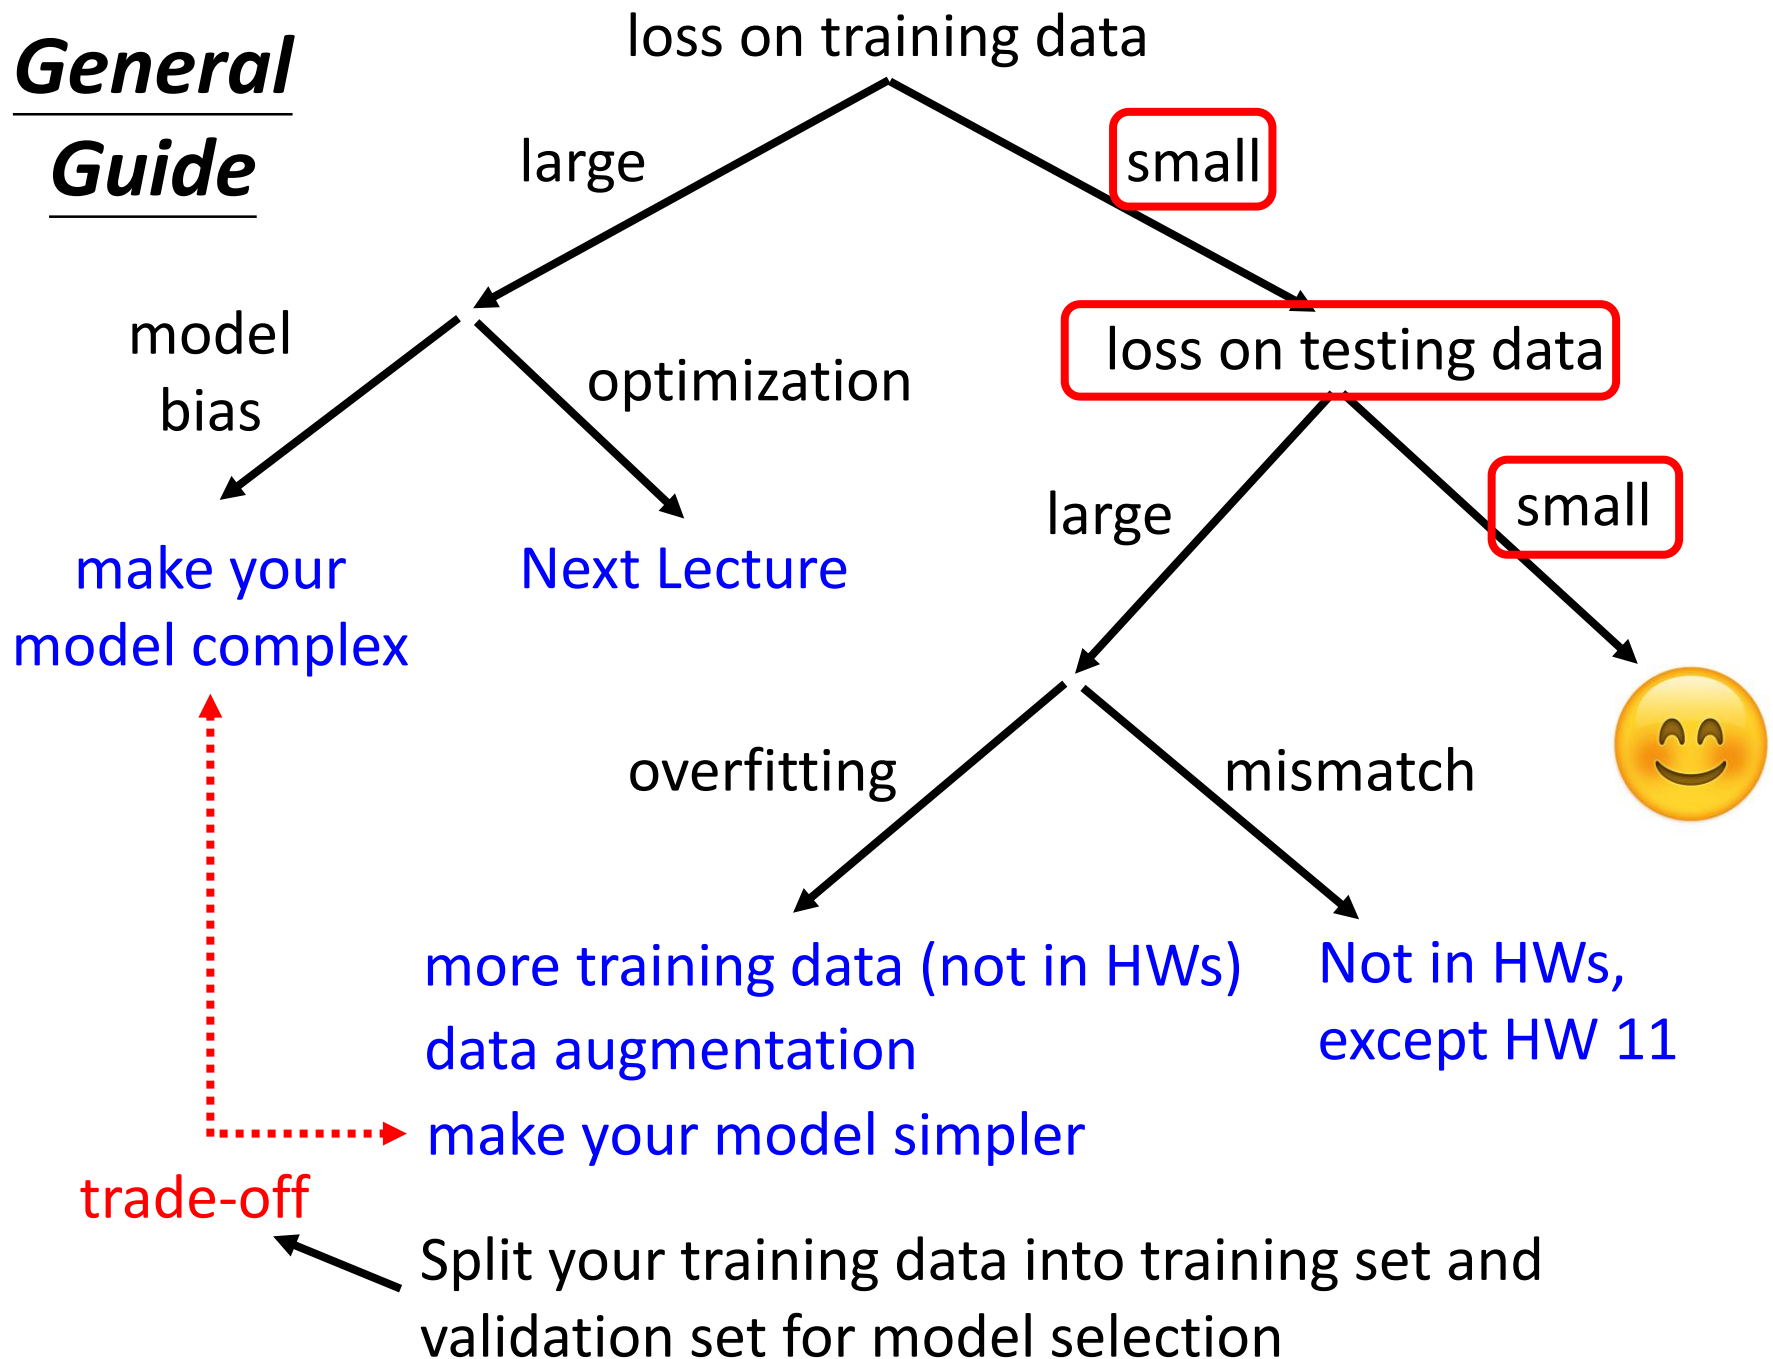

General Guide

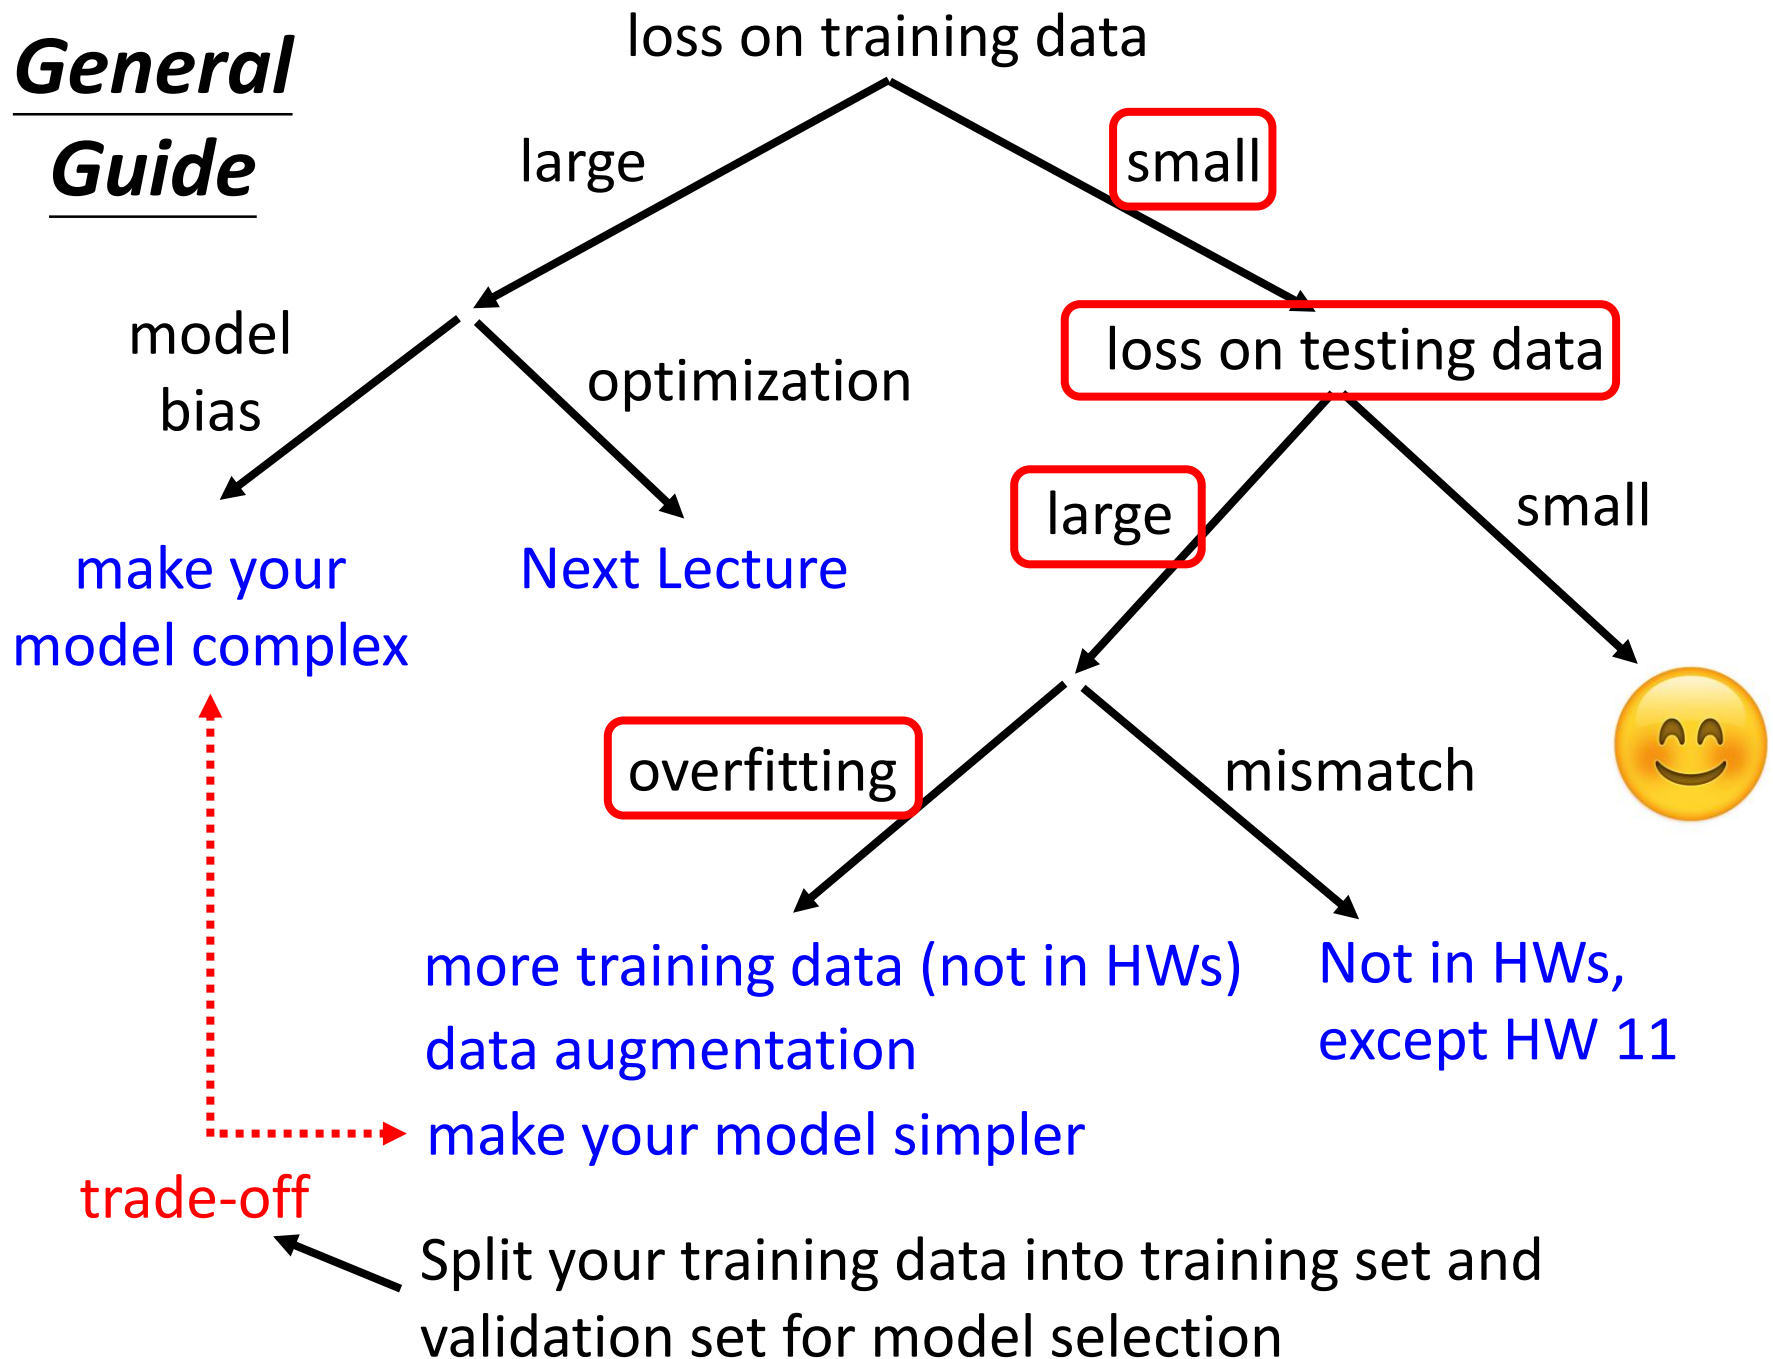

Overfitting

- Small loss on training data, large loss on testing data. Why?


An extreme example

Training data: $\{(\mathbf{x}^1, \hat{y}^1), (\mathbf{x}^2, \hat{y}^2), \dots, (\mathbf{x}^N, \hat{y}^N)\}$




$$f(\mathbf{x}) = \begin{cases} \hat{y}^i & \exists \mathbf{x}^i = \mathbf{x} \\ random & otherwise \end{cases} \quad \text{Less than useless ...}$$

This function obtains **zero training loss**, but **large testing loss**.

Overfitting

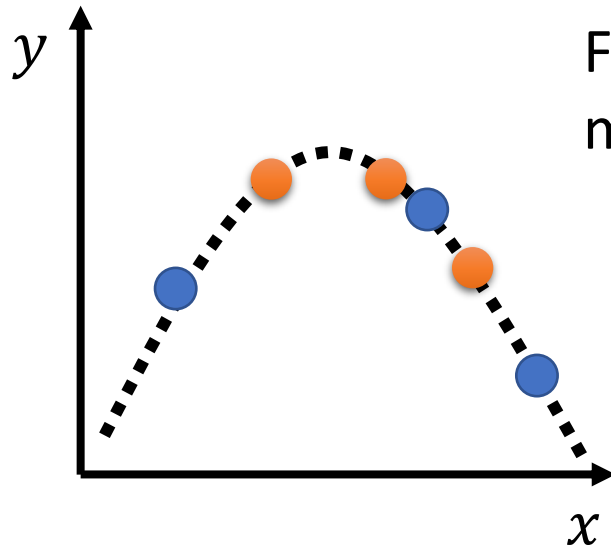

Flexible
model

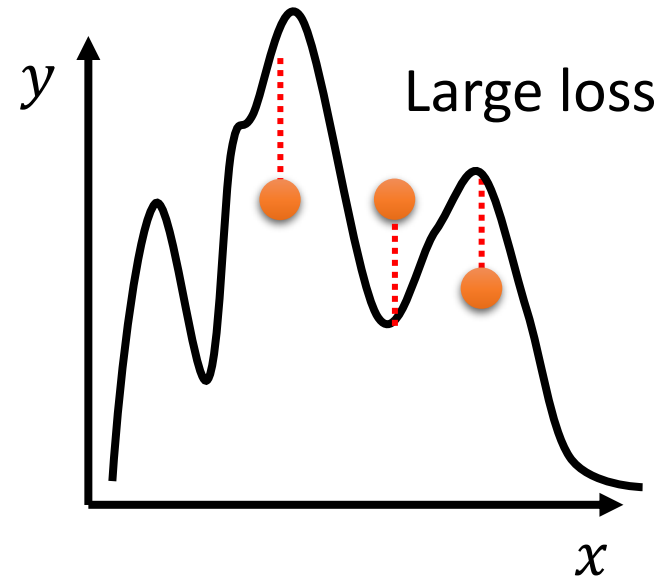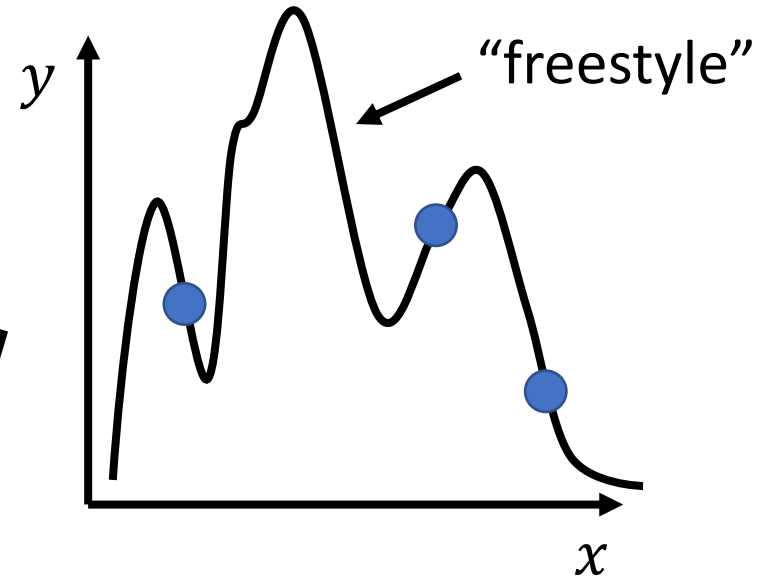


---- Real data distribution
(not observable)

● Training data

● Testing data


Overfitting

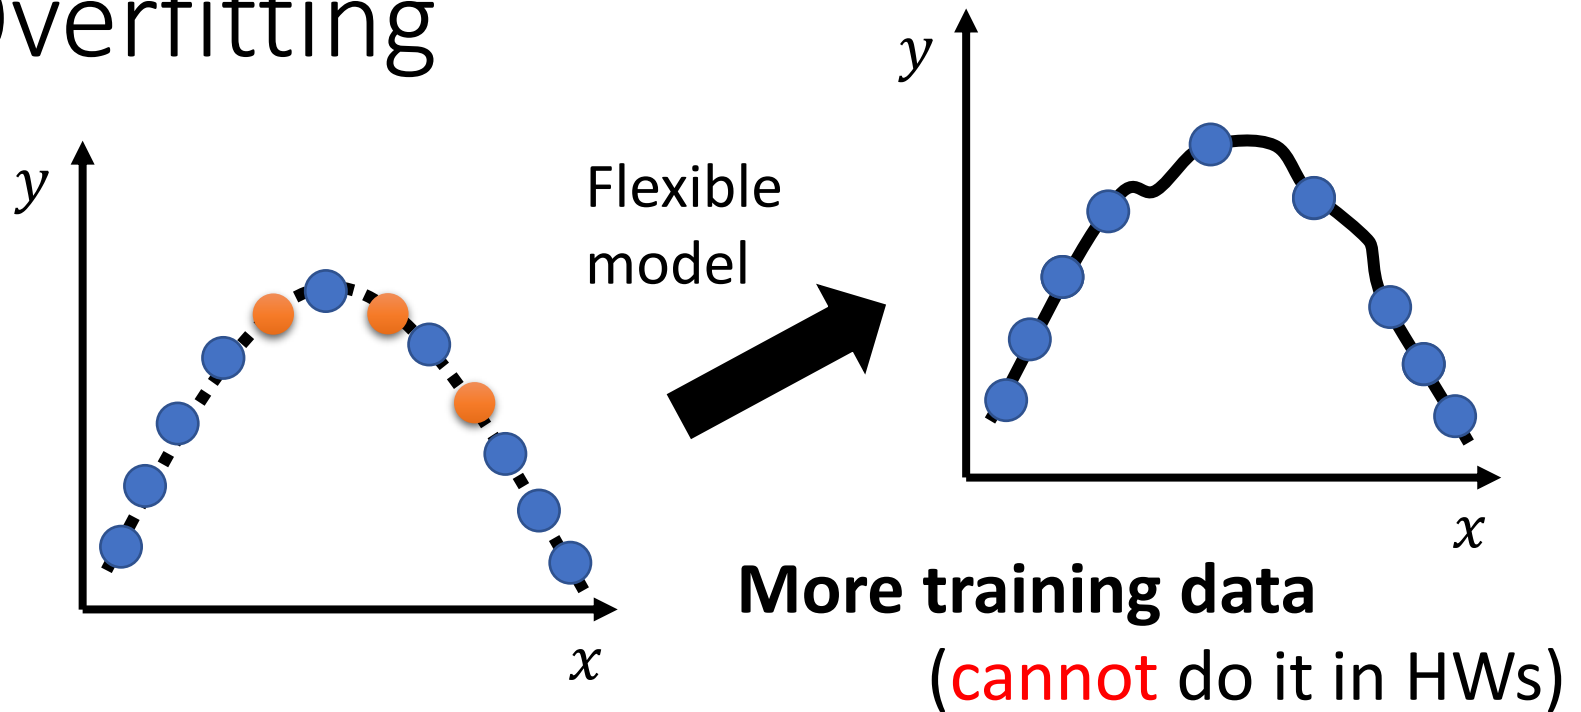



Data augmentation (you can do that in HWs)



Overfitting

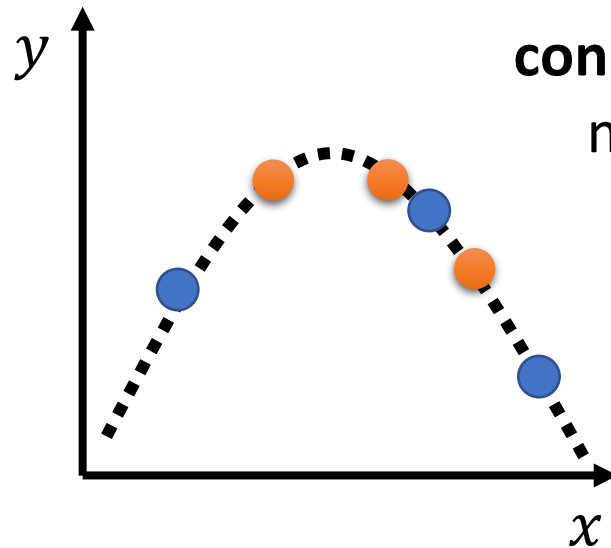


**constrained
model**

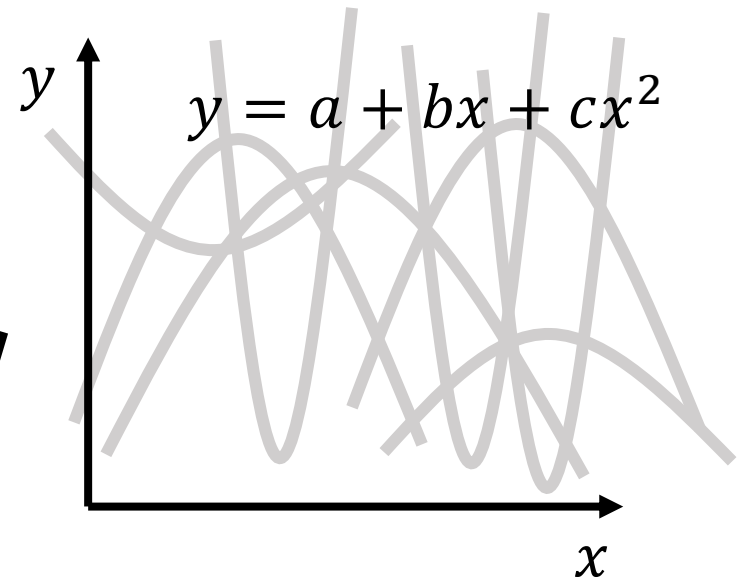



- Real data distribution
(not observable)
- Training data
- Testing data

Overfitting

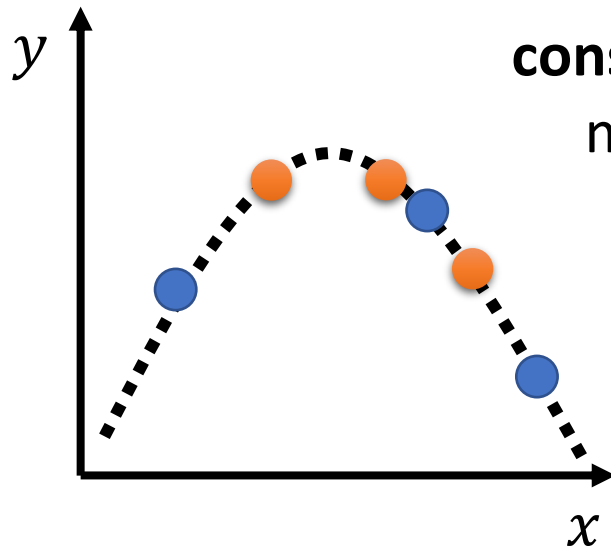


constrained
model

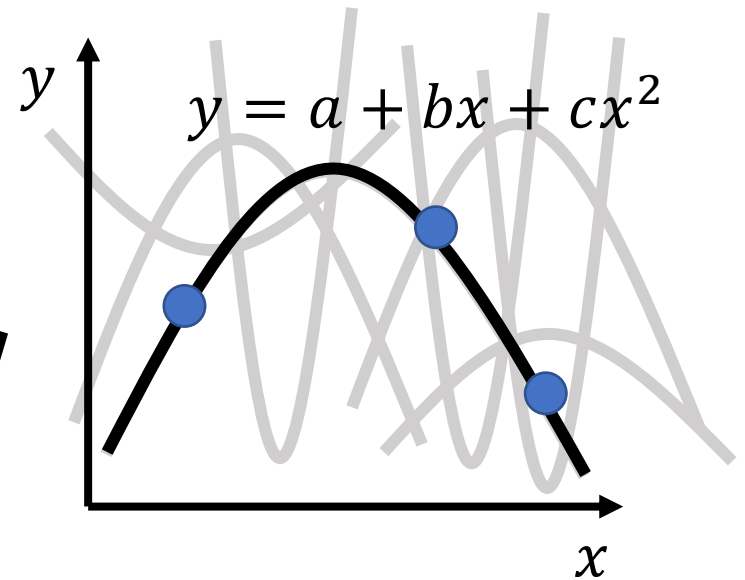


---- Real data distribution
(not observable)

● Training data



● Testing data

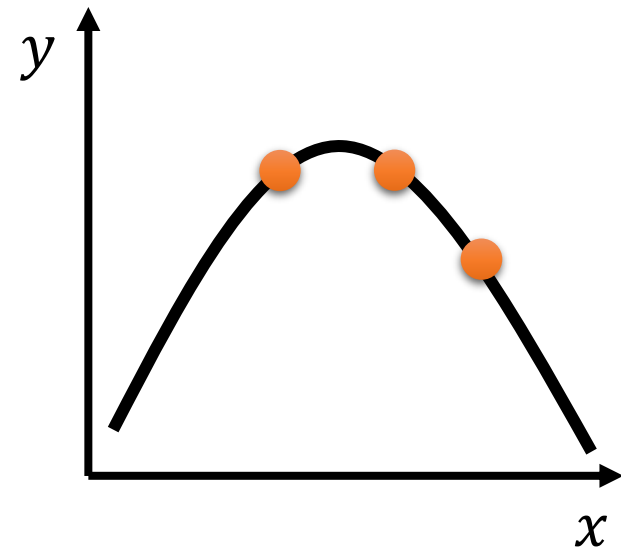


Overfitting

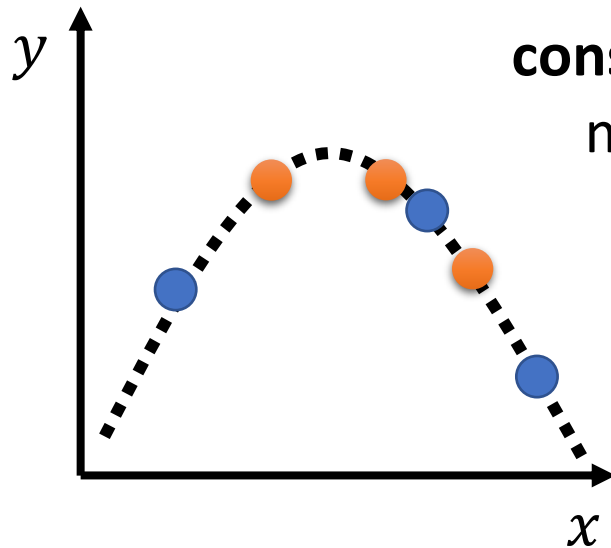



**constrained
model**

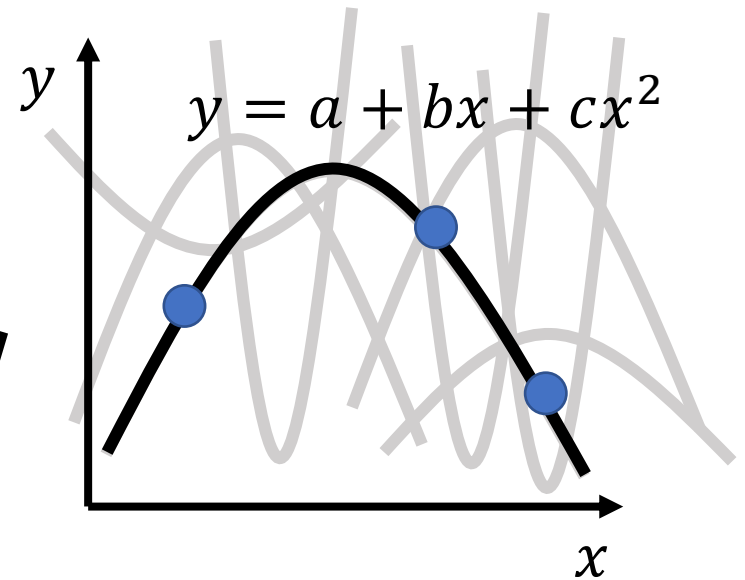


- Less parameters, sharing parameters
- Less features
- Early stopping
- Regularization
- Dropout

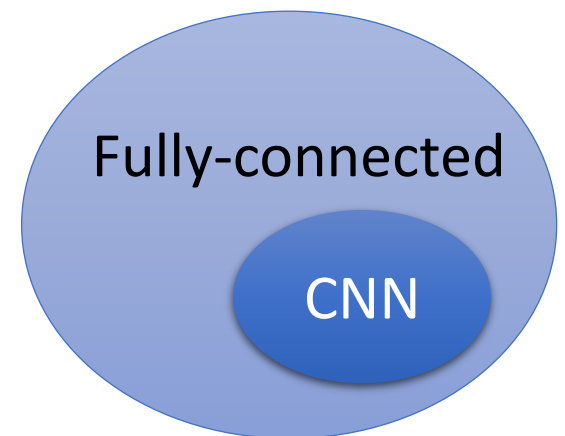


Overfitting

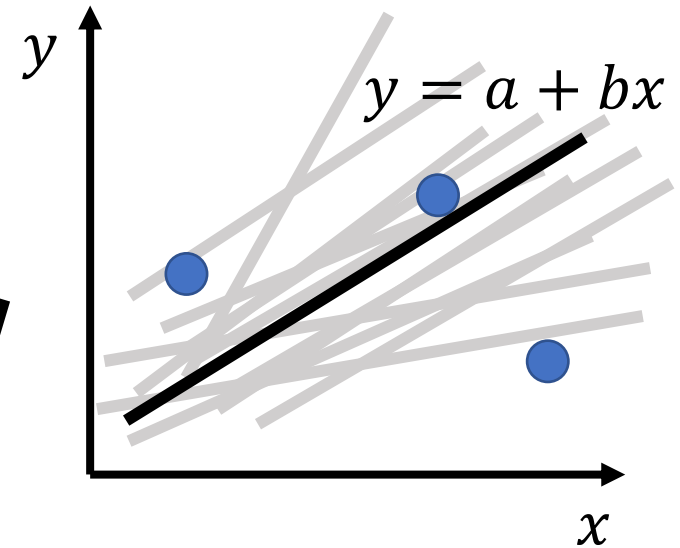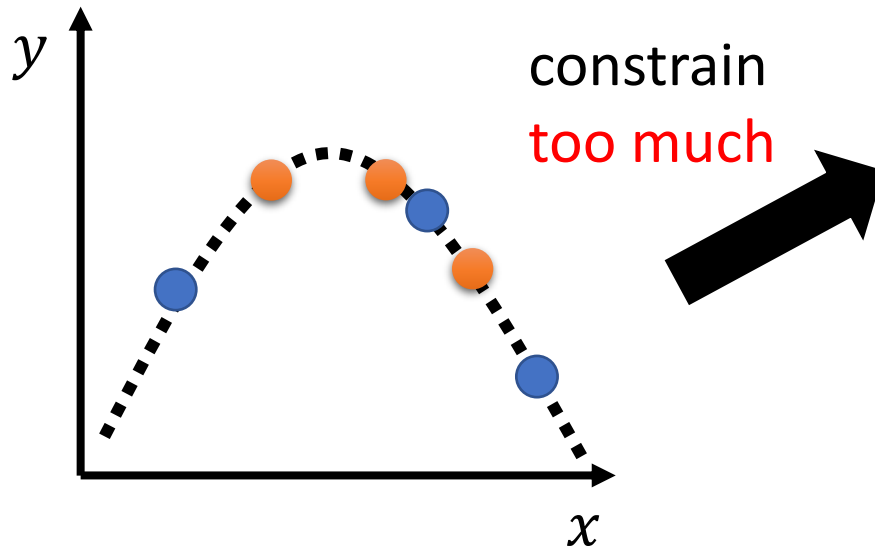

- Real data distribution (not observable)
- Training data
- Testing data

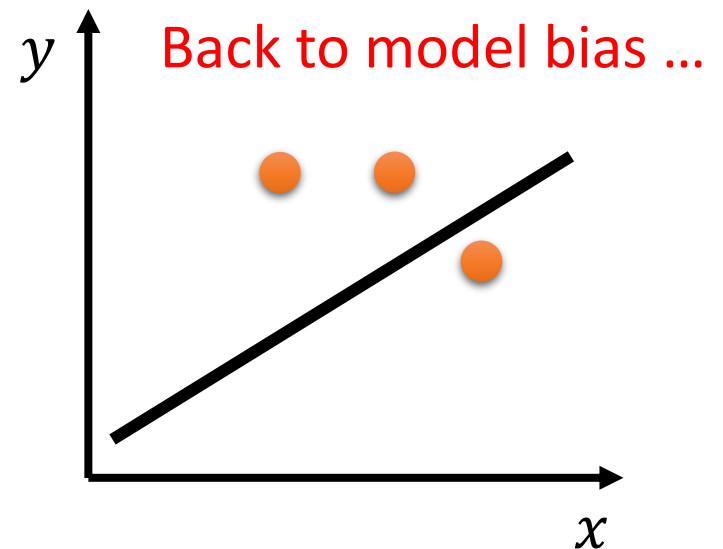

Bias-Complexity Trade-off

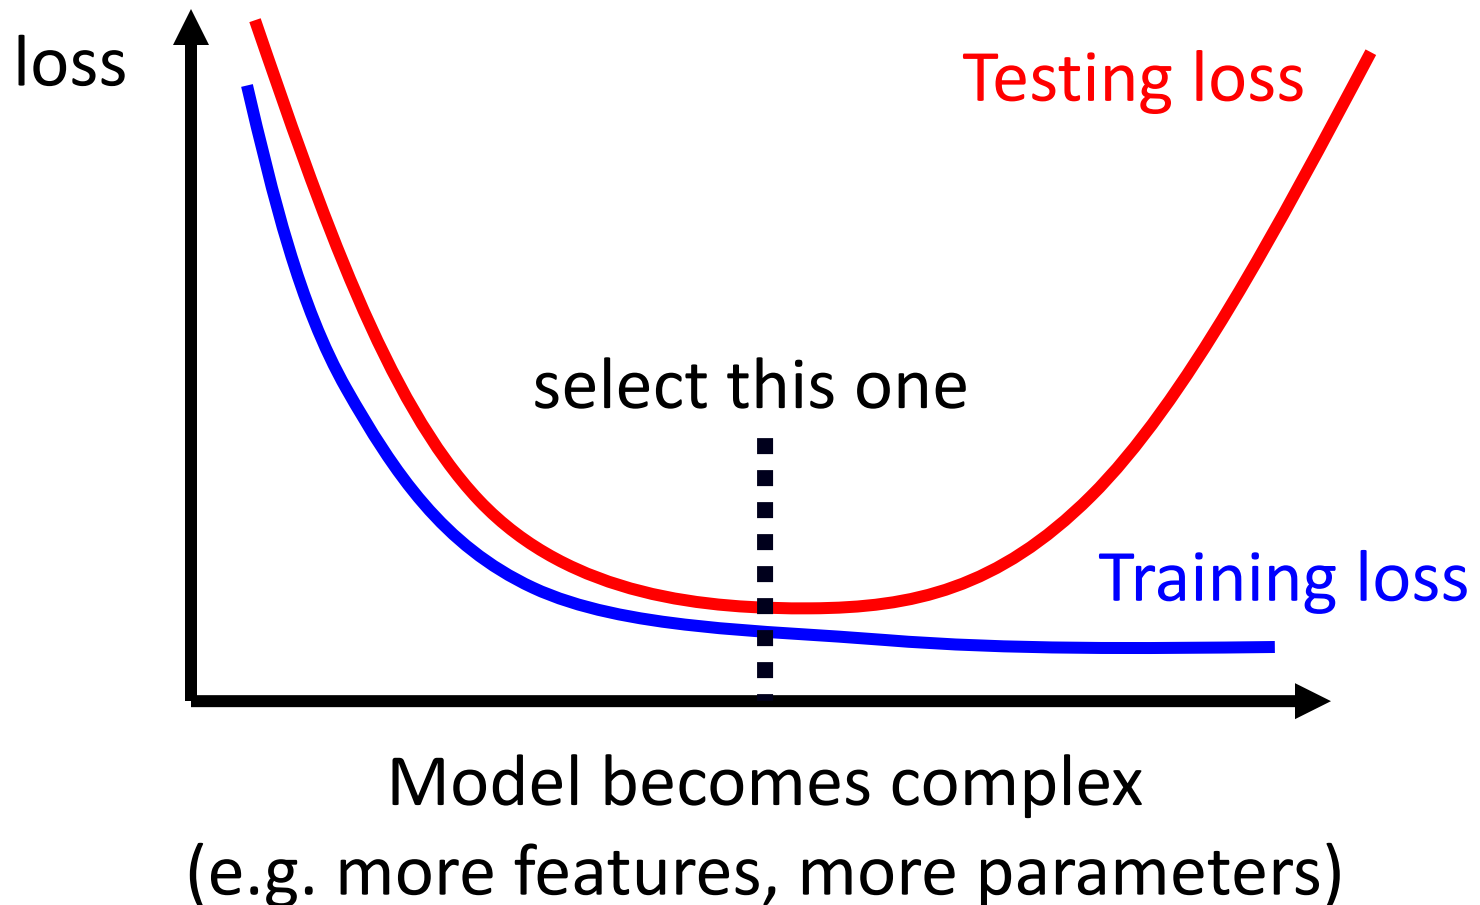

Homework

public

private

Training Set

Testing Set

Testing Set

Why?

Model 1 \longrightarrow mse = 0.9

Model 2 \longrightarrow mse = 0.7

Model 3 \longrightarrow mse = 0.5 \longrightarrow mse > 0.5


Pick this one!

May be poor ...

What will happen?

<http://www.chioka.in/how-to-select-your-final-models-in-a-kaggle-competitio/>

This explains why machine usually beats human on benchmark corpora. 😊

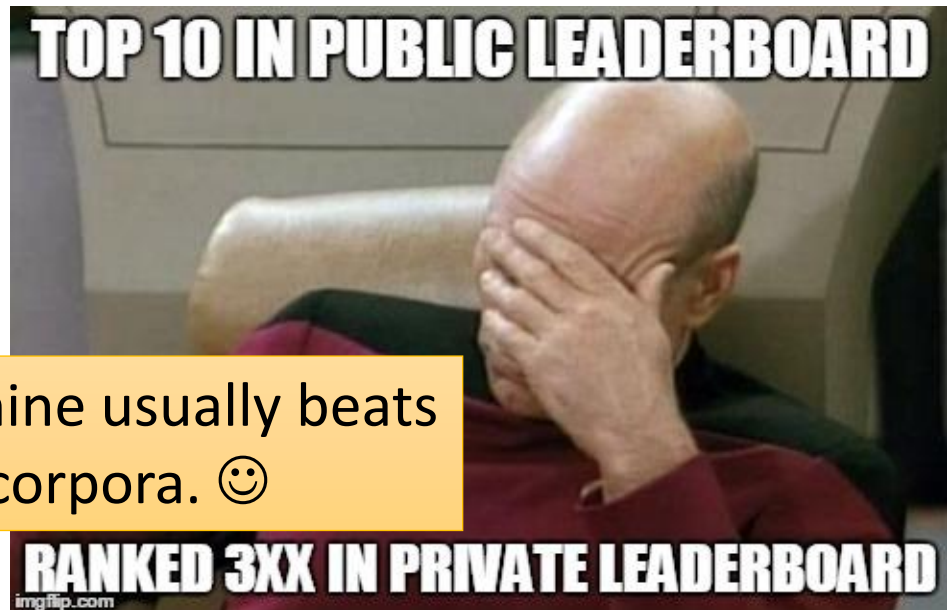

Cross Validation


How to split?




public



private

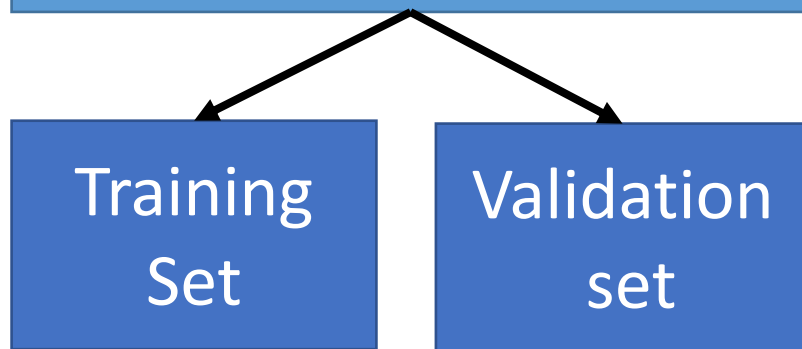


Using the results of public testing data to select your model
You are making public set better than private set.

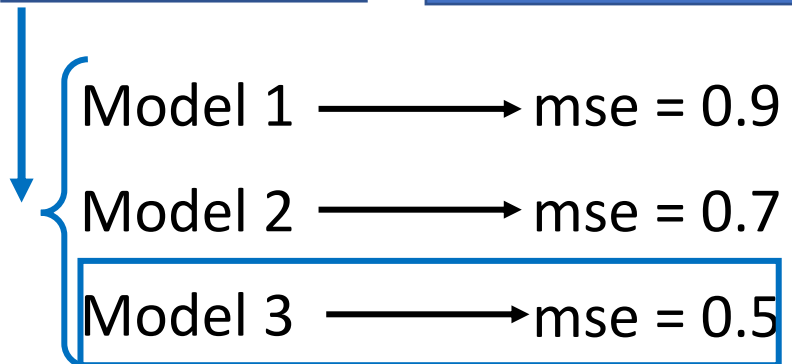


Not recommend

mse > 0.5 → mse > 0.5


N-fold Cross Validation

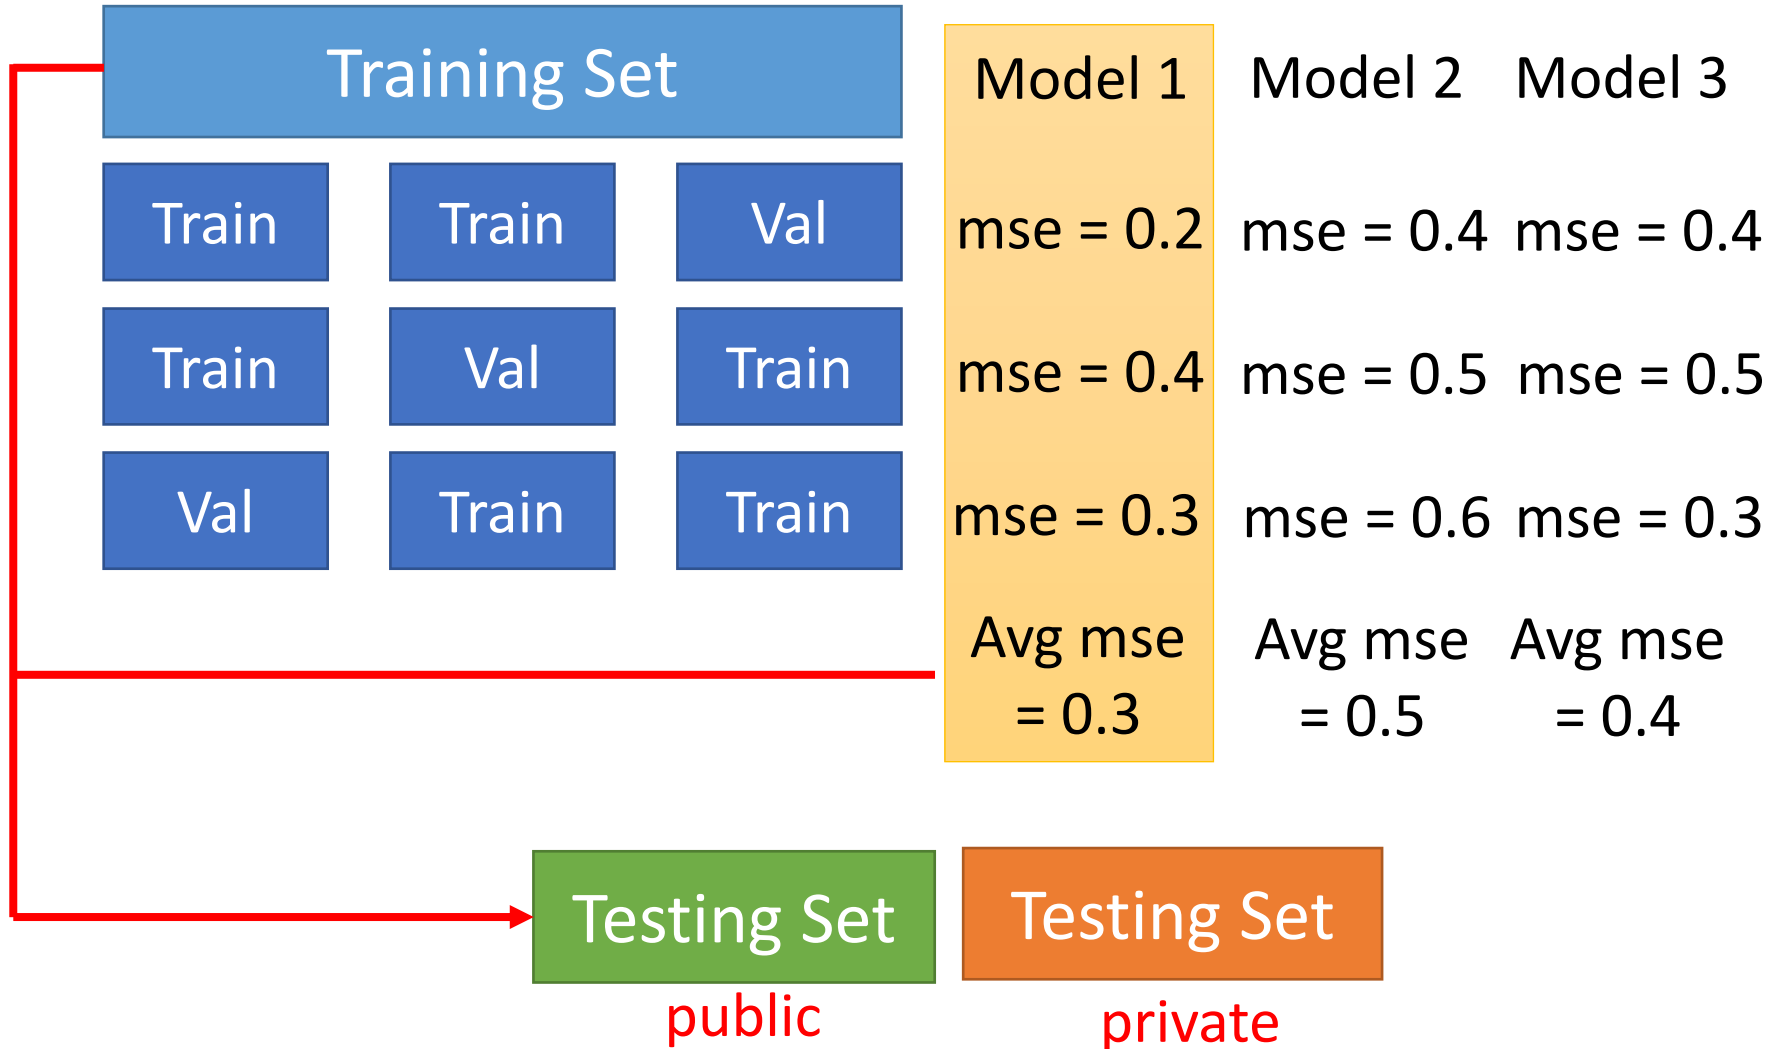


General Guide

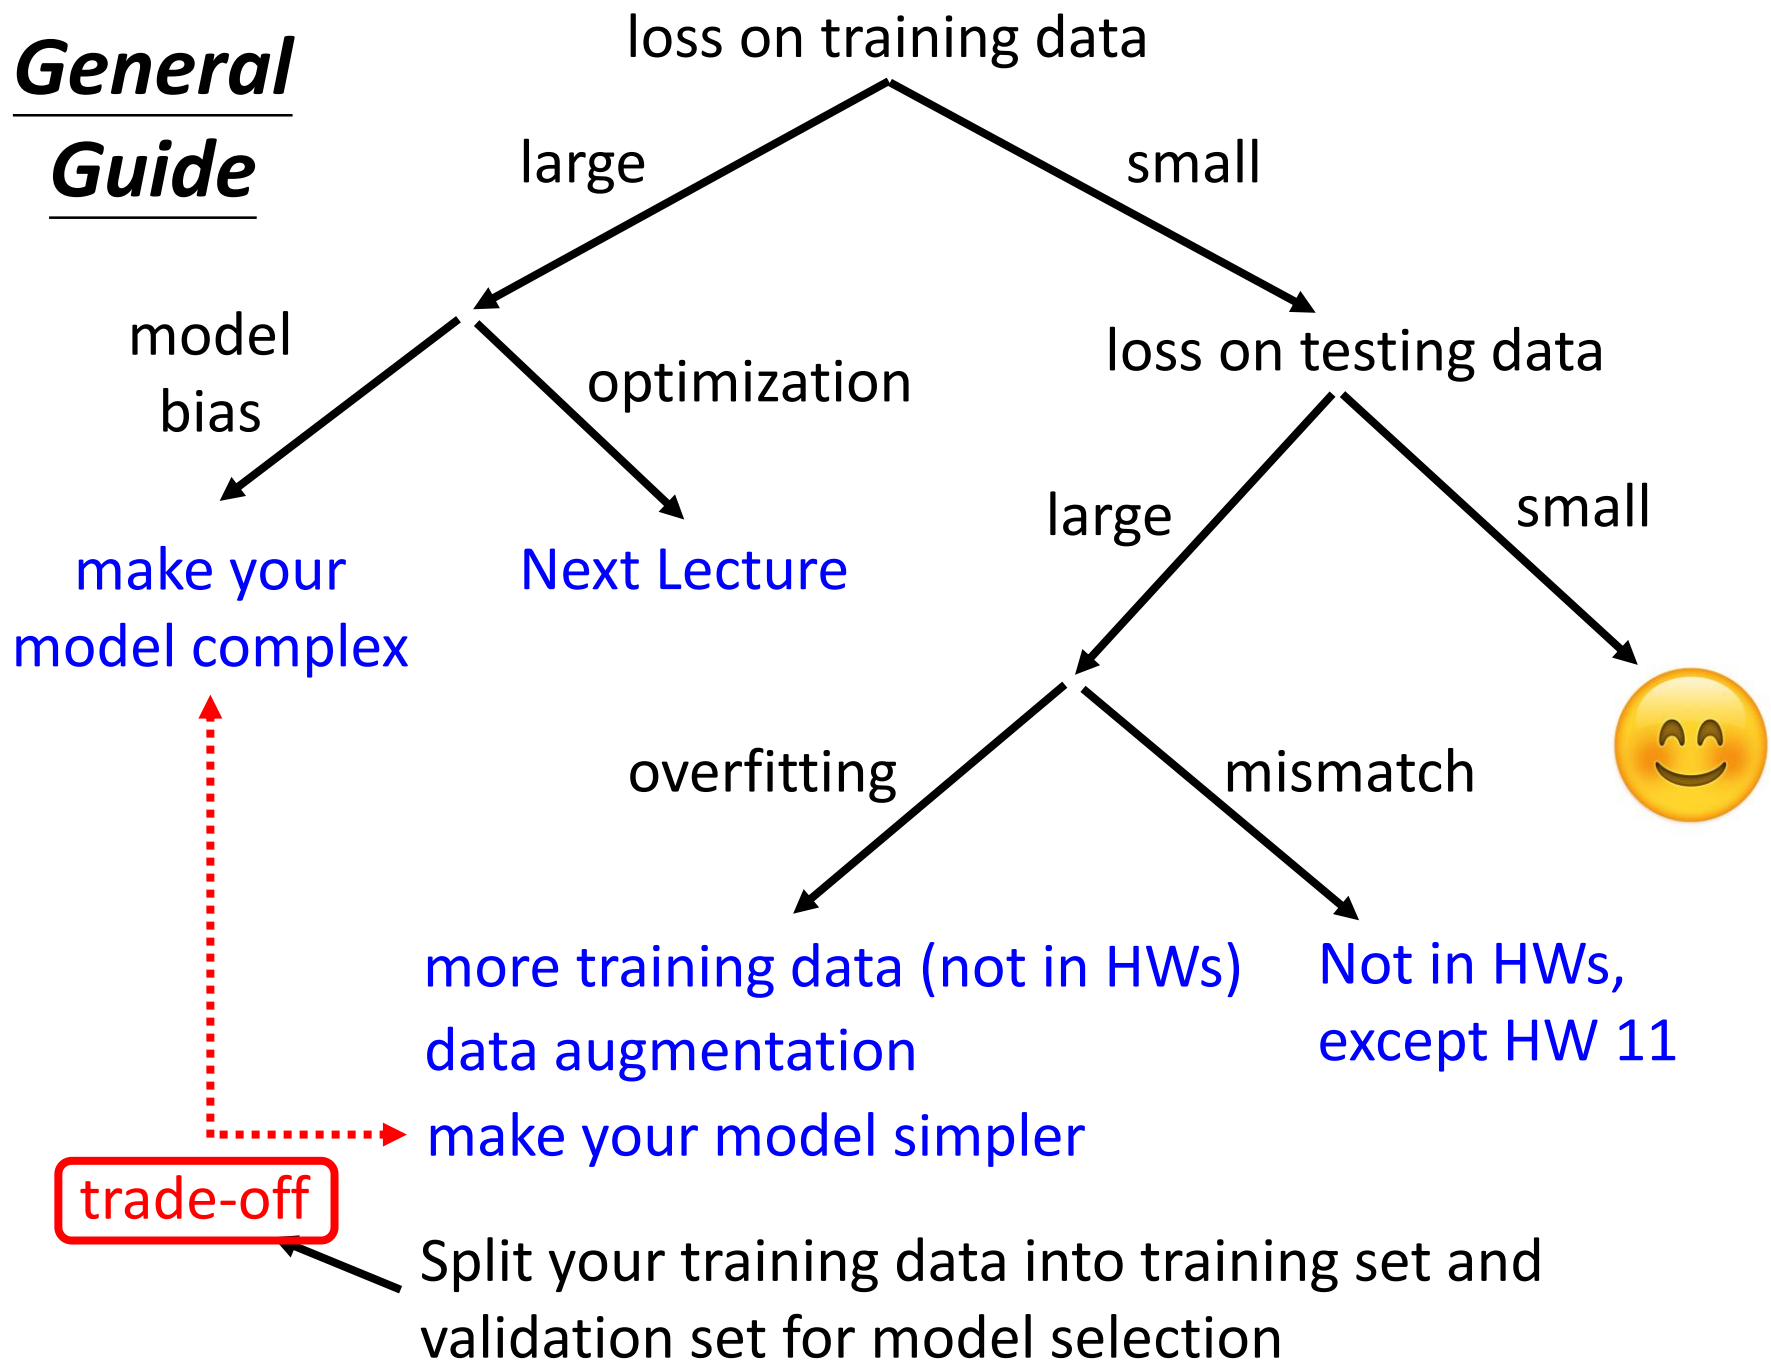

Let's predict no. of views of 2/26!

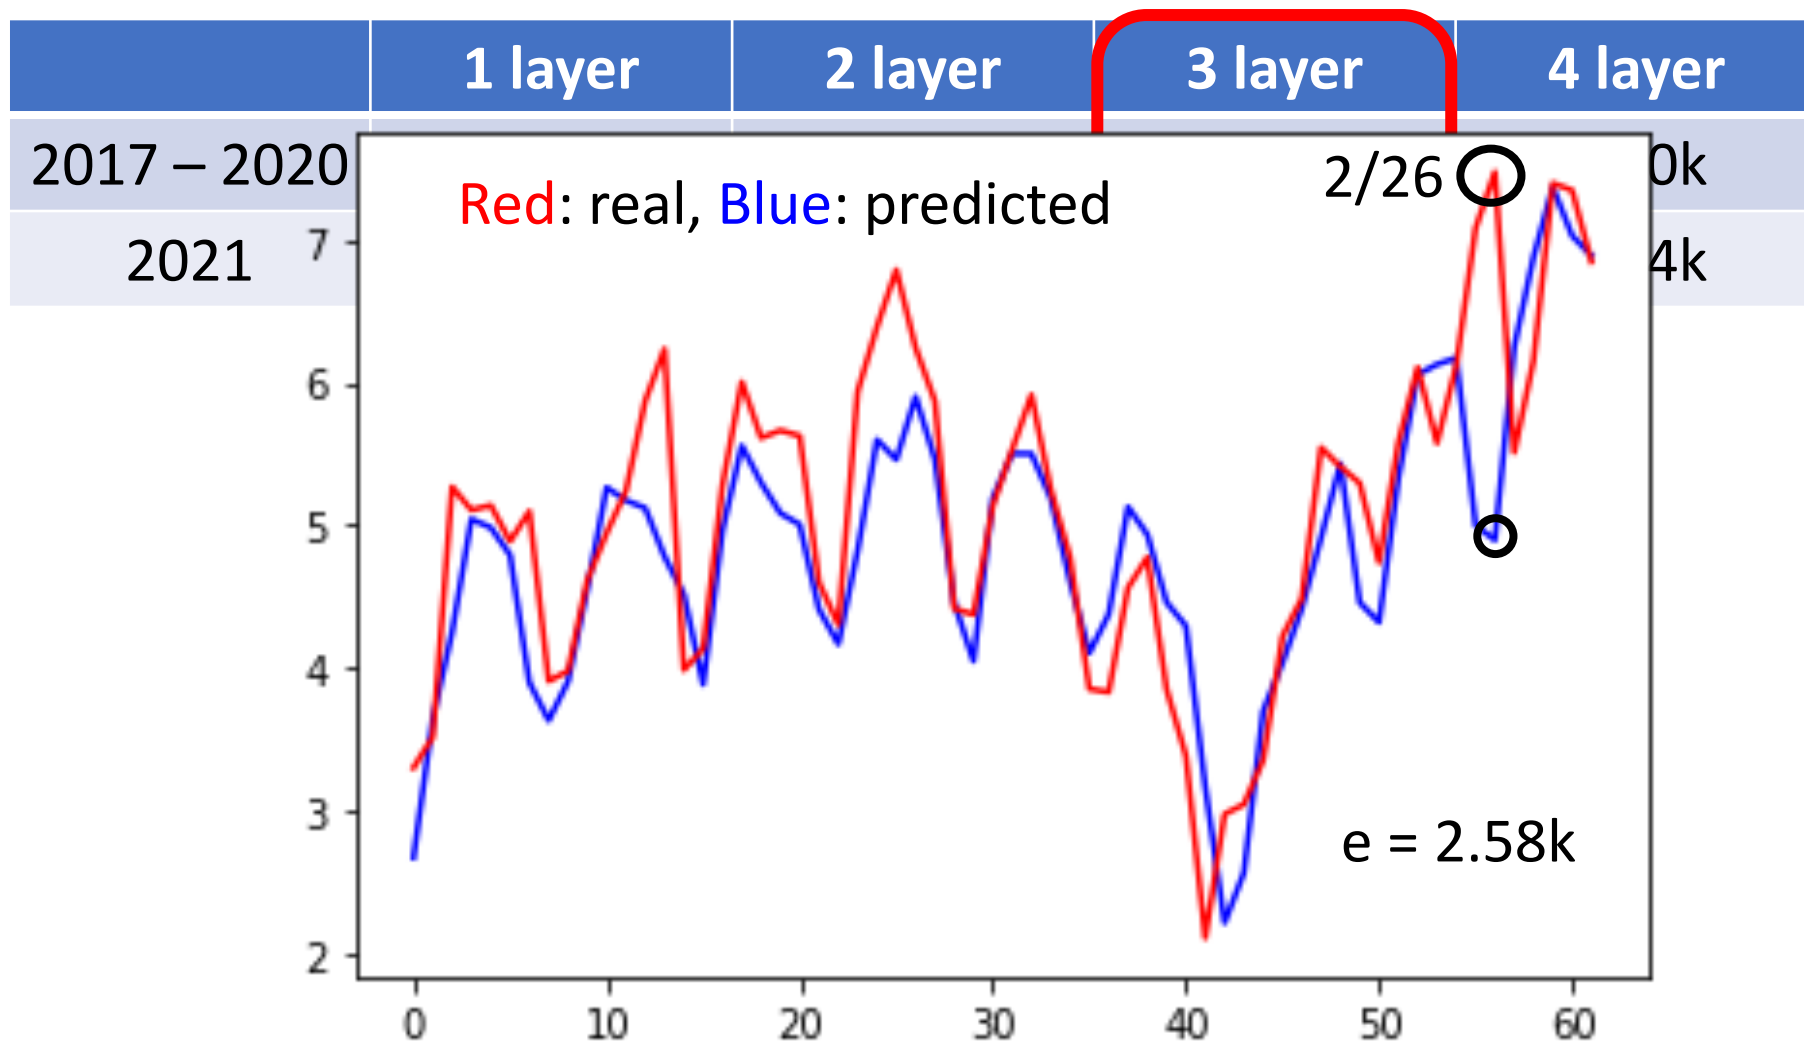

General Guide

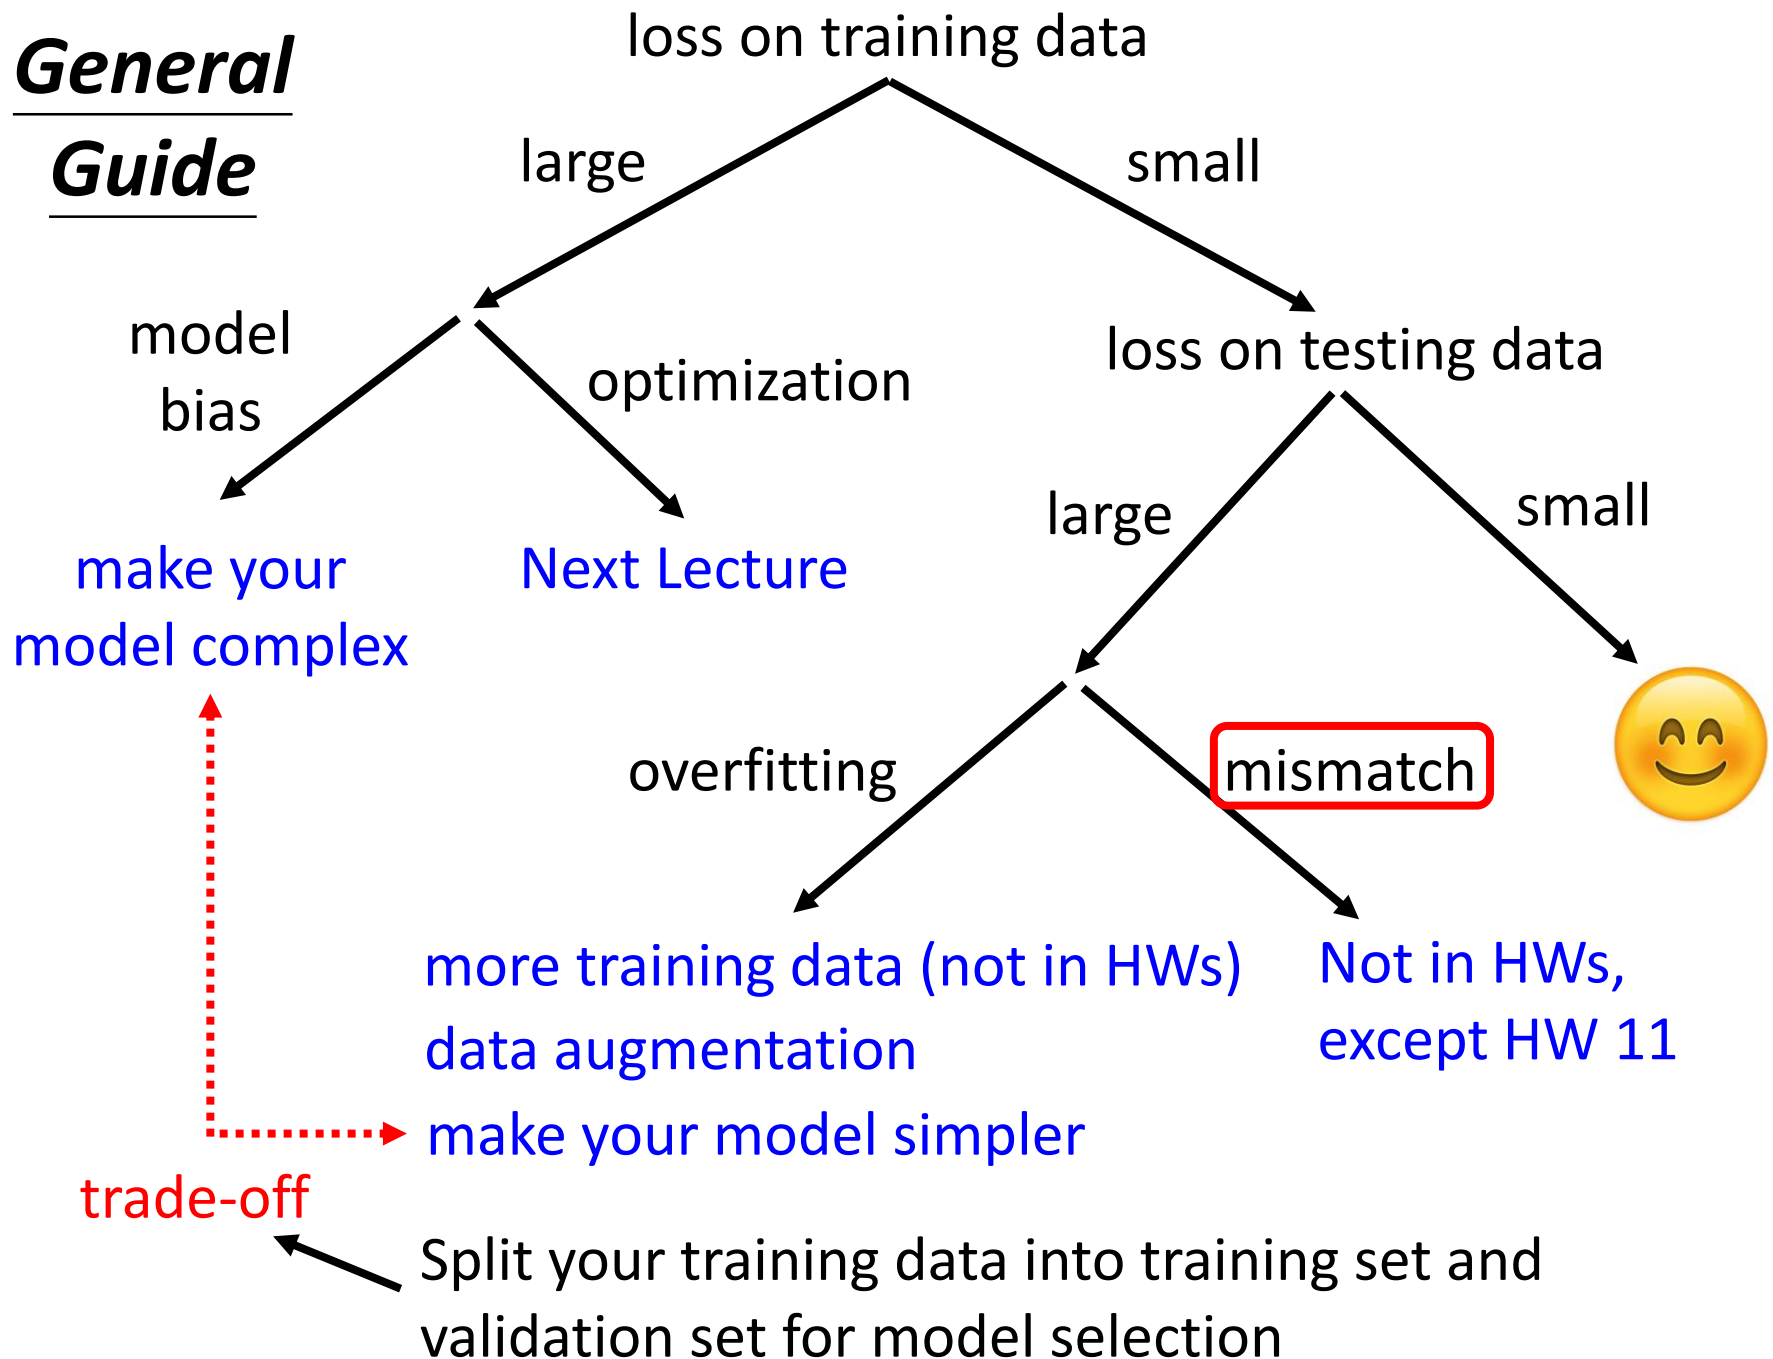

Mismatch

- Your training and testing data have different distributions. Be aware of how data is generated.

Most HWs do not have this problem, except HW11

Training Data

horse



bed



clock



apple



cat



plane



television



dog



dolphin



spider



Simply increasing the training data will not help.

Testing Data



General Guide

