Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (B.Sc.I.T Semester V)
MERN Practical

Practical – III

Roll No. : T048	Name: Lavkush Vishwakarma
Class : TYIT	Date/Time of Submission : 30/06/2026

Aim: React Introduction and JSX.


3.A). Create multiple components and render them on a single page.

SOURCE CODE:-

App.JSX

```
import { useState } from 'react'
import reactLogo from './assets/react.svg'
import viteLogo from './assets/vite.svg'
import heroImg from './assets/hero.png'
import './App.css'
function App() {
 return (
   <div>
     <h1>Vite + React Practical 3</h1>
   </div>
 );
}
export default App
```

OUTPUT:-

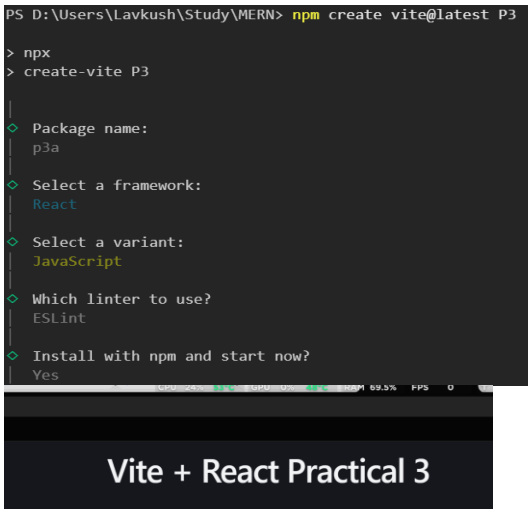

3.B). Display dynamic data using JSX.

SOURCE CODE:-

```
function App()
{
 const emp = "Lavkush";
 const dept = "IT";
 const sal = 50000;
 const eid= "T048";
 return (
   <div>
     <h1>Employee Details</h1>
     <p>Name :{emp}</p>
     <p>Employee ID :{eid}</p>
     <p>Department :{dept}</p>
     <p>Salary :${sal}</p>
   </div>
 );
}export default App
```


2nd code:

```
function App()
```

OUTPUT:-



```
{
 const sname = "John Wick";
 const Tclass = "70";
 const Aclass = "50";
 const Attendence = (Aclass / Tclass) * 100;
 return (
  <div>
   <h1>Attendance Dashboard</h1>
   <p>Name :{sname}</p>
   <p>Total Classes :{Tclass}</p>
   <p>Classes Attended :{Aclass}</p>
   <p>Attendance Percentage :{Attendence.toFixed(2)}%</p>
   <p>Status :{Attendence >= 75 ? "Eligible for examination" : "Not Eligible for examination"}</p>
  </div>
 );
}export default App
```

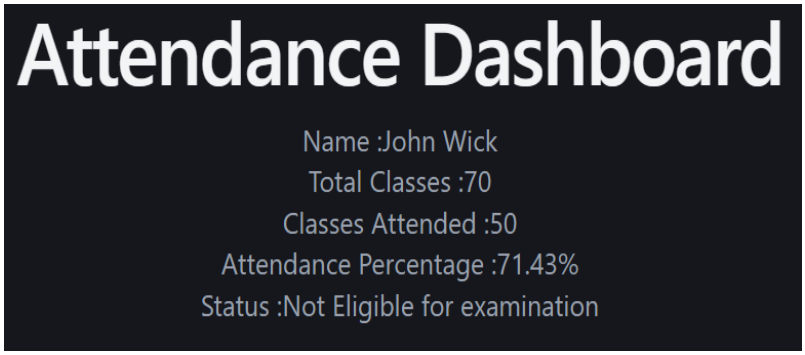


3.C). Declare variables and write a function to calculate the sum of two numbers and display the result.

SOURCE CODE:-

```
function App()
{
 const name = "Lavkush";
 const math = 87;
 const sci = 90;
 function calculate(mark1, mark2) { return mark1 + mark2;}
 return (
  <div>
   <h1> Student Mark </h1>
   <p>Name: {name}</p>
   <p>Math: {math}</p>
   <p>Science: {sci}</p>
   <p>Total Marks: {calculate(math, sci)}</p>
  </div>
 );
}
export default App
```

OUTPUT:-

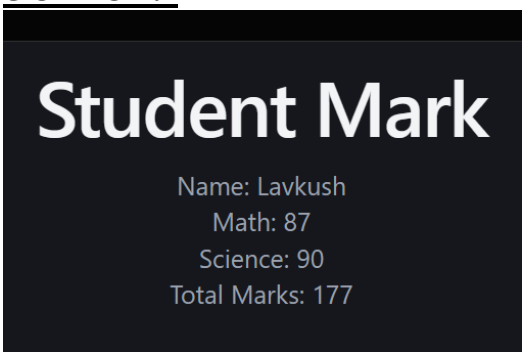


3.D). Apply basic CSS styling to a React component.

SOURCE CODE:-

```
import "./App.css";
function App(){
 return (
  <div className="container">
   <h1>Student Dashboard</h1>
   <hr />
   <p>Name : Lavkush Vishwakarma</p>
   <p>Roll no :48</p>
   <p>course: BSCIT</p>
   <p>Semester: V</p>
   <button>Result Dekho</button>
  </div>
 );
}
export default App;
/* App.css */
* {
 margin: 0;
 padding: 0;
 box-sizing: border-box;
 font-family: "Poppins", sans-serif;
}
body {
 min-height: 100vh;
```

```
  display: flex;
  justify-content: center;
  align-items: top;
  background: linear-gradient(
    135deg,
    #0f172a 0%,
    #1d4ed8 40%,
    #3b82f6 70%,
    #60a5fa 100%
  );
}
.container {
  width: 430px;
  padding: 35px;
  border-radius: 22px;
  background: rgba(255, 255, 255, 0.18);
  backdrop-filter: blur(15px);
  border: 1px solid rgba(255, 255, 255, 0.25);
  box-shadow: 0 20px 45px rgba(0, 0, 0, 0.25);
  transition: all 0.35s ease;
  margin: 0;
}
.container:hover {
  transform: translateY(-8px) scale(1.02);
  box-shadow: 0 25px 55px rgba(0, 0, 0, 0.35);
}
h1 {
  text-align: center;
  color: white;
  font-size: 2rem;
  margin-bottom: 18px;
  letter-spacing: 1px;
}
hr {
  border: none;
  height: 3px;
  width: 90px;
  margin: 0 auto 25px;
  border-radius: 10px;
  background: linear-gradient(to right, #38bdf8, #ffffff);
}
p {
  font-size: 18px;
  color: white;
  margin: 14px 0;
  padding: 14px 18px;
  background: rgba(255, 255, 255, 0.12);
  border-left: 5px solid #38bdf8;
  border-radius: 10px;
  transition: 0.3s;
}
p:hover {
  background: rgba(255, 255, 255, 0.2);
  transform: translateX(5px);
}
button {
  width: 100%;
  margin-top: 28px;
  padding: 14px;
  border: none;
  border-radius: 12px;
  background: linear-gradient(135deg, #2563eb, #0ea5e9);
  color: white;
  font-size: 18px;
  font-weight: 600;
  letter-spacing: 0.5px;
  cursor: pointer;
  transition: all 0.35s ease;
  box-shadow: 0 8px 20px rgba(37, 99, 235, 0.4);
}
button:hover {
  background: linear-gradient(135deg, #1d4ed8, #0284c7);
  transform: translateY(-3px);
  box-shadow: 0 12px 25px rgba(37, 99, 235, 0.5);
}
button:active {
  transform: scale(0.97);
}
```

OUTPUT:-

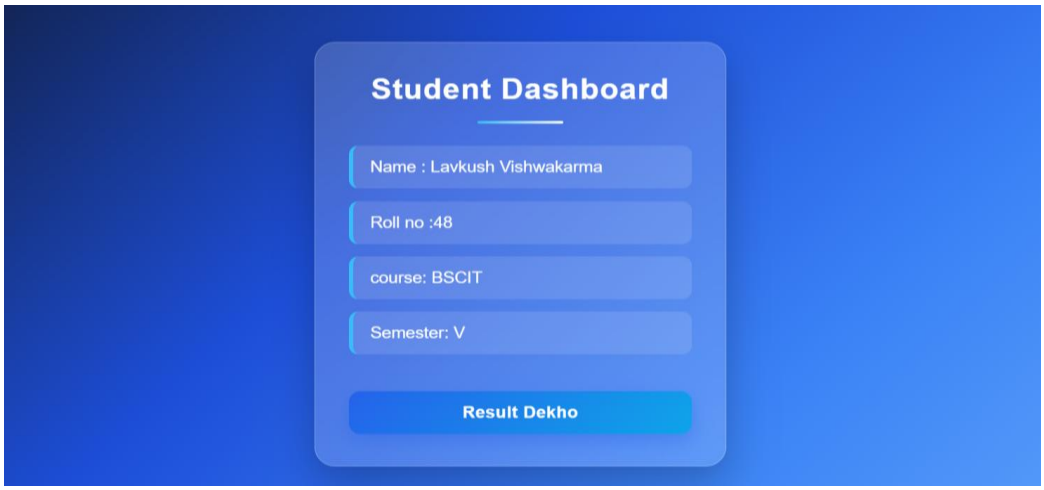

3.E). Create a simple functional component and render it in App.js.

SOURCE CODE:-


Student.jsx

```
function Student() {
 return (
  <div>
   <h1 style={{ color: "white" }}>Student Details</h1>
   <hr />
   <p>Name: Lavkush</p>
   <p>Roll No: 48</p>
   <p>Department: IT</p>
   <p>Semester: V</p>
   <button>VIEW RESULT</button>
  </div>
 );
}
export default Student;
```

App.jsx

```
import "./App.css";
import Student from "./components/Student";
function App() {
 return (
  <div className="container1">
   <h1 style={{ color: "white" }}>This is Function component</h1>
  <div className="container">
   <Student />
  </div>
  </div>
 );
}
export default App;
```

OUTPUT:-

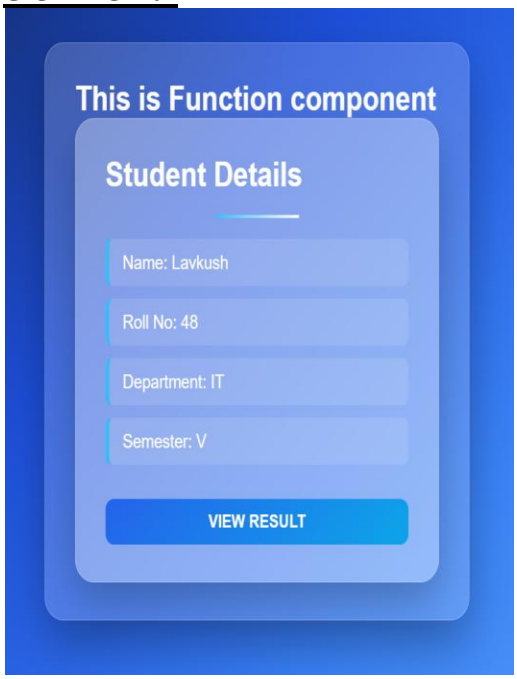


3.F). Create a React component that displays the current date and time dynamically using JavaScript.

SOURCE CODE:-

```
function App() {
 const now = new Date();
 return (
  <div>
   <h2>Current Date and Time</h2>
   <p>Date: {now.toLocaleDateString()}</p>
   <p>Time: {now.toLocaleTimeString()}</p>
   <p>Lavkush T048</p>
  </div>
 );
}
export default App;
```

OUTPUT:-

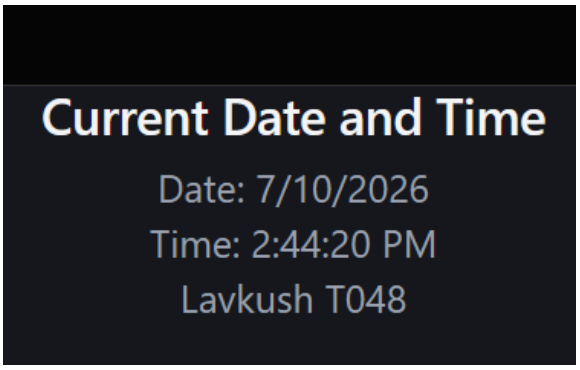

Extra). MVLU Student Management Application.

SOURCE CODE:- ***OUTPUT:-***

```
import "./App.css";
import Student from "./components/Student";
```

```
import Header from "./components/Header";
import Footer from "./components/Footer";
import Result from "./components/Result";
import Attendance from "./components/Attendance";


function App(){
 return(
 <div className="container1">
   <Header/>
   <div className="container">
     <Student/>
     <hr/>
     <Attendance/>
     <hr/>
     <Result/>
   </div>
   <Footer/>
 </div>
 );
}
export default App;

function Result(){
   const java=90;
   const python=95;
   const math=99;
   const total=(java+python+math);
   const per=(total/300)*100;
   return(
      <div className="result">
         <h1>Result</h1>
         <hr/>
         <p>Marks: 300</p>
         <p>Total Marks: {total}</p>
         <p>Percentage: {per.toFixed(2)}%</p><p>Grade: A+</p>
      </div>
   );
}
export default Result;

function Header(){
   return(
      <div className="header">
      <h1> M.V.L.U. College Management System</h1>
      </div>
   );
}
export default Header;

function Footer(){
   return(
      <div className="footer">
         <h1>© Sheth M.V.L.V College</h1>
      </div>
   );
}
export default Footer;

function Attendance(){
   const totalClasses=60;
   const attendedClasses=59;
   const attendance= (attendedClasses/totalClasses)*100;
```

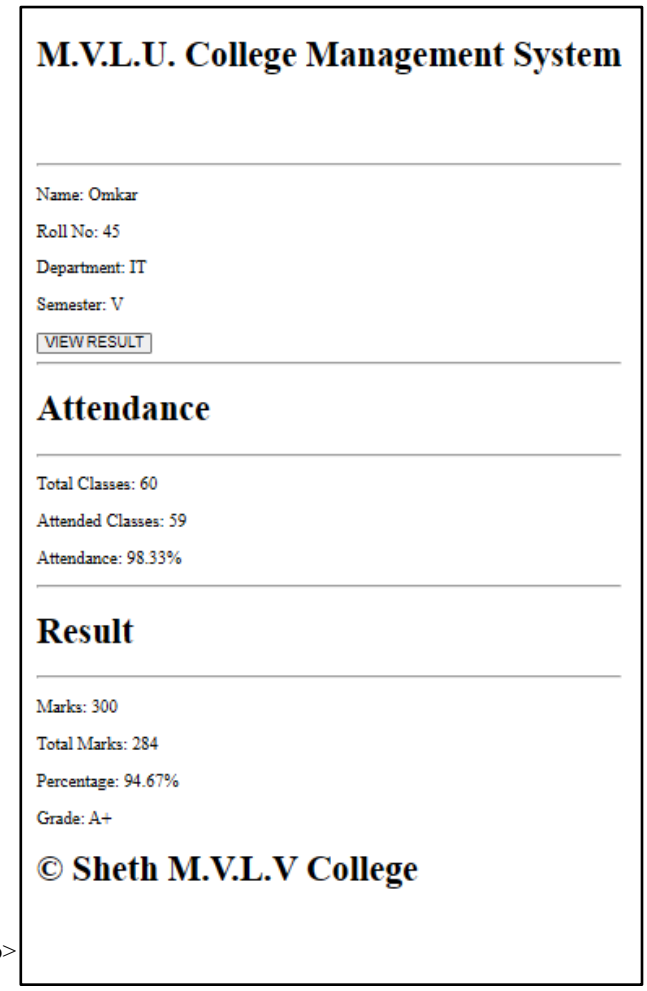

```
    return(
        <div className="attendance">
            <h1>Attendance</h1><hr/><p>Total Classes: {totalClasses}</p><p>Attended Classes: {attendedClasses}</p>
            <p>Attendance: {attendance.toFixed(2)}%</p>
        </div>
    )
}
export default Attendance;

function Student() {
  return (
    <div>
      <h1 style={{ color: "white" }}>Student Details</h1>
      <hr />
      <p>Name: Lavkush</p>
      <p>Roll No: 48</p>
      <p>Department: IT</p>
      <p>Semester: V</p>
      <button>VIEW RESULT</button>
    </div>
  );
}

export default Student;
```