

# **Scape From Mon Design Document**

## **1. Design Structure**

“Scape From Mon” development design will be established on the layered architecture and the Model View Controller pattern. This decision is made to allow team members to work independently from each other and reuse the existing modules/components. Since it is very likely to have highly chaotic code in the game developments at the end of the day, design patterns will be highly used, especially the Mediator pattern. Behavior of the classes and the relationships between them will be carried out in a way that without breaking the Single Responsibility Principle.

## **2. Subsystems**

### **2.1. Main Program**

This system keeps the game specific issues inside it and uses other subsystems. It gives commands to other systems like load this level, open these panels, etc. Behavior and controller classes belong to this subsystem. It is also responsible for deciding which data will be updated when, so it is the center of the logic in the game.

### **2.2. Game Cycle System**

This system gives the game the ability of loading levels, moving to the next level and keeping the data of the player's last played level.

### **2.3. UI Manager System**

This system is responsible for the capability of managing pop-ups and panels and deciding the issues related to them like which will be displayed next, which will be closed etc.

### **2.4. Collectibles System**

This system acts like an inventory manager. It keeps the items that are collected inside the game in an inventory.

### **2.5. Player Preferences System**

This system acts like a database and it keeps the data that is not session-based. This data, for example, can be the player's selected options from the settings pop-up.

### 3. Patterns

#### 3.1. Template Method

##### *Overview*

This pattern is used with a motivation of decreasing the change that may be needed in the large portion of the code and prohibiting the possibility of duplicate code in future. In the game, there may be situations where the player needs to contact the non-player characters to solve the puzzles. In these situations, we may need to override the methods according to the type of the non-player characters. To achieve this, the Template Method pattern was used.

##### *Structure*

Each non-player character will need a main logic conversation so the same method will be used; at this point the Template Pattern will get on the stage.

##### *Behavior*

Different non-player characters will be in the game with different animations and to trigger these animations, the startConversation method needs to be overridden and in each non-player character, its specific animation will be called that way.

#### 3.2. State

##### *Overview*

State pattern was used in the game because a situation occurred where the behavior of an object changes when its internal state changes. Instead of using the State pattern, if conditions may be used, this would create a bigger burden that is hard to manage.

##### *Structure*

Classes that represent the Non-player characters, an abstract class which represents the base state class and two derived classes that are Chatting and Idle state classes are the participants of this pattern. When behavior classes are initiated, a state array is set up which has two elements: a Chatting class instance and an Idle class instance in which they represent the two states that an NPC can be in. When a state is updated in a behavior class, one of these two states is selected and kept in the CurrentState variable.

##### *Behavior*

Things that need to be carried out inside the update method of NPC will change depending on the value of the currentState variable.

### **3.3. Observer**

#### *Overview*

This pattern is used to set up a subscription mechanism between behavior/controller classes and the modules, also between the view classes and the behavior/controller classes. We applied this pattern to get rid of the mess of updating the publisher's code when a new subscriber class is added.

#### *Structure*

Participants of this pattern are the modules, the classes inside these modules, UI classes and the controller/behavior classes. The relation between them is represented in the diagram presented in the first section.

#### *Behavior*

When a player collects a key in one stage, this key will be shown in the panel that is called an in-game panel.

### **3.4 Mediator**

#### *Overview*

To reduce the dependency between the classes and to prohibit the possibility of having chaotic relations between these classes. So we enforce the object to collaborate with other objects through a mediator class.

#### *Structure*

In the Game Manager class, there is a method called awake. Instead of giving awake to each of the classes and losing the control because of that, each class calls the awake method inside this class.

#### *Behavior*

The Awake method inside the Game Manager class is the one who initializes and controls everyone. When the Game Manager ensures that everyone is ready then the game is ready to be played. So the Game Manager class acts like an entry point.

### 3.5. Singleton

#### Overview

The Singleton pattern is used to create a global access point to the UI Manager class and prevent the possibility of having multiple manager classes that are responsible for the UI.

#### Structure

UI Manager class and behavior/controller classes are the participants of this pattern.


#### Behavior

The UI Manager class has a unique instance that controls everything related to the view of the game.

## 4. Use-Case Realizations


#### Sequence Diagram for “Change Settings” Use Case:

This diagram represents how user toggles sound using the button existent in the Settings Panel. When the user clicks the turn off button, a command is sent to the Sound Controller in which sound is toggled by itself. After that Sound Controller sends update command to the Data Manager to update the recorded preferences of User.

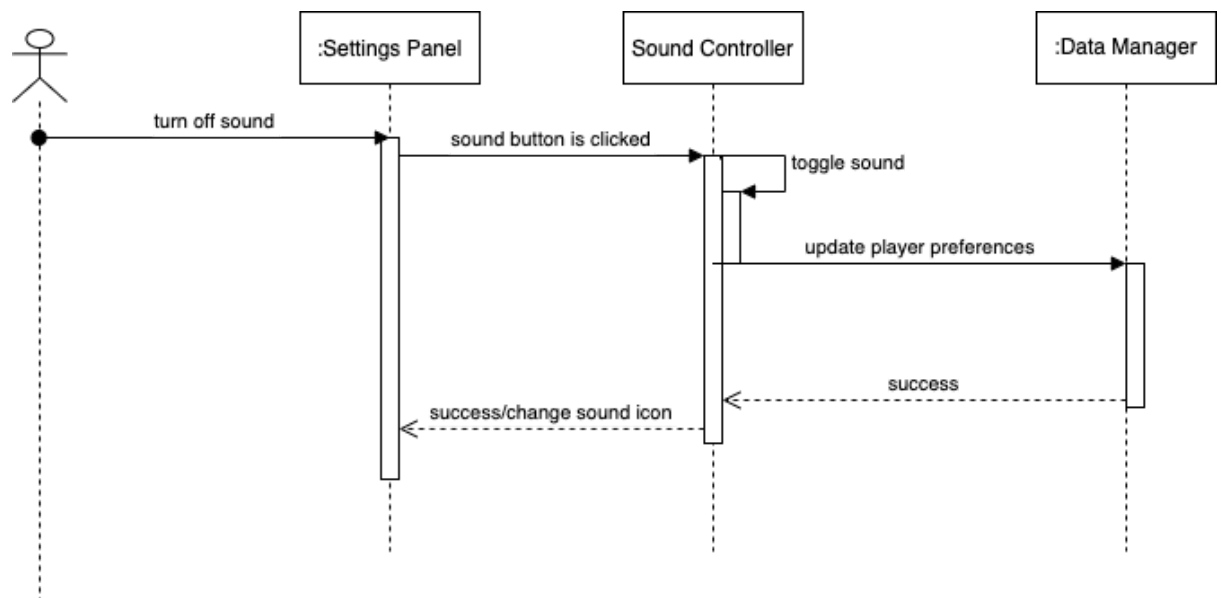

*Sequence Diagram for “Change Settings” Use Case:*

This diagram represents how the user toggles language using the button existent in the Settings Panel. When the user shifts the language from English to Turkish or vice versa, a command is sent to the Localization Controller in which language is shifted by itself. After that, the Localization Controller sends an update command to the Data Manager to update the recorded preferences of the user.

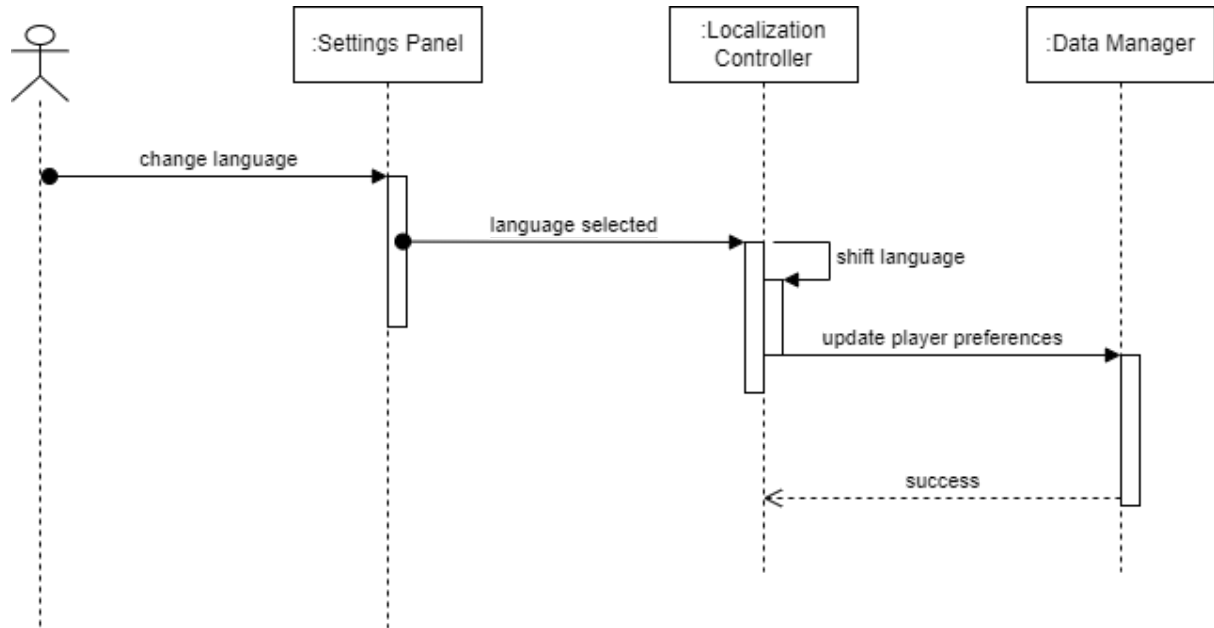

*Sequence Diagram for “Play Game” Use Case:*

This diagram represents how the game is loaded. When the user clicks the “New Game” button on the Main Menu, the Game Manager is informed. Then, Game Manager sends a “load level” command to the Game Controller and the first level of the game is loaded with the action of the Game Manager, which kills the Main Menu Panel object and creates the In Game Panel object.

