
Msess verification session

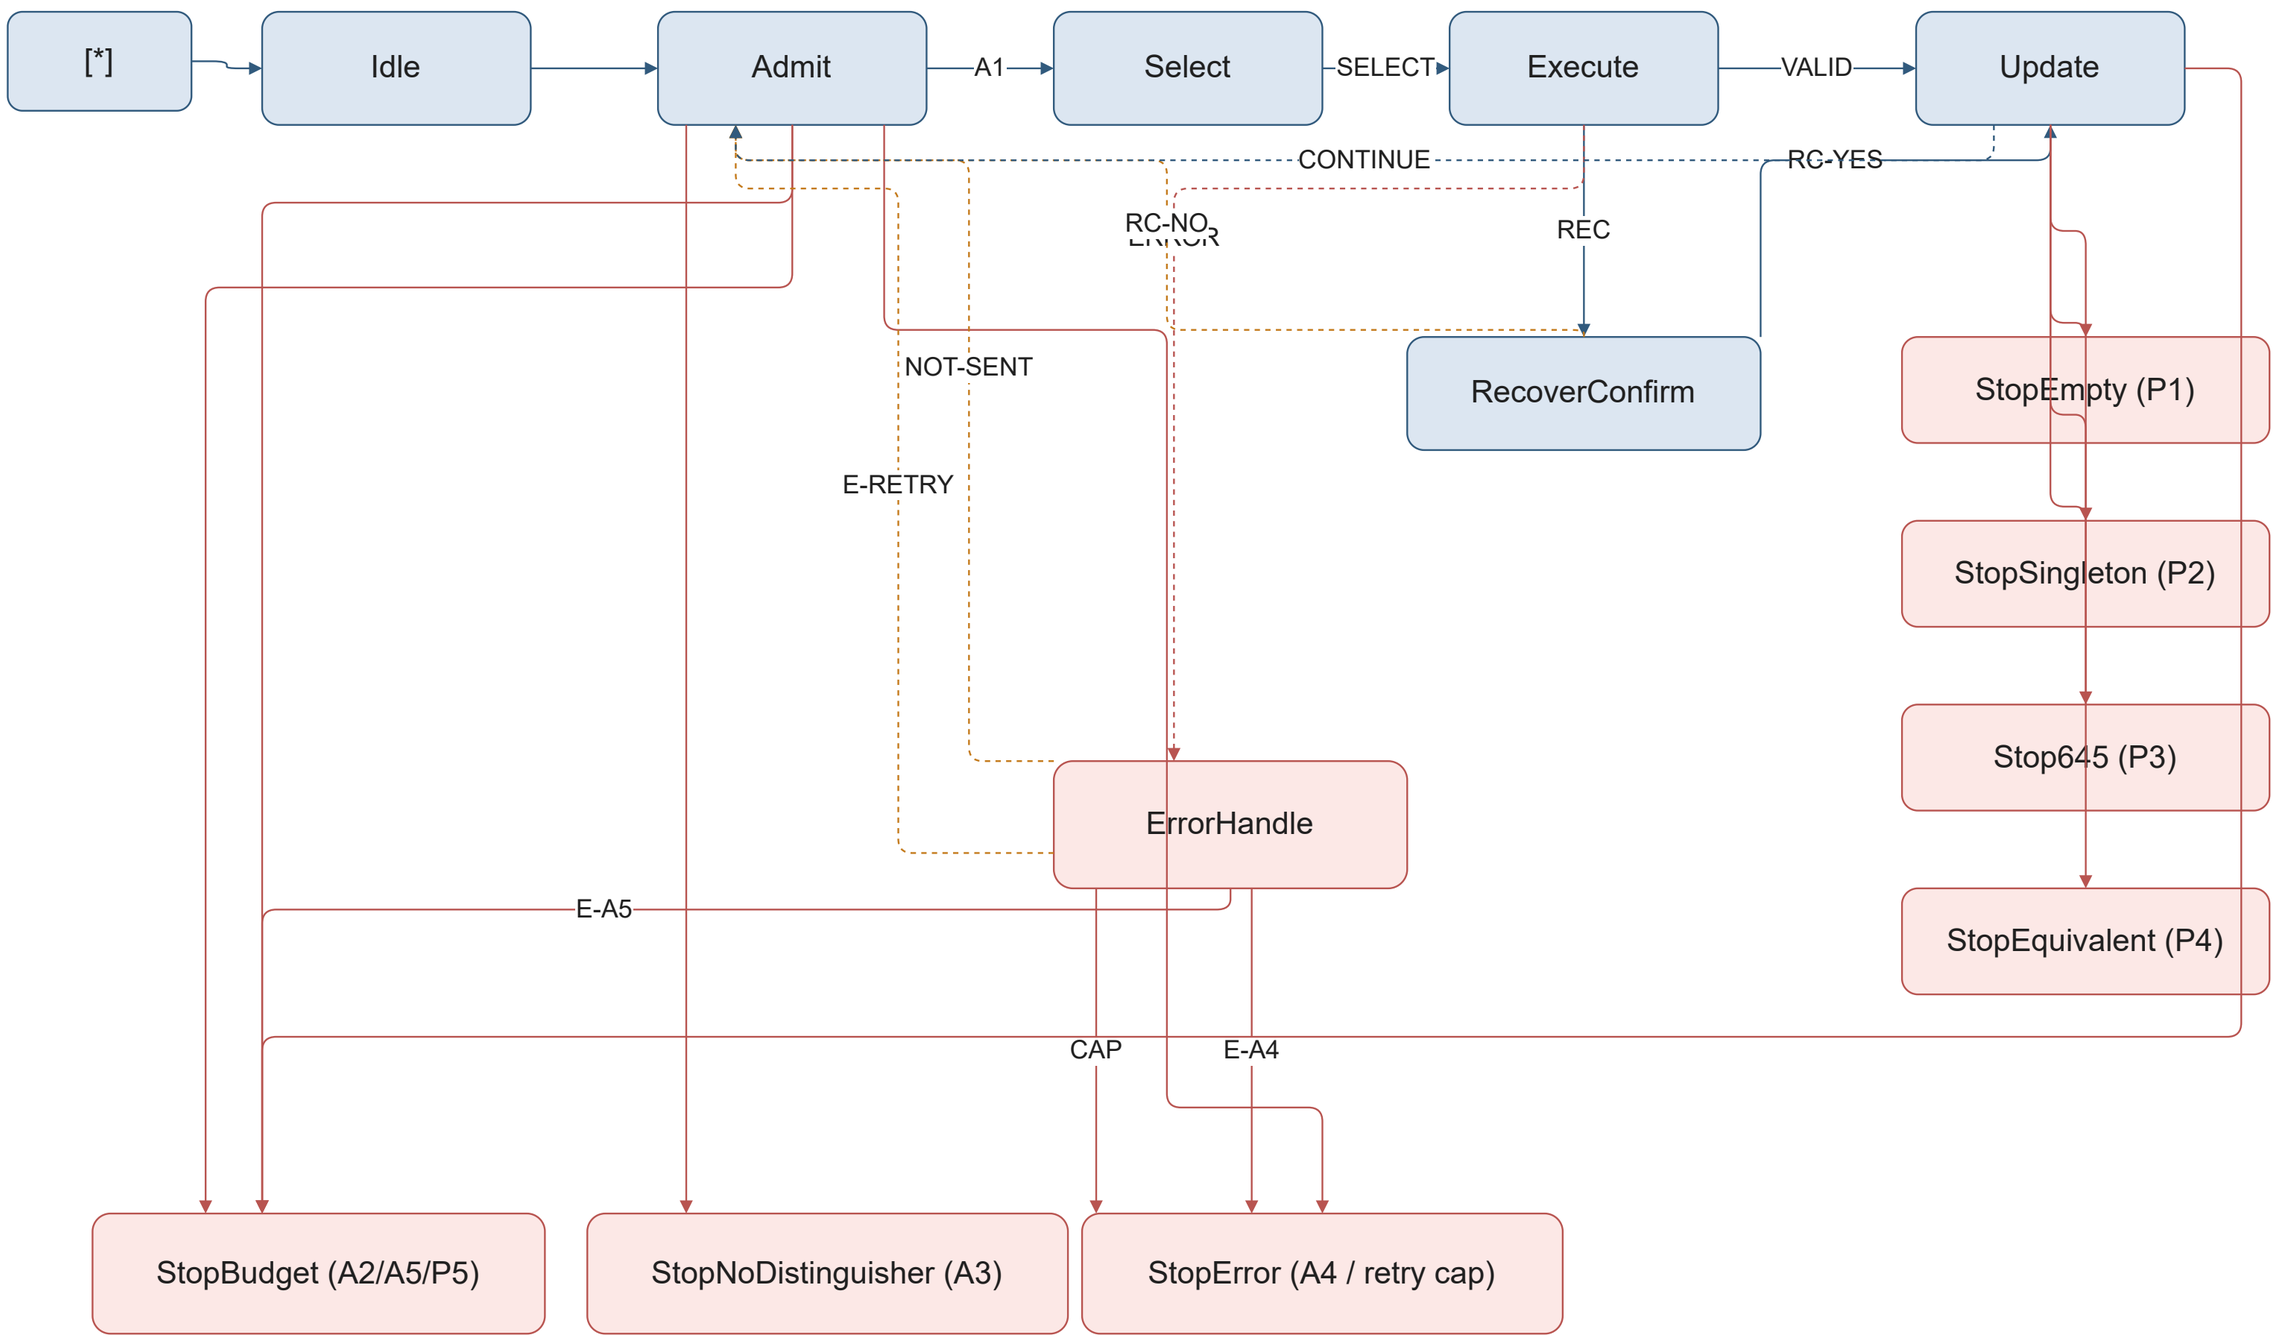

A1: selectable S nonempty | A2: strictly-reducing TEST or Prep unaffordable | A3: no strictly-reducing TEST and no Prep
A4: q unknown and Recover not eligible | A5: q unknown and Recover eligible but unaffordable

SELECT: chosen from S | VALID: TEST/Prep valid Izk | REC: Recover valid record | ERROR: execution error
RC-YES: target confirmed | RC-NO: unconfirmed; q UNKNOWN

ErrorHandle order: CAP first; then E-A4/E-A5 or retry
E-A4: retry remains AND unknown-effect AND Recover ineligible | E-A5: retry remains AND unknown-effect AND Recover eligible but unaffordable
NOT-SENT: confirmed not sent AND retry remains | E-RETRY: retry remains AND unknown-effect AND Recover in S

P1: Hk empty | P2: singleton | P3: named 645-blocked | P4: observational equivalence | P5: selected-mode resource exhausted
CONTINUE: |Hk| > 1 and resource remains

Independent machines communicate through FIG-CL-TAV-04 ports; there is no cross-machine state transition. A nonempty A does not imply Execute; S empty uses A2-A5.

Mprot protocol black box

bound M2 INFORMATION / UPLOAD
approved identity; no new behavior edges

planned CRS scope; no behavior edges
Media/Operator Defined DOWNLOAD; FIND