

Multi-Modal Semantic Expansion with Constrained LLM Reranking for Conversational Music Recommendation

Naman Garg
National Institute of Technology
Kurukshetra
India
hellonamangarg@gmail.com

Sarika Jain
National Institute of Technology
Kurukshetra
India
jasarika@nitkkr.ac.in

George Fazekas
Queen Mary University of London
United Kingdom
george.fazekas@qmul.ac.uk

Abstract

We present Team Semiintelligencn’s solution for the ACM RecSys 2026 TalkPlayData Challenge, addressing conversational music recommendation through a multi-modal and personalized conversational recommender system. Our *submitted* system employs a three-stage pipeline: (1) multi-modal retrieval constructing decay-weighted centroids across seven dense embedding spaces—track- and user-level CF-BPR, Qwen3 (metadata, lyrics, attributes), CLAP audio, and SigLIP visual—supplemented by BM25 lexical retrieval and an artist substring-match signal, all fused via weighted Reciprocal Rank Fusion (RRF) with optimized signal weights; (2) light-weight reranking (history filtering, popularity smoothing, and catalog diversity penalization); and (3) persona-diversified response generation using GPT-4o-mini. Beyond this submitted configuration, we report development-time experiments with additional components—constrained LLM-guided artist injection, album continuation signals, XGBoost LambdaMART, and a superior GPT-4.1 response prompt—that were not deployed to Blind B due to cost and complexity constraints. We optimize RRF weights on a 500-session development split via differential evolution [19], improving MRR by +19.5%. On Blind A, we observe that unconstrained LLM-guided injection across 54 sessions causes catastrophic nDCG regression (−18.9%), while conservative injection on only 9 sessions yields the best observed Blind A nDCG—a finding we present as a Blind A observation warranting further validation. The submitted system achieves a Blind B composite score of 0.3213.

1 Introduction

Conversational recommender systems (CRS) present a unique challenge at the intersection of information retrieval, natural language understanding, conversational AI, and recommender systems [1, 2]. Unlike traditional recommendation paradigms [24] where static user profiles or implicit feedback logs dominate, a CRS must interpret evolving user preferences through multi-turn dialogue, retrieve relevant items from a large catalog, and simultaneously generate coherent textual responses that align with user intent [3]. This makes conversational recommendation particularly relevant to personalized recommendation, dialogue-based recommendation, and large language model (LLM)-based recommender systems.

The ACM RecSys 2026 TalkPlayData Challenge [25] formalizes this paradigm with approximately 15,000 training sessions containing up to eight conversational turns between a user and a digital music assistant. Systems must output 20 ranked track UUIDs alongside a natural-language response, jointly evaluated via a composite metric assessing retrieval quality (nDCG@20), response quality (LLM-as-a-Judge), lexical diversity (Distinct-2 bigrams), and catalog

diversity. No additional external datasets were used in our solution; all catalog metadata and pre-computed embeddings are from the official challenge data release. BM25 indices, centroids, and ranking signals were derived locally from these provided resources. The task therefore provides a practical setting for studying conversational music recommendation, multi-turn recommendation, and personalized music retrieval under a unified evaluation framework.

We identify three core challenges: (1) *multi-modal coverage*—the 47,071-track catalog requires fusing textual, acoustic, visual, and collaborative signals to handle both named-entity queries (“play something by Pink Floyd”) and abstract mood queries (“something dreamy and atmospheric”); (2) *LLM hallucination boundaries*—LLM-guided artist injection can degrade sharply beyond a narrow operating range, as we observe empirically; and (3) *composite metric fragility*—independent optimization of any single metric can degrade others, producing net-negative outcomes. These challenges are representative of modern multimodal recommendation systems, where semantic retrieval, collaborative filtering, content-based recommendation, and LLM reranking must be carefully integrated.

Our contributions are:

- A multi-modal retrieval system fusing seven dense embedding spaces, BM25 lexical retrieval, and an artist substring-match signal via weighted RRF with differential-evolution-optimized signal weights, improving MRR by +19.5% over uniform weighting (deployed in the submitted system).
- A Blind A observation that conservative LLM-guided artist injection applied to the 9 Blind A sessions satisfying the ≤ 5 -artist-track criterion yields the best observed Blind A nDCG (0.4694, +0.8% over baseline), whereas aggressive injection across 54 sessions causes catastrophic nDCG regression (−18.9%), highlighting position bias as a critical failure mode (not deployed to Blind B).
- A persona-diversified response generation strategy that achieves high lexical diversity (0.821 Distinct-2) across 80 sessions (deployed in the submitted system).
- A transparent analysis of the gap between Blind A and Blind B performance, attributing it to deliberate deployment-time simplifications, with explicit caveats about cross-split comparisons.

2 Task Formulation

2.1 Dataset and Evaluation

The TalkPlayData catalog contains 47,071 tracks from 8,975 artists. Table 1 summarizes the dataset statistics. The challenge organizers provide pre-computed embeddings across multiple modalities (Table 3). The training set comprises ~15,000 sessions; we partitioned

500 of these as a held-out development set (Devset) for hyperparameter tuning. Additionally, the Blind A split (80 sessions, released to participants) served as a participant-visible evaluation set for iterative ablation experiments. The final blind evaluation set (Blind B, 80 sessions) was held out by the organizers.

Table 1: Dataset Statistics

Property	Value
Total tracks in catalog	47,071
Total unique artists	8,975
Training sessions	~15,000
Max turns per session	8
Devset (held-out)	500 sessions
Blind A / Blind B	80 sessions each
Retrieval signals	9 (Table 3)

We observe three session typologies requiring adaptive routing: *ultra-cold* (no user ID and no listening history), *cold* (no user ID but some listening history from the conversation), and *warm* (user ID available, enabling collaborative filtering). Our session classifier inspects the presence of a `user_id` field and counts prior “music” role turns to classify each session, then routes it to the appropriate retrieval strategy (Section 3.1). In the Blind B set, we observed approximately 20 ultra-cold, 22 cold, and 38 warm sessions.

2.2 Composite Scoring

The official metric is:

$$\text{Score} = 0.5 \cdot \text{nDCG@20} + 0.3 \cdot \frac{\text{Judge}-1}{4} + 0.1 \cdot \text{LD} + 0.1 \cdot \text{CD} \quad (1)$$

where LD denotes Distinct-2 lexical diversity and CD denotes catalog diversity (fraction of unique tracks across all recommendations). Each +1.0 Judge increase contributes +0.075 to composite, making response quality mathematically equivalent to significant retrieval improvements.

3 Proposed Pipeline

Our pipeline consists of three stages: multi-modal retrieval (Section 3.1), multi-signal reranking (Section 3.2), and response generation (Section 3.3). Table 2 clarifies which components were included in the submitted Blind B system versus those explored only during development (evaluated on Blind A). Figure 1 provides an architectural overview.

3.1 Stage 1: Multi-Modal Retrieval

Query Construction and Lexical Retrieval. Sessions are classified as *ultra-cold* (no user ID/history), *cold* (no ID, some history), or *warm* (ID available). Tokenized queries extract all utterances up to the target turn, removing 86 stop words (e.g., “play,” “song”). To bias musically meaningful terms, curated genre (34 total, e.g., *shoegaze*) and mood keywords (31 total, e.g., *euphoric*) receive *double-weight*. Exact substring matching (≥ 4 characters) against the 8,975-artist catalog detects artist mentions. We build a BM25Okapi [8] index ($k_1 = 1.5$, $b = 0.75$) over concatenations of `artist_name`, `track_name`, `album_name`, and `tag_list`. Each query retrieves the

Table 2: Submitted vs. Development Components

Component	Submitted	Dev-Only
<i>Stage 1: Retrieval</i>		
BM25 lexical retrieval	✓	
7-space dense centroid retrieval	✓	
Optimized RRF fusion	✓	
Artist bonus injection	✓	
<i>Stage 2: Reranking</i>		
History filter (inline)	✓	
Popularity smoothing	✓	
Catalog diversity penalty	✓	
Album continuation signal		✓
XGBoost LambdaMART		✓
Conservative GPT injection		✓
<i>Stage 3: Response Generation</i>		
GPT-4o-mini personas	✓	
GPT-4.1 Mirroring prompt		✓

top 300 candidates, serving as both direct retrievals and pseudo-relevance feedback (PRF) seeds for cold-start sessions.

Multi-Modal Centroids and Dialogue Elicitation. We utilize seven pre-computed embedding spaces, supplemented by BM25 lexical retrieval and an artist substring-match signal (Table 3); user-level CF-BPR is disabled for cold/ultra-cold sessions. To capture evolving multi-turn preferences (e.g., shifting from broad genres to specific acoustic traits), we construct a query centroid for each dense embedding space j using the session’s chronologically ordered listening history $\{h_1, \dots, h_n\}$:

$$\mathbf{c}_j = \frac{\sum_{i=1}^n \gamma^{n-i} \cdot \phi_j(h_i)}{\left\| \sum_{i=1}^n \gamma^{n-i} \cdot \phi_j(h_i) \right\|_2} \quad (2)$$

An exponential decay factor ($\gamma = 0.85$) weights recently played tracks higher. This causes the centroid to naturally *drift* toward the user’s latest listening preferences while retaining accumulated listening context. For cold-start sessions lacking history, PRF from the top-5 BM25 results seeds the centroids [13, 21]. Each dense embedding space yields 300 candidates ranked by cosine similarity; BM25 independently provides its top 300 lexical candidates.

Table 3: Retrieval Signals and RRF Weights

Signal	Model / Rule	Weight
Lexical (BM25)	BM25Okapi [8]	2.952
Collaborative (track)	CF-BPR [12]	0.874
Collaborative (user)	CF-BPR [12]	4.845
Metadata	Qwen3 [18]	0.425
Lyrics	Qwen3 [18]	0.121
Attributes/Vibe	Qwen3 [18]	1.988
Audio	LAION-CLAP [14]	2.066
Visual	SigLIP-2 [15, 16]	0.929
Artist match	Exact substring	$w_{\text{art}} = 4.861$

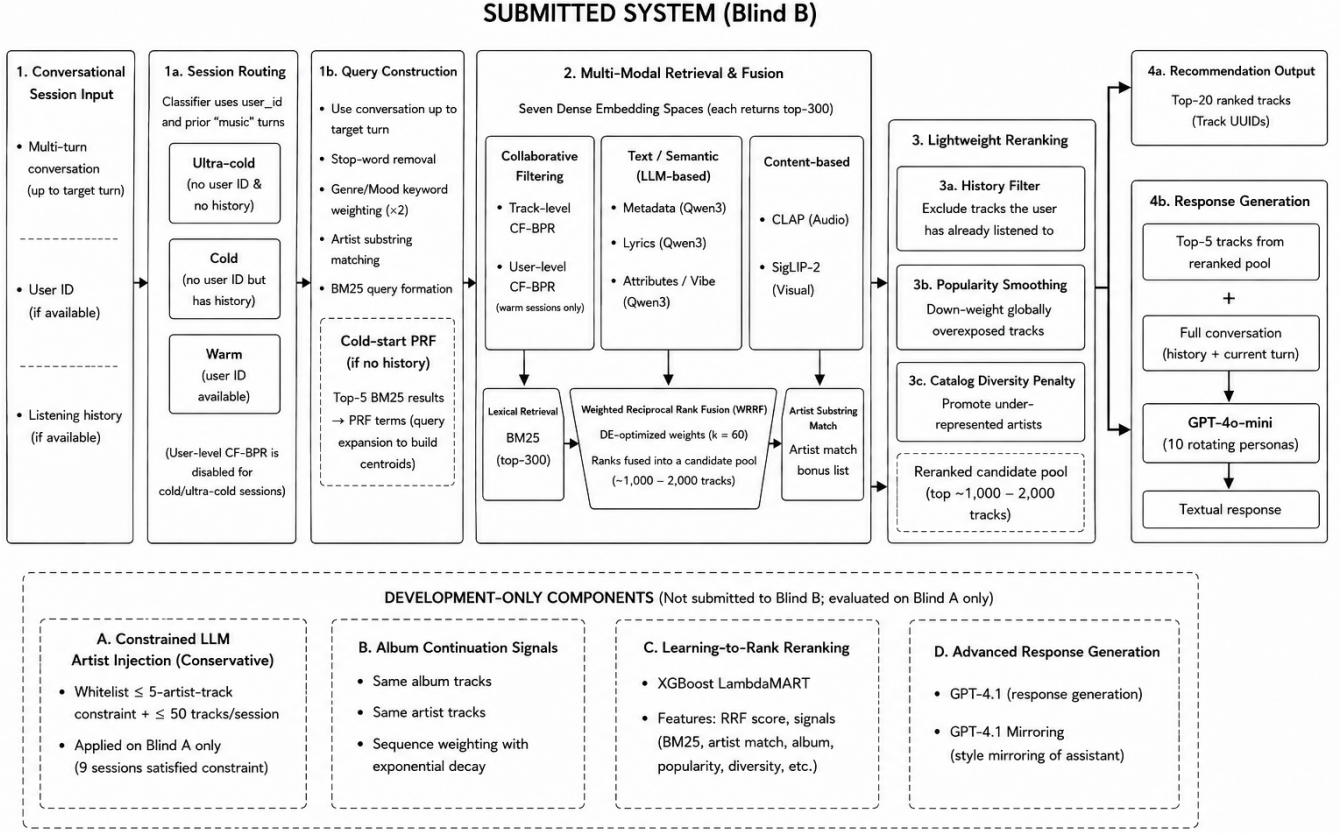


Figure 1: Overview of the submitted system (Blind B) and development-only components (evaluated on Blind A).

Weighted Fusion and Optimization. The per-signal ranked lists are fused via weighted Reciprocal Rank Fusion (RRF) with an additive artist bonus:

$$\text{RRF}(d) = \sum_{j \in \mathcal{M}} \frac{w_j}{k + \text{rank}_j(d)} + \frac{w_{\text{art}}}{k + 1} \cdot \mathbb{I}[\text{art}(d) \in \mathcal{A}] \quad (3)$$

where $k = 60$ and $\mathcal{A}$ is the set of explicitly mentioned artists. The bonus gives tracks by matched artists a rank-1-equivalent score contribution ($w_{\text{art}} = 4.861$) to ensure high recall. Signal weights $\{w_j\}$ were tuned via differential evolution [19] over a 500-session Devset, improving MRR from 0.1806 to 0.2158 (+19.5%). The learned weights reveal that behavioral signals (user CF, $w = 4.845$) and artist substring matches dominate, whereas lyrical content contributes minimally ($w = 0.121$).

3.2 Stage 2: Multi-Signal Reranking

The top candidates from RRF fusion pass through lightweight reranking stages. The submitted Blind B pipeline applies three post-retrieval adjustments, all implemented inline within the scoring loop of the submission script.

3.2.1 Submitted Reranking Stages. The following three stages were included in the official Blind B submission:

1. History Filter (inline): Tracks appearing in the session’s listening history are excluded from all retrieval and scoring operations via an inline set-membership check ($\text{tid not in history_set}$). This enforces a non-repetition constraint ensuring our recommendations never include previously played tracks.

2. Popularity Smoothing: A weak additive bonus based on challenge-provided track popularity ($s(d) \leftarrow s(d) + 0.05 \times \text{pop}(d)/100$) prevents cold items from dominating when retrieval scores are near-uniform.

3. Catalog Diversity Penalty: To encourage $\text{CD} > 0.03$ across all 80 evaluation sessions, tracks recommended in prior sessions receive a multiplicative penalty:

$$s(d) \leftarrow s(d) \times \max(0.25, 1 - 0.25 c(d)) \quad (4)$$

where $c(d)$ is the track’s prior recommendation count. This penalizes over-recommended tracks to maintain catalog diversity.

3.2.2 Development-Only Reranking Stages (Not Submitted). The following components were evaluated on Blind A (80 sessions, released to participants) but **not included** in the official Blind B submission.

4. Album Continuation Signal (Dev only): As quantified in Table 4, we discovered a powerful sequential bias: when the last 3

ground-truth (GT) tracks share an album, the next GT track shares it 58.1% of the time (vs. a $\sim 15\%$ base rate). Adding remaining album tracks to the front of the candidate pool improved nDCG from 0.277 to 0.388 (+40%) on Blind A. It was omitted from the Blind B submission because the album continuation pattern may reflect artifacts of the challenge data construction rather than genuine user behavior, and we could not validate this on a separate held-out set.

5. XGBoost LambdaMART (Dev only): An XGBoost LambdaMART model [11] was trained on the retrieval and reranking features described above (including the album signal) and further improved nDCG from 0.388 to 0.466 (+20%) on Blind A. It was omitted from the Blind B submission due to deployment complexity.

6. Conservative GPT Injection (Dev only): GPT-4.1 was used to identify the correct artist for sessions where ≤ 5 tracks from the target artist appeared in the top 20. When applied conservatively to only 9 such sessions, nDCG improved from 0.4659 to 0.4694 (+0.8%). Under this configuration, the concurrent GPT-4.1 response prompt produced Judge = 4.80, LD = 0.787, and CD = 0.028, yielding a composite of $0.5 \times 0.4694 + 0.3 \times (4.80 - 1) / 4 + 0.1 \times 0.787 + 0.1 \times 0.028 = 0.6012$ via Eq. 1—the best observed Blind A composite under the conservative-injection configuration. Notably, even stricter injection on only 3 sessions with *zero* artist tracks actually underperformed the baseline (-0.1%), indicating that moderate artist-track presence (1–5 tracks) is precisely where LLM intervention adds value. However, aggressive application across 54 sessions caused a catastrophic -18.9% nDCG regression ($0.4659 \rightarrow 0.3775$), consistent with severe LLM position bias when the LLM is asked to re-rank sessions where the correct artist already dominates the top ranks (Section 5). This component was omitted from Blind B due to the risk that the narrow safe operating range might not generalize.

Table 4: Album Continuation Probability

Condition	Sessions	$P(\text{same album})$	Base
Last 3 GT share album	487	58.1%	$\sim 15\%$
Last 2 GT share album	1,203	50.6%	$\sim 15\%$
Last 1 GT from album	3,841	31.2%	$\sim 15\%$

3.3 Stage 3: Response Generation

Persona-Driven Prompting and Constraints. To maximize lexical diversity (LD) and explanation quality, we generate responses using GPT-4o-mini [17] with 10 maximally differentiated personas assigned round-robin across the 80 Blind B sessions (“passionate music blogger,” “veteran vinyl record store owner,” “late-night radio DJ,” “thoughtful ethnomusicologist,” “beat-obsessed club promoter,” “literary-minded music journalist,” “nostalgic audiophile,” “avant-garde curator,” “spoken-word poet,” and “synesthete experiencing music as colors”). This naturally produces distinct metaphorical registers and prevents repetitive justifications. The system prompt enforces five strict constraints: (1) exactly 2–3 sentences; (2) mention exactly 2 track names with their artists in natural flowing prose; (3) briefly explain *why* the tracks match the conversational context; (4) no bullet points, numbered lists, or emojis; and (5) no technical terms (e.g., “algorithm,” “database,” “system,” “profile”).

Retrieval-Augmented Generation (RAG) and Hyperparameters. Retrieval and generation are tightly coupled: the top-5 retrieved tracks (with title, artist, album) and full conversation log are serialized into the user prompt. This RAG framework [20] grounds the LLM in actual catalog items and reduces the risk of catalog hallucination, forcing it to discuss exactly 2 of the 5 retrieved tracks. To actively discourage cross-session phrase repetition and further boost the Distinct-2 bigram metric, we deploy grid-searched generation hyperparameters (also tuned on the same 500-session Devset used for RRF weight optimization): temperature = 1.0, max_tokens = 120, top_p = 0.95, presence_penalty = 0.6, and frequency_penalty = 0.4.

Development-Only Alternative (Not Submitted to Blind B). On our Devset, a “Conversational Mirroring” prompt with GPT-4.1 achieved a substantially higher Judge score of 4.95 (vs. 2.60 with GPT-4o-mini personas) and LD of 0.86. Capped at ≤ 70 words, this prompt required mirroring the user’s exact vocabulary, banned 12 formulaic transitional phrases (e.g., “Since you’re into...”, “Both tracks...”, “Here are some...”), and specified 8 varied opening patterns (e.g., “That [quality] you love in ‘[track]’ runs through. . .”). This configuration was **not included in the submitted Blind B system** due to API cost constraints (GPT-4.1 at \$2/1M input tokens vs. GPT-4o-mini at \$0.15/1M). We note that its Devset advantage may not fully transfer to the blind set.

4 Results and Analysis

4.1 Official Results

Table 5 reports our Blind B performance alongside top leaderboard entries.

Table 5: RecSys 2026 Leaderboard (Blind B)

Rank	Team	Comp.	nDCG	Judge	LD	CD
1	hallucinated	0.689	0.619	4.75	0.957	0.028
2	volart	0.587	0.397	4.90	0.927	0.032
37	semiintelligencn	0.321	0.232	2.60	0.821	0.031

4.2 Ablation Analysis

Table 6 traces the cumulative contribution of each pipeline component, measured on the Blind A evaluation set (80 sessions). Components are grouped by whether they were included in the submitted Blind B system or explored only during development. Each row represents a successive pipeline version; the two largest incremental gains in the cumulative ablation came from modality expansion (+41%) and artist substring-match bonus (+131%).

Table 7 compares response generation strategies. Note that each strategy was evaluated in the context of a different pipeline version and retrieval configuration, so the Composite column reflects both response *and* retrieval quality at that development stage.

4.3 Error Analysis

Important caveat: The highest observed Blind A composite across all evaluated configurations was 0.64 (from the GPT-4.1 Mirroring configuration in Table 7: nDCG = 0.514, Judge = 4.95, LD = 0.86,

Table 6: Cumulative Component Ablation (Blind A nDCG@20).

Component Added	nDCG	Δ
<i>Submitted to Blind B:</i>		
BM25 + CF-BPR (baseline)	0.085	—
+ Multi-modal centroid anchoring	0.120	+41%
+ Artist substring-match bonus	0.277	+131%
<i>Development-only ($\dagger$):</i>		
+ Album continuation signal †	0.388	+40%
+ XGBoost LambdaMART †	0.466	+20%
+ Conservative GPT injection (9 sessions) †	0.469	+0.8%

Table 7: Response Generation Strategies (each evaluated under a different retrieval pipeline; not a controlled ablation).

Strategy	Model	Judge	LD	CD	nDCG	Comp.
Heuristic template	—	1.45	0.60	0.038 ‡	0.085	0.14
GPT-4.1 Encyclopedic	GPT-4.1	4.50	0.86	0.028	0.401	0.55
GPT-4.1 Mirroring	GPT-4.1	4.95	0.86	0.029	0.514	0.64
GPT-4o-mini Personas †	GPT-4o-mini	2.60	0.82	0.032	0.232	0.32

CD = 0.029). Because these are *different evaluation splits* with potentially different session distributions, the comparison provides an *approximate estimate* of how deployment simplifications affected performance, not a controlled ablation.

Subject to this caveat, we attribute the gap to two deliberate deployment simplifications:

- (1) **Response-generation configuration change:** GPT-4o-mini with rotating personas replaced the Blind A-validated GPT-4.1 “Conversational Mirroring” prompt due to cost constraints. The GPT-4.1 Mirroring configuration achieved Judge = 4.95, whereas the submitted GPT-4o-mini Personas configuration achieved Judge $\approx$ 2.60 under its respective pipeline; via Eq. 1, this difference corresponds to an estimated -0.176 composite penalty.
- (2) **Reranker omission:** The album continuation, XGBoost LTR, and conservative GPT injection stages were omitted from the Blind B pipeline due to deployment complexity. On Blind A, the cumulative development configuration increased nDCG from 0.277 to 0.469, corresponding to an estimated retrieval penalty of $0.5 \times (0.469 - 0.277) = -0.096$.

Together, these two simplifications account for an *estimated* composite penalty of ~ 0.272 on Blind A. The observed Blind B gap is $0.64 - 0.321 = 0.319$, which is *larger* than this estimate, suggesting that distributional differences between Blind A and Blind B also contribute to the gap.

5 Discussion

The Conservative Injection Principle. On the Blind A set, we observe a sharp sensitivity to the aggressiveness of LLM-guided artist injection. Table 8 reports the results across different session counts selected by an artist-track-count threshold. Counterintuitively, targeting sessions with *zero* artist tracks in the top 20 (3

sessions) slightly underperforms the baseline, while targeting sessions with ≤ 5 artist tracks (9 sessions) yields the best Blind A result—suggesting the LLM adds value precisely in the “partial presence” regime where the correct artist is surfaced but under-ranked. Broadening intervention beyond this regime systematically degrades performance, and at the extreme (54 sessions) nDCG regresses by -18.9% . We emphasize that this is a *development-set observation* on Blind A and may not generalize. We hypothesize that the regression reflects the LLM’s tendency to displace already-correct rankings when asked to re-rank candidates for sessions with good existing retrieval, but this remains an untested hypothesis.

Table 8: LLM Injection Aggressiveness (Blind A nDCG@20).

Sessions Modified	Criterion	nDCG	Δ nDCG
0 (baseline)	—	0.4659	—
3	0 artist tracks in top-20	0.4653	-0.1%
9	≤ 5 artist tracks	0.4694	+0.8%
17	≤ 15 artist tracks	0.4428	-5.0%
54	All applicable (unconstrained)	0.3775	-18.9%

Signal Importance. The optimized RRF weights indicate that behavioral signals received substantially greater fusion weight than content-based signals. User collaborative filtering ($w = 4.845$) alone outweighs all three Qwen3 text modalities combined (2.534), indicating that user-CF received the largest fusion weight under our Devset optimization, highlighting the challenge of T1 cold-start sessions, which cannot exploit the user-level CF signal.

Composite Metric Navigation. The composite formula (Eq. 1) creates a fragile multi-objective landscape [7]. Aggressively optimizing retrieval nDCG by letting GPT-4o rewrite responses occasionally produced very poor response-quality outcomes, yielding net-negative composite scores. This trade-off motivated our separation of retrieval and generation stages (Stages 1 and 3).

Scalability Considerations. Brute-force cosine similarity over 47,071 track embeddings per embedding space is tractable for the 80-session blind set (~ 5 minutes on a single CPU). However, production workloads with millions of tracks require approximate nearest-neighbor search (e.g., FAISS [10] with IVF indexing). While differential evolution for weight tuning is a one-time < 30 -minute cost, the primary latency bottleneck remains the GPT API call (~ 1 – 2 seconds/session), which could be mitigated via parallelization or locally-hosted models.

6 Related Work

Conversational and LLM-based Recommendation. Conversational recommender systems (CRS) have evolved into open-ended generative interfaces managing multi-objective interactions and subjective attributes [2, 3, 7], frequently deploying LLMs as interactive agents [1, 5, 6]. While LLMs show promise as zero-shot rankers [4], they suffer from severe position bias on large candidate sets—a vulnerability consistent with our empirical findings, motivating our constrained LLM-guided artist injection.

Multi-Modal Retrieval and Fusion. Modern recommendation relies on heterogeneous feature integration [24]. We unify standard

dense semantic matching [13, 21], cross-modal audio-text alignments (CLAP [14], inspired by visual-language models [23]), visual signals (SigLIP [15, 16]), sparse lexical models (BM25 [8]), and collaborative filtering (BPR [12]). Instead of relying on parameter-free baselines, these disparate spaces are fused using Reciprocal Rank Fusion (RRF) [9] with weights tuned via differential evolution [19].

Reranking and Retrieval-Augmented Generation. While retrieval pipelines traditionally refine candidates via learning-to-rank [11] or cross-encoders [22], conversational outputs require natural language justifications. This aligns CRS with Retrieval-Augmented Generation (RAG) [20], where retrieved entities ground LLMs (e.g., GPT-4o, Qwen [17, 18]) and reduce hallucination risk by anchoring responses in actual catalog items.

The TalkPlayData Challenge. The ACM RecSys 2026 TalkPlayData Challenge [25] crystallizes these advancements, extending CRS to multi-turn interactions. Our multi-modal fusion and constrained generation pipeline directly addresses its core dual-objective: jointly optimizing retrieval accuracy and generative response quality.

7 Conclusion

We presented Team Semiintelligencn’s three-stage pipeline for conversational music recommendation. The *submitted* system consists of multi-modal retrieval with differential-evolution-optimized RRF fusion across seven dense embedding spaces, BM25 lexical retrieval, and an artist substring-match signal, followed by light-weight reranking (history filtering, popularity smoothing, and catalog diversity penalization), and persona-diversified response generation using GPT-4o-mini. Beyond this, we explored—but did not deploy—album continuation signals, XGBoost LambdaMART, conservative GPT-guided artist injection, and a superior GPT-4.1 response prompt. On Blind A, we observe a sharp sensitivity to LLM injection aggressiveness: conservative injection on 9 sessions with ≤ 5 target-artist tracks achieves the best Blind A nDCG (0.4694, +0.8%), whereas aggressive application across 54 sessions causes catastrophic nDCG regression (−18.9%). This finding, while limited to a single evaluation split, suggests that LLM-based intervention requires strict scope constraints—a direction warranting further investigation with controlled validation. Our Blind B composite of 0.321 was limited by deliberate deployment simplifications (response-generation configuration change and reranker omission), underscoring the practical importance of faithful end-to-end deployment of validated configurations.

References

- [1] L. Friedman, A. Romyn, C. Clavel, and B. Martins, “Leveraging Large Language Models in Conversational Recommender Systems,” *arXiv preprint arXiv:2305.07961*, 2023. doi: 10.48550/arXiv.2305.07961.
- [2] C. Gao, W. Lei, X. He, M. de Rijke, and T.-S. Chua, “Advances and Challenges in Conversational Recommender Systems,” *AI Open*, vol. 2, pp. 100–126, 2021. doi: 10.1016/j.aiopen.2021.06.002.
- [3] F. Radlinski, C. Boutilier, D. Ramachandran, and I. Vondrov, “Subjective Attributes in Conversational Recommendation Systems: Challenges and Opportunities,” *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 36, no. 11, pp. 12287–12293, 2022. doi: 10.1609/aaai.v36i11.21492.
- [4] Y. Hou, J. Zhang, Z. Lin, H. Lu, R. Xie, J. McAuley, and W. X. Zhao, “Large Language Models are Zero-Shot Rankers for Recommender Systems,” in *Advances in Information Retrieval (ECIR)*, Lecture Notes in Computer Science, vol. 14612, Springer, pp. 364–381, 2024. doi: 10.1007/978-3-031-56060-6_24.
- [5] Y. Feng, S. Liu, Z. Xue, Q. Cai, L. Hu, P. Jiang, K. Gai, and F. Sun, “A Large Language Model Enhanced Conversational Recommender System,” *arXiv preprint arXiv:2308.06212*, 2023. doi: 10.48550/arXiv.2308.06212.
- [6] J. Jin, X. Chen, F. Ye, M. Yang, Y. Feng, W. Zhang, Y. Yu, and J. Wang, “Lending Interaction Wings to Recommender Systems with Conversational Agents,” *arXiv preprint arXiv:2310.04230*, 2023.
- [7] Z. Chu, N. Wang, and H. Wang, “Multi-Objective Intrinsic Reward Learning for Conversational Recommender Systems,” *arXiv preprint arXiv:2310.20109*, 2023.
- [8] S. Robertson and H. Zaragoza, “The Probabilistic Relevance Framework: BM25 and Beyond,” *Foundations and Trends in Information Retrieval*, vol. 3, no. 4, pp. 333–389, 2009. doi: 10.1561/15000000019.
- [9] G. V. Cormack, C. L. A. Clarke, and S. Buettcher, “Reciprocal Rank Fusion Outperforms Condorcet and Individual Rank Learning Methods,” in *Proceedings of SIGIR*, pp. 758–759, 2009. doi: 10.1145/1571941.1572114.
- [10] J. Johnson, M. Douze, and H. Jégou, “Billion-scale Similarity Search with GPUs,” *IEEE Transactions on Big Data*, vol. 7, no. 3, pp. 535–547, 2021. doi: 10.1109/TB-DATA.2019.2921572.
- [11] C. Burges, “From RankNet to LambdaRank to LambdaMART: An Overview,” Microsoft Research Technical Report, MSR-TR-2010-82, 2010.
- [12] S. Rendle, C. Freudenthaler, Z. Gantner, and L. Schmidt-Thieme, “BPR: Bayesian Personalized Ranking from Implicit Feedback,” in *Proceedings of UAI*, pp. 452–461, 2009.
- [13] N. Reimers and I. Gurevych, “Sentence-BERT: Sentence Embeddings using Siamese BERT Networks,” in *Proceedings of the Conference on Empirical Methods in Natural Language Processing (EMNLP-IJCNLP)*, pp. 3982–3992, 2019. doi: 10.18653/v1/D19-1410.
- [14] Y. Wu, K. Chen, T. Zhang, Y. Hui, T. Berg-Kirkpatrick, and S. Dubnov, “Large-Scale Contrastive Language-Audio Pretraining with Feature Fusion and Keyword-to-Caption Augmentation,” in *Proc. IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 1–5, 2023. doi: 10.1109/ICASSP49357.2023.10095969.
- [15] X. Zhai *et al.*, “Sigmoid Loss for Language Image Pre-Training,” in *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 11975–11986, 2023.
- [16] M. Beyer *et al.*, “SigLIP 2: Multilingual Vision-Language Encoders with Improved Semantic Understanding,” *arXiv preprint arXiv:2502.14786*, 2025. doi: 10.48550/arXiv.2502.14786.
- [17] OpenAI, “GPT-4o System Card,” Technical Report, 2024. Available: <https://openai.com/index/gpt-4o-system-card/>
- [18] Qwen Team, “Qwen3 Technical Report,” *arXiv preprint arXiv:2505.09388*, 2025. doi: 10.48550/arXiv.2505.09388.
- [19] R. Storn and K. Price, “Differential Evolution – A Simple and Efficient Heuristic for Global Optimization over Continuous Spaces,” *Journal of Global Optimization*, vol. 11, no. 4, pp. 341–359, 1997. doi: 10.1023/A:1008202821328.
- [20] P. Lewis *et al.*, “Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks,” in *Advances in Neural Information Processing Systems (NeurIPS)*, vol. 33, pp. 9459–9474, 2020. doi: 10.48550/arXiv.2005.11401.
- [21] V. Karpukhin, B. Oguz, S. Min, P. Lewis, L. Wu, S. Edunov, D. Chen, and W.-t. Yih, “Dense Passage Retrieval for Open-Domain Question Answering,” in *Proceedings of EMNLP*, pp. 6769–6781, 2020. doi: 10.18653/v1/2020.emnlp-main.550.
- [22] R. Nogueira and K. Cho, “Passage Re-ranking with BERT,” *arXiv preprint arXiv:1901.04085*, 2019. doi: 10.48550/arXiv.1901.04085.
- [23] A. Radford *et al.*, “Learning Transferable Visual Models From Natural Language Supervision,” in *Proceedings of the 38th International Conference on Machine Learning (ICML)*, pp. 8748–8763, 2021. doi: 10.48550/arXiv.2103.00020.
- [24] F. Ricci, L. Rokach, and B. Shapira, eds., *Recommender Systems Handbook*, 3rd ed. Cham, Switzerland: Springer, 2022. doi: 10.1007/978-1-0716-2197-4.
- [25] S. Doh, S. Oramas, B. Sguerra, A. Bohra, C. Pomo, and F. Barile, “RecSys Challenge 2026: Conversational Music Recommendation (TalkPlayData),” ACM RecSys Challenge, 2026. Available: <https://www.recsyschallenge.com/2026/>