

MatToolBench: Benchmarking Multimodal Agents in Real-World Materials Science Workflows

Mei Wu^{1,2*}, Rui Xie^{1,4*}, Runyu Zhang¹, Yuqiang Li³, Tianfan Fu³,
Bo Chen^{2†}, Kai Yu^{1,2,6}, Xin Chen², Lu Chen^{1,2,5,6†}

<https://mattoolbench.github.io/>

¹X-LANCE Lab, School of Computer Science, Shanghai Jiao Tong University, Shanghai, China

²Suzhou Laboratory, Suzhou, China ³Shanghai Artificial Intelligence Laboratory, Shanghai, China

⁴State Key Laboratory for General Artificial Intelligence, BIGAI, Beijing, China

⁵Shanghai Innovation Institution, Shanghai, China ⁶Jiangsu Key Lab of Language Computing, Suzhou, China

Correspondence: chenb@szlab.ac.cn; chenlusz@sjtu.edu.cn

Abstract

Multimodal GUI agents have achieved impressive results on general software benchmarks, yet their ability to operate professional scientific software remains largely unexplored. In materials science, sparse domain-specific web data, specialized interfaces, and tacit workflow conventions create blind spots that general-purpose pretraining cannot readily bridge.

We present **MatToolBench**, the first real-environment benchmark for evaluating multimodal GUI agents on professional materials science software, comprising **204 tasks** across **10 tools** in three modalities: GUI operation, OriginPro scripting, and code-based database queries, all executed inside a Windows 11 VM. Each task is decomposed into fine-grained sub-criteria by domain experts, enabling interpretable partial-credit scoring; the GUI component of our multi-level evaluation pipeline achieves an average F1 of **0.98**. For OriginPro figure-generation tasks, we further conduct a human-LLM agreement study to validate the use of a multimodal judge for secondary aesthetic assessment.

Our experiments show that strong performance on general benchmarks does not transfer to professional scientific workflows, and that this gap is not a visual-grounding problem alone: failures arise from domain-specific operational knowledge, sparse pretraining coverage of scientific software, weak cross-tool artifact handoff, and critical states exposed only visually. Even the best model reaches only **25%** success rate on GUI tasks and **45%** on code tasks. MatToolBench therefore serves as a challenging diagnostic benchmark and real-environment testbed for data-scarce, knowledge-intensive scientific workflows.

Introduction

With the rapid development of multimodal large language models and GUI-specialized visual agents (OpenAI 2024; Hong et al. 2024), GUI agents have achieved remarkable progress in visual perception, decision-making, and grounding capabilities. They have demonstrated strong performance in general-purpose scenarios (Xie et al. 2024; Zhou et al.

*These authors contributed equally.

†Corresponding authors.

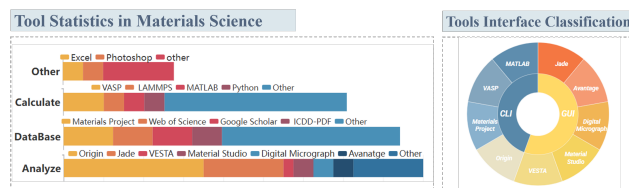


Figure 1: Survey results from 25 materials graduate students: tool usage frequency across sub-fields (left) and distribution of primary interaction interface types (right).

2024), such as web browsing (Zhou et al. 2024), desktop operation (Xie et al. 2024), or synthetic environments (Shridhar et al. 2021). However, existing research remains predominantly confined to everyday general-purpose software. Due to the scarcity of web data related to professional scientific software, the pre-trained knowledge of large models in this vertical domain is inevitably constrained, leaving it an open question whether they can exhibit similarly excellent performance in complex, real-world scientific workflows.

Materials chemistry tools, characterized by complex graphical interfaces and strong domain dependencies, offer an ideal platform for systematically testing the domain-specific capabilities of multimodal GUI agents. Compared to general-purpose scenarios, the use of materials tools exhibits distinctive complexity: (1) Highly fragmented tool ecosystem. As shown in Figure 1, a survey of materials science graduate students reveals that different research subfields and usage requirements correspond to a large number of heterogeneous tools, which often belong to different operating environments and interaction interfaces. (2) Cross-tool artifact handoff. As shown in Figure 2, complete materials analysis may require switching between tools and preserving intermediate files, paths, and scientific meaning; we include these cases as diagnostic mixed workflows rather than as the main task split. (3) Severely limited accessibility interfaces. Such professional GUI software commonly features information-dense interfaces, deeply nested menu hierarchies, and implicit feedback mechanisms for critical operation states, lacking unified and

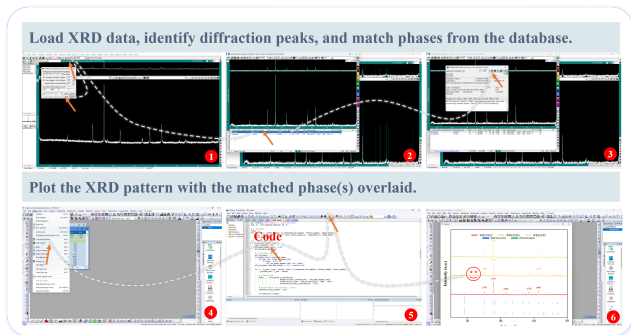


Figure 2: A complete XRD diffraction pattern requires cross-tool collaboration: raw XRD data is analyzed in JADE, then plotted and annotated in OriginPro.

standardized accessibility interfaces.

To fill this gap, we present **MatToolBench**, the first real-environment benchmark specifically centered on professional materials-science software workflows, spanning GUI-based desktop applications, scripted automation, and API-based database queries, and evaluates multimodal GUI agents across all three modalities within a unified framework. MatToolBench comprises **204 tasks** across **10 tools** covering GUI operation, OriginPro scripting (a GUI+code hybrid modality), and code-based database queries, all running inside a Windows 11 VM pre-installed with the complete target software stack. Tasks are stratified into three difficulty levels, and each is decomposed by materials science experts into multiple independent scoring sub-criteria, enabling fine-grained partial-credit scoring that reveals *where* agents fail in complex multi-step workflows rather than collapsing performance to a binary outcome.

To ensure reliable scoring, we design modality-specific assessment methods. GUI results are extracted via OCR and pixel analysis and validated against a labeled test set, where the GUI evaluator achieves an average F1 of **0.98**. OriginPro tasks use a two-stage pipeline: deterministic figure-generation/export checks for export SR, followed by LLM-assisted aesthetic assessment validated against human ratings through correlation, confidence-interval, and significance analyses. Code tasks are evaluated by matching reference outputs when deterministic answers exist.

We evaluate seven frontier multimodal models and find that professional materials science software poses a substantially harder challenge than general benchmarks suggest. Even the best-performing model reaches only 25.0% GUI SR and 45.0% code SR. The difficulty is uneven across domains: DigitalMicrograph, with its dense microscopy interface and implicit operation feedback, does not exceed 20.0% SR for any model, while OPTIMADE, whose query syntax is well-documented, reaches up to 85.0% SR. Origin tasks, which demand both GUI navigation and scripted automation, show the widest model performance spread (0.0%–68.8% SR), suggesting that hybrid modalities impose compounding capability requirements.

Ablation studies further show that domain-specific workflow guidance is decisive: for Doubao-seed-1-8, removing

hints collapses JADE SR from 25.0% to 5.0%; for GPT-5.4, MP performance drops from 15.0% to 0.0%; and for Claude-sonnet-4.6 on Origin tasks, removing full workflow support reduces the total score from 17/32 to 5.2/32.

Related Work

GUI-based Agents

GUI-agent benchmarks have expanded from early web-control environments (World of Bits (Shi et al. 2017)) to web and mobile interaction (WebArena (Zhou et al. 2024), VisualWebArena (Koh et al. 2024), WebVoyager (He et al. 2024), Mind2Web (Deng et al. 2023), AITW (Rawles et al. 2023), Mobile-Env (Zhang et al. 2023)) to desktop environments such as OSWorld/OSWorld-Verified (Xie et al. 2024; XLANG Lab 2025), WindowsAgentArena (Bonatti et al. 2024), and recent 50-step Windows or cross-platform GUI evaluations (Yang et al. 2026; Wang et al. 2026). ProSoftArena (Ai et al. 2026) covers broad professional software suites, but these benchmarks do not target materials-science workflows, specialized scientific GUIs, or domain-specific evaluation criteria. Other work benchmarks knowledge-work applications (Drouin et al. 2024), general visual agent capabilities (Liu et al. 2025b), and UI-oriented visual understanding (Baechler et al. 2024), but not materials-science tool chains. The need for software-specific knowledge is also studied in GUIDE (Xie et al. 2026), which retrieves task-relevant tutorial videos to guide planning and grounding.

Science Benchmarks

Scientific-agent benchmarks have progressed from textual reasoning (SciBench (Wang et al. 2024), MatSciBench (Zhang et al. 2025), ChemLLMBench (Guo et al. 2023)) to executable code and tool use (ScienceAgentBench (Chen et al. 2025), SciCode (Tian et al. 2024), MatTools (Liu et al. 2025a), ChemCrow (Bran et al. 2024), Coscientist (Boiko et al. 2023)), and more recently to multi-step scientific workflows (Spider2-V (Cao et al. 2024), ScienceBoard (Sun et al. 2026), LabBench (Laurent et al. 2024)). ChemCrow and Coscientist emphasize tool-augmented chemical reasoning rather than real desktop manipulation, while ScienceBoard uses realistic scientific environments but is not centered on the materials tool chain. Most prior benchmarks evaluate structured states, scripts, or logs; MATTOOLBENCH targets software whose state is often exposed only visually.

MatToolBench Environment

As illustrated in Figure 3, the MATTOOLBENCH environment is built on a Windows 11 virtual machine and exposes three interaction modalities (GUI operation, Python code generation, and OriginPro script authoring) through a unified evaluation interface.

Task Definition

Task execution is formalized as a POMDP $\langle \mathcal{S}, \mathcal{O}, \mathcal{A}, \mathcal{T}, \mathcal{R} \rangle$. At each step t the agent receives observation o_t (screenshot/execution feedback), takes action a_t , and transitions to s_{t+1} . Policy π conditions on the full history $m_t = \{g, o_0, a_0, \dots, o_t\}$ where g is the fixed natural-language instruction. Episodes

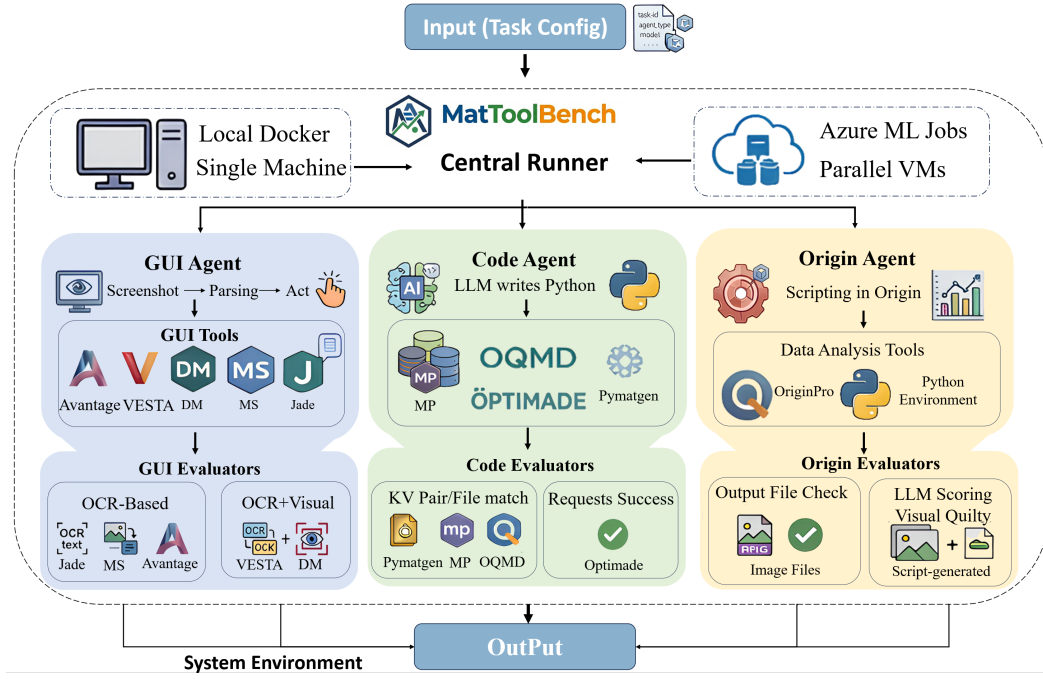


Figure 3: Overview of the MATTOOLBENCH framework. Tasks are dispatched by a central runner to one of three specialized agents: the *GUI Agent* operates materials science desktop applications (e.g., JADE, VESTA, Avantage) via screenshot perception and coordinate-based interaction; the *Code Agent* generates Python scripts to query materials database APIs (e.g., MP, OQMD, OPTIMADE); and the *Origin Agent* combines GUI interaction with OriginPro script generation for experimental data plotting. All agents execute inside a Windows 11 VM hosted within a Docker container, communicating through a Flask-based control server. Task-specific evaluators assess the final environment state after each episode.

terminate on: DONE (agent declares success), FAIL (agent declares infeasible), or step-budget exhaustion (default 50 steps). A WAIT action is available for slow GUI responses.

Environment Initialization. Each task ships with an initialization sequence (config) that is executed automatically by the environment before the episode begins, bringing the VM to a deterministic starting state. Initialization steps cover application launch (launch), file transfer (vm_file), in-software pre-configuration (execute), and GUI readiness wait (sleep), ensuring every episode starts from a reproducible initial state.

Partial-Credit Score Design. MATTOOLBENCH decomposes each task into multiple verifiable **scoring sub-criteria** (pts). At episode end, the evaluator independently scores each sub-criterion and produces a fine-grained score vector. Compared to a binary success label, this decomposed score exposes which intermediate requirements are satisfied and supports more interpretable failure analysis across multi-step workflows. Appendix A summarizes the JSON task schema.

Observation Space

GUI-Based Tasks. Each observation o_t for desktop-application tasks comprises the task instruction g , a full-desktop screenshot v_t (1920×1080), foreground-window metadata, and clipboard content. We use screenshot-based observations in all reported experiments, since this is the

most portable interface across legacy scientific GUI software whose accessibility metadata is often incomplete or unavailable.

Code Tasks. For database tasks o_t reduces to text-only execution feedback (stdout, stderr, return code); no visual signal is provided.

Origin Tasks. Origin tasks combine GUI interaction with script authoring, so the observation mirrors that of GUI-based tasks: the full-desktop screenshot v_t is used both for GUI operations (e.g., clicking menus, creating new files) and for inspecting the current OriginPro workspace to verify that the generated plot meets requirements.

Action Space

GUI Actions. GUI tasks use a hierarchical Computer interface with five sub-modules: Mouse for coordinate-based clicking, scrolling, and dragging, Keyboard for input and hotkeys, Clipboard for copy-paste, OS for program launch, and WindowManager for fuzzy-match application switching. Actions are transmitted as Python code strings executed via `exec()` on the VM. The full API is in Appendix C, Table 6.

Code and Origin Actions. Code tasks reduce to a generate-and-correct loop: the agent writes a complete Python script per step, executed in an isolated virtual environment per domain; stdout/stderr/return-code are fed back for self-

correction. Origin tasks inject scripts into OriginPro’s Code Builder via clipboard paste and F5, combining code generation with GUI navigation.

Execution Environment

The environment has two layers: an **outer** Linux Docker container hosting agent logic, screenshot capture, and evaluation services; and an **inner** 1920×1080 Windows 11 VM pre-installed with all target applications and per-domain isolated Python venvs. The code agent selects the appropriate venv by task category and activates it via `activate.bat` before running the generated script. A Flask server in the VM serves as the sole control interface, with external API calls routed through tinyproxy. The framework exposes a unified evaluation interface and supports concurrent multi-worker evaluation. Large-scale experiments are run on Azure ML using `Standard_D8_v3` compute instances (see Appendix D for infrastructure details).

The MATTOOLBENCH Benchmark

Task Statistics

MATTOOLBENCH comprises **204 tasks** spanning **10 domain-specific tools**, organized into three agent types: GUI-based (JADE, Avantage, VESTA (Momma and Izumi 2011), DM, MS), Origin-based (Origin), and code-based (MP (Jain et al. 2013; Ong et al. 2015), OQMD (Saal et al. 2013), OPTIMADE (Andersen et al. 2021), Pymatgen (Ong et al. 2013)). Brief descriptions of the ten software tools are provided in Appendix O. Table 1 summarizes the task distribution, difficulty split, and scoring sub-criteria across domains. Appendix B, Figure 7 illustrates the sub-category distribution within each domain. The complete task list with instructions and difficulty levels is provided in Appendix E. Mixed cross-tool diagnostic tasks are summarized in Appendix F. To support realistic evaluation, the VM is pre-loaded with authentic experimental data files for each GUI and Origin domain (e.g., real XPS spectra, TEM images, XRD patterns, and crystal structure files); the full inventory is listed in Appendix G. Before deployment in the VM, task workflows were cross-checked against vendor tutorials, public operation videos, and domain documentation. Similar low-level actions may recur across tasks, but the target artifacts, software states, and scoring criteria differ.

Scoring Scheme. Each task is decomposed into one or more **scoring sub-criteria** (pts), each corresponding to a distinct intermediate or final state the agent must correctly achieve. The per-task score equals the fraction of sub-criteria satisfied, enabling partial credit on multi-step tasks. A task is counted as a full success (SR = 1) only when all sub-criteria are met. **Difficulty Levels.** Tasks are stratified into three levels according to the expected number of operations and scoring sub-criteria. For GUI tasks, the number of scoring sub-criteria is the main proxy: **Easy** (1–3 pts), **Medium** (4 pts), and **Hard** (5–7 pts). For Origin and code tasks, where scoring dimensions are more standardized, E/M/H labels reflect workflow complexity and are listed in Appendix E. Mixed tasks use the same point-count proxy because each stage is evaluated through explicit artifact-level sub-criteria.

Table 1: Benchmark task statistics.

E/M/H: easy / medium / hard task counts. Mixed tasks are reported separately as cross-tool diagnostics; total sub-criteria are 454 single-tool criteria plus 30 mixed diagnostic criteria.

Cat.	Domain	#	E/M/H	Avg	Tot.
GUI	Avantage	20	14/2/4	3.25	65
	DM	20	13/5/2	3.35	67
	JADE	20	15/5/0	2.95	59
	MS	20	6/11/3	4.10	82
	VESTA	20	13/2/5	3.45	69
Origin	Origin	16	0/7/9	2.00	32
Code	MP/OQMD/ OPTIMADE/Pymatgen	80	37/41/2	1.00	80
Mixed	Mixed	8	3/4/1	3.75	30
Total		204			484

Evaluation Protocol

Evaluation follows a two-stage pipeline after each episode: a domain-specific **getter** extracts the task-relevant result, and a **metric function** scores it against a reference. GUI results are extracted via OCR or pixel analysis; code results are written to files and compared against a gold-standard directory; Origin results use deterministic export checks plus an optional Gemini-3.1-pro visual judge. Metric details appear in Appendices H and M, especially Tables 10 and 11. A step-by-step evaluation walkthrough is in Appendix L; pixel-detection method examples are in Appendix M.

Metrics. We report **Score** (normalized fraction of sub-criteria satisfied, enabling partial credit) and **SR** (success rate: all sub-criteria met). Efficiency is captured by **Steps** (mean steps across all episodes), **Steps*** (mean steps on successful episodes only), and **FTR** (false termination rate: fraction of agent-terminated episodes where SR = 0). All step counts are out of a 50-step maximum; fewer steps indicate higher efficiency.

Experiments

Experimental Setup

Models. We evaluate seven state-of-the-art multimodal models spanning five commercial providers: **Doubao-seed-1-8** (ByteDance), **Kimi-k2.5** (Moonshot), **Claude-sonnet-4.6** (Anthropic), **GPT-5.4** (OpenAI), **Qwen3-VL-235B** and **Qwen3-VL-32B** (Alibaba), and **Qwen3-VL-8B** (Alibaba). All models are accessed via API. For GUI and Origin tasks, each model is wrapped in the NAVIAGENT framework with raw screenshots as the sole visual input and a system prompt tailored to the agent type. For code tasks, no visual input is provided. The maximum step budget is 50 for all task types.

Reproducibility Details. All reported evaluations use the same VM image, Docker environment, task configuration files, input artifacts, gold/reference files, Origin reference scripts,

Table 2: Accuracy results on MATTOOLBENCH. Sc. (Score): normalized task score (%) averaged over sub-criteria; SR: success rate (%; all sub-criteria satisfied). **Bold**: best average metric within each category; ***bold italic***: best overall average metric.

Cat.	Domain	Doubao seed-1-8		Kimi k2.5		Claude sonnet-4.6		GPT 5.4		Qwen3-VL 235B		Qwen3-VL 32B		Qwen3-VL 8B	
		Sc.	SR	Sc.	SR	Sc.	SR	Sc.	SR	Sc.	SR	Sc.	SR	Sc.	SR
GUI	Avantage	44.6	35.0	32.3	20.0	41.3	35.0	32.3	15.0	30.8	10.0	26.2	15.0	18.5	15.0
	JADE	54.2	25.0	50.8	25.0	57.6	25.0	50.8	20.0	45.8	10.0	37.3	10.0	37.3	5.0
	DM	56.7	20.0	52.2	20.0	40.3	20.0	50.7	20.0	52.2	10.0	6.0	0.0	38.8	10.0
	MS	47.6	15.0	35.4	10.0	52.4	20.0	56.1	30.0	43.9	0.0	26.8	0.0	20.7	0.0
	VESTA	52.2	20.0	59.4	25.0	58.0	25.0	65.2	20.0	52.2	10.0	29.0	10.0	30.4	10.0
	Avg.	52.1	24.0	46.0	20.0	49.9	25.0	51.0	21.0	45.0	8.0	25.1	7.0	29.1	8.0
Origin	OriginPro	11.7	12.5	22.5	25.0	53.1	56.3	63.8	68.8	6.3	6.3	5.3	6.3	0.0	0.0
Code	Pymatgen	30.0	30.0	15.0	15.0	25.0	25.0	35.0	35.0	35.0	35.0	29.4	29.4	15.0	15.0
	MP	25.0	25.0	22.5	20.0	21.9	15.0	17.5	15.0	25.0	25.0	10.0	10.0	10.0	10.0
	OQMD	33.2	10.0	50.3	30.0	60.8	50.0	58.2	45.0	26.2	10.0	11.5	0.0	18.4	0.0
	OPTIMADE	70.0	70.0	80.0	80.0	75.0	75.0	85.0	85.0	20.0	20.0	30.0	30.0	10.0	10.0
	Avg.	39.6	33.8	42.0	36.2	45.7	41.3	48.9	45.0	26.6	22.5	20.2	17.4	13.4	8.8
Mixed	Mixed	50.0	12.5	60.0	37.5	56.7	25.0	50.0	25.0	50.0	25.0	33.3	25.0	53.3	37.5
Overall Avg.		43.4	26.0	43.1	27.5	48.8	33.8	51.2	34.3	34.9	14.2	21.9	11.7	21.6	8.8

decoding settings, and post-action wait time. Full runtime and reproducibility details are provided in Appendix D.

Execution Protocol. To reduce avoidable run-to-run variation in GUI evaluation, every episode starts from a reset VM state with fixed screen resolution, identical input files, the same task initialization script, and the same 50-step budget. Worker instances use copy-on-write VM storage, so parallel runs do not share application state. All success checks are performed after the episode terminates by deterministic getters or by the validated Origin quality judge described below.

Main Results

Table 2 reports Score and SR for all seven models across GUI, Origin, Code, and the diagnostic Mixed row. The overall performance level is consistently low, with the best-performing models achieving only 24–25% SR on GUI tasks and 41–45% SR on code tasks. GPT-5.4 obtains the best overall average, followed by Claude-sonnet-4.6. Compared with reported success rates above 70% on general desktop benchmarks such as OSWorld, the best MATTOOLBENCH GUI SR reaches only 25.0%, providing diagnostic evidence of a domain-transfer gap (Appendix Q). The gap is compound: models often complete isolated sub-steps, but fail to maintain domain-correct state across visual interfaces, scripts, and files. Because failure modes differ across GUI grounding, API usage, and Origin scripting, we report both category averages and domain-level breakdowns.

GUI Tasks. On GUI tasks, Doubao-seed-1-8 achieves the highest average Score of 52.1% and a near-best average SR of 24.0%, while Claude-sonnet-4.6 achieves the highest average SR of 25.0%. GPT-5.4 remains competitive, with the second-highest average Score of 51.0% and an average SR of 21.0%. Models without adequate GUI grounding (notably Qwen3-VL-32B at 7.0% avg. SR) struggle on tasks requiring precise multi-step interaction sequences.

Among individual domains, **MS** (Materials Studio) has the lowest average SR across models, while **DM** remains uniformly difficult, with no model exceeding 20% SR. These results reflect highly nested menu hierarchies and implicit feedback after operations. In contrast, **VESTA** and **JADE** show relatively higher scores, likely because these tools provide more explicit visual confirmation of state changes.

A notable gap exists between Score and SR across all GUI domains: models routinely complete a fraction of scoring sub-criteria (Score $\approx$ 50%) while rarely satisfying all of them simultaneously (SR $\approx$ 20%). This pattern confirms the utility of the partial-credit scoring mechanism, revealing that models *do* make meaningful progress on complex tasks even when they fall short of full completion.

Code Tasks. Code tasks show higher performance overall, consistent with LLMs’ strength in structured text generation. GPT-5.4 achieves the best average SR of 45.0%, followed by Claude-sonnet-4.6 (41.3%). Performance varies markedly across databases. **OPTIMADE** yields the highest SRs (20–85%), partly because its instructions can return multiple valid provider-dependent results. We therefore evaluate whether

Table 3: Ablation conditions for each task type. **Env Setup** indicates whether the task environment automatically opens Code Builder (Alt+4) before the episode starts. In `no_hint` mode this step is suppressed, requiring the agent to discover the workflow tool independently.

Type	Parameter	Value	Condition	Script	Hint	Env Setup	Injected Content
GUI	<code>gui_hint_mode</code>	<code>hint</code>	full	—	✓	—	GUI workflow instructions generic guidelines only
		<code>no_hint</code>	baseline	—	×	—	
Code	<code>code_hint_mode</code>	<code>hint</code>	full	—	✓	—	API examples & docs generic guidelines only
		<code>no_hint</code>	baseline	—	×	—	
Origin	<code>origin_mode</code> × <code>origin_hint_mode</code>	<code>script+hint</code>	full	✓	✓	✓	template + workflow workflow only generic guidelines only
		<code>no_script+hint</code>	partial	×	✓	✓	
		<code>no_script+no_hint</code>	baseline	×	×	×	

the script issues a valid query and saves valid output values, rather than exact-matching a single gold file. **MP** is more challenging (10–25% SR) as it requires accurate use of the `mp-api` Python client with evolving API conventions; results are validated by key-value pair matching within a 0.1% tolerance. **OQMD** tasks occupy a middle ground (0–50% SR), with large performance gaps between frontier models (Claude 50%, GPT 45%) and smaller ones (Qwen3-VL-8B 0%); outputs are compared against reference key-value pairs. **Pymatgen** tasks use line-by-line file comparison against a gold-standard reference.

The smaller Qwen3-VL models (32B, 8B) underperform substantially on code tasks despite reasonable GUI scores, suggesting that reliable scientific API usage requires deeper domain-specific knowledge that scales differently from general GUI interaction.

Origin Tasks. Origin tasks show the sharpest performance bifurcation. GPT-5.4 leads with 68.8% SR, followed by Claude-sonnet-4.6 at 56.3%, while all other models remain below 25%; the Qwen series reaches at most 6.3%, and Qwen3-VL-8B scores 0%. For Origin tasks, SR is determined by deterministic file-existence checks: `exact_match` verifies that the required `.png` is exported to the specified path. Correctness, completeness, and aesthetics are assessed separately by Gemini-3.1-pro as secondary quality scores rather than SR criteria. We exclude the LLM-based quality judge from SR to preserve a deterministic and reproducible definition of task success. Models must successfully use OriginPro Code Builder, generate a valid Python script, and save the file before visual judging; otherwise both scores are zero. Mid-tier models such as Kimi-k2.5 (25.0%) and Doubao-seed-1-8 (12.5%) show mostly binary outcomes, confirming that failures are concentrated in script execution rather than visual assessment.

Mixed Cross-Tool Tasks. The eight Mixed tasks are reported only as a diagnostic row for artifact handoff across `code`→`code`, `code`→`GUI`, `GUI`→`Origin`, and `GUI`→`GUI` stages. We do not use this small split as a headline ranking. Their scores are relatively high because code-first workflows can earn partial credit by producing verifiable intermediate files, while full SR remains lower when GUI-export artifacts cannot be located, parsed, or reused by the downstream tool. **Efficiency.** Appendix J, Table 13 reports Steps, Steps* and FTR. GUI tasks consume approximately 35–42 steps on aver-

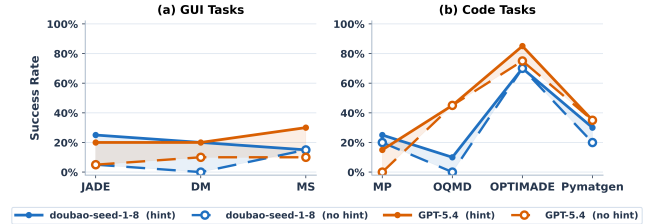


Figure 4: Ablation study: SR comparison between **hint** (solid) and **no_hint** (dashed) prompt modes for Doubao-seed-1-8 (blue) and GPT-5.4 (orange). Left: GUI tasks. Right: Code tasks. Shaded bands indicate the gap between hint and no_hint conditions.

age, reflecting frequent exploratory actions, while code tasks use only approximately 1–4 steps since each step is a complete script execution. High FTR values (40–70%) on GUI tasks reveal a persistent premature-termination failure mode across all models. Qualitative trajectory inspection identifies four recurring failure patterns: GUI grounding errors, premature termination, deadlock loops, and domain knowledge gaps, each illustrated with real trajectory screenshots in Appendix P.

Ablation Study

Table 3 summarizes the ablation conditions. We ablate the effect of domain-specific prompt hints (`hint_mode`) by comparing the full agent prompt against a `no_hint` baseline that omits all domain-specific workflow instructions, evaluated on Doubao-seed-1-8 and GPT-5.4. The agent prompt structure for each modality is detailed in Appendix N.

GUI Tasks. Figure 4 (left) shows that removing hints consistently degrades GUI performance. Doubao-seed-1-8 drops from 25.0% to 5.0% SR on JADE and from 20.0% to 0.0% on DM; GPT-5.4 shows similar trends. Advantage and VESTA are not included in the ablation because their workflows are sufficiently self-evident from the interface and do not require additional guidance. The main failures are tool-specific startup traps: JADE opens a reference-pattern dialog that blocks task-file loading, while DM starts with a floating panel that can occlude the imported filename and disrupt file-import verification.

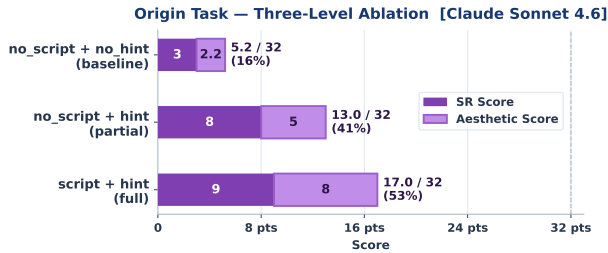


Figure 5: Origin three-level ablation for Claude Sonnet 4.6. Bars show deterministic success points (dark purple, max 16 pts) and Aesthetic Score (light purple, max 16 pts) for each condition. Total scores and percentages are annotated at bar ends.

Code Tasks. Figure 4 (right) shows a more nuanced picture. For OPTIMADE, both models retain nearly the same SR with and without hints (Doubao-seed-1-8: 70% $\rightarrow$ 70%; GPT-5.4: 85% $\rightarrow$ 75%), suggesting that its standardized query syntax is sufficiently covered in pretraining data. However, on MP and OQMD, removing hints causes larger drops (GPT-5.4 MP: 15% $\rightarrow$ 0%), because the code agent prompt includes one-shot API usage examples; without these examples, models must reconstruct library-specific conventions from memory, which is less reliable for evolving or niche APIs. This asymmetry suggests that hints mainly help when the tool convention is niche or unstable rather than broadly standardized.

Origin Tasks. Origin tasks present a unique challenge: the standard workflow requires the agent to open OriginPro’s built-in Code Builder editor via `Alt+4` and execute a Python script to generate figures programmatically. We ablate three levels of workflow support using the conditions in Table 3. Removing only the template script mostly affects visual quality, because the agent still knows to use Code Builder; removing the hint as well often pushes the agent toward GUI-only exploration, reducing both file generation and aesthetic quality.

Figure 5 confirms this: deterministic success drops from 9 to 8 and then to 3 at baseline — a **67% reduction**. Aesthetic Score follows the same trend (8 $\rightarrow$ 5 $\rightarrow$ 2.2), and the combined total score falls from 17/32 (53%) to 5.2/32 (16%) at baseline. Representative output figures under both conditions are shown in Appendix K (Figure 9).

Evaluator Reliability

GUI Evaluator

For each GUI domain, we apply task-specific evaluators to the collected trajectory final states, forming an $n \times n$ cross-evaluation matrix ($n = 20$). Each final state is evaluated against every task configuration in the same domain, measuring both matched detection and cross-task false positives. We report **Score** agreement over sub-criterion labels and **SR** agreement over task-level success labels; Table 4 summarizes the results, with per-task details in Appendix I.

Code Evaluator

Code tasks use deterministic checks whenever possible: Py-matgen uses reference-file comparison, while MP/OQMD use

Table 4: GUI evaluator reliability under an $n \times n$ cross-evaluation protocol ($n = 20$). DM uses the filtered audit described in Appendix I.

Domain	Score				SR			
	Acc.	Prec.	Rec.	F1	Acc.	Prec.	Rec.	F1
JADE	1.00	1.00	0.99	0.99	1.00	1.00	1.00	1.00
MS	1.00	0.99	1.00	0.99	1.00	1.00	1.00	1.00
Avantage	0.99	0.98	0.98	0.98	1.00	0.98	1.00	0.99
VESTA	0.98	0.94	0.99	0.97	0.99	0.94	1.00	0.97
DM	0.99	0.99	0.94	0.96	1.00	0.98	1.00	0.99

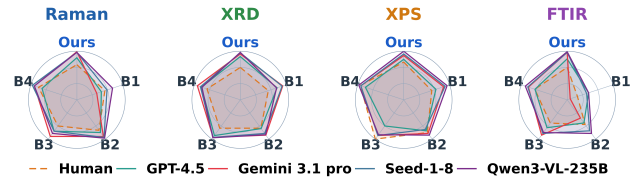


Figure 6: Radar chart comparing Origin figure quality across four task types (Raman, XRD, XPS, FTIR). Subplots are task types; axes are visual correctness, aesthetic quality, and task completeness (1–5). Dashed lines are means from 9 humans; solid lines are four LLM judges.

tolerance-based value matching. The evaluator also checks that generated outputs are parseable, valid, and task-specific, so malformed files or unrelated values do not receive credit. For provider-dependent OPTIMADE, we require constrained queries with saved valid parsed output values rather than a single gold file.

Origin Aesthetic Evaluator

Origin SR is determined by deterministic file-existence `exact_match` checks on the expected exported figure path; the LLM judge provides only a secondary aesthetic score. We validate four judges on 20 human-rated conditions and 43 generated Origin figures. Detailed statistics are reported in Appendix I, Table 14. Qwen3-VL-235B has a slightly higher Pearson correlation than Gemini-3.1-pro, but the Williams dependent-correlation test shows no significant difference ($\Delta r = 0.043$, $t = 0.582$, $p = 0.569$). Since Qwen3-VL-235B also gives more score-saturated ratings, we use Gemini-3.1-pro as the more conservative secondary judge to reduce score inflation. This choice does not affect any reported SR.

Conclusion

We introduced MATTOOLBENCH, a real-environment benchmark with 204 tasks across 10 materials-science tools, spanning GUI, OriginPro, and code workflows. Results provide diagnostic evidence of a domain-transfer gap from general benchmarks to scientific software: the best models achieve only 25% SR on GUI tasks and 45% on code tasks. The gap

between partial scores and full success reveals end-to-end failures. Ablations show that workflow support is crucial, especially when interfaces and APIs are sparsely represented in pretraining. Deterministic success criteria and validated quality judges enable reliable, interpretable evaluation across workflows. MATTOOLBENCH offers a practical testbed for improving scientific agents. Limitations and broader impacts are discussed in Appendix R.

Open-source repository:

<https://github.com/meiwu5/MatToolBench>.

References

- Ai, J.; Feng, Y.; Zhang, F.; Sun, J.; Li, Z.; Li, C.; Chang, Y.; Wu, W.; Wang, R.; Zhai, M.; and Zhang, K. 2026. ProSoft-Arena: Benchmarking Hierarchical Capabilities of Multimodal Agents in Professional Software Environments. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 34586–34595.
- Andersen, C. W.; Armiento, R.; Blokhin, E.; Conduit, G. J.; Dwaraknath, S.; Evans, M. L.; Fekete, A.; Gopakumar, A.; Grazulis, S.; Merkys, A.; Mohamed, F.; Oses, C.; Pizzi, G.; Rignanese, G.-M.; Scheidgen, M.; Talirz, L.; Toher, C.; Winston, D.; Aversa, R.; Choudhary, K.; Colinet, P.; Curtarolo, S.; Di Stefano, D.; Draxl, C.; Er, S.; Esters, M.; Fornari, M.; Giantomassi, M.; Govoni, M.; Hautier, G.; Hegde, V. I.; Horton, M. K.; Huck, P.; Huhs, G.; Hummelshoj, J.; Kariryaa, A.; Kozinsky, B.; Kumbhar, S.; Liu, M.; Marzari, N.; Morris, A. J.; Mostofi, A. A.; Persson, K. A.; Petretto, G.; Purcell, T.; Ricci, F.; Rose, F.; Scheffler, M.; Speckhard, D.; Uhrin, M.; Vaitkus, A.; Villars, P.; Waroquiers, D.; Wolverton, C.; Wu, M.; and Yang, X. 2021. OPTIMADE, an API for Exchanging Materials Data. *Scientific Data*, 8(1): 217.
- Baechler, G.; Sunkara, S.; Wang, M.; Zubach, F.; Mansoor, H.; Etter, V.; Cărbune, V.; Lin, J.; Chen, J.; and Sharma, A. 2024. ScreenAI: A Vision-Language Model for UI and Infographics Understanding. In Larson, K., ed., *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence, IJCAI-24*, 3058–3068. International Joint Conferences on Artificial Intelligence Organization. Main Track.
- Boiko, D. A.; MacKnight, R.; Kline, B.; and Gomes, G. 2023. Autonomous chemical research with large language models. *Nature*, 624(7992): 570–578.
- Bonatti, R.; Zhao, D.; Bonacci, F.; Dupont, D.; Abdali, S.; Li, Y.; Lu, Y.; Wagle, J.; Koishida, K.; Bucker, A.; Jang, L.; and Hui, Z. 2024. Windows Agent Arena: Evaluating Multi-Modal OS Agents at Scale. *arXiv:2409.08264*.
- Bran, A. M.; Cox, S.; Schilter, O.; Baldassari, C.; White, A. D.; and Schwaller, P. 2024. Augmenting large language models with chemistry tools. *Nature Machine Intelligence*, 6(5): 525–535.
- Cao, R.; Lei, F.; Wu, H.; Chen, J.; Fu, Y.; Gao, H.; Xiong, X.; Zhang, H.; Mao, Y.; Hu, W.; Xie, T.; Xu, H.; Zhang, D.; Wang, S.; Sun, R.; Yin, P.; Xiong, C.; Ni, A.; Liu, Q.; Zhong, V.; Chen, L.; Yu, K.; and Yu, T. 2024. Spider2-V: How Far Are Multimodal Agents From Automating Data Science and Engineering Workflows? In *NeurIPS*.
- Chen, Z.; Chen, S.; Ning, Y.; Zhang, Q.; Wang, B.; Yu, B.; Li, Y.; Liao, Z.; Wei, C.; Lu, Z.; Dey, V.; Xue, M.; Baker, F. N.; Burns, B.; Adu-Ampratwum, D.; Huang, X.; Ning, X.; Gao, S.; Su, Y.; and Sun, H. 2025. ScienceAgentBench: Toward Rigorous Assessment of Language Agents for Data-Driven Scientific Discovery. In *ICLR*.
- Deng, X.; Gu, Y.; Zheng, B.; Chen, S.; Stevens, S.; Wang, B.; Sun, H.; and Su, Y. 2023. Mind2Web: Towards a Generalist Agent for the Web. In *NeurIPS*.
- Drouin, A.; Gasse, M.; Caccia, M.; Laradji, I. H.; Del Verme, M.; Marty, T.; Vazquez, D.; Chapados, N.; and Lacoste, A. 2024. WorkArena: How Capable are Web Agents at Solving Common Knowledge Work Tasks? In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, 11642–11662. PMLR.
- Guo, T.; Guo, K.; Nan, B.; Liang, Z.; Guo, Z.; Chawla, N. V.; Wiest, O.; and Zhang, X. 2023. What can Large Language Models do in chemistry? A comprehensive benchmark on eight tasks. In *Advances in Neural Information Processing Systems*, volume 36, 59662–59688. Curran Associates, Inc.
- He, H.; Yao, W.; Ma, K.; Yu, W.; Dai, Y.; Zhang, H.; Lan, Z.; and Yu, D. 2024. WebVoyager: Building an End-to-End Web Agent with Large Multimodal Models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 6864–6890. Bangkok, Thailand: Association for Computational Linguistics.
- Hong, W.; Wang, W.; Lv, Q.; Xu, J.; Yu, W.; Ji, J.; Wang, Y.; Wang, Z.; Dong, Y.; Ding, M.; and Tang, J. 2024. CogAgent: A Visual Language Model for GUI Agents. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 14281–14290.
- Jain, A.; Ong, S. P.; Hautier, G.; Chen, W.; Richards, W. D.; Dacek, S.; Cholia, S.; Gunter, D.; Skinner, D.; Ceder, G.; and Persson, K. A. 2013. Commentary: The Materials Project: A Materials Genome Approach to Accelerating Materials Innovation. *APL Materials*, 1(1): 011002.
- Koh, J. Y.; Lo, R.; Jang, L.; Duvvur, V.; Lim, M.; Huang, P.-Y.; Neubig, G.; Zhou, S.; Salakhutdinov, R.; and Fried, D. 2024. VisualWebArena: Evaluating Multimodal Agents on Realistic Visual Web Tasks. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 881–905. Bangkok, Thailand: Association for Computational Linguistics.
- Laurent, J. M.; Janizek, J. D.; Ruzo, M.; Hinks, M. M.; Hammerling, M. J.; Narayanan, S.; Ponnampati, M.; White, A. D.; and Rodriques, S. G. 2024. LAB-Bench: Measuring Capabilities of Language Models for Biology Research. *arXiv preprint arXiv:2407.10362*.
- Liu, S.; Hu, B.; Ye, B.; Xu, J.; Srolovitz, D. J.; and Wen, T. 2025a. MatTools: Benchmarking Large Language Models for Materials Science Tools. *arXiv preprint arXiv:2505.10852*.
- Liu, X.; Zhang, T.; Gu, Y.; Iong, I. L.; Song, X.; Xu, Y.; Zhang, S.; Lai, H.; Sun, J.; Yang, X.; Yang, Y.; Qi, Z.; Yao, S.; Sun, X.; Cheng, S.; Zheng, Q.; Yu, H.; Zhang, H.; Hong, W.; Ding, M.; Pan, L.; Gu, X.; Zeng, A.; Du, Z.; Song, C. H.; Su, Y.; Dong, Y.; and Tang, J. 2025b. VisualAgentBench: Towards

- Large Multimodal Models as Visual Foundation Agents. In *International Conference on Learning Representations*, volume 2025, 95650–95707.
- Momma, K.; and Izumi, F. 2011. VESTA 3 for Three-Dimensional Visualization of Crystal, Volumetric and Morphology Data. *Journal of Applied Crystallography*, 44(6): 1272–1276.
- Ong, S. P.; Cholia, S.; Jain, A.; Brafman, M.; Gunter, D.; Ceder, G.; and Persson, K. A. 2015. The Materials Application Programming Interface (API): A simple, flexible and efficient API for materials data based on REpresentational State Transfer (REST) principles. *Computational Materials Science*, 97: 209–215.
- Ong, S. P.; Richards, W. D.; Jain, A.; Hautier, G.; Kocher, M.; Cholia, S.; Gunter, D.; Chevrier, V. L.; Persson, K. A.; and Ceder, G. 2013. Python Materials Genomics (pymatgen): A Robust, Open-Source Python Library for Materials Analysis. *Computational Materials Science*, 68: 314–319.
- OpenAI. 2024. GPT-4o System Card. *arXiv preprint arXiv:2410.21276*.
- Rawles, C.; Li, A.; Rodriguez, D.; Riva, O.; and Lillicrap, T. 2023. Android in the Wild: A Large-Scale Dataset for Android Device Control. In *NeurIPS*.
- Saal, J. E.; Kirklin, S.; Aykol, M.; Meredig, B.; and Wolverton, C. 2013. Materials Design and Discovery with High-Throughput Density Functional Theory: The Open Quantum Materials Database (OQMD). *JOM*, 65: 1501–1509.
- Shi, T.; Karpathy, A.; Fan, L.; Hernandez, J.; and Liang, P. 2017. World of Bits: An Open-Domain Platform for Web-Based Agents. In *ICML*, 3135–3144.
- Shridhar, M.; Yuan, X.; Côté, M.-A.; Bisk, Y.; Trischler, A.; and Hausknecht, M. 2021. ALFWorld: Aligning Text and Embodied Environments for Interactive Learning. In *ICLR*.
- Sun, Q.; Liu, Z.; Ma, C.; Ding, Z.; Xu, F.; Yin, Z.; Zhao, H.; Wu, Z.; Cheng, K.; Liu, Z.; Wang, J.; Li, Q.; Tang, X.; Xie, T.; Feng, X.; Li, X.; Kao, B.; Wang, W.; Qi, B.; Kong, L.; and Wu, Z. 2026. ScienceBoard: Evaluating Multimodal Autonomous Agents in Realistic Scientific Workflows. In *ICLR*.
- Tian, M.; Gao, L.; Zhang, S. D.; Chen, X.; Fan, C.; Guo, X.; Haas, R.; Ji, P.; Krongchon, K.; Li, Y.; Liu, S.; Luo, D.; Ma, Y.; Tong, H.; Trinh, K.; Tian, C.; Wang, Z.; Wu, B.; Xiong, Y.; Yin, S.; Zhu, M.; Lieret, K.; Lu, Y.; Liu, G.; Du, Y.; Tao, T.; Press, O.; Callan, J.; Huerta, E.; and Peng, H. 2024. SciCode: A Research Coding Benchmark Curated by Scientists. In *NeurIPS*.
- Wang, X.; Hu, Z.; Lu, P.; Zhu, Y.; Zhang, J.; Subramaniam, S.; Loomba, A. R.; Zhang, S.; Sun, Y.; and Wang, W. 2024. SciBench: Evaluating College-Level Scientific Problem-Solving Abilities of Large Language Models. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, 50622–50649. PMLR.
- Wang, X.; Wu, Z.; Xie, J.; Ding, Z.; Yang, B.; Li, Z.; Liu, Z.; Li, Q.; Dong, X.; Chen, Z.; Wang, W.; Zhao, X.; Chen, J.; Duan, H.; Xie, T.; Yang, C.; Su, S.; Yu, Y.; Zhang, Y.; Yue, X.; Su, W.; Zhu, X.; Shen, W.; Dai, J.; and Wang, W. 2026. MMBench-GUI: A Unified Hierarchical Evaluation Framework for Multi-Platform GUI Agents. In *CVPR*, 6239–6248.
- Xie, R.; Gao, Z.; Shi, C.; Shang, Z.; Chen, L.; and Li, Q. 2026. GUIDE: Resolving Domain Bias in GUI Agents through Real-Time Web Video Retrieval and Plug-and-Play Annotation. *arXiv preprint arXiv:2603.26266*.
- Xie, T.; Zhang, D.; Chen, J.; Li, X.; Zhao, S.; Cao, R.; Hua, T. J.; Cheng, Z.; Shin, D.; Lei, F.; Liu, Y.; Xu, Y.; Zhou, S.; Savarese, S.; Xiong, C.; Zhong, V.; and Yu, T. 2024. OSWorld: Benchmarking Multimodal Agents for Open-Ended Tasks in Real Computer Environments. In *NeurIPS*.
- XLANG Lab. 2025. Introducing OSWorld-Verified. Blog post. Published July 28, 2025.
- Yang, B.; Jin, K.; Wu, Z.; Liu, Z.; Sun, Q.; Li, Z.; Xie, J.; Liu, Z.; Xu, F.; Cheng, K.; Wang, Y.; Li, Q.; Qiao, Y.; Wang, Z.; and Ding, Z. 2026. OS-Symphony: A Holistic Framework for Robust and Generalist Computer-Using Agents. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics*, 22300–22330.
- Zhang, D.; Shen, Z.; Xie, R.; Zhang, S.; Xie, T.; Zhao, Z.; Chen, S.; Chen, L.; Xu, H.; Cao, R.; and Yu, K. 2023. Mobile-Env: Building Qualified Evaluation Benchmarks for LLM-GUI Interaction. *arXiv preprint arXiv:2305.08144*.
- Zhang, J.; Gan, J.; Wang, X.; Jia, Z.; Gu, C.; Chen, J.; Zhu, Y.; Ma, M. D.; Zhou, D.; Li, L.; and Wang, W. 2025. MatSciBench: Benchmarking the Reasoning Ability of Large Language Models in Materials Science. *arXiv preprint arXiv:2510.12171*.
- Zhou, S.; Xu, F. F.; Zhu, H.; Zhou, X.; Lo, R.; Sridhar, A.; Cheng, X.; Ou, T.; Bisk, Y.; Fried, D.; Alon, U.; and Neubig, G. 2024. WebArena: A Realistic Web Environment for Building Autonomous Agents. In *ICLR*.

Appendix A. Task Configuration Schema

Each task is stored as a JSON file in a per-domain directory. The schema separates the agent-facing instruction, VM initialization, runtime metadata, and sub-criterion evaluators, making task execution reproducible and assignment explicit. Table 5 summarizes the core fields in each task configuration.

Table 5: Core fields in a task configuration.

Field	Content
id, snapshot	Task identifier and VM/software snapshot.
instruction	Natural-language goal shown to the agent.
config	Ordered setup actions: launch, vm_file, execute, sleep.
trajectory, related_apps	Output path and involved applications.
difficulty	Expert-assigned easy/medium/hard label.
evaluator	Aligned func, result, target, and conjunction logic.
workflow_stages	Mixed-task stages with domain, agent type, goal, and artifacts.

The evaluator field defines the partial-credit score structure. GUI tasks pair domain-specific getters, such as file-open, visual-state, pixel, or OCR checks, with metric functions. Origin tasks add a secondary figure-quality score after deterministic file checks. Code tasks use key-value or file-output matching when deterministic references exist, while OPTIMADE uses valid-output checks because provider results may vary. Mixed tasks add `workflow_domains` and `workflow_stages` to evaluate artifact transfer between code and GUI tools.

Listing 1 shows a representative task configuration, shortened from an OriginPro example. The same schema is used across GUI, code, Origin, and mixed tasks, with domain-specific initialization and evaluator items.

Listing 1: Abbreviated task JSON example.

```
{
  "id": "5ab55722-9775-4074-ae3c-ca56028acc5f-wos",
  "snapshot": "originlab",
  "instruction": "Open ... CE2.ogwu, plot a voltage-time curve,
    annotate '5 mA cm^-2, 5 mAh cm^-2', and save CE2.png.",
  "config": [
    {
      "type": "launch",
      "parameters": {
        "command": ["C:\\Program Files\\OriginLab\\Origin2026\\Origin64.exe"]
      }
    },
    {
      "type": "sleep",
      "parameters": {
        "seconds": 30
      }
    },
    {
      "type": "execute",
      "parameters": {
        "command": ["python", "-c", "pyautogui.hotkey('ctrl','o')"]
      }
    }
  ],
  "related_apps": ["Origin"],
  "evaluator": {
    "func": ["exact_match", "pass_through"],
    "result": [
      {
        "type": "file_exists",
        "file_path": "C:\\Users\\Docker\\Desktop\\setup\\output_result\\origin\\CE2.png",
        "description": "The image is a galvanostatic long-cycle voltage-time curve."
      },
      {
        "type": "origin_aesthetic_score",
        "file_path": "C:\\Users\\Docker\\Desktop\\setup\\output_result\\origin\\CE2.png",
        "description": "The image is a galvanostatic long-cycle voltage-time curve."
      }
    ]
  },
  "expected": [{"type": "rule", "rules": {"expected": true}}, null],
  "func_conj": "and",
  "difficulty": "medium"
}
```

Appendix B. Additional Task Distribution

Figure 7 complements Table 1 by showing the distribution of tasks across 10 tool domains and their operational sub-categories. The outer ring reports domain-level proportions, while the inner segments summarize the composition of task families within each domain.



Figure 7: Task distribution across 10 domains and their sub-categories.

Distribution and Taxonomy

The distribution is intentionally non-uniform. GUI-intensive tools are divided into finer categories because their difficulty depends strongly on visual states, modal dialogs, and tool-specific interaction conventions. In contrast, code and database tasks are grouped mainly by query or structure-analysis intent, where variation arises from API constraints, returned fields, and output validation rather than interface manipulation.

The taxonomy covers three major patterns of scientific work. First, **spectroscopy tasks** include file import, peak/background processing, axis or view adjustment, and report or export operations. Second, **crystal-structure tasks** involve display modification, atom or boundary editing, orientation adjustment, and structural inspection. Third, **database tasks** focus on filtering, property extraction, structure retrieval, and validation of saved outputs. This taxonomy enables the partial-credit criteria to assess both intermediate actions and final scientific outputs, providing a more fine-grained view of agent performance than binary success alone.

Appendix C. Complete Action Interface

The `Computer` object provides a unified Python API for agent-VM interaction. Commands are sent via HTTP POST and executed server-side through a compact action space covering mouse, keyboard, clipboard, program control, and window management. Table 6 summarizes the complete action interface and its execution constraints.

Table 6: Complete `Computer` action interface and execution constraints on the Windows VM. Calls are sent as Python strings via HTTP POST and executed server-side with `exec(code, {"computer": computer})`.

Module	Method	Parameters	Description
mouse	<code>move_id(id)</code>	Element ID (int)	Optional; available only when SoM or accessibility-tree observations are enabled. Not used in the reported screenshot-only experiments
	<code>move_abs(x, y)</code>	Normalized coords $\in [0, 1]$	Move cursor to a relative screen position; (0, 0)=top-left, (1, 1)=bottom-right
	<code>single_click()</code>	—	Left single-click at the current cursor position
	<code>double_click()</code>	—	Left double-click at the current cursor position
	<code>right_click()</code>	—	Right-click at the current cursor position
	<code>scroll(dir)</code>	"up" / "down"	Scroll the active window by 400 units in the given direction
	<code>drag(x, y)[†]</code>	Screen pixel coords (int)	Left-button drag from current position to the target screen coordinates
keyboard	<code>write(text)[‡]</code>	ASCII string	Type text character-by-character via <code>pyautogui.write()</code> ; suitable only for short labels and filenames
	<code>press(key)</code>	Key name or combo	Press a single key (e.g. "f5", "enter") or hotkey combo (e.g. "ctrl+a", "alt+4")
clipboard	<code>copy_text(text)</code>	Unicode string (optional)	Copy <i>text</i> to the system clipboard via <code>pyperclip.copy()</code> ; supports full Unicode. If called with no argument, sends Ctrl+C to copy the current selection
	<code>paste()</code>	—	Paste clipboard content at the current focus via Ctrl+V
	<code>view_clipboard()</code>	—	Return the current clipboard text as a Python string (via <code>pyperclip.paste()</code>)
	<code>copy_image(id)</code>	Element ID (int)	Crop the SoM element's bounding box from the screenshot and write it to the clipboard as a DIB bitmap via <code>win32clipboard</code>
	image-copy note	Element ID + description	Used only when the observation includes SoM element IDs; screenshot-only agents cannot call ID-based image copy reliably
os	<code>open_program(name)</code>	Executable name (str)	Launch the named program via <code>start</code> , then maximize and bring to foreground; no-op if not installed
	<code>maximize_window()</code>	Window handle (opt.)	Maximize the specified window, or the current foreground window if omitted, via <code>win32gui</code>
	<code>is_installed(name)</code>	Executable name (str)	Return <code>True</code> if the program is found in the Windows registry or PATH
	program policy	Application alias	Prefer explicit program launch or window switching over desktop-icon clicking to reduce dependence on icon layout
window _manager	<code>switch_to_application(name)</code>	App name (str)	Restore and maximize the closest-matching visible window (fuzzy match via <code>difflib</code>), then bring it to the foreground
	<code>find_open_applications()</code>	—	Return a list of title strings for all currently visible, non-empty windows
	focus recovery	App name or title fragment	Used after setup, file dialogs, or script execution to recover the intended foreground application before the next action
runtime	transport	HTTP POST request	The client sends one Python code block per step to the VM-side executor; the executor returns status, stdout, stderr, and any exception message
	namespace	<code>computer</code> object	The executed code receives only the exposed <code>Computer</code> object and standard Python runtime needed for action composition
	coordinate frame	Normalized or pixel coords	<code>move_abs</code> uses normalized screen coordinates, while <code>drag</code> uses raw screen pixels; mixing the two is a common failure mode
	Unicode policy	Clipboard preferred	Long scripts, non-ASCII text, and multi-line commands should be copied through the clipboard rather than typed through <code>keyboard.write</code>
	error handling	JSON status payload	Invalid method calls, bad parameters, or backend exceptions return an error status; the episode continues unless the agent terminates
	termination	Agent-level signal	The agent marks completion with the framework-level <code>DONE</code> decision; evaluators then capture a fresh VM state and score sub-criteria

Appendix D. Execution Environment and Reproducibility

This appendix records the runtime settings needed to reproduce the main evaluation. All large-scale experiments reported in this paper were executed on **Microsoft Azure Machine Learning** using the `run_azure.py` launcher. Each evaluation job runs inside a Docker container on an Azure ML **Compute Instance** of type `Standard_D8_v3` (8 vCPUs, 28 GiB RAM), which provides sufficient resources to host the outer Linux container together with the inner QEMU-based Windows 11 VM.

Episode initialisation. Each task is launched from its JSON configuration, which specifies the user instruction, setup actions, target files, and scoring criteria. Before the agent acts, the VM is reset to the task-specific initial state using the same input files and screen resolution. The agent then receives observations until it issues `DONE` or exhausts the 50-step budget. Post-hoc evaluation is run only after the episode terminates, so intermediate rewards do not alter the agent policy during the benchmark run.

Parallelism and isolation. The launcher spawns one Compute Instance per worker and distributes tasks across workers via the `num_workers` parameter in `experiments.json`. Each instance is created on-demand at job start and deleted after the job completes, keeping costs proportional to actual evaluation time. For local multi-worker runs, each worker uses a copy-on-write overlay derived from the same base VM image. Thus, parallel workers share neither application state nor generated output files.

Storage. Task configuration files, VM disk images, and result artifacts are stored in **Azure Blob Storage** and mounted to each Compute Instance at runtime. This decouples storage from compute and allows results to be incrementally synchronised to a local machine via `sync_results.py` while jobs are still running.

Startup sequence. Each Compute Instance runs `compute-instance-startup.sh`, which (1) pulls the `mattoolbench/mattoolbench:latest` Docker image, (2) mounts the Azure Blob datastore, and (3) launches the evaluation container with the appropriate task configuration. External API calls are routed through a `tinypoxy` instance injected into the container environment on boot.

API and decoding settings. Unless otherwise stated for ablations, all model calls use the same decoding and execution settings in Table 7. All agent types use the same maximum output-token budget.

Table 7: Shared API and execution settings for main experiments.

Parameter	Value
Observation input	Raw screenshot for GUI/Origin; text feedback for code
Accessibility/SoM	Not used in main experiments; screenshot-only observations
Action interface	Python <code>Computer/PyAutoGUI</code> actions or generated Python scripts
Temperature / top-p	1.0 / 0.9
Max output tokens	8000 for GUI/code; 8000 for Origin
Step budget	50 agent steps per task
Post-action wait	3 seconds before the next observation
Origin judge	Gemini-3.1-pro-preview for secondary aesthetic scoring
Released artifacts	Task JSON, input files, gold/reference outputs, Origin scripts
Parallel isolation	One copy-on-write VM storage per worker

Agent wrappers. GUI and Origin tasks use the same NAVI-AGENT loop with screenshots as visual input. The GUI agent emits calls to the `Computer` action API, whereas the Origin agent interacts with `OriginPro` and may generate longer script fragments. Code tasks use a text-only code agent: the prompt contains the task instruction and available files, and the generated Python program is executed in the domain-specific environment configured for that task.

Evaluation and aggregation. For GUI tasks, final states are extracted by deterministic OCR, pixel, SSIM, or file-state getters, depending on the task configuration. For Origin tasks, success is determined by deterministic output-file checks; the LLM aesthetic judge only contributes a secondary quality score. For code tasks, outputs are checked against reference files, numeric/key-value tolerances, or validated saved values when the underlying database provider may return non-unique records. A task is counted as successful only when all required sub-criteria are satisfied; the reported Score is the sum of partial-credit sub-criteria normalized by the available points.

Reproducibility controls. To limit avoidable infrastructure variation, all evaluations use the same VM image, Docker image, task setup scripts, input files, decoding settings, step budget, and post-action wait time. The released benchmark package includes task JSON files, input artifacts, gold/reference outputs, evaluator definitions, and Origin reference scripts, allowing the same environment and scoring pipeline to be redeployed.

Comparison with local execution. Table 8 summarises the key differences between local and Azure execution modes.

Table 8: Local vs. Azure execution at a glance.

Aspect	Local	Azure
Entry point	<code>run-local.sh</code>	<code>run_azure.py</code>
Storage	Local disk (<code>vm/storage/</code>)	Azure Blob Storage
Concurrency	Serial, single machine	Parallel ML Jobs (<code>num_workers</code>)
Docker image	Built locally	Pulled from registry
VM image	Persisted locally	Uploaded to datastore
Compute type	Any local machine	<code>Standard_D8_v3</code>

Appendix E. Complete Task List

This appendix lists the 196 individually specified single-tool tasks in **MATTOOLBENCH**; the 8 mixed cross-tool diagnostic tasks are reported separately in the main text. Each entry is formatted as **Domain-Difficulty** followed by the shortened

task instruction, where **E**, **M**, and **H** denote easy, medium, and hard.

Avantage-E Import O1s Scan.VGD, select Display Modes to show data in stacked graph mode.

Avantage-H Import C1s Scan.VGD + C1s Scan2.VGD; copy spectrum to window B; apply Add Constant 3333; arrange vertically; save.

Avantage-E Import Zn2p Scan.VGD, adjust X-Axis font size.

Avantage-E Import Zn2p Scan.VGD, reverse the X-axis direction.

Avantage-E Import Zn2p Scan.VGD, set X-Axis title colour.

Avantage-E Import O1s Scan.VGD, perform charge correction.

Avantage-E Import XPS Survey.VGD, copy the spectrum to window B.

Avantage-E Import C1s Scan.VGD, adjust grid properties.

Avantage-E Import Zn2p Scan.VGD, perform automatic peak fitting.

Avantage-E Import O1s Scan.VGD, intelligently add O1s background.

Avantage-H Import C1s Scan.VGD, copy spectrum to window B; apply Add Constant; arrange vertically; save as stacked_3333.vgp.

Avantage-E Import C1s Scan.VGD + C1s Scan2.VGD, display both spectra.

Avantage-E Import XPS Survey.VGD, smooth the spectrum.

Avantage-H Import C1s Scan.VGD, add and lock a Shirley background.

Avantage-E Import C1s Scan.VGD, double-click to zoom.

Avantage-M Import O1s Scan.VGD, intelligently add background.

Avantage-E Import C1s Scan.VGD (file open only).

Avantage-M Import C1s Scan.VGD + C1s Scan2.VGD, configure comparison view.

Avantage-E Import Zn2p Scan.VGD, add background using manual method.

Avantage-H Import O1s Scan.VGD, add a Peak (range start/end), set peak parameters, save.

DM-E Import dm4.dm3, use Box tool to draw a frame on the image.

DM-E Import dm2.dm3, use RectangleROI at centre of image.

DM-E Import dm5.dm3, use Oval tool to draw an ellipse.

DM-H Import dm7.dm3, perform FFT and inverse FFT.

DM-H Import dm9.dm3, perform FFT analysis, apply mask, inverse FFT.

DM-E Import dm8.dm3, select rotate, rotate image.

DM-M Import dm6.dm3, perform FFT analysis and apply mask.

DM-M Import dm1.dm3, use Box inside lattice image for FFT.

DM-E Import dm4.dm3, perform FFT on lattice image.

DM-E Import dm3.dm3, drag the dm3 file to the workspace.

DM-M Import dm1.dm3, use RectangleROI to draw a region.

DM-E Import dm1.dm3, change the scale bar to nm.

DM-E Import dm2.dm3, change the scale bar font size.

DM-M Import dm5.dm3, use Box to draw a frame and measure.

DM-E Import dm10.dm3, select mask tools in FFT.

DM-E Import dm4.dm3, use Profile tool to draw a line profile.

DM-E Import dm6.dm3, select operator filter.

DM-E Import dm9.dm3, measure average and standard deviation.

DM-M Import dm2.dm3, on optimised lattice image draw ROI.

DM-E Import dm7.dm3, select scale and set scale bar.

JADE-E Open WRT-ZSX-5.txt, perform Whole Pattern Fitting.

JADE-E Open XRD1.xrdml, perform background subtraction with default parameters.

JADE-E Open XRD1.xrdml, switch x-axis from 2θ to d-spacing, apply smoothing.

JADE-E Open XRD4.xrdml, perform peak search with default parameters.

JADE-M Open WRT-ZSX-5.txt, remove background, perform peak search.

JADE-E Open XRD4.xrdml, apply smoothing once.

JADE-E Open WRT-ZSX-5.txt, perform profile fitting.

JADE-E Open XRD1.xrdml, perform peak search with default parameters.

JADE-E Import WRT-ZSX-5.txt file.

JADE-E Open XRD1.xrdml, switch x-axis from 2θ to d-spacing directly.

JADE-M Open WRT-ZSX-5.txt (Fe and Ni), perform Rietveld refinement.

JADE-E Open WRT-ZSX-5.txt, perform peak search then profile fitting.

JADE-E Open WRT-ZSX-5.txt, select Zoom from menu bar.

JADE-E Open XRD4.xrdml, apply smoothing once and perform background

removal.

JADE-M Open WRT-ZSX-5.txt, smooth once, remove background, perform peak search.

JADE-M Open XRD1.xrdml, perform full-pattern three-phase Rietveld refinement.

JADE-E Open WRT-ZSX-5.txt, add two peaks.

JADE-M Open XRD4.xrdml, apply smoothing, perform background removal and peak search.

JADE-E Open XRD2.xrdml, perform profile fitting.

JADE-E Open WRT-ZSX-5.txt, calculate interplanar spacing.

MS-M Open untitled.stp, create a new 3D Atomistic document.

MS-E Open untitled.stp, create a new 3D Atomistic document.

MS-H Build homopolymer (propylene, chain 40), select all atoms, open Forcite.

MS-E Create a new project, save to task_1.stp.

MS-M Open untitled.stp, import file, configure supercell.

MS-M Open untitled.stp, import file, set force-field parameters.

MS-M Open untitled.stp, create 3D Atomistic document, add atom.

MS-M Open untitled.stp, import file, run geometry optimisation.

MS-H Open untitled.stp, build homopolymer (propylene, chain 40), run Forcite.

MS-E Open untitled.stp, import file.

MS-M Open untitled.stp, import file, set space group.

MS-H Build polypropyl acrylate chain (40 units, isotactic), run Forcite.

MS-M Open untitled.stp, import file, configure lattice parameters.

MS-M Open untitled.stp, import file, set atom properties.

MS-M Open untitled.stp, create 3D Atomistic document, configure display.

MS-E Create 3D Atomistic document (fractional coordinates), add default atom.

MS-E Open untitled.stp, import file.

MS-M Open untitled.stp, import file, set symmetry.

MS-E Open untitled.stp, import file.

MS-M Open untitled.stp, import file, configure bonds.

VESTA-H Import GaAs.cif, adjust boundary ranges, change style to Polyhedral.

VESTA-H Import GaN.cif, set y(max)=2, change style to Polyhedral, set coordination.

VESTA-E Import MgO.cif, create lattice plane with hkl indices.

VESTA-E Import Si.cif, remove several Si atoms.

VESTA-H Import GaN.cif, set Polyhedral style, toggle coordination polyhedra.

VESTA-E Import C.cif, check coordinate axes display.

VESTA-E Import GaAs.cif, delete atoms, save modified file.

VESTA-E Import GaN.cif, view N atom details, delete atoms.

VESTA-E Import Au.cif, change display style to Wireframe.

VESTA-E Import GaN.cif, zoom in by 100%.

VESTA-E Import GaN.cif, view coordinates and atom details.

VESTA-E Import C.cif, translate structure 400 units right.

VESTA-E Import Fe.cif, select two Fe atoms, view bonding structure.

VESTA-H Import Si.cif, set fractional coordinate ranges, change style.

VESTA-E Import Fe.cif, rotate crystal to standard crystallographic orientation.

VESTA-M Import Al2O3.cif, adjust fractional coordinate ranges.

VESTA-E Import MgO.cif, set up vector to [3,3,3].

VESTA-E Import Cu.cif, rotate crystal 90° left around y-axis.

VESTA-H Import NaCl.cif, remove bond, modify structure, save.

VESTA-M Import MgO.cif, change atomic radius to 1.5, save.

Origin-H Open CPO1.opju, plot FTIR spectrum in transmittance mode, add legend.

Origin-M Open Cycle2.ogwu, plot battery cycling performance figure with labels.


Origin-M Open CPO2.ogwu, plot FTIR spectrum in transmittance mode, set sample name.

Origin-H Open book2.ogwu, plot Raman stacked/offset plot, annotate peaks.

Origin-M Open CE2.ogwu, plot galvanostatic long-cycle voltage-time curve, annotate.


Origin-H Open book9.ogwu, plot Raman stacked/offset plot, annotate peaks.

Origin-M	Open XPS1.ogwu, plot XPS spectrum with labels [Zn 2p1/2, Zn 2p3/2].	OQMD-E	Query elemental Fe (ntypes=1), extract name/delta_e/stability.
Origin-H	Open XRD2.txt + card file, plot XRD pattern with phase annotations.	OPTIMADE-M	Query structures with exactly 4 elements (nelements=4), randomly select 5.
Origin-M	Open XPS2.ogwu, plot XPS spectrum with labels [O-C=O, C-O, C-C].	OPTIMADE-E	Query all structures containing Li, save total count.
Origin-H	Open CE1.ogwu, plot galvanostatic long-cycle voltage-time curve, annotate.	OPTIMADE-M	Query structures with formula_prototype="AB2", query at least 2 databases.
Origin-H	Open XRD1.txt + card file, plot XRD pattern with phase annotations.	OPTIMADE-E	Query structures composed exclusively of C and H, save total count.
Origin-M	Open CPO1.opju, plot FTIR spectrum in transmittance mode (no inset).	OPTIMADE-E	Query structures with at most 2 sites (nsites≤2), save total count.
Origin-M	Open Cycle1.ogwu, plot battery cycling performance figure with labels.	OPTIMADE-M	Query binary Ti-O structures (nelements=2), randomly select 5 results.
Origin-H	Open step.opju, plot free energy step diagram with labels.	OPTIMADE-M	Query structures with volume 50–200 Å ³ and exactly 3 elements.
Origin-H	Open WRT-ZSX-5.txt + card files, plot XRD pattern with phase annotations.	OPTIMADE-M	Query non-magnetic insulators with band gap>1 eV via Materials Project OPTIMADE.
Origin-H	Open book3.ogwu, plot Raman stacked/offset plot, annotate peaks.	OPTIMADE-E	Query structures with a single element type (nelements=1), save count.
MP-E	Get relaxed structure of mp-153 (hcp Mg), extract lattice vector lengths a and b.	OPTIMADE-M	Query structures with chemical_formula_reduced="SiO2", count per database.
MP-E	Search all TiO2 materials, count total material IDs.	OPTIMADE-M	Query structures with Ca, Ti, O as only three elements.
MP-E	Query mp-1201: band gap, magnetic ordering, is_magnetic.	OPTIMADE-H	Query structures with formula_prototype="ABC3" (perovskite), query ≥2 databases.
MP-M	Query mp-19005 formation energy per atom and decomposition products.	OPTIMADE-M	Query structures containing Fe, Co, or Ni with computed band gap.
MP-M	Query mp-149 structure, convert to VASP POSCAR format.	OPTIMADE-H	Query structures with Fe and S, at most 3 element types.
MP-M	Search Fe-Ni materials with energy_above_hull=0, extract stable phases.	OPTIMADE-M	Query records with formula_prototype="AB" (NaCl-type), extract properties.
MP-E	Get space group symbol and number of mp-1143.	OPTIMADE-E	Query structures with only Group-IV elements (C, Si, Ge, Sn, Pb).
MP-E	Query elasticity of mp-134: K_VRH and G_VRH.	OPTIMADE-E	Query binary structures (nelements=2) with both elements in Group IV.
MP-E	Get phonon born effective charges of mp-2490.	OPTIMADE-M	Query Al-O compounds (nelements=2) that are insulators.
MP-M	Get band structure of mp-1434, extract high-symmetry point labels.	OPTIMADE-E	Query structures containing both Fe and O, save count.
MP-M	Search materials with band gap 2.0–3.0 eV, exclude precious metals.	OPTIMADE-E	Query structures with chemical_formula_reduced="H2O", save count.
MP-M	Get spin-polarised DOS of mp-13 (bcc Fe), record Spin.Up and Spin.Down maxima.	Pymatgen-E	Create Si diamond structure (a=5.43), save frac_coords.
MP-M	Query band gap of mp-19005, check if Hubbard U was enabled.	Pymatgen-E	Calculate volume of hexagonal Ti structure (a=4.0, c=6.0).
MP-E	Search Al-O materials with energy_above_hull=0, list material IDs.	Pymatgen-M	Define Si structure, convert to Poscar, save VASP format text.
MP-M	Search Fe-O materials, filter by ferromagnetic ordering, record first 5.	Pymatgen-E	Create Incar object, set NSW=100 and EDIFF=1e-6.
MP-M	Get mp-126 structure, use SlabGenerator with Miller index (1,1,1).	Pymatgen-E	Generate 8×8×8 Monkhorst-Pack k-point grid.
MP-M	Search insertion electrodes with Li, Fe, P, O (num_elements=4).	Pymatgen-E	Parse vasprun.xml, extract Fermi level eferrni.
MP-M	Query piezoelectric total tensor of mp-2104, find maximum component.	Pymatgen-E	Parse vasprun.xml, extract final energy from last ionic step.
MP-M	Query phonon band structure of mp-149 via new API.	Pymatgen-E	Create hexagonal lattice (a=4.0, c=6.0), save lattice matrix.
MP-E	Get total dielectric tensor of mp-2534.	Pymatgen-M	Parse vasprun.xml, extract stress tensor from last ionic step.
OQMD-E	Query elemental Cu (ntypes=1), extract band_gap/volume/delta_e/stability.	Pymatgen-E	Create hexagonal Ti structure at [0,0,0], save structure description.
OQMD-M	Query Zn-O binary polymorphs (ntypes=2, limit=10), sort by delta_e.	Pymatgen-M	Read POSCAR, extract num_sites and formula.
OQMD-M	Query Li-Fe-O ternary compounds (ntypes=3, limit=10), calculate average delta_e.	Pymatgen-E	Create C-C molecular fragment, save molecular coordinates.
OQMD-M	Query Ni-Al binary compounds (ntypes=2, limit=10), sort by delta_e.	Pymatgen-M	Read POSCAR, extract num_sites and atom types.
OQMD-E	Query Mg-O compounds (limit=1), save first result.	Pymatgen-E	Measure C-C interatomic distance using get_distance.
OQMD-M	Query Ga-N compounds with band gap 1.0–2.0 eV.	Pymatgen-M	Read EIGENVAL, compute band gap via eigenvalue_band_gap.
OQMD-M	Query Li ternary compounds twice (ntypes=3, limit=1), read total count.	Pymatgen-M	Create CsCl primitive structure (space group 225, a=4.2).
OQMD-E	Query Ba-Ti-O compounds (limit=10), save total count.	Pymatgen-E	Create CsCl structure, extract num_sites (should be 2).
OQMD-E	Query Fe2O3 entries (ntypes=2, natoms=5), extract first result.	Pymatgen-M	Create CsCl structure, build [2,2,1] supercell.
OQMD-M	Query Ce-O binary compounds with band_gap>0, sort by band_gap.	Pymatgen-E	Create LiO molecule, call as_dict(), save dictionary string.
OQMD-M	Query Cu-Au binary compounds (ntypes=2, limit=10), sort by delta_e.	Pymatgen-M	Reconstruct LiO molecule from dictionary, verify formula is LiO.
OQMD-E	Count total entries containing Fe and O.	Mixed-E	Download mp-149 Si as CIF via Materials Project, open it in VESTA, remove one Si site, and save the modified structure.
OQMD-M	Query Fe binary compounds (ntypes=2, limit=10), sort by delta_e.		
OQMD-M	Query La-Mn-O ternary compounds (ntypes=3, limit=10), sort by delta_e.		
OQMD-M	Query Al-O compounds with volume 8–12 Å ³ /atom.		
OQMD-E	Query first SiO2 entry, extract name/composition/delta_e/stability.		
OQMD-E	Query first NaCl entry, extract name/composition/spacegroup/volume.		
OQMD-E	Count all binary compounds containing Al (ntypes=2).		
OQMD-M	Query Ti-O compounds (limit=10), sort by delta_e ascending.		

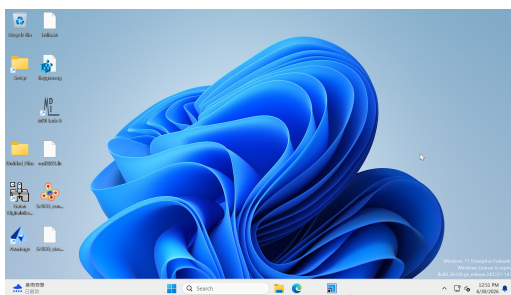


(a) Code stage: artifact creation.

A Pymatgen/API stage writes a structure artifact.

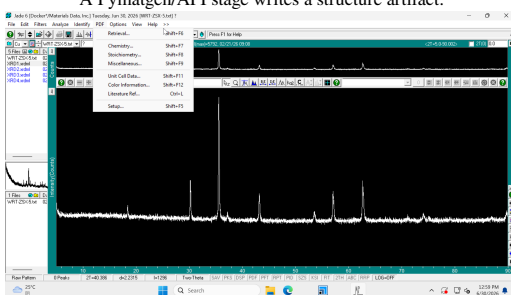


(c) GUI analysis stage.

JADE performs XRD analysis in a GUI-only interface.

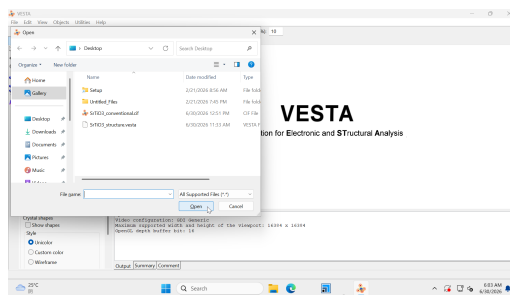

(b) GUI stage: artifact consumption.

VESTA opens the generated structure file.

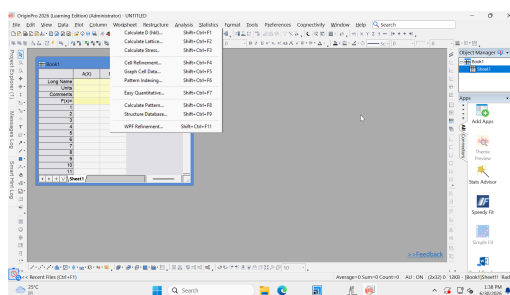

(d) Origin handoff stage.

Origin receives the downstream plotting/analysis stage.

Figure 8: Representative mixed-task trajectories. Mixed tasks require stage-wise handoffs across software boundaries.

Mixed-E Query elemental Si via OPTIMADE, export POSCAR, then use Pymatgen to identify space group and crystal system.

Mixed-E Download SrTiO₃ (mp-5229), extract the conventional structure with Pymatgen, open in VESTA, switch to Ball-and-Stick, and save.

Mixed-M Build bilayer MoS₂ with Pymatgen, export CIF, then open in Materials Studio, build a surface, and save the model.

Mixed-M Create a polyethylene crystal in Materials Studio, export CIF, then open in VESTA, set standard orientation and fractional ranges.

Mixed-M Process C1s XPS data in Avantage, export the report, then plot the exported spectrum in Origin.

Mixed-M Analyze WRT-ZSX-5 XRD data in JADE, export the matching PDF card, then plot the annotated XRD match in Origin.

Mixed-H Retrieve LiCoO₂, generate three Li-content structures, and create separate VASP input directories for each composition.

Appendix F. Mixed Cross-Tool Diagnostic Tasks

The eight mixed tasks are designed as cross-tool diagnostic examples, not as another per-domain result category. Each task is split into ordered stages in which an upstream environment creates an intermediate artifact that is then consumed by a different tool. Figure 8 illustrates this interaction pattern through representative trajectories rather than aggregate model scores.

The first pattern is **code-GUI handoff**: a Python stage uses Pymatgen or a database API to generate a structure file, and the next stage must open that file in a GUI visualisation or modelling program. The second pattern is **GUI-Origin handoff**: a domain GUI such as JADE or Avantage must produce a processed spectrum or table that is then replotted or further analyzed inside Origin. These examples expose an

artifact-boundary bottleneck: the agent must not only finish the first tool’s operation, but also save the result with the right path, extension, and semantic content for the next software.

Appendix G. Bundled Dependency Files

Table 9 documents the concrete files bundled inside the VM. These files are part of the benchmark definition rather than incidental examples: each task starts from a fixed file path and software state, so the agent must operate on the same scientific input regardless of model, worker, or execution date. The table also makes explicit which native formats are exercised by each tool, such as .VGD for XPS analysis, .dm3 for microscopy, .xrdml for diffraction, .xsd for Materials Studio, .cif for VESTA, and POSCAR/vasprun.xml for Pymatgen.

The dependency set is intentionally heterogeneous, combining raw instrument outputs that require GUI import and visual confirmation with structured materials files used by code-based parsers. This allows the same environment to evaluate file opening, visualization, parameter editing, scientific analysis, and artifact export across multiple data modalities. To support realistic and reproducible evaluation, MATTOOL-BENCH ships a curated collection of authentic experimental and simulation files pre-installed in the Windows 11 VM. Table 9 lists these inputs by domain, including XPS spectra, TEM/STEM images, XRD patterns, crystal structures, Origin workbooks, and VASP-related outputs. Their native formats are preserved so that tasks test realistic import, parsing, analysis, and export workflows rather than simplified synthetic examples.

Table 9: Bundled sample data files pre-installed in the evaluation VM, grouped by domain.

Domain	File(s)	Description
Avantage	C1s_Scan.VGD O1s_Scan.VGD XPS_Survey.VGD Zn.vgp Zn2p_Scan.VGD	XPS narrow-scan spectrum for C 1s core level XPS narrow-scan spectrum for O 1s core level Full XPS survey spectrum Avantage project file for Zn sample XPS narrow-scan spectrum for Zn 2p core level
DM	dm1.dm3-dm10.dm3 5.dm3	TEM/STEM images in DigitalMicrograph format Additional TEM image
JADE	WRT-ZSX-5.txt WRT-ZSX-5.jip XRD1-XRD4.xrdml XRD1-XRD4.jip	Raw XRD data in plain-text format JADE project file for WRT-ZSX-5 sample XRD patterns in PANalytical XRDML format Corresponding JADE project files
MS	AIGH-mol.xsd Al2O3.xsd Fe.xsd LiF.xsd Novolac4.xsd SuperSi.xsd TMOS.xsd urea.xsd	Molecular structure of AIGH compound Crystal structure of aluminium oxide Crystal structure of iron Crystal structure of lithium fluoride Polymer structure of Novolac resin Crystal structure of silicon supercell Molecular structure of TMOS Molecular structure of urea
Origin	Book2/3/9.ogwu CE1/2.ogwu, CPO1.opju, CPO2.ogwu Cycle1/2.ogwu step.opju XPS_1.ogwu, XPS2.ogwu XRD1/2.txt, XRD2.xrdml	Origin workbook files with tabular data Cyclic voltammetry and electrochemical data Cycling performance data Origin project with step-function data XPS spectral data imported into Origin XRD data files for Origin import tasks
Pymatgen	POSCAR_* (20 files) vasprun.xml	POSCAR input files for various crystal structures Sample VASP-format output for parsing tasks
VESTA	mp-*_* .cif (10 files)	CIF crystal structure files from the Materials Project (Al ₂ O ₃ , MgO, Fe, Si, NaCl, GaAs, Cu, C, GaN, Au)

The bundled data cover both GUI- and code-oriented scenarios. Avantage and DigitalMicrograph use spectroscopy and microscopy files, Pymatgen uses POSCAR and `vasprun.xml`, and Origin, JADE, Materials Studio, and VESTA use domain-specific project, structure, and tabular files. Reusing these controlled inputs reduces setup overhead and evaluation variance, allowing failures to be attributed to tool operation or reasoning rather than missing files or inconsistent downloads. File dependencies also encode domain conventions, such as core-level scan names in XPS, distinctions between raw and project files in XRD, and chemically meaningful atom and lattice information in structure visualization. Thus, Table 9 specifies both the benchmark resources and the scientific objects underlying each workflow.

Appendix H. Evaluation Protocol Details

MATTOOLBENCH employs a modular evaluation pipeline in which each task sub-criterion is assessed by a domain-specific

getter that extracts the relevant VM state, followed by a *metric function* that converts the extracted value into a score. Table 11 summarises the metric functions, while Table 10 lists the GUI getter types.

A single generic OCR check is insufficient because different software exposes state through different channels. Avantage and JADE require recognizing dialogs, spectra, and fitting results; DigitalMicrograph relies on ROI state and pixel-level properties; Materials Studio and VESTA require checking 3D rendering, boundary settings, and structure orientation. The getters therefore combine OCR, pixel analysis, SSIM, dialog recognition, and domain-specific predicates.

GUI and Origin sub-criteria use binary state checks. MP and OQMD use key-value matching with numerical tolerance, while Pymatgen uses file-level comparison. OPTIMADE is evaluated through a valid saved-output predicate rather than a unique gold-file match, since records may vary across endpoints and time.

Table 10: Getter types used in GUI-based domains, all paired with `exact_match`.

Domain	Getter Type	Description
Avantage	<code>check_multiple_files_imported</code>	Confirms that multiple XPS scan channels (<i>e.g.</i> , C 1s, O 1s, Zn 2p) are loaded.
	<code>check_dialog_exists</code>	Detects the presence of a specific dialog window via OCR.
	<code>check_dialog_parameter</code>	Extracts and validates a parameter value inside a dialog.
	<code>check_stacked_graph</code>	Verifies that spectra are displayed in stacked mode.
	<code>check_background_added</code>	Confirms background curve addition to a spectrum.
DM	<code>check_energy_axis_reversed</code>	Validates that the binding-energy axis is inverted.
	<code>check_file_import</code>	Verifies that a <code>.dm3/.dm4</code> file is imported.
	<code>check_ocr_text</code>	Extracts arbitrary text from the UI via OCR and matches it against an expected string.
	<code>check_drawing_tool</code>	Confirms the active drawing tool (box, circle, line, <i>etc.</i>).
	<code>check_border_color</code>	Detects the border color of a drawn shape via pixel analysis.
JADE	<code>check_roi_copy_and_enlarge</code>	Verifies ROI duplication and enlargement.
	<code>check_checkbox_selected</code>	Confirms a checkbox state from the accessibility tree.
	<code>check_file_opened_jade</code>	Confirms that the target XRD data file is open.
	<code>check_peak_finding</code>	Counts the number of detected peaks in the XRD pattern.
	<code>check_background_removal</code>	Validates background subtraction by detecting a $\geq 20\%$ drop in $I_{\max}$.
MS	<code>check_smoothing</code>	Confirms the “Smooth whole Pattern” operation.
	<code>check_axis_switch</code>	Verifies switching between two-theta and d -scale axes.
	<code>check_wpf_refinement</code>	Extracts the R -factor from Whole Pattern Fitting.
	<code>check_refinement_result</code>	Counts Rietveld refinement profiles.
	<code>check_dialog_title_jade</code>	Matches expected dialog titles via OCR.
VESTA	<code>check_file_in_title</code>	Confirms the project filename in the window title bar.
	<code>check_text_keyword</code>	Searches for specific keywords in UI panels (<i>e.g.</i> , “3D Atomistic”).
	<code>check_dialog_title_ms</code>	Matches dialog titles with optional forbidden-keyword filters.
	<code>check_field_value</code>	Extracts and validates form-field values (<i>e.g.</i> , space group “P1”).
	<code>check_visual_similarity</code>	Computes SSIM between the current screenshot and a reference image.
Origin	<code>check_file_opened_vesta</code>	Verifies that a CIF structure file is loaded.
	<code>check_dialog_opened_vesta</code>	Confirms a dialog window is visible.
	<code>check_atom_deletion</code>	Validates that specified atoms have been removed.
	<code>check_boundary_settings</code>	Checks boundary cell display parameters.
	<code>check_style_change</code>	Verifies rendering style changes (sphere, ball-and-stick).
Origin	<code>check_lattice_plane</code>	Confirms that a lattice plane is displayed.
	<code>check_rotation_90_up</code>	Validates a 90° upward rotation of the structure.
	<code>check_polyhedral_style</code>	Confirms polyhedral representation is active.
	<code>file_exists</code>	Checks whether the output image file was created.
	<code>validate_image_with_model</code>	Encodes the output figure as base64 and queries Gemini-3.1-pro to verify it against a natural-language description of the expected plot.

This two-stage design, state capture followed by score computation, makes evaluation independent of the action sequence. Agents may use different menus, shortcuts, or scripts but receive the same score when their final states satisfy the required conditions. Getters inspect application state, text, screenshots, files, structured outputs, and scientific artifacts, while metrics apply exact matching, tolerance checks, boolean validation, file-existence checks, or image similarity.

Formally, a task x is specified by an instruction g , an initialization program c , and n scoring sub-criteria $\mathcal{C}(x) = \{(g_i, m_i, w_i)\}_{i=1}^n$, where g_i is a getter, m_i is a metric function, and w_i is the criterion weight. After an agent trajectory terminates in final VM state v_T ,

$$r_i = m_i(g_i(v_T), y_i), \quad r_i \in [0, 1], \quad (1)$$

where y_i is the reference value or predicate. The task score is

$$\text{Score}(x) = \frac{\sum_{i=1}^n w_i r_i}{\sum_{i=1}^n w_i}, \quad \text{SR}(x) = \mathbb{I}[\forall i, r_i = 1]. \quad (2)$$

This definition is shared across GUI, Origin, and code tasks; only the getter and metric implementations differ. Partially correct final states can therefore receive credit for completed scientific milestones.

The separation also makes failures interpretable by identifying missing states such as an unopened file, unset parameter, unsaved plot, or unwritten numeric field. It thereby distinguishes operational failures from domain-reasoning failures instead of reducing multi-step workflows to a single pass/fail label.

Table 11: Metric functions used per domain. ✓: all tasks use this metric; fractions indicate partial usage.

Domain	exact_match	detect_kv_match	detect_file_match
Avantage	✓	–	–
DM	✓	–	–
JADE	✓	–	–
MS	✓	–	–
VESTA	✓	–	–
Origin	✓	–	–
MP	–	14/20	6/20
OQMD	–	✓	–
OPTIMADE	✓	–	–
Pymatgen	–	–	✓

exact_match: binary $\{0, 1\}$ outcome for discrete GUI results and binary conditions. *detect_kv_match*: parses key-value pairs and matches numeric values within $r_{\text{tol}} = 0.1\%$, returning partial credit. *detect_file_match*: line-by-line comparison against a gold-standard reference file, returning a binary outcome.

Table 12: Per-task evaluator reliability across five GUI domains: Score F1 and SR-F1. Values below 1.00 are explicitly reported. Means are macro-averaged over the 20 tasks in each domain: JADE 0.991, MS 0.994, Avantage 0.980, VESTA 0.979, DM 0.936.

Task	JADE		MS		Avantage		VESTA		DM	
	F1	SR-F1	F1	SR-F1	F1	SR-F1	F1	SR-F1	F1	SR-F1
in1	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.86	1.00
in2	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	0.80	0.86
in3	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
in4	1.00	1.00	1.00	1.00	0.88	0.92	1.00	1.00	1.00	1.00
in5	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
in6	0.92	1.00	1.00	1.00	1.00	1.00	0.97	1.00	1.00	1.00
in7	1.00	1.00	0.98	1.00	0.92	1.00	1.00	1.00	1.00	1.00
in8	1.00	1.00	1.00	1.00	0.92	0.89	1.00	1.00	0.67	1.00
in9	0.94	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
in10	1.00	1.00	1.00	1.00	1.00	1.00	0.86	0.86	0.80	1.00
in11	0.96	1.00	0.99	1.00	1.00	1.00	1.00	1.00	0.93	1.00
in12	1.00	1.00	0.98	1.00	0.95	1.00	1.00	1.00	1.00	1.00
in13	1.00	1.00	1.00	1.00	1.00	1.00	0.89	0.86	0.67	1.00
in14	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
in15	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
in16	1.00	1.00	0.98	1.00	0.97	1.00	1.00	1.00	1.00	1.00
in17	1.00	1.00	0.98	1.00	1.00	1.00	0.98	0.95	1.00	1.00
in18	1.00	1.00	0.97	1.00	1.00	1.00	0.91	1.00	1.00	1.00
in19	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
in20	1.00	1.00	1.00	1.00	0.96	1.00	0.97	1.00	1.00	1.00
Mean	0.991	1.000	0.994	1.000	0.980	0.991	0.979	0.984	0.936	0.993

Appendix I. Evaluator Reliability Details

GUI getter reliability. We validate the automated GUI evaluators with an $n \times n$ cross-evaluation protocol over collected trajectory final states ($n = 20$ per domain). For each domain, every final state is evaluated against every task configuration from the same domain. This creates positive matching pairs and non-matching pairs, allowing us to measure both successful detection and cross-task false positives.

We report two F1 measures. **Score F1** is computed over binary sub-criterion-level partial-credit labels, while **SR-F1** is computed over task-level binary success labels for each task-state pair. The per-domain aggregated results are reported in Table 4, and the per-task macro breakdown is shown in Table 12.

For DigitalMicrograph, several final-state cues are intentionally excluded from the filtered reliability calculation because they are valid benchmark getters but not discrimina-

tive under cross-task evaluation. These include short OCR tokens that commonly appear across microscopy images (nm, scale, rotate), geometry checks shared by multiple drawing or ROI tasks, and file-import labels with the same filename stem but different extensions (dm4 . dm3/dm4 . dm4 and dm5 . dm3/dm5 . dm5). This filtering affects only the reliability audit and does not change the benchmark evaluator or task scores.

Most residual disagreements arise from visual edge cases, including OCR confusion, final screenshots with transient dialogs or selection highlights, and rendering-dependent pixel thresholds. The modular getter-metric design keeps these errors interpretable: each disagreement can be traced to a specific sub-criterion rather than to an opaque task-level pass/fail judgment.

Origin aesthetic-judge reliability. Origin tasks require a second reliability analysis because figure quality is not fully captured by file existence. Table 14 therefore reports both parsing stability and agreement with human ratings for the aesthetic judge. All four candidate judges successfully parse all 43 figures, so the comparison is not affected by formatting failures.

The table also reveals a calibration difference across judges. Qwen3-VL-235B obtains the highest Pearson and Spearman correlations, but its raw C/A/T scores are visibly more saturated and lenient. Gemini-3.1-pro is slightly more conservative while retaining similar human agreement. A Williams dependent-correlation test between Qwen3-VL-235B and Gemini-3.1-pro gives $\Delta r = 0.043$, $t = 0.582$, and $p = 0.569$, indicating that their correlations are not statistically distinguishable at this sample size. We therefore use Gemini-3.1-pro as the aesthetic scorer, while emphasizing that this choice only affects the secondary aesthetic score and never changes Origin SR.

Together, Tables 12 and 14 validate the two evaluator components used by the benchmark: deterministic state getters for GUI tasks and a calibrated human-aligned judge for generated scientific figures.

The residual disagreements are concentrated in visually ambiguous GUI states: OCR confuses similar characters in small labels, and pixel/SSIM thresholds occasionally react to anti-

Table 13: MATTOOLBENCH efficiency metrics. Steps: mean steps across all episodes (max 50; fewer is better). Steps*: mean steps on successful (SR = 1) episodes. FTR (%): false termination rate. **Cat.**: task category. ‘NaN’: no successful episodes (Steps* undefined).

Cat.	Domain	Doubao seed-1-8			Kimi k2.5			Claude sonnet-4.6			GPT -5.4			Qwen3-VL 235B			Qwen3-VL 32B			Qwen3-VL 8B		
		Steps	Steps*	FTR	Steps	Steps*	FTR	Steps	Steps*	FTR	Steps	Steps*	FTR	Steps	Steps*	FTR	Steps	Steps*	FTR	Steps	Steps*	FTR
GUI	Avantage	36.1	19.9	25.0	42.4	36.0	60.0	41.1	26.1	25.0	39.2	7.8	50.0	39.7	8.0	71.4	46.2	31.7	60.0	44.9	42.4	66.7
	JADE	34.6	24.2	50.0	35.3	15.6	44.4	35.9	15.2	44.4	29.0	8.7	85.7	41.8	19.5	71.4	42.9	5.1	85.7	48.7	41.4	0.0
	DM	38.3	27.6	42.9	42.9	30.8	40.0	45.4	28.6	0.0	39.3	27.3	57.1	38.1	18.5	77.8	50.0	NaN	NaN	50.0	50.0	NaN
	MS	47.6	42.0	50.0	48.8	39.0	50.0	45.1	42.1	50.0	41.6	34.9	37.5	50.0	NaN	100.0	50.0	NaN	NaN	50.0	NaN	NaN
	VESTA	39.1	22.3	50.0	41.1	36.6	57.1	41.1	36.6	57.1	30.3	40.8	83.3	33.5	10.5	75.0	44.1	13.3	33.3	50.0	50.0	NaN
	Avg.	39.1	27.2	43.6	42.1	31.6	50.3	41.7	29.7	35.3	35.9	23.9	62.7	40.6	14.1	79.1	46.7	16.7	59.7	48.7	—	—
Origin	Origin	47.7	NaN	100.0	47.2	31.7	50.0	32.7	33.7	83.3	34.3	23.5	60.0	48.0	24.5	50.0	48.6	50.0	100.0	50.0	NaN	NaN
Code	Pymatgen	2.0	2.0	70.0	13.5	2.0	80.0	2.2	2.0	75.0	4.9	2.0	63.2	2.0	2.0	65.0	10.7	3.0	68.8	13.5	2.0	81.3
	MP	2.0	2.0	75.0	2.0	2.0	80.0	2.0	2.0	85.0	2.0	2.0	100.0	2.3	2.0	75.0	3.4	3.0	90.0	2.0	2.0	90.0
	OQMD	2.0	2.0	90.0	2.0	2.0	20.0	2.0	2.0	50.0	2.0	2.0	55.0	2.0	2.0	90.0	3.1	NaN	100.0	2.0	NaN	100.0
	OPTIMADE	2.0	2.0	30.0	2.0	2.0	20.0	2.0	2.0	25.0	2.0	2.0	15.0	2.0	2.0	80.0	3.0	3.0	70.0	2.0	2.0	90.0
	Avg.	2.0	2.0	66.3	4.9	2.0	50.0	2.1	2.0	58.8	2.7	2.0	58.3	2.1	2.0	77.5	5.1	3.0	82.2	4.9	2.0	90.3
Overall Avg.		29.6	14.6	70.0	31.4	21.8	50.1	25.5	21.8	59.1	24.3	16.5	60.3	30.2	13.5	68.9	33.5	23.2	80.6	34.5	NaN	NaN

Table 14: Origin aesthetic-judge validation. C/A/T denote visual correctness, aesthetic quality, and task completeness. All judges parse all 43 images.

Judge	Avg C/A/T	Parsed	Pearson	95% CI	Spearman
GPT-5.4	4.33/4.15/4.38	43/43	0.513	[-0.180, 0.826]	0.348
Doubao-seed-1-8	4.61/4.43/4.80	43/43	0.677	[-0.017, 0.896]	0.402
Gemini-3.1-pro	4.60/4.25/4.68	43/43	0.694	[0.033, 0.891]	0.346
Qwen3-VL-235B	4.81/4.46/4.92	43/43	0.737	[0.104, 0.928]	0.518

aliasing or rendering differences. These cases are rare and do not change the conclusion that the automated getters closely track expert annotations across the evaluated GUI domains.

Appendix J. Efficiency Results

Table 13 reports the efficiency results. **Efficiency** metrics capture the number of agent steps consumed during task execution (maximum 50 steps; fewer is better). **Steps** reports the mean step count across all episodes; **Steps*** reports the mean step count on successful episodes only (SR = 1), removing the confounding effect of premature termination on overall step counts. **FTR** quantifies the fraction of agent-terminated episodes where SR = 0, revealing systematic failure modes. GUI tasks typically consume 35–42 steps due to exploratory interaction requirements such as locating UI elements and reading dialog boxes, whereas code tasks use only 1–4 steps because each step corresponds to a complete script execution.

As shown in Table 13, high FTR values (40–70%) on GUI tasks indicate a persistent premature-termination failure mode across frontier models, suggesting that agents often struggle to distinguish true task completion from temporary pauses in the workflow.

Let $\mathcal{E}$ be the set of evaluated episodes in a domain, T_e the number of executed steps in episode e , s_e the final success indicator, and d_e an indicator that the episode ended with an

agent-issued DONE. We compute

$$\text{Steps} = \frac{1}{|\mathcal{E}|} \sum_{e \in \mathcal{E}} T_e, \quad \text{Steps}^* = \frac{\sum_{e \in \mathcal{E}} s_e T_e}{\sum_{e \in \mathcal{E}} s_e}, \quad (3)$$

with Steps* left undefined when no episode succeeds. False termination is measured only among self-terminated runs:

$$\text{FTR} = \frac{\sum_{e \in \mathcal{E}} d_e \mathbb{I}[s_e = 0]}{\sum_{e \in \mathcal{E}} d_e}. \quad (4)$$

This separation is important because a low raw step count can be misleading: an agent may appear efficient simply because it declares completion before performing the required scientific operation. Steps* and FTR therefore provide complementary views of efficiency and reliability.

Appendix K. Origin Ablation Output Examples

Origin tasks use two independent evaluation signals. Binary success rate indicates whether the expected image exists at the designated VM path. For each generated figure, a judge assigns visual correctness (C), aesthetic quality (A), and task completeness (T) scores in $[1, 5]$: $s = \frac{C+A+T}{3 \times 5}$. If no image is generated, $SR = 0$ and $s = 0$. The quality score does not affect SR, but distinguishes low-quality figures from publication-ready outputs.

Figure 9 shows representative outputs from Claude Sonnet 4.6. **script+hint** provides Code Builder guidance and plotting templates; **no_script+hint** removes only the template; and **no_script+no_hint** removes both supports. The latter often causes incorrect axes, missing labels, weak formatting, or execution failure.

File existence alone is insufficient because a generated figure may still contain scientific defects, such as reversed axes, missing annotations, or inconsistent styling. We therefore use SR to measure operational success and s to diagnose scientific presentation quality.

The ablation therefore separates artifact generation from scientific figure quality. An agent may create the required

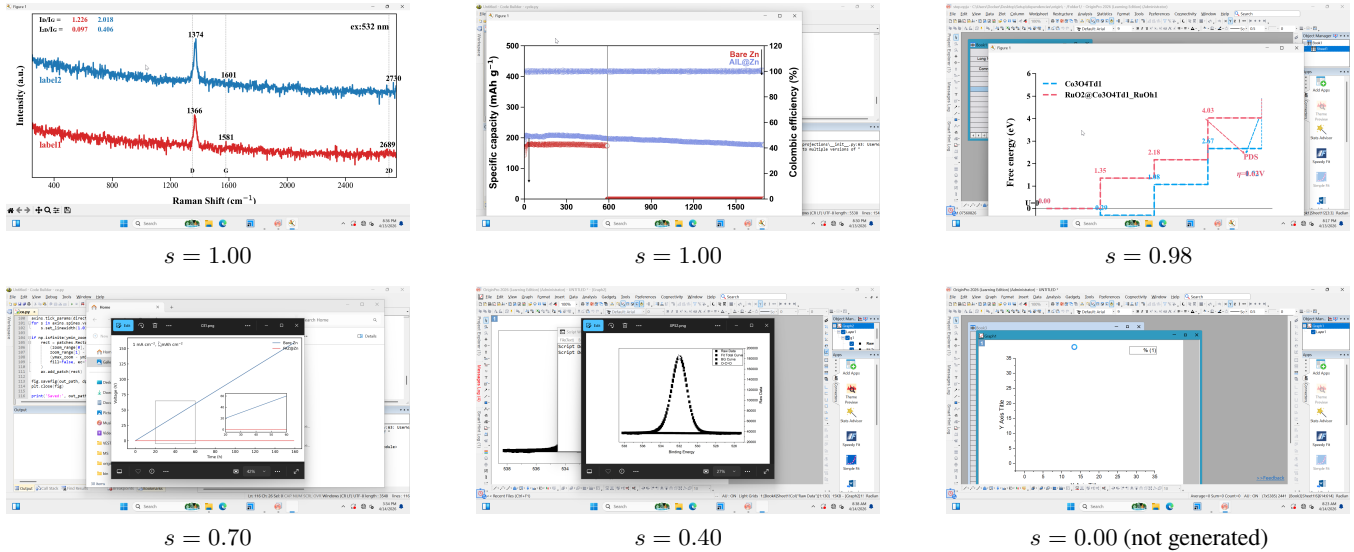


Figure 9: Representative Origin figures generated by Claude Sonnet 4.6 with **script+hint** (top) and **no_script+no_hint** (bottom). Scores are computed as $s = (C + A + T)/(3 \times 5)$. Template scripts produce high-quality outputs ($s \geq 0.98$), whereas GUI-only execution reduces quality ($s \leq 0.70$) or fails ($s = 0$).

file without reproducing the intended plotting conventions, whereas template scripts substantially improve scaling, annotations, and formatting.

Appendix L. Evaluation Scoring Criteria Examples

Algorithm 1: Instruction-to-Score Evaluation Framework

Require: Instruction g , initialization program c , budget $T_{\max}$, criteria $\mathcal{C} = \{(g_i, m_i, w_i, y_i)\}_{i=1}^n$

- 1: Execute c to obtain the initial VM state v_0 .
- 2: **for** $t = 0, \dots, T_{\max} - 1$ **do**
- 3: Build observation o_t from the instruction and current VM state.
- 4: Agent outputs COMMAND, WAIT, DONE, or FAIL.
- 5: **if** COMMAND **then**
- 6: Execute the action and update v_{t+1} .
- 7: **else if** WAIT **then**
- 8: Wait for environment stabilization.
- 9: **else if** DONE or FAIL **then**
- 10: Set the final state to v_T and terminate.
- 11: **end if**
- 12: **end for**
- 13: **if** the budget is exhausted **then**
- 14: Set v_T to the current VM state.
- 15: **end if**
- 16: **for** $(g_i, m_i, w_i, y_i) \in \mathcal{C}$ **do**
- 17: Extract evidence $z_i = g_i(v_T)$ and compute $r_i = m_i(z_i, y_i) \in [0, 1]$.
- 18: **end for**
- 19: Return Score = $\frac{\sum_i w_i r_i}{\sum_i w_i}$, SR = $\mathbb{I}[\forall i, r_i = 1]$, and the criterion-level trace.

This section demonstrates the evaluation framework through an Avantage XPS example and GUI pixel-detection methods.


Avantage Task: Step-by-Step Evaluation

We trace the full instruction-to-output evaluation pipeline for a representative Avantage task: “Reverse the binding-energy axis of the loaded XPS spectrum.” The framework is action-sequence agnostic: it evaluates the final scientific state rather than requiring the agent to follow a fixed menu path. For the axis-reversal task, the getter is `check_energy_axis_reversed`: it crops the axis region, applies OCR, and checks whether binding-energy labels decrease from left to right. The metric is `exact_match`; the sub-criterion receives 1 if the axis is confirmed reversed and 0 otherwise. The same framework is used for the harder multi-step case below, where each GUI milestone is scored independently.

Pt.	Sub-criterion	Evidence
1	Avantage imports C1s Scan.VGD.	title/OCR
1	Window A and window B both contain the C1s spectrum.	window state
1	Add Constant dialog is opened for window B.	dialog OCR
1	Constant value equals 3333.	parameter getter
1	The transformed spectrum appears in window B.	pixel/OCR state
1	Windows are arranged vertically for comparison.	layout getter
1	stacked_3333.vgp is saved at the target path.	file check


Detailed Avantage Case Study

We illustrate how the evaluator verifies each scoring sub-criterion using a hard Avantage task (8ebfc15b, 7pts), corresponding to the getter types listed in Table 10.

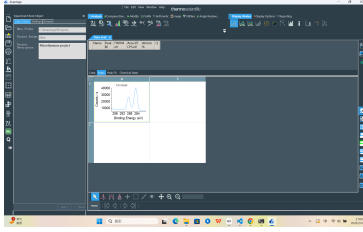


(a) Open file

OCR confirms "CIs Scan" in window A, while the saved file verifies the output path.

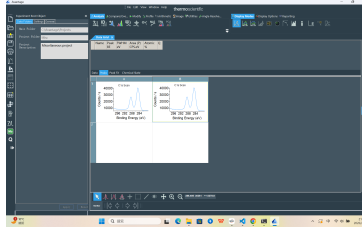


(b) Copy spectrum to window B

The evaluator checks whether the same XPS scan is present in both window A and window B.

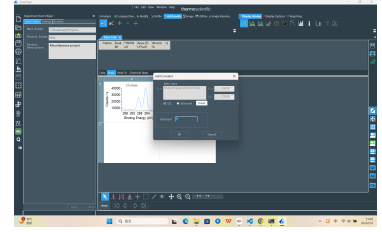


(c) Open Add Constant dialog

OCR verifies that the central dialog is titled "Add Constant".

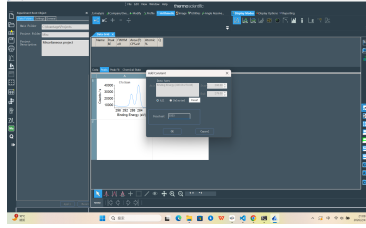

(d) Enter constant value 3333

The parameter getter extracts the "Constant" field and checks that it equals 3333.

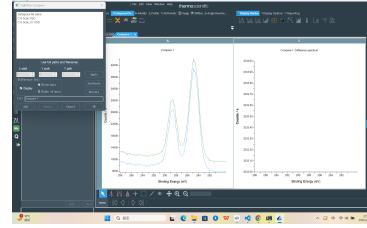

(e) Vertical comparison view

The LightBox panel must contain both **CIs Scan.VGD** and **CIs Scan_01**.

Figure 10: Execution trajectory and scoring sub-criteria for the Avantage task 8ebfc15b (hard, 7 pts). Each panel shows an intermediate GUI state validated by a domain-specific getter, including OCR, parameter extraction, file-existence, and application-state checks. The evaluator scores all sub-criteria independently at episode end, and the final task score is the fraction of passed criteria.

Task instruction. Open Avantage and import `CIs Scan.VGD`; copy the spectrum to window B; apply *Add Constant* with value **3333** to the spectrum in window B; arrange window A and window B vertically in comparison view; save the active document as `stacked_3333.vgp`.

The seven criteria intentionally mix interface evidence and artifact evidence. This prevents a shortcut such as saving an unchanged project from receiving full credit, while still awarding partial credit for completed milestones. The trajectory in Figure 10 shows the observable states used by these getters.


The example also illustrates why the benchmark scores final states rather than command histories. An agent may use toolbar buttons, menu commands, keyboard shortcuts, or scripting to reach the same Avantage state. These action paths differ operationally, but the scientific requirement is identical: the imported spectrum must be duplicated, transformed, arranged for comparison, and saved. The getter-metric decomposition makes this equivalence explicit while still exposing which milestone failed when the final result is incomplete.

Each of the seven sub-criteria contributes one point, and SR is achieved only when all seven are satisfied. This makes near-miss failures visible. For example, an episode that imports the file, opens the dialog, enters the correct constant, and saves the project but fails to arrange the two windows vertically receives partial credit rather than being collapsed into a single failure. Conversely, an episode that only saves a file without transforming the spectrum cannot obtain high credit because the intermediate scientific states remain unsatisfied.

The same trace is used for debugging evaluator errors. If a model receives a low score despite visually plausible progress, the per-criterion record identifies whether the failure comes from OCR, parameter extraction, layout recognition, or file persistence. During benchmark construction, this trace allowed domain experts to audit ambiguous cases and adjust only the affected getter threshold rather than rewriting the task definition. This is the main reason the framework reports both aggregate scores and detailed sub-criterion outcomes.


Appendix M. Visual Pixel Detection Methods

Beyond OCR text recognition, MATTOOLBENCH evaluators use three visual pixel detection methods, corresponding to `check_style_change`, `check_polyhedral_style`, `check_visual_similarity`, and `check_border_color` in Table 10. These methods target GUI states where text labels are absent or insufficient: for example, the active rendering style in VESTA is encoded as the position of a coloured radio button rather than a text label; the selected polyhedral style is indicated by a coloured highlight on an icon; and the completion of a drawing operation in DigitalMicrograph is indicated by the appearance of green corner handles. All three methods operate directly on raw pixel data captured from the VM screenshot, without relying on the application’s accessibility tree or any structured UI metadata, and return a binary signal that is passed to `exact_match` to produce the final sub-criterion score. Figure 11 provides concrete examples of all three detection strategies, together with the expected

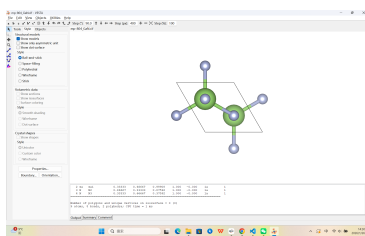


(a) Ball-and-stick style

The blue-filled radio button next to “Ball-and-stick” identifies the active rendering style.

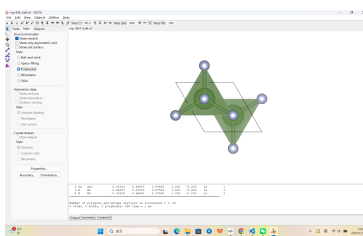


(b) Polyhedral style

The selected blue pixel cluster moves to “Polyhedral”, confirming the style transition.

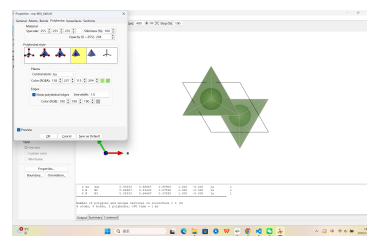


(c) Highlighted polyhedral icon

HSV thresholding locates the yellow-highlighted icon and verifies the selected polyhedral style index.

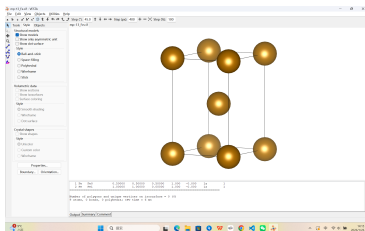


(d) Standard orientation by SSIM

The central crystal region is compared with a reference image; $\text{SSIM} \geq 0.9$ indicates the target orientation.

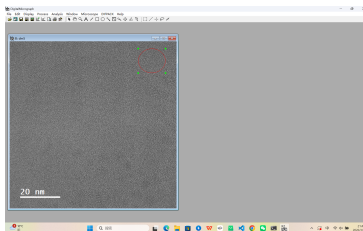

(e) Ellipse detection

At least four green control handles detected in HSV space confirm that an ellipse has been drawn.

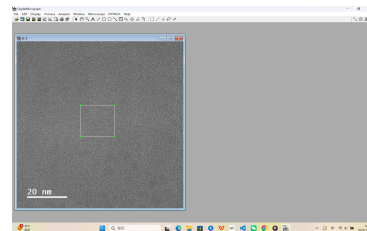

(f) Rectangle detection

Four green corner handles verify that the rectangle tool was used and the shape is present.

Figure 11: Representative visual-state detection methods used by the GUI evaluators. Panels (a)–(b) identify the active VESTA rendering style from the vertical position of blue radio-button pixels. Panel (c) detects the yellow-highlighted polyhedral icon using HSV thresholding. Panel (d) uses structural similarity against a reference image to validate the target crystal orientation. Panels (e)–(f) count green control handles in DigitalMicrograph to confirm ellipse and rectangle creation. Each detection result is paired with `exact_match` to produce a binary sub-criterion score.

visual cues and the decision logic applied in each case.

Table 10 lists the complete set of getter types used across all five GUI-based domains. Each getter encapsulates a self-contained detection strategy — OCR, pixel colour analysis, or structural similarity — and is paired with `exact_match` to produce a binary pass/fail score. The diversity of getter types reflects the heterogeneity of GUI states in real materials-science software, where a single workflow may require confirming a dialog title, reading a numeric field, and verifying a rendering style change simultaneously.

Appendix N. Agent System Prompts

Each agent type receives a tailored system prompt that defines its interaction modality, available actions, and domain-specific workflow instructions. The three base prompt families are shown below in condensed form.

GUI Agent: System Prompt (condensed)

You are MatGUI Helper, an AI agent that controls materials-science GUI software on a user’s computer to complete analytical tasks. You interact with desktop applications such as Jade (XRD), Avantage (XPS), VESTA (crystal structure), DigitalMicrograph, and Materials Studio.

Guidelines: plan efficiently; execute ONE action per step; verify progress using the previous screenshot; use coordinates and hotkeys carefully.

Outputs per step: screen analysis → multi-step plan → next-step rationale → decision block (COMMAND / DONE / FAIL / WAIT) → python code block → memory update.

Per-application startup hints (hint mode only):

- **JADE (ablation-critical):** The “Read Pattern Files” database dialog is PRE-OPENED at startup. Close it *first* — it accepts only reference patterns, not sample data files. Attempting to load task files here causes an unrecoverable deadlock.
- **Avantage:** A file Open dialog is PRE-TRIGGERED (Ctrl+O). Type the file path and press Enter directly. Workflow is self-evident from the interface; not included in the ablation.
- **VESTA:** A file Open dialog is PRE-TRIGGERED. Type the path and press Enter. Workflow is self-evident from the interface; not included in the ablation.
- **DM (ablation-critical):** A file Open dialog is PRE-TRIGGERED. At startup a floating panel (“Histogram”, “Images”, “Status”, etc.) occupies the left side of the workspace — close it *first*. Without this hint, the panel can obscure the filename shown in the title bar, directly disrupting the evaluator’s file-import check and causing incorrect scoring.
- **Materials Studio:** Maximize the window *before* any other action.
- **Origin:** The target `.opju` file is already open and Code Builder is already open (Alt+4 pre-pressed).

Code Agent: System Prompt (condensed)

You are MatCode Helper, an AI agent that writes Python scripts to query materials-science databases and APIs.

Output: a single, complete, self-contained `python` code block that (1) queries the specified database, (2) processes results, and (3) writes output to the exact file path given in the task.

Rules: Python 3.10; mp-api 0.39.5 / emmet-core 0.78.7; no GUI windows; UTF-8 output; handle errors gracefully; do not include venv activation.

One-shot API examples (hint mode only):

- **MP:** use the Materials Project summary-search API with task-specific elements and returned fields.
- **OQMD:** use `requests.get(...)` on the formation-energy endpoint with retry logic.
- **OPTIMADE:** `requests.get("https://optimade.materialsproject.org/v1/structures", params={"filter": "...", "page_limit": 100})` with auto-pagination
- **Pymatgen:** `Structure.from_file(path), SpacegroupAnalyzer, Poscar`

Origin Agent: System Prompt (condensed)

You are an AI agent that controls OriginLab to complete plotting and data-analysis tasks by writing Python (originpro) scripts in Code Builder.

Standard workflow (hint mode):

1. Data file is already open in Origin's worksheet — do NOT reopen it.
2. Code Builder is already open (Alt+4 pre-pressed) — go straight to step 3.
3. Press Ctrl+N to create a new Python file; name it to match the plot type (`raman.py`, `xrd.py`, `xps.py`, `ftir.py`, ...).
4. Paste the full script via clipboard: `copy_text("...script...")` → `paste()`. **Never use** `keyboard.write()` for scripts — ASCII-only, corrupts Unicode.
5. Press F5 to run. Fix errors by clearing (Ctrl+A, Delete) and re-pasting.
6. Verify the output file exists at the specified path, then mark DONE.

Baseline mode (no_hint): No workflow instructions are provided. The agent must independently discover whether to use Code Builder or GUI-only interaction, and must write the entire plotting script without a template. Code Builder is *not* pre-opened, removing the implicit workflow signal.

Available packages: `originpro`, `numpy`, `pandas`, `matplotlib`, `scipy`, `re`, `os`, `math`.

Appendix O. Software and Tool Descriptions

MATTOOLBENCH spans ten domain-specific software packages drawn from experimental characterization, computational modelling, and database retrieval workflows. Table 15

provides a brief description of each tool, its domain, and the primary task categories it covers in the benchmark.


The ten tools span four interaction modalities: (1) GUI-only software operated entirely through mouse-and-keyboard actions; (2) GUI software with an embedded scripting interface (OriginPro Code Builder); (3) REST API databases accessed via Python; and (4) file-based structure analysis pipelines (Pymatgen). This mix prevents the benchmark from reducing to a single interaction paradigm.

Appendix P. Failure Mode Analysis

To gain qualitative insight beyond aggregate scores, we manually inspected agent trajectories from the Doubao-seed-1-8 experiment across all task types and identified four recurring failure patterns, illustrated with real trajectory screenshots below.

GUI Grounding Errors

The most frequent failure mode for GUI agents is incorrect element localisation: the agent generates a valid high-level action (e.g., “click the Display Modes tab”) but the coordinate prediction lands on the wrong widget or opens an unintended panel. This is especially common in Advantage, where multiple toolbars contain visually similar icons. Figure 12 shows a representative trajectory in which the agent attempts to arrange two spectra in comparison view. At step 20, the agent has imported one file and is inspecting the spectrum under *Data Grid 14*; by step 40, repeated misclicks on toolbar icons have opened 19 independent data grids (*Data Grid 19* is active) without ever selecting both spectra or invoking the stacking layout, ultimately exhausting the step budget. In approximately 30% of inspected GUI trajectories at least one grounding error occurred; in half of these cases the agent self-corrected, but in the remaining cases the trajectory diverged unrecoverably.

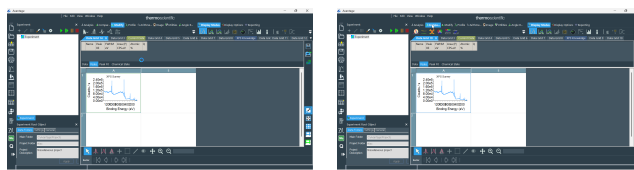

(a) Step 20: one spectrum loaded in *Data Grid 14*.

(b) Step 40: repeated misclicks open 19 data grids.


Figure 12: GUI grounding error in an Advantage comparison-view task (Doubao-seed-1-8). Each misclick on a visually similar toolbar icon opens a new independent data grid instead of selecting the target layout option.

Premature Termination

A significant fraction of failures result from the agent issuing a DONE action too early — declaring task completion before the required steps (e.g., file import, stacked-graph layout, file export) have been performed. Figure 13 shows an Advantage task requiring the agent to import `Ols_Scan.VGD` and enable stacked-graph display mode. The initial state (step 0) shows

Table 15: Overview of the ten software tools and APIs covered by MATTOOLBENCH.

Tool	Domain	Description
JADE	characterization	MDI JADE is a commercial XRD analysis suite for phase identification, Rietveld refinement, and diffractogram comparison using the PDF card database.
Avantage	characterization	Thermo Fisher Avantage is the standard software for XPS spectrum processing, including peak fitting, quantification, and elemental binding-energy analysis.
VESTA	Visualisation	VESTA (Visualisation for Electronic and STructural Analysis) renders crystal structures in 3-D; tasks cover bond/polyhedra style changes, CIF import, and orientation control.
DigitalMicrograph	characterization	Gatan DigitalMicrograph (DM) is the de-facto TEM image analysis platform; tasks cover FFT, line profiles, annotation, and drawing-tool operations.
Materials Studio	Simulation	Dassault BIOVIA Materials Studio is a molecular modelling environment; tasks require building supercells, setting force-field parameters, and running geometry optimisations.
OriginPro	Analysis	OriginLab OriginPro is a scientific graphing and statistics package; tasks span curve fitting, multi-panel figure layout, axis formatting, and batch export via Code Builder (Python).
Materials Project	Database	The Materials Project (MP) REST API provides computed properties (bandgap, formation energy, elastic moduli) for >150 000 inorganic compounds.
OQMD	Database	The Open Quantum Materials Database (OQMD) offers DFT-computed thermodynamic properties for >1 million crystal structures via a public REST API.
OPTIMADE	Database	The OPTIMADE standard defines a unified JSON:API query language across multiple materials databases; tasks require constructing cross-database queries with filter expressions.
Pymatgen	Simulation	Pymatgen (Python Materials Genomics) is a Python library for materials analysis; tasks cover structure creation, POSCAR/vasprun.xml parsing, INCAR editing, and energy extraction.

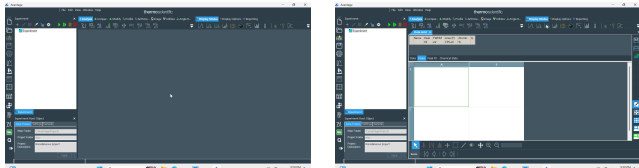

(a) Step 0: empty workspace; no data imported. (b) Step 6: DONE issued while canvas remains empty.


Figure 13: Premature termination in an Avantage stacked-graph task (Doubao-seed-1-8). The agent mistakes the pre-highlighted “Display Modes” tab for evidence of task completion after only 6 of ≤ 50 steps.

an empty workspace; after only 6 steps the agent observes that the “Display Modes” toolbar tab appears highlighted (it is highlighted by default) and issues `DONE`, leaving the canvas empty with no data ever imported. This pattern is more pronounced for longer tasks (≥ 8 steps) and correlates with agents losing track of progress in the absence of explicit state memory. Workflow hints reduce this failure mode as shown in Section .

Deadlock / Repetitive Loops

For tasks involving modal dialogues or complex nested menus, agents occasionally enter a repetitive loop: they perform the same unsuccessful action sequence repeatedly without escaping to an alternative approach. Figure 14 shows a Materials Studio task in which the agent must navigate to a specific

.xsd file via an “Import Document” dialogue. The agent becomes stuck in the Desktop folder, alternating clicks between the left-panel shortcut and an adjacent folder entry every step. Steps 45 and 49 show an identical UI state: the dialogue remains open at the Desktop root, the file name field is empty, and no progress has been made.

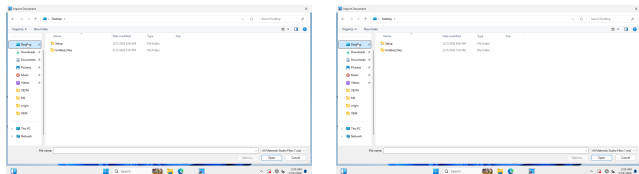


(a) Step 45: import dialog stuck at Desktop. (b) Step 49: identical UI state four steps later.

Figure 14: Deadlock in a Materials Studio file-import task (Doubao-seed-1-8). The agent alternates clicks between two adjacent left-panel entries every step, never entering the target subdirectory; the step budget expires with the dialog still open.

Domain Knowledge Gaps

GUI and code agents sometimes fail because of missing materials-science or tool-specific knowledge that cannot be inferred from the interface alone. Figure 15 shows a JADE task requiring the agent to perform profile fitting and then print the report to a PDF file. At step 45 the fitting has converged and the parameter table is populated correctly; at

step 49 the agent invokes the *Print* menu expecting to export to PDF, but receives a “JADE 5.5 -- No Installed Printers” error dialog because the evaluation VM has no virtual PDF printer configured.

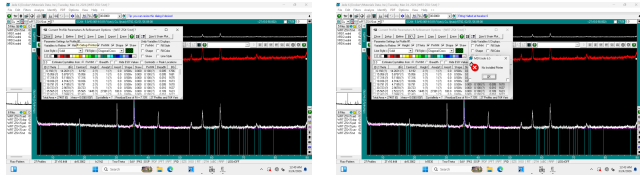

(a) Step 45: fitting converged; parameters populated. (b) Step 49: no printer is available for report export.

Figure 15: Domain knowledge gap in a JADE profile-fitting task (Doubao-seed-1-8). The agent correctly completes the fitting but fails at the final export step because it lacks knowledge that the VM has no virtual PDF printer installed.

Similar gaps appear in code tasks: scripts that are syntactically correct but use wrong units (e.g., lattice parameter in nm instead of Å) or outdated API endpoints run without raising exceptions, silently producing incorrect output and scoring zero.

Appendix Q. Contrast with General GUI Benchmarks

MATTOOLBENCH complements broad GUI-control benchmarks by isolating specialized materials-software workflows. We use three existing benchmark families as diagnostic context rather than as a controlled leaderboard: OSWorld/OSWorld-Verified for broad desktop-control performance, WindowsAgentArena for general Windows tasks under comparable 50-step settings, and MMBench-GUI for hierarchical GUI automation and cross-application tasks across platforms. Across these references, general GUI agents can obtain substantially higher success rates on broad desktop or Windows tasks than on MATTOOLBENCH, while MMBench-GUI shows that long-horizon automation and cross-application collaboration remain difficult even outside scientific software. These comparisons therefore support a transfer-gap diagnostic rather than a controlled head-to-head claim, since the benchmarks differ in task distribution, agent wrappers, observations, action spaces, and evaluators.

Table 16: Diagnostic comparison with general GUI benchmarks. Values are drawn from public reports and are not a controlled leaderboard comparison.

Benchmark context	Public setting / result	MATTOOLBENCH reference	Diagnostic role
OSWorld-Verified	Matched/closet families report 41.6-72.1% SR at 100 steps	7.0-25.0% GUI SR	Broad desktop contrast
WindowsAgentArena	GPT-5 and Qwen3-VL-72B families report 63.5% and 45.3% SR at 50 steps	21.0% and 7.0% GUI SR	Same step-budget Windows contrast
MMBench-GUI	Best 50-step LLM4 average SR: 26.6% / 8.8%	Best MATTOOLBENCH GUI SR: 25.0%	Automation difficulty context

The qualitative source of the gap is also different. OSWorld and WindowsAgentArena emphasize everyday applications, system operations, web/file workflows, and general Windows productivity tasks. MMBench-GUI further shows that even broad 50-step single-application automation remains below 30% average SR, and cross-application collaboration remains below 10% for the best reported method. In contrast,

MATTOOLBENCH requires preserving scientific state across specialized interfaces, domain file formats, instrument-like visual feedback, and software-specific operational conventions. The mixed tasks extend this idea only as a small diagnostic set for artifact handoff; the main quantitative conclusions are based on the larger GUI, Origin, and code splits.

Appendix R. Limitations and Broader Impacts

Limitations. MATTOOLBENCH focuses on a curated set of ten tools that are representative of experimental and computational materials science, but the selection inevitably omits important platforms such as LabView instrument-control workflows, experimental-planning notebooks, and proprietary simulation codes. Task difficulty is intentionally constrained to single-session interactions of at most 50 steps; longer multi-session or multi-agent pipelines — increasingly relevant in autonomous laboratory settings — are outside the current scope. The automated graders achieve >97% agreement with human annotators on average (Table 12), but edge cases remain, particularly for tasks involving visually-rendered crystal structures where SSIM thresholds may be sensitive to GPU-dependent anti-aliasing differences. Finally, the benchmark evaluates English-only agent prompts; performance may differ for agents instructed in other languages.

Broader Impacts. MATTOOLBENCH is intended to accelerate the development of AI assistants for materials researchers. Reliable autonomous agents could reduce the time experts spend on routine software operation and lower the barrier of entry for early-career researchers unfamiliar with legacy instruments. At the same time, over-reliance on automated agents for instrument operation carries risks: incorrect parameter settings in characterization software (e.g., wrong peak assignments in XPS) could propagate errors into published datasets. We therefore recommend that any agent-assisted workflow include a human-in-the-loop review step before results are used for publication or engineering decisions. The benchmark data and code are released under a permissive open-source licence to encourage transparent and reproducible research.